

NEW **NEW** Introducing DigitalOcean Managed MongoDB — a fully managed, database as a service for modern apps



Community



TUTORIAL

How To Set Up a Private Docker Registry on Ubuntu 18.04

Nginx Docker Ubuntu 18.04

By [Young Kim](#)

Published on January 7, 2019 209k

🌐 English ▼

Not using Ubuntu 18.04?

Choose a different version or distribution.

Ubuntu 18.04 ▼

The author selected the [Apache Software Foundation](#) to receive a donation as part of the [Write for DOnations](#) program.

Introduction

[Docker Registry](#) is an application that manages storing and delivering Docker container images. Registries centralize container images and reduce build times for developers. Docker images guarantee the same runtime environment through virtualization, but building an image can involve a significant time investment. For example, rather than installing dependencies and packages separately to use Docker, developers can download a compressed image from a registry that contains all of the necessary components. Furthermore, developers can automate pushing images to a registry using continuous integration tools, such as [TravisCI](#), to seamlessly update images during production and development.

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Enter your email address

Sign Up

In this tutorial, you will set up and secure your own private Docker Registry. You will use [Docker Compose](#) to define configurations to run your Docker applications and Nginx to forward server traffic from HTTPS to the running Docker container. Once you've completed this tutorial, you will be able to push a custom Docker image to your private registry and pull the image securely from a remote server.

Prerequisites

Before you begin this guide, you'll need the following:

- Two Ubuntu 18.04 servers set up by following [the Ubuntu 18.04 initial server setup guide](#), including a sudo non-root user and a firewall. One server will host your private Docker Registry and the other will be your **client** server.
- Docker and Docker-Compose installed on both servers by following the [How to Install Docker-Compose on Ubuntu 18.04](#) tutorial. You only need to complete the first step of this tutorial to install Docker Compose. This tutorial explains how to install Docker as part of its prerequisites.
- Nginx installed on your private Docker Registry server by following the [How to Install Nginx on Ubuntu 18.04](#).
- Nginx secured with Let's Encrypt on your server for the private Docker Registry, by following [How to Secure Nginx With Let's Encrypt](#). Make sure to redirect all traffic from HTTP to HTTPS in Step 4.
- A domain name that resolves to the server you're using for the private Docker Registry. You will set this up as part of the Let's Encrypt prerequisite.

Step 1 — Installing and Configuring the Docker Registry

The Docker command line tool is useful for starting and managing one or two Docker containers, but, for full deployment most applications running inside Docker containers require other components to be running in parallel. For example, a lot of web applications consist of a web server, like Nginx, that serves up the application's code, an interpreted scripting language such as PHP, and a database server like MySQL.

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Sign Up

Docker Registry is itself an application with multiple components, so you will use Docker Compose to manage your configuration. To start an instance of the registry, you'll set up a `docker-compose.yml` file to define the location where your registry will be storing its data.

On the server you have created to host your private Docker Registry, you can create a `docker-registry` directory, move into it, and then create a `data` subfolder with the following commands:

```
$ mkdir ~/docker-registry && cd $_  
$ mkdir data
```

Use your text editor to create the `docker-compose.yml` configuration file:

```
$ nano docker-compose.yml
```

Add the following content to the file, which describes the basic configuration for a Docker Registry:

docker-compose.yml

```
version: '3'  
  
services:  
  registry:  
    image: registry:2  
    ports:  
      - "5000:5000"  
    environment:  
      REGISTRY_STORAGE_FILESYSTEM_ROOTDIRECTORY: /data  
    volumes:  
      - ./data:/data
```

The `environment` section sets an environment variable in the Docker Registry container with the path `/data`. The Docker Registry application checks this environment variable when it

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Sign Up

The `ports` section, with configuration `5000:5000`, tells Docker to map port `5000` on the server to port `5000` in the running container. This allows you to send a request to port `5000` on the server, and have the request forwarded to the registry application.

You can now start Docker Compose to check the setup:

```
$ docker-compose up
```

You will see download bars in your output that show Docker downloading the Docker Registry image from Docker's own registry. Within a minute or two, you'll see output that looks similar to the following (versions might vary):

Output of `docker-compose up`

```
Starting docker-registry_registry_1 ... done
```

```
Attaching to docker-registry_registry_1
```

```
registry_1 | time="2018-11-06T18:43:09Z" level=warning msg="No HTTP secret provided - generated random
registry_1 | time="2018-11-06T18:43:09Z" level=info msg="redis not configured" go.version=go1.7.6 inst
registry_1 | time="2018-11-06T18:43:09Z" level=info msg="Starting upload purge in 20m0s" go.version=go
registry_1 | time="2018-11-06T18:43:09Z" level=info msg="using inmemory blob descriptor cache" go.vers
registry_1 | time="2018-11-06T18:43:09Z" level=info msg="listening on [::]:5000" go.version=go1.7.6 in
```

You'll address the `No HTTP secret provided` warning message later in this tutorial. The output shows that the container is starting. The last line of the output shows it has successfully started listening on port `5000`.

By default, Docker Compose will remain waiting for your input, so hit `CTRL+C` to shut down your Docker Registry container.

You have set up a full Docker Registry listening on port `5000`. At this point the registry won't start unless you bring it up manually. Also, Docker Registry doesn't come with any built-in authentication mechanism, so it is currently insecure and completely open to the public. In

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Sign Up

you can access your registry directly at `example.com`.

As part of the [How to Secure Nginx With Let's Encrypt](#) prerequisite, you have already set up the `/etc/nginx/sites-available/example.com` file containing your server configuration.

Open this file with your text editor:

```
$ sudo nano /etc/nginx/sites-available/example.com
```

Find the existing `location` line. It will look like this:

```
/etc/nginx/sites-available/example.com
```

```
...
location / {
    ...
}
...
```

You need to forward traffic to port `5000`, where your registry will be running. You also want to append headers to the request to the registry, which provide additional information from the server with each request and response. Delete the contents of the `location` section, and add the following content into that section:

```
/etc/nginx/sites-available/example.com
```

```
...
location / {
    # Do not allow connections from docker 1.5 and earlier
    # docker pre-1.6.0 did not properly set the user agent on ping, catch "Go *" user agents
    if ($http_user_agent ~ "^(\docker\/1\.(3|4|5(?:!\. [0-9]-dev))|Go ) .*$" ) {
        return 404;
    }

    proxy_pass http://localhost:5000;
```

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Sign Up

The `$http_user_agent` section verifies that the Docker version of the client is above 1.5, and ensures that the `UserAgent` is not a Go application. Since you are using version 2.0 of the registry, older clients are not supported. For more information, you can find the `nginx` header configuration in [Docker's Registry Nginx guide](#).

Save and exit the file. Apply the changes by restarting Nginx:

```
$ sudo service nginx restart
```

You can confirm that Nginx is forwarding traffic to port 5000 by running the registry:

```
$ cd ~/docker-registry
$ docker-compose up
```

In a browser window, open up the following url:

`https://example.com/v2`

You will see an empty JSON object, or:

```
{}
```

In your terminal, you'll see output similar to the following:

Output of `docker-compose up`

```
registry_1 | time="2018-11-07T17:57:42Z" level=info msg="response completed" go.version=go1.7.6 http.r
registry_1 | 172.18.0.1 - - [07/Nov/2018:17:57:42 +0000] "GET /v2/ HTTP/1.0" 200 2 "" "Mozilla/5.0 (Ma
```

You can see from the last line that a `GET` request was made to `/v2/`, which is the endpoint

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Sign Up

Now that you have set up port forwarding, you can move on to improving the security of your registry.

Step 3 — Setting Up Authentication

With Nginx proxying requests properly, you can now secure your registry with HTTP authentication to manage who has access to your Docker Registry. To achieve this, you'll create an authentication file with `htpasswd` and add users to it. HTTP authentication is quick to set up and secure over a HTTPS connection, which is what the registry will use.

You can install the `htpasswd` package by running the following:

```
$ sudo apt install apache2-utils
```

Now you'll create the directory where you'll store our authentication credentials, and change into that directory. `$_` expands to the last argument of the previous command, in this case `~/docker-registry/auth`:

```
$ mkdir ~/docker-registry/auth && cd $_
```

Next, you will create the first user as follows, replacing `username` with the username you want to use. The `-B` flag specifies `bcrypt` encryption, which is more secure than the default encryption. Enter the password when prompted:

```
$ htpasswd -Bc registry.password username
```

Note: To add more users, re-run the previous command without the `-c` option, (the `c` is for create):

```
$ htpasswd registry.password username
```

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Sign Up

```
$ cd ~/docker-registry
$ nano docker-compose.yml
```

You can add environment variables and a volume for the `auth/` directory that you created, by editing the `docker-compose.yml` file to tell Docker how you want to authenticate users. Add the following highlighted content to the file:

docker-compose.yml

```
version: '3'

services:
  registry:
    image: registry:2
    ports:
      - "5000:5000"
    environment:
      REGISTRY_AUTH: htpasswd
      REGISTRY_AUTH_HTPASSWD_REALM: Registry
      REGISTRY_AUTH_HTPASSWD_PATH: /auth/registry.password
      REGISTRY_STORAGE_FILESYSTEM_ROOTDIRECTORY: /data
    volumes:
      - ./auth:/auth
      - ./data:/data
```

For `REGISTRY_AUTH`, you have specified `htpasswd`, which is the authentication scheme you are using, and set `REGISTRY_AUTH_HTPASSWD_PATH` to the path of the authentication file. Finally, `REGISTRY_AUTH_HTPASSWD_REALM` signifies the name of `htpasswd` realm.

You can now verify that your authentication works correctly, by running the registry and checking that it prompts users for a username and password.

```
$ docker-compose up
```

In a browser window, open <https://example.com/v2>

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Sign Up

Step 4 — Starting Docker Registry as a Service

You want to ensure that your registry will start whenever the system boots up. If there are any unforeseen system crashes, you want to make sure the registry restarts when the server reboots. Open up `docker-compose.yml`:

```
$ nano docker-compose.yml
```

Add the following line of content under `registry:`:

`docker-compose.yml`

```
...
  registry:
    restart: always
...
```

You can start your registry as a background process, which will allow you to exit the `ssh` session and persist the process:

```
$ docker-compose up -d
```

With your registry running in the background, you can now prepare Nginx for file uploads.

Step 5 — Increasing File Upload Size for Nginx

Before you can push an image to the registry, you need to ensure that your registry will be able to handle large file uploads. Although Docker splits large image uploads into separate layers, they can sometimes be over `1GB`. By default, Nginx has a limit of `1MB` on file uploads, so you need to edit the configuration file for `nginx` and set the max file upload size to `2GB`.

```
$ sudo nano /etc/nginx/nginx.conf
```

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Sign Up

```
...
http {
    client_max_body_size 2000M;
    ...
}
...
```

Finally, restart Nginx to apply the configuration changes:

```
$ sudo service nginx restart
```

You can now upload large images to your Docker Registry without Nginx errors.

Step 6 — Publishing to Your Private Docker Registry

You are now ready to publish an image to your private Docker Registry, but first you have to create an image. For this tutorial, you will create a simple image based on the `ubuntu` image from Docker Hub. Docker Hub is a publicly hosted registry, with many pre-configured images that can be leveraged to quickly Dockerize applications. Using the `ubuntu` image, you will test pushing and pulling to your registry.

From your **client** server, create a small, empty image to push to your new registry, the `-i` and `-t` flags give you interactive shell access into the container:

```
$ docker run -t -i ubuntu /bin/bash
```

After it finishes downloading you'll be inside a Docker prompt, note that your container ID following `root@` will vary. Make a quick change to the filesystem by creating a file called `SUCCESS`. In the next step, you'll be able to use this file to determine whether the publishing process is successful:

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics. ✕

Sign Up

The following command creates a new image called `test-image` based on the image already running plus any changes you have made. In our case, the addition of the `/SUCCESS` file is included in the new image.

Commit the change:

```
$ docker commit $(docker ps -lq) test-image
```

At this point, the image only exists locally. Now you can push it to the new registry you have created. Log in to your Docker Registry:

```
$ docker login https://example.com
```

Enter the `username` and corresponding password from earlier. Next, you will tag the image with the private registry's location in order to push to it:

```
$ docker tag test-image example.com/test-image
```

Push the newly tagged image to the registry:

```
$ docker push example.com/test-image
```

Your output will look similar to the following:

Output

```
The push refers to a repository [example.com/test-image]
e3fbbfb44187: Pushed
5f70bf18a086: Pushed
a3b5c80a4eba: Pushed
7f18b442972b: Pushed
```

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Sign Up

You've verified that your registry handles user authentication, and allows authenticated users to push images to the registry. Next, you will confirm that you are able to pull images from the registry as well.

Step 7 — Pulling From Your Private Docker Registry

Return to your registry server so that you can test pulling the image from your **client** server. It is also possible to test this from a third server.

Log in with the username and password you set up previously:

```
$ docker login https://example.com
```

You're now ready to pull the image. Use your domain name and image name, which you tagged in the previous step:

```
$ docker pull example.com/test-image
```

Docker will download the image and return you to the prompt. If you run the image on the registry server you'll see the `SUCCESS` file you created earlier is there:

```
$ docker run -it example.com/test-image /bin/bash
```

List your files inside the bash shell:

```
$ ls
```

You will see the `SUCCESS` file you created for this image:

```
SUCCESS bin boot dev etc home lib lib64 media mnt opt proc root run sbin srv sys tmp
```

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Sign Up

Conclusion

In this tutorial you set up your own private Docker Registry, and published a Docker image. As mentioned in the introduction, you can also use [TravisCI](#) or a similar CI tool to automate pushing to a private registry directly. By leveraging Docker and registries into your workflow, you can ensure that the image containing the code will result in the same behavior on any machine, whether in production or in development. For more information on writing Docker files, you can read this [Docker tutorial](#) explaining the process.

Was this helpful?

Yes

No



[Report an issue](#)

About the authors



[Young Kim](#)

has authored 2 tutorials.



[Kathryn Hancox](#)

Editor

Still looking for an answer?

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Enter your email address

Sign Up

RELATED

Join the DigitalOcean Community



Join 1M+ other developers and:

- Get help and share knowledge in Q&A
- Subscribe to topics of interest
- Get courses & tools that help you grow as a developer or small business owner

[Join Now](#)[How To Set Up Multiple WordPress Sites Using Multisite \[Quickstart\]](#)[Tutorial](#)[How To Set Up WordPress Multisite with Nginx and LEMP on Ubuntu 20.04](#)[Tutorial](#)

Comments

10 Comments

Leave a comment...

[Sign In to Comment](#)

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.

[Sign Up](#)

docker login \$URL I received a Error 403

Error response from daemon: login attempt to https://\$HOST/v2/ failed with status: 403 Forbidden

While if I do :

```
http -a $USER https://$HOST/v2/_catalog
http: password for $USER@$HOST:
HTTP/1.1 200 OK
Connection: keep-alive
Content-Length: 20
Content-Type: application/json; charset=utf-8
Date: Fri, 15 Mar 2019 10:35:03 GMT
Docker-Distribution-Api-Version: registry/2.0
Server: nginx/1.15.9
X-Content-Type-Options: nosniff
```

```
{
  "repositories": []
}
```

It works !

[Reply](#) [Report](#)

 [caffeinatedtech](#) April 3, 2019

0 Great tutorial as always !

I experienced an annoying error, so adding my findings here for posterity:

When pushing a repo to my registry, I first login successfully, but pushing results in an “unauthorized: authentication required” error **after** the image has already been partially uploaded.

Going through the server logs, I find a cryptic “Unknown Blob” error.

I had to change my nginx config to `proxy_set_header X-Forwarded-Proto https;` instead of

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Sign Up

^ [acuisinierhtc](#) June 28, 2019

0 Hi, thanks for this nice work.

Juste a little mistake:

"client`maxbody_size` 2000M" - if you want to setup 2G the value must be 2048 ;)

[Reply](#) [Report](#)

^ [timatgca](#) August 1, 2019

0 An almost completely awesome tutorial ... thanks. These tutorials are a bit like the arch wiki.

Minor but annoying error in the documentation.:

It is important that new `htpasswd` users are added with the `-B` flag.

Without this, docker login will fail.

Currently, it reads:

Note: To add more users, re-run the previous command without the `-c` option, (the `c` is for creat

```
htpasswd registry.password username
```

please correct to

Note: To add more users, re-run the previous command without the `-c` option, (the `c` is for create):

```
htpasswd -B registry.password username
```

[Reply](#) [Report](#)

^ [jordonedavidson](#) October 8, 2019

0 When attempting to login to the registry the following error is returned:

Error response from daemon: Get https://<myServer>/v2/: x509: certificate signed by unknown authority.

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Sign Up



[jordonedavidson](#) October 9, 2019

1

Found the issue. The Certificate used to secure must be the full chain starting with the domain cert and flowing up the chain to the original Certificate Authority.

Thanks for your good work here.

[Reply](#) [Report](#)



[evk02](#) November 12, 2019


0

Unfortunately when I am pushing I get:

```
af0b15c8625b: Pushing [=====] 3.584kB
received unexpected HTTP status: 501 Not Implemented
```

The logs of the docker registry container only shows a warning:

```
time="2019-11-12T20:35:04.529028691Z" level=warning msg="invalid remote IP address: "unknown""
```



Any ideas?

[Reply](#) [Report](#)



[hbi](#) November 29, 2019

0

Thanks for the tutorial.

Everything worked fine but there is no information on how I can delete the test-image from my private registry. Would be great if you added that as well. I can't be alone to aim for digital hygiene :-)

[Reply](#) [Report](#)



[prvidja](#) January 2, 2020

0

How can we add push restrictions for some users? Like create a separate user for pull and push the docker images.

[Reply](#) [Report](#)

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Sign Up


I couldn't get docker-compose up to run with version: '3'.

Nice article all the same.

[Reply](#) [Report](#)



This work is licensed under a Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International License.

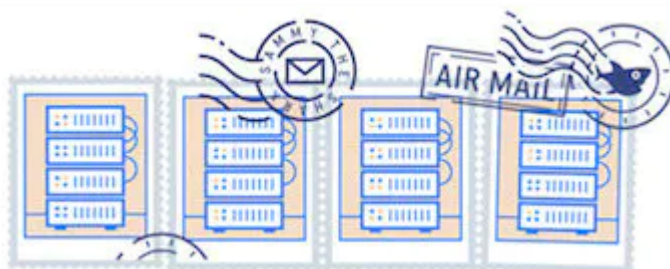

GET OUR BIWEEKLY NEWSLETTER

Sign up for Infrastructure as a
Newsletter.



Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Enter your email address

Sign Up

and spurring economic growth?
We'd like to help.



BECOME A CONTRIBUTOR

You get paid; we donate to tech nonprofits.

Featured on [Community](#) [Kubernetes Course](#) [Learn Python 3](#) [Machine Learning in Python](#)
[Getting started with Go](#) [Intro to Kubernetes](#)

[DigitalOcean Products](#) [Virtual Machines](#) [Managed Databases](#) [Managed Kubernetes](#) [Block Storage](#)
[Object Storage](#) [Marketplace](#) [VPC](#) [Load Balancers](#)

Welcome to the developer cloud

DigitalOcean makes it simple to launch in the cloud and scale up as you grow – whether you're running one virtual machine or ten thousand.


[Learn More](#)

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Enter your email address

Sign Up

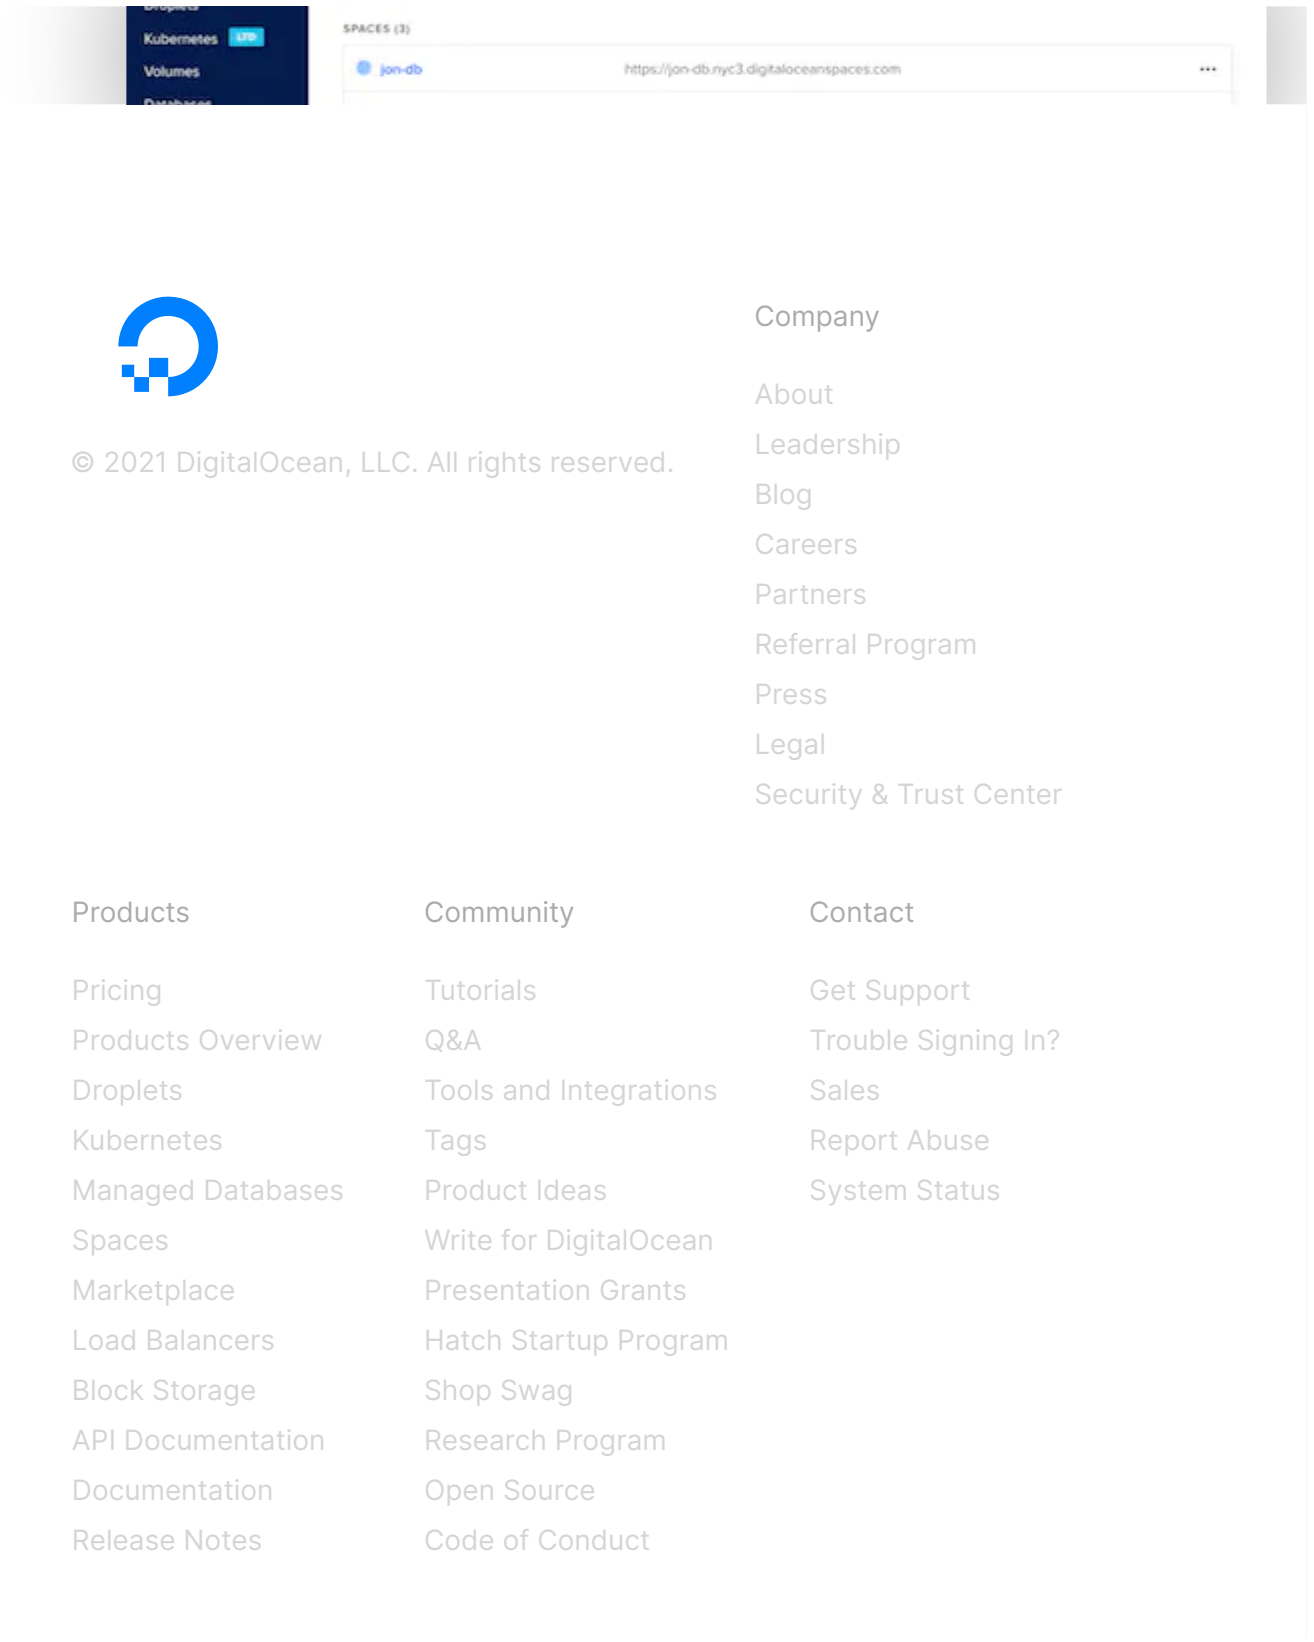

Sign up for our newsletter Get the latest tutorials on SysAdmin and open source topics.



Enter your email address

Sign Up