

# Cucumber Report

03-Aug-2022, 5:12:23 PM

Start : Aug 03, 5:12:22.239 PM

End : Aug 03, 5:12:22.343 PM

Duration : 0.104 s

Features

Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0


PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 0  
SKIPPED - 3





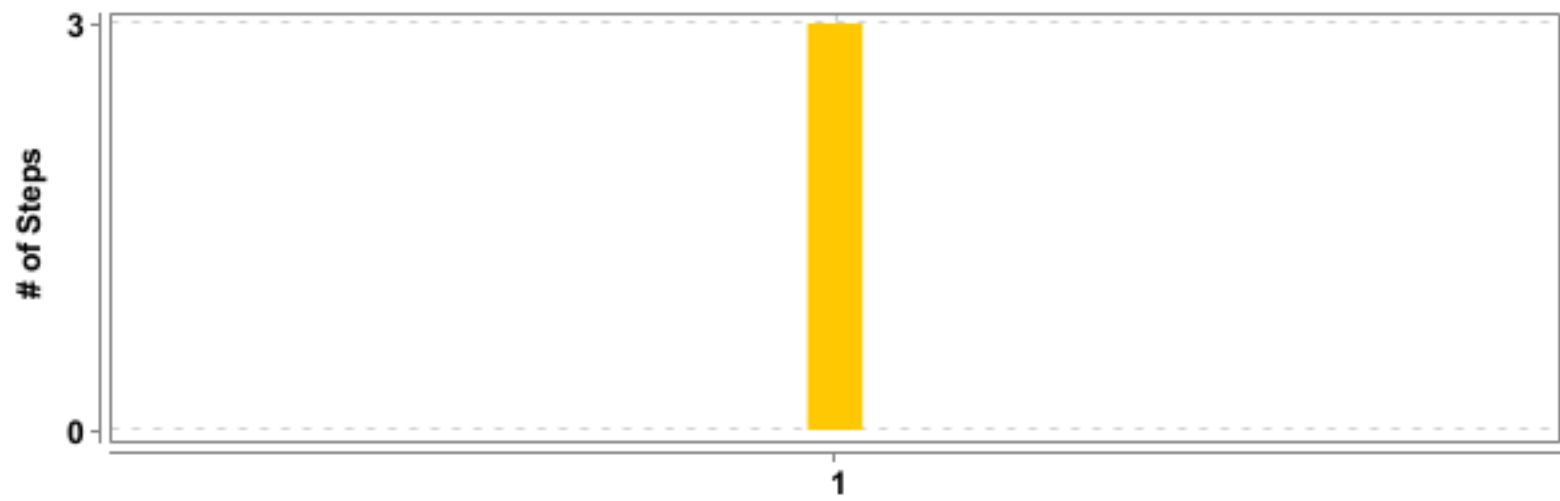

#	Feature Name	T	P	F	S	Duration
1	<u>ICICI scenario</u>	1	0	1	0	0.104 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>ICICI scenario</u>	<u>ICICI</u>	3	0	0	3	0.102 s

**(F)- ICICI scenario**

<b>FAILED</b>	<b>DURATION - 0.104 s</b>	Scenarios		Steps	
/ 5:12:22.239 PM // 5:12:22.343 PM /		Total - 1		Total - 3	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 3	

**(S)- ICICI**
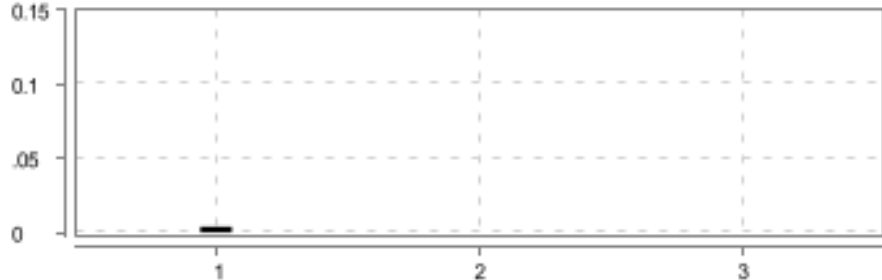
<div>FAILED</div> <div>DURATION - 0.102 s</div>			Steps		
/ 5:12:22.241 PM // 5:12:22.343 PM /			Total - 3		
ICICI scenario			Pass - 0		
@icici-1			Fail - 0		
			Skip - 3		

#	Step / Hook Details	Status	Duration
	<b>BEFORE - coreframework.BrowserFactory.LaunchTheBrowser()</b> io.cucumber.core.exception.CucumberException: Failed to instantiate class coreframework.BrowserFactory at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:143) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:127) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.TestCase.run(TestCase.java:89) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)	<b>FAILED</b>	0.029 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.junit.runner.JUnitCore.run(JUnitCore.java:160) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:135) ... 43 more Caused by: java.lang.StackOverflowError at Reusables.Methods.&lt;init&gt;(Methods.java:15) at Reusables.Superclass.&lt;init&gt;(Superclass.java:8) at Reusables.Methods.&lt;init&gt;(Methods.java:15) at Reusables.Superclass.&lt;init&gt;(Superclass.java:8) at Reusables.Methods.&lt;init&gt;(Methods.java:15) at Reusables.Superclass.&lt;init&gt;(Superclass.java:8) </pre>		

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

#	Step / Hook Details	Status	Duration
	at Reusables.Methods.<init>(Methods.java:15) at Reusables.Superclass.<init>(Superclass.java:8) at Reusables.Methods.<init>(Methods.java:15) at Reusables.Superclass.<init>(Superclass.java:8) at Reusables.Methods.<init>(Methods.java:15) at Reusables.Superclass.<init>(Superclass.java:8) at Reusables.Methods.<init>(Methods.java:15) at Reusables.Superclass.<init>(Superclass.java:8) at Reusables.Methods.<init>(Methods.java:15) at Reusables.Superclass.<init>(Superclass.java:8)		
1	Given Click the Accounts tab	SKIPPED	0.004 s
2	Then Click Deposit option	SKIPPED	0.000 s
3	Then Check the window	SKIPPED	0.000 s
	AFTER - coreframework.BrowserFactory.CloseDriver()  io.cucumber.core.exception.CucumberException: Failed to instantiate class coreframework.BrowserFactory at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:143) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:127) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.TestCase.run(TestCase.java:101) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)	FAILED	0.014 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.junit.runner.JUnitCore.run(JUnitCore.java:160) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:135) ... 43 more Caused by: java.lang.StackOverflowError at Reusables.Methods.&lt;init&gt;(Methods.java:15) at Reusables.Superclass.&lt;init&gt;(Superclass.java:8) at Reusables.Methods.&lt;init&gt;(Methods.java:15) at Reusables.Superclass.&lt;init&gt;(Superclass.java:8) at Reusables.Methods.&lt;init&gt;(Methods.java:15) at Reusables.Superclass.&lt;init&gt;(Superclass.java:8) at Reusables.Methods.&lt;init&gt;(Methods.java:15) at Reusables.Superclass.&lt;init&gt;(Superclass.java:8) at Reusables.Methods.&lt;init&gt;(Methods.java:15) at Reusables.Superclass.&lt;init&gt;(Superclass.java:8) at Reusables.Methods.&lt;init&gt;(Methods.java:15) at Reusables.Superclass.&lt;init&gt;(Superclass.java:8) at Reusables.Methods.&lt;init&gt;(Methods.java:15) at Reusables.Superclass.&lt;init&gt;(Superclass.java:8) at Reusables.Methods.&lt;init&gt;(Methods.java:15) at Reusables.Superclass.&lt;init&gt;(Superclass.java:8) </pre>		

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

#	Step / Hook Details	Status	Duration
	at Reusables.Superclass.<init>(Superclass.java:8)		