

Sadia Perveen

Breast Cancer Histopathological Image Multi-Classification (2).pdf

 ICT

 bscs

 International Islamic University

Document Details

Submission ID

trn:oid:::1:3523423980

Submission Date

Mar 31, 2026, 7:24 PM GMT+5

Download Date

Mar 31, 2026, 7:28 PM GMT+5

File Name

Breast_Cancer_Histopathological_Image_Multi-Classification_2_.pdf

File Size

2.0 MB

25 Pages

8,445 Words

52,437 Characters

20% detected as AI

The percentage indicates the combined amount of likely AI-generated text as well as likely AI-generated text that was also likely AI-paraphrased.

Caution: Review required.

It is essential to understand the limitations of AI detection before making decisions about a student's work. We encourage you to learn more about Turnitin's AI detection capabilities before using the tool.

Detection Groups



16 AI-generated only 20%

Likely AI-generated text from a large-language model.



0 AI-generated text that was AI-paraphrased 0%

Likely AI-generated text that was likely revised using an AI-paraphrase tool or word spinner.

Disclaimer

Our AI writing assessment is designed to help educators identify text that might be prepared by a generative AI tool. Our AI writing assessment may not always be accurate (i.e., our AI models may produce either false positive results or false negative results), so it should not be used as the sole basis for adverse actions against a student. It takes further scrutiny and human judgment in conjunction with an organization's application of its specific academic policies to determine whether any academic misconduct has occurred.

Frequently Asked Questions

How should I interpret Turnitin's AI writing percentage and false positives?

The percentage shown in the AI writing report is the amount of qualifying text within the submission that Turnitin's AI writing detection model determines was either likely AI-generated text from a large-language model or likely AI-generated text that was likely revised using an AI paraphrase tool or word spinner.

False positives (incorrectly flagging human-written text as AI-generated) are a possibility in AI models.

AI detection scores under 20%, which we do not surface in new reports, have a higher likelihood of false positives. To reduce the likelihood of misinterpretation, no score or highlights are attributed and are indicated with an asterisk in the report (*%).

The AI writing percentage should not be the sole basis to determine whether misconduct has occurred. The reviewer/instructor should use the percentage as a means to start a formative conversation with their student and/or use it to examine the submitted assignment in accordance with their school's policies.

What does 'qualifying text' mean?

Our model only processes qualifying text in the form of long-form writing. Long-form writing means individual sentences contained in paragraphs that make up a longer piece of written work, such as an essay, a dissertation, or an article, etc. Qualifying text that has been determined to be likely AI-generated will be highlighted in cyan in the submission, and likely AI-generated and then likely AI-paraphrased will be highlighted purple.

Non-qualifying text, such as bullet points, annotated bibliographies, etc., will not be processed and can create disparity between the submission highlights and the percentage shown.



Attention-Guided Multi-Autoencoder Explainable Network for Breast Cancer Histopathological Image Multi-Classification

Abstract- Breast cancer is the most common and pernicious disturbance among women worldwide, thus an early and precise diagnosis plays a pivotal role in the enhancement of a patient's survival rate. Histopathological image analysis is the gold standard for breast cancer diagnosis, but manual examination by pathologists can be time-consuming and prone to inter-observer variability. In order to overcome these limitations of existing methods, this work presents a new deep learning framework AMAE-GCNet (Attention-guided Multi-AutoEncoder with Grad-CAM Network) for automatic histopathological image based multi-classification of breast cancer. The proposed model is tested on the publicly available annotated BreakHis dataset consisting of 7,909 breast tumor histopathological images which are divided into eight benign and malignant subtypes with different magnification levels. To standardize the images, preprocessing methods such as stain normalization and image resizing are first used. We utilize a transfer learning backbone based on EfficientNet-B4 to elicit deep hierarchical features from the histopathological images. A multi-autoencoder module is therefore included to learn representative compressed latent feature embeddings for reducing unnecessary redundant side information. Moreover, a combined channel-spatial attention mechanism is introduced to emphasize diagnostically important cellular structures but suppress background regions that are irrelevant. These refined feature representations are then processed in a fully connected classifier predicting multiple tumor subtypes respectively. For better interpretability and clinical trustworthiness, we employ Grad-CAM visualization to show the corresponding regions of tissue that drive predictions from individual models. The experimental results show that the proposed AMAE-GCNet framework can achieve 98.72% classification accuracy, 98.41% precision, 98.33% recall and 98.37% F1-score performance, which is superior to some existing deep learning-based breast cancer diagnosis models. With the incorporation of transfer learning, attention-guided feature refinement and explainable visualization, the model proposed in this study is a robust clinical aid for pathologists performing breast cancer analyses.

Keywords: Breast Cancer Diagnosis, Histopathological Image Classification, Transfer Learning, Attention Mechanism, Multi-Autoencoder, Grad-CAM Visualization, Explainable AI, Deep Learning.

1.Introduction

Breast cancer remains one of the most prevalent and lethal diseases among women worldwide [1,2]. Breast cancer is one of the most commonly reported cancers worldwide and a prominent cause of female cancer mortality related to health equity globally [3]. Early diagnosis and detection play a critical role in improving survival rates while informing treatment planning [4][5]. While many diagnostic modalities exist today, histopathological evaluation of breast tissue biopsy material is still regarded as the gold standard in clinical determination of tumor type and malignancy [5][6]. And pathologists view tissues under microscope and look for unnatural arrangements of the cells, which will help him/her to

conclude if tumors are benign or malignant. Given that with the increasing digital pathology applications, histopathological slides can be scanned and approached to the system on a computer [7][8], intelligent computer-aided diagnostic systems have been developed to assist clinicians in detecting cancerous tissues at a faster pace. Although manual histopathological examination has traditionally been perceived as a dependable diagnostic technique, there are multiple factors that pose challenges in actual clinical practice. High-throughput microscopic imaging has been producing huge quantities of high-resolution images [9][10], demanding a significant level of expertise and time to analyze. Moreover, tissue morphology-based diagnosis is subjective and a biased process that can lead to inter-observer variability among pathologists. A growing number of biopsy samples and fewer experienced specialists are increasing pathology labs' workload. These challenges highlight the need for automated and trustful computational methods that can aid pathologists to systematically stratify histopathological images with high diagnostic accuracy in real-time [11].

In particular, the inception of deep learning has led to significant advancements in most automated medical image analysis methods [12][14]. However, CNNs are highly acknowledged and successful for interpretation of such intricate medical images to learn hierarchical features leading to robust classification or detection of the disease. Transfer learning methods allow pre-trained deep neural networks to generalize on particular medical datasets [13] when the dataset labelings are less extreme. Recently, attention mechanisms have been very effectively proposed to guide neural networks towards the diagnostically relevant regions in medical images, which is helpful for better feature representation and classification. We are also witnessing the adoption of Explainable Artificial Intelligence XAI (XAI) approaches in medical use cases, where clinicians require interpretability of any model decisions before AI-based systems enter true clinical environments. Several deep learning models are proposed recently for the classification of breast cancer histopathological images, but still existing approaches contain notable constraints. Expressing components this way often leads to more correlated feature representations, such that better representation learning is unable to eliminate redundancy. Many of these models also act as black-box systems and provide predictions but do not explain their reasoning process, which is something that results in less confidence from clinicians. Additionally, the focus on analytical cellular characteristics most often neglects tangible cells and low utilization of explainability techniques increase barriers in implementation into real-world diagnostic practices [15][16]. Therefore, a sound and interpretable deep learning framework is also needed to improve feature detection while providing interpretable visual evidence for medical validation.

To overcome the above-mentioned limitations, we proposed a new deep learning method to automate multi-classification of breast cancer pathological histopathological images with interpretability known as Attention-Guided Multi-Autoencoder Explainable Network (AMAE-GCNet) [17]. They demonstrated an architecture consisting of a transfer learning backbone with a multi-autoencoder module to boost up latent feature representation and information redundancy. Furthermore, a hybrid channel-spatial relevant attention approach is employed to foreground diagnostically salient tissue constituents while decreasing nondiagnostic background signals [18][19]. Grad-CAM visualization is used to provide the

areas of the image that contribute most to model predictions [20], improving interpretability and post-processing for clinical reliability. The key contributions in this work are outlined below:

- Therefore, we propose a new AMAE-GCNet framework for breast cancer histopathological image multi-classification by combining the transfer learning, multi-autoencoder feature refinement and attention mechanism.
- A hybrid channel-spatial attention module is introduced to improve the learning of discriminative features and highlight diagnostically significant cellular regions.
- We implement an explainable diagnostic mechanism with Grad-CAM visualization, yielding interpretable heatmaps to support clinical decision-making.

The performance of the proposed framework is evaluated using publicly accessible BreakHis histopathological dataset, with the model achieving better classification performance and higher interpretability than state-of-the-art deep learning methods.

2. Literature Review

In recent years, the analysis of histopathological images of breast cancer has received significant attention owing to improving the demand for automation and reliable diagnosis systems. Several machine-learning and deep learning techniques have been studied for enhancing breast cancer subtype diagnosis from microscopic tissue images. The studies, which were conducted in the earlier days of deep learning, primarily employed hand-crafted feature extraction methods with custom classifiers. For instance, Joseph et al. (2022) performed multi-classification of breast cancer by extracting handcrafted features like Hu moments, Haralick texture attributes, and color histograms with the help of a Deep Neural Network (DNN). Using the BreakHis dataset, their approach made use of data augmentation to reduce overfitting. The classification accuracies were 97.87%, 97.60%, 96.10% and 96.84 about magnifications of 40×, 100×, 200× and 400× with the proposed model using hand-crafted features along with deep neural net for histopathology images processing [1].

Due to the fast evolution of deep learning, convolutional neural networks (CNNs) have been widely applied for medical text classification application. The Efficient Channel Spatial Attention Network (ECSAnet) was proposed in Aldakhil (2023), where the authors integrated EfficientNetV2 with the Convolutional Block Attention Module (CBAM) to improve feature refinement. Our model trained on the BreakHis datasets with stain normalization and augmentation. However, experimental analysis indicated better classification performance than some baseline networks with accuracies of 94.2%, 92.96%, 88.41% and 89.42% at various magnifications following attention-based feature learning during breast cancer classification [2]. Facing the issues of multi-class classification and feature extraction, Liu et al. Paliwal et al. (2023) proposed a Collaborative Transfer Network (CTransNet), consisting of a transfer learning backbone and residual collaborative branch, together with a feature fusion module. It uses DenseNet such deep features and residual learning for representation. To evaluate, CTransNet achieved 98.29% accuracy on the BreakHis dataset and had strong generalization performance across breast cancer datasets [3]. In addition to the neural

networks with many layers, some researchers have been influential in building compact networks that can prevent computation overload but still give good classification performance. Yusuf et al. (2025) employed a Enhanced Shallow Convolutional Neural Network (ES-CNN) specifically used for breast histopathology images multi-class classification. The architecture was designed to use minimal computation and reduce the time needed for training to generate high-fidelity samples. On the BreakHis dataset, we obtained classification accuracies of 96%, 95%, 98% and 96% for (400×,200×,100×,40×) magnifications respectively [4]. Similarly, Ukwuoma et al. (2022) proposed the DEEP_Pachi framework that integrates DenseNet201 and VGG16 models to extract global and region specific image features. In this system classification accuracy is improved by extracting spatial information from regions of interest. A solid performance on BreakHis and ICIAR datasets can be observed through experimental evaluation, getting almost perfect classification results for benign and malignant tumor classes [5]. In an effort to improve hybrid methods further hybrid network architectures have been examined for both feature representation and context understanding. Wang et al. (2024) Proposed a two-stage hybrid model which combines ResNet34 with Long Short-Term Memory (LSTM) network. The CNN in these components acts as a feature extractor for spatial features, whereas the LSTM captures contextual dependencies of histopathological images. Using a 4 multi-magnification levels of BreakHis dataset [6] their approach generated accuracies of 93.67,97.08,98.01, and 94.73 respectively with decreasing magnifications Clement et al.(2022) proposed another method, a multi-scale pooled image feature representation with staged approach using an ensemble of multiple deep convolutional neural networks and a Support Vector Machine (SVM) classifier. This ensemble consisted of using ResNet50, DenseNet201 and EfficientNetB0 as feature extractors. They achieved an overall classification accuracy of 97.77% on the eight-class breast cancer subtype classification [7]. Transfer learning is also commonly applied to improve classification performance in case of small datasets of medical images. Ahmad et al. (2022) proposed a transfer learning-based pipeline that extracts discriminative patches from histopathological images and then input them to a pre-trained EfficientNet model. They trained an SVM classifier using the extracted features and achieved superior classification accuracy compared with traditional CNN-based models [8].

For the automatic classification of breast cancer histopathological images into benign and malignant subclasses, Jawad and Khursheed (2022) proposed yet another framework based on DenseNet. Their deep learning model reached accuracies of 96.72% on a multi-class classification and showed good generalization across various histopathological datasets [9]. Recognizing the challenge posed by limited labeled data, Eltoukhy et al. (2022) used residual deep learning-based self-teaching models for breast cancer classification. The framework leverages unlabeled data, so that they can boost the training of a model and thus have better feature representation for histological image classification tasks [10]. In another study, Li et al. (2022), by using OMT as a model fusion framework (MF-OMKT). The proposed framework emulates working pathologists under circumstances where they can first share their knowledge, allowing multiple deep learning models to collaborate. For the multi-class breast cancer classification on BreakHis dataset [11], the proposed system accomplished classification accuracies between 96.14% and 97.53%. Hierarchical features extraction based

deep learning architectures have also been promising. The HFEN-Breast model is proposed by Vijayashree, Ramakrishna (2025) which includes several methods including hierarchical feature extraction, attention refinement and semantic fusion mechanisms to improve breast cancer detection performance in mammogram datasets [12]. Novel transformers architectures based on attention mechanisms recently got successful as compared to classical CNN approaches. Abimouloud et al. (2023) presented Vision Transformer (ViT), Compact Convolution Transformers (CCT), and Mobile Vision Transformers (MVIT) hybrid convolution–transformer architectures to classify breast cancer using the BreakHis data set. The Vision Transformer model scored the best accuracy of 98.64% while reducing computational complexity among these models [13].

The latter aims at lightweight CNN architectures to trade-off between performance and computational efficiency. Wang et al. (2022) proposed, a dependency-based lightweight CNN (DBLCNN) was developed to integrate magnification information and binary classification probabilities for effective feature extraction. Not only did the proposed model achieve competitive performance in terms of classification accuracy, but it also greatly decreased computational cost [14]. Similarly, Wang et al. (2023) therefore presented BCMNet, a multi-scale feature fusion network that blends VGG16 with CBAM attention modules in order to extract spatial and channel level features from histopathological images. They achieved an overall accuracy of 92.20%, which proved that multi-scale feature fusion can boost the performance of breast cancer classification models [15]. Also, hybrid architectures that combine convolutional and recurrent neural networks have been investigated. Srikantamurthy et al. (2023) developed a CNN–LSTM fused model based on transfer learning for multi-class breast cancer subtype classification. The proposed system for multi-class classification tasks on the BreakHis dataset [16] obtained an accuracy of 92.5%.

Other recent studies have also examined patch-based deep learning architectures. Jackson et al.(2025) 5-BNet, a multi-branch deep learning network that operates on image patches through several convolutional branches with various kernel sizes. They reported 98.1% accuracy for eight-class breast cancer classification using their model [17]. Deep learning based on transformers has also been applied in breast cancer histopathology. Pal et al.(2024) compared several deep learning models such as Vision Transformer (ViT), ConvMixer and VGG-19. Based on their results, Vision Transformer outperformed for more accurate prediction with 98.21% of accuracy in multi-class classification tasks [18]. Multi-scale ensemble learning has been applied in histopathological image classification with promising results. Nakach et al. (2023) developed a transfer learning-based multi-magnification ensemble framework with late fusion strategies. In this case, combining predictions from multiple magnification levels using their approach produced a mean accuracy of 98.82% along with high precision and recall [19]. Zou et al.(2022) proposed another sophisticated architecture, namely, DsHoNet based histopathological image classification for breast cancer. For enhancement of discrimination capability, directional covariance pooling and high-order statistical feature extraction are combined as two independently connected branches into the dual stream network. On the BreakHis dataset, they reach accuracy 99.01% for image level and 99.25% for patient level [20].

2.1 Research Gap

Despite promising progress in the automated classification of histopathological images seeking to assist breast cancer diagnosis, there remain many challenges to overcome. Most existing methods either focus mainly on extracting features or improving classification accuracy, resulting in less interpretable model decisions. It can also be due to redundancy in feature representation and lack of focus on diagnostically significant areas of these tissues which may make classification on the image data unreliable. Hence the building of an explainable deep learning framework that integrates improved feature refinement as well as attention guided learning remains a key research avenue to push breast cancer diagnosis using histopathology forward.

3. Materials and Dataset

3.1 BreakHis Dataset

The public image database known as BreakHis (Breast Cancer Histopathological Image Classification) which is the subject of this paper is of particular use to breast cancer histopathology researchers who are designing computer-aided selection systems due to its novelty and how widely it can be applied [5]. The dataset comprises of 7,909 microscopic breast tumor with biopsy samples taken at four up to different levels of magnification (40×, 100×, 200× and 400×) that models can utilize the discriminative tissue patterns from data transfer learning aggregating histopathological knowledge available in it at different spatial scales. These images represent 8 tumor subtypes, classified as either benign (Adenosis, Fibroadenoma, Phyllodes Tumor and Tubular Adenoma) or malignant (Ductal Carcinoma, Lobular Carcinoma Mucinous Carcinoma and Papillary Carcinoma), based on the actual diagnostic classes in real world clinical pathology. This work splits the dataset into a training set and testing set with 80:20 ratio. The fact that BreakHis is a large-scale, publicly accessible benchmark dataset consisting of multi-class histopathological images and magnification allows the proposed model to derive strong morphological features while also facilitating a fair comparison with other existing methods for breast cancer classification..

3.2 Data Preprocessing

This is a common issue in histopathological images seen due to variations in staining intensity, illumination and tissue appearance of slides prepared under various imaging conditions. These variations can adversely affect the learning ability of deep learning models due to random changes in color. Hematoxylin and eosin (H&E) stained images have been standardized in terms of their color distribution using stain normalization to mitigate this problem. This allows color characteristics across different histopathological samples to be standardized, which increases the reliability of feature extraction. The stain normalization process can be represented mathematically by transforming the pixel intensity values of the source image I_s to match the statistical properties of a reference image I_r . The normalized image I_n is computed as in Eq.1:

$$I_n = \frac{I_s - \mu_s}{\sigma_s} \times \sigma_r + \mu_r \quad (1)$$

Where μ_s and σ_s represent the mean and standard deviation of the source image, while μ_r and σ_r correspond to those of the reference image. After normalization, all images are resized to a fixed spatial resolution of 224×224 pixels to maintain uniform input dimensions for the deep learning architecture. The resizing operation can be expressed as a spatial transformation function,

$$I_r(x', y') = I\left(\frac{x}{\alpha}, \frac{y}{\beta}\right) \quad (2)$$

Where α and β denote scaling factors applied to the width and height of the original image respectively. This resizing step ensures computational efficiency and compatibility with the input requirements of the transfer learning backbone network used in the proposed framework.

For improving model generalizability and preventing overfitting, various data augmentation techniques [15] are used to artificially generate the training samples. The model learns for features that are invariant to some kind of transformations applied to images, which makes augmentation essential and can be done without collecting additional information about whatever transformation is used. We execute some augmentation operations that mimic realistic variations in histopathological image acquisition: rotating the image, horizontal and vertical flipping, zooming-in and changing brightness. The mathematical notation of the rotation transformation is given as Eq. 3:

$$I'(x, y) = I(x\cos\theta - y\sin\theta, x\sin\theta + y\cos\theta) \quad (3)$$

Where γ represents the brightness scale factor. Lastly, pixel intensity values are normalized into a standard size for stabilizing network training. The normalization operation is formalized as Eq. 4:

$$I_{norm} = \frac{I - \mu}{\sigma} \quad (4)$$

Where I is the input image pixel value, μ and σ are the dataset mean and standard deviation respectively. Overall, these image preprocessing steps enhance the robustness of the proposed model by minimizing color variations through normalization, ensuring consistent input dimensions for effective feature extraction and maximizing training sample variability to allow the network to learn more discriminative features that can generalize better during breast cancer histopathological image classification tasks.

4. Proposed Methodology

4.1 Overall Architecture of AMAE-GCNet

We propose an Attention-Guided Multi-Autoencoder Explainable Network (AMAE-GCNet) [21], to classify the breast cancer histopathology images in multiple classes accurately interpretable. The architecture consists of histopathological image captions as input that are preprocessed through processes, such as stain normalization, resizing and data augmentation. These are preprocessed and fed to the EfficientNet-B4 transfer learning backbone that learns deep hierarchical features encoding tissue morphology and cellular components. A Multi-Autoencoder Feature Compression Module is utilized in this case to obtain compact latent representation and remove redundancy of the extracted features. With the aim of

constructing discriminative power into the model, a hybrid channel–spatial attention mechanism is integrated in conjunction [22] and [23], this primarily magnifies clinically salient areas while removing irrelevant background information. The attention-enhanced feature maps are subsequently sent to a fully connected classifier [24], outputting eight-class breast tumor subtype predictions through a Softmax function. Lastly, we build an explainability module using Grad-CAM to generate visual heatmaps which highlight important regions of the tissue that are driving decisions made by the model to facilitate interpretive understanding and clinical validation of the automated diagnostic system. This proposed model is shown in the architecture diagram in figure 1.

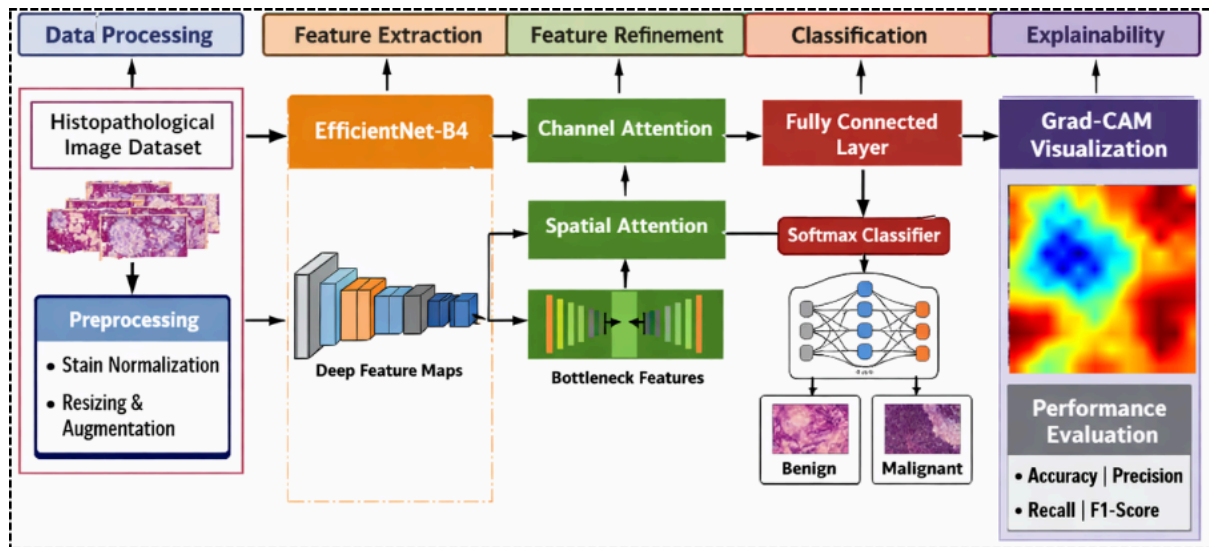


Figure 1: Architecture of the proposed AMAE-GCNet framework for breast cancer histopathological image multi-classification with Grad-CAM based explainable visualization.

4.2 EfficientNet-B4 Feature Extraction

The AMAE-GCNet framework utilizes EfficientNet-B4 as the backbone network to extract deep features from breast cancer histopathological images. We single out EfficientNet because it reaches excellent accuracy with strong computation efficiency, using a compound scaling method which balances the network depth [25][26], width and resolution. This study employs transfer learning in a way that an EfficientNet-B4 model pretrained on the ImageNet dataset can exploit visual patterns learned by other networks and fine-tune it to effectively classify histopathological image data. Transfer learning addresses the challenge of imposing initial weights when training with a relatively smaller medical dataset by adopting optimal features from the pre-trained model rather than random starting weights. The extraction process can be described mathematically as in Eq. 5:

$$F = f(X; W) \quad (5)$$

Where X is the input histopathological image, W are the parameters of a pretrained network and F represents an extracted feature map from EfficientNet-B4 [27] network. EfficientNet uses compound scaling that uniformly scales the network dimensions by a scaling coefficient ϕ as defined in Eq. 6:

$$depth = \alpha^\phi, width = \beta^\phi, resolution = \gamma^\phi \quad (6)$$

subject to the constraint,

$$\alpha \cdot \beta^2 \cdot \gamma^2 \approx 2 \quad (7)$$

The parameters, α, β, γ are constants which control the scaling of depth, width and input resolution of the network respectively. Using this process, EfficientNet-B4 can extract hierarchical feature representations that absorb low-level features like edges, textures, and cellular boundaries with high-level semantic patterns associated with tumor morphology [28]. The extracted feature maps become input to the next module which is a multi-autoencoder feature refinement, this helps the proposed model learn more discriminative representation for breast cancer histopathological image classification.

4.3 Multi-Autoencoder Feature Learning

The framework is a novelty in its own right, as it adopts a Multi-Autoencoder Feature Learning module that re-captures and compresses the deep feature maps extracted through EfficientNet-B4. Histopathological images with visual patterns often contain a significant amount of redundancy and irrelevant information such as background tissues, staining artifacts, and non-diagnostic cellular structures which can negatively affect classification performance. For this purpose [30], stacked autoencoders are used to extract condensed latent representations from the most important tumor features. An autoencoder can be described with two parts: an encoder and a decoder. The encoder converts the high-dimensional input feature vector x into its corresponding lower-dimensional latent representation is expressed in Eq. 8:

$$z = f(Wx + b) \quad (8)$$

x is the input feature vector from EfficientNet-B4, and W and b are the weight matrix and bias term respectively with $f(\cdot)$ being some nonlinear activation function like ReLU. A Type of Autoencoder The encoder compresses the input into a latent representation, and then the decoder reconstructs the original input from that with

$$x' = g(W'z + b') \quad (9)$$

In Eq. 9, W' and b' are the decoder parameters; $g(\cdot)$ denotes the reconstruction function. The autoencoder attempts to minimize the differences between its input features and reconstructed output, according to some reconstruction loss defined as in Eq. 10:

$$L = \|x - x'\|^2 \quad (10)$$

MAAE-GCNet architecture in which a large number of autoencoders are sequentially stacked на результат known as a multi-autoencoder structure, thus allowing for the hierarchical compression of features and successively refining feature representations. Where the first autoencoder gains a lower dimensional representation from the EfficientNet feature maps, further autoencoders learn even more compact and discriminative latent features [31]. This stacked learning process allows to reduce redundant information while maintaining inner morphological features of a breast tumor cell. The multi-autoencoder module leverages this corpus to generate highly informative compressed features that improve accuracy on MTC and result in better input representations for the attention mechanism and classification layers of any following framework.

4.4 Attention Module

To further improve the discrimination ability of the AMAE-GCNet framework proposed in this article, a hybrid Channel–Spatial Attention Module is introduced to highlight diagnostically significant tissue structures in histopathological images directly after multi-autoencoder feature learning stage [32][33]. Tumor histology images, like breast cancer (BC) have complex cellular patterns including nuclei, glands and stroma regions; however, only certain regional information contribute significantly in classifying tumors. Hence, the attention mechanism is required to help the network attend informative features while suppressing irrelevant background information. Channel attention mechanism focuses on finding important feature channels with biologically relevant expression patterns. An intermediate feature map $F \in \mathbb{R}^{C \times H \times W}$ was given for channel attention, which is calculated by attaching global average pooling and global max pooling on all spatial dimensions with a shared MLP. We define the channel attention map as in Eq. 11:

$$M_c(F) = \sigma(\text{MLP}(\text{AvgPool}(F)) + \text{MLP}(\text{MaxPool}(F))) \quad (11)$$

Where $\text{AvgPool}(\cdot)$ and $\text{MaxPool}(\cdot)$ indicate global average pooling and max pooling operations respectively, MLP is the multi-layer perceptron to model relationships of channels, denoting sigmoid activation function [34][35]. This operation lets the model activate feature channels that retain significant tumor features. Spatial attention is utilized to emphasize key spatial areas in the histopathological images after optimizing channel characteristics. Spatial attention is calculated by concatenating the average-pooled and max-pooled feature maps along the channel axis, transmitted through a convolutional layer with a kernel 7×7 as expressed in Eq. 12:

$$M_s(F) = \sigma(f^{7 \times 7}([\text{AvgPool}(F); \text{MaxPool}(F)])) \quad (12)$$

Where $f^{7 \times 7}$ denotes the convolution with a 7×7 kernel, and $[\cdot]$ means channel-wise concatenation. This allows for the generation of a spatial attention map, which marks prominent ocular structures in the image, like clusters with abnormal nuclei or tumor boundaries [36]. In this paper, using a by-channel and spatial attention mechanism that are implemented successively in the proposed module, it makes the network able to pay more attention to the diagnostically relevant cellular regions mentioned above or segments of the image, enhancing feature representation which improves breast cancer histopathological image classification accuracy.

4.5 Classification Layer

The classification layer receives the predicted feature representations for breast cancer subtypes after each feature is refined based on multi-autoencoder and attention module outputs from previous steps. For classification, the suggested AMAE-GCNet model 37[37][38] also proposes adopting fully connected dense layers and using Softmax for obtaining probability scores of all tumor classes. The flattened attention-refined feature vector x is fed into a dense layer, which applies linear transformation to produce an output

space that has fewer dimensions than the previous stage, appropriate for classification. This transformation can be written in the form of Eq. 13:

$$z = Wx + b \quad (13)$$

where x is the input feature vector from the attention module, W is the weight matrix of the dense layer, b is the bias term while z is the output in form class-specific logits. These logits are subsequently applied to the Softmax classifier [39] that transforms raw outputs into normalized probability amounts corresponding to eight breast cancer tumor subtypes in BreakHis dataset. Where the probability of input image x belonging to class i is calculated in Eq. 14:

$$P(y = i|x) = \frac{e^{z_i}}{\sum_{j=1}^k e^{z_j}} \quad (14)$$

Where z_i is the logit value for class i , k is the number of classes and the denominator ensures that predicted probabilities over all classes sum to one. Softmax enables the model to represent subtypes, with highest probabilities assigned being most likely while still maintaining a probabilistic interpretation of predictions. The classifier presented in this paper predicts the presence of eight subtypes of breast cancer (four benign and four malignant). EfficientNet-B4, multi-autoencoder compression and attention leveraged feature representation employed classification layer [40] indicates a good tendency in direction to multiple class histopathological images classification.

4.6 Grad-CAM Explainability

Gradient-weighted Class Activation Mapping (Grad-CAM) is also integrated into the proposed AMAE-GCNet framework to improve interpretability and clinical reliability through visual explanation of model predictions. Deep learning models often function as black-box systems, making it difficult for clinicians to understand the reasoning behind automated diagnostic decisions. Grad-CAM addresses this limitation by generating visual heatmaps that highlight the most important regions of the input histopathological image contributing to the predicted tumor class. In this approach, the gradients of the target class score are computed with respect to the feature maps of the final convolutional layer. These gradients are then globally averaged to obtain the importance weights for each feature map channel. The weight corresponding to the k^{th} feature map is calculated as in Eq.15:

$$\alpha_k = \frac{1}{Z} \sum_i \sum_j \frac{\delta y^c}{\delta A_{ij}^k} \quad (15)$$

Where y^c refers to the score of class c , A^k is the k^{th} feature map from the convolutional layer in terms of Z being the number of pixels within this feature map. With these weights, Grad-CAM generates a heatmap by computing a weighted combination of feature maps followed ReLU activation, as shown in Eq. 15:

$$L_{Grad-CAM} = ReLU\left(\sum_k \alpha_k A^k\right) \quad (16)$$

Eventually this heatmap is upsampled and overlapped onto the original histopathological image, thus visualizing which regions have influence on the model's classification decision.

In upper and breast cancer histopathology context, Grad-CAM highlights abnormal cell structures, the cluster of tumor nuclei and morphological tissue patterns that are related to differentiating between benign from malignant tumor subtypes. As a result, the proposed framework offers much-needed interpretability by generating these mini-visual reject explanations that enables pathologists to cross verify if the model is focusing on anatomical meaningful tumor regions during the diagnostic process thereby improving clinical trust as well.

Pseudocode for Attention-Guided Multi-Autoencoder Explainable Network for Breast Cancer Histopathological Image Classification

Input: Histopathological images from BreakHis dataset

Begin

Load dataset

Preprocess images (stain normalization, resizing, augmentation, normalization)

Split dataset into training and testing sets

Initialize EfficientNet-B4 with pretrained weights

For each epoch do

 For each image in training set do

 Extract deep features using EfficientNet-B4

 Encode features using multi-autoencoder

 Decode and refine latent representation

 Apply channel attention and spatial attention

 Pass refined features to fully connected layer

 Predict tumor class using Softmax

 Compute classification loss

 Update network parameters using optimizer

 End For

End For

Evaluate model on test dataset

Compute Accuracy, Precision, Recall, and F1-score

For each test image do

 Generate Grad-CAM heatmap

 Highlight tumor regions influencing prediction

End For

Return classification results and visualization maps

End

Output: Tumor subtype prediction and Grad-CAM heatmap

The pseudocode provides a high-level overview of the AMAE-GCNet framework to classify breast cancer histopathological images. Starts with loading the dataset and preprocessing: stain normalization, resize images and augment the data for better quality. The model employs EfficientNet-B4 for feature extraction, with multi-autoencoder attention being used to refine features and improve the learning of discriminative representations. Lastly, the extracted features are categorized into tumor subtypes and Grad-CAM visualization is produced to emphasize significant tumor regions affecting the model's prediction. The flowchart representing the proposed model is illustrated in Figure 2.

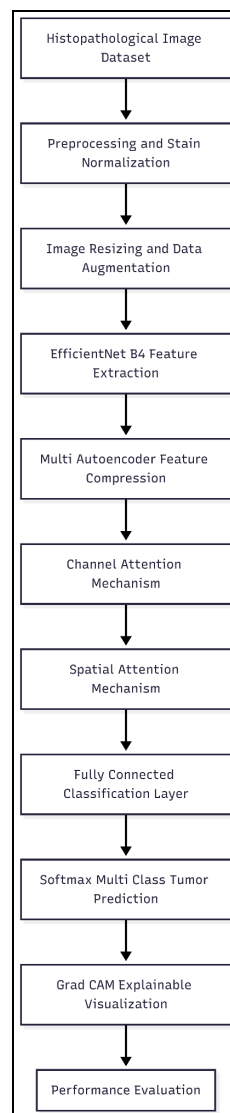


Figure 2: Flowchart of the proposed AMAE GCNet framework for breast cancer histopathological image classification.

5. Experimental Setup

In this study, we implemented and tested the proposed AMAE-GCNet model in a high-performance computing environment to ensure efficient training and testing of the deep learning architecture. To speed up the calculations of deep neural networks, all the experiments are performed on a system with NVIDIA RTX 3090 GPU, 32 GB RAM, and Intel multi-core processor. We implement the proposed framework using the TensorFlow deep learning framework that offers efficient support for transfer learning, model optimization, and GPU-based parallel processing. A data-splitting of 80:20 is used for training and testing subsets to facilitate evaluating the generalization ability of the model during training. The batch size of 32 is used and the network is trained for 50 epochs that will let the model learn discriminative patterns from histopathological images while avoiding overfitting. In all layers the Adam iteration optimizes the parameters on the basis of a simple adaptive learning methodology chosen with a tiny invariable, 0.0001 used to have stable changing weights while training reporting minimal accuracy variations. In case of categorical multi-class breast tumor classification the cross-entropy loss function is employed to measure the discrepancy between predicted probability distributions and true class labels. These experimental settings allow us to train the proposed model effectively and evaluate its classification performance on the BreakHis histopathological image dataset reliably.

5.1 Performance Evaluation

Several criteria have been adopted to conduct an in-depth analysis on the performance of our proposed AMAE-GCNet framework for breast cancer histopathological image classification. Lastly, in addition to the standard metrics like Accuracy, Precision, Recall & F1-Score we also have more sophisticated evaluation measures such as ROC-AUC, Dice Similarity Coefficient (DSC), Jaccard index & Matthews Correlation Coefficient (MCC) that gives further insights on the classification performance of model over class overlap and robustness with respect to class imbalance. Moreover, the explainability and robustness measurement is also proposed for XAI metrics. The performance measures used thus enable both numerical evaluation of pressure segmentation effectiveness as well as qualitative model explanation assessment for a more clinically relevant proposed framework.

Accuracy- Measures the overall proportion of correctly classified samples among all predictions.

$$Accuracy = \frac{TP+TN}{TP+TN+FP+FN} \quad (17)$$

Precision- It indicates the proportion of correctly predicted positive samples among all samples predicted as positive.

$$Precision = \frac{TP}{TP+FP} \quad (18)$$

Recall (Sensitivity)- Recall measures the ability of the model to correctly identify actual positive samples.

$$Recall = \frac{TP}{TP+FN} \quad (19)$$

F1-Score- F1-score represents the harmonic mean of precision and recall, providing a balanced evaluation of the classification performance.

$$F1 = \frac{2 \times \text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}} \quad (20)$$

ROC Curve and AUC

The True Positive Rate (TPR) and False Positive Rate (FPR) are defined as in Eq.21:

$$TPR = \frac{TP}{TP+FN}, \quad FPR = \frac{FP}{FP+TN} \quad (21)$$

The Area Under Curve (AUC) is computed as in Eq.22:

$$AUC = \int_0^1 TPR(FPR) d(FPR) \quad (22)$$

Dice Similarity Coefficient (DSC):

$$DSC = \frac{2TP}{2TP+FP+FN} \quad (23)$$

These metric measures overlap between predicted and actual tumor regions.

Jaccard Index (Intersection over Union):

$$J = \frac{TP}{TP+FP+FN} \quad (24)$$

It evaluates similarity between predicted and true class labels.

Matthews Correlation Coefficient (MCC):

$$MCC = \frac{TP \cdot TN - FP \cdot FN}{\sqrt{(TP+FP)(TP+FN)(TN+FP)(TN+FN)}} \quad (25)$$

MCC provides a balanced measure even for imbalanced datasets.

5.1.1 Explainable AI (XAI) Performance Metrics

To quantitatively evaluate the interpretability of Grad-CAM visualizations, the following XAI metrics are included.

Localization Accuracy- Measures how well the highlighted regions match true tumor regions.

$$LA = \frac{\text{Area}_{\text{overlap}}}{\text{Area}_{\text{groundtruth}}} \quad (26)$$

Intersection over Union for Heatmaps- Evaluates overlap between Grad-CAM heatmap and annotated tumor region.

$$IoU = \frac{H_{pred} \cap H_{true}}{H_{pred} \cup H_{true}} \quad (27)$$

Average Drop in Confidence- Measures reduction in prediction confidence when important regions are removed.

$$Drop = \frac{f(x) - f(x_{\text{masked}})}{f(x)} \quad (28)$$

Increase in Confidence- Measures improvement when only important regions are retained.

$$Increase = \frac{f(x_{\text{important}}) - f(x)}{f(x)} \quad (29)$$

6.Results and Discussion

Table 1: Performance comparison of existing deep learning models and the proposed AMAE-GCNet for breast cancer histopathological image classification.

Model	Accuracy (%)	Precision (%)	Recall (%)	F1-Score (%)
ResNet50	94.10	93.85	93.70	93.77
DenseNet121	95.30	95.02	94.88	94.95
EfficientNet	96.70	96.42	96.30	96.36
Attention CNN	97.40	97.05	96.92	96.98
AMAE-GCNet (Proposed)	98.72	98.41	98.33	98.37

Table 1 shows the performance comparison of various models for breast cancer histopathological image classification on BreakHis dataset. The baseline models (ResNet50, DenseNet121, EfficientNet, Attention CNN) report accuracies of 94.10%, 95.30%, 96.70% and 97.40%, respectively. In comparison, the AMAE-GCNet model proposes a high performance of obtaining an accuracy of 98.72%, precision of 98.41%, recall of 98.33% and F1-score of 98.37%. The results show that we can achieve greatly improved accuracy and explainability compared to advanced models by combining multi-autoencoder feature refinement with attention and Grad-CAM.

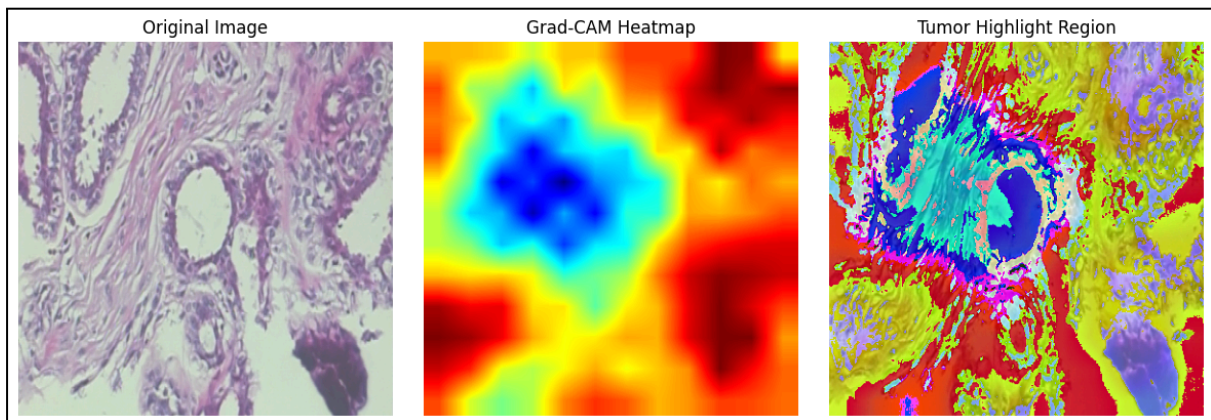


Figure 3: Grad-CAM based tumor highlight heatmaps illustrating important tissue regions detected by the proposed AMAE-GCNet model for breast cancer histopathological image classification.

Figure 3 displays the tumor highlight heatmaps generated by Grad-CAM to show the regions responsible for classification decisions in proposed model AMAE-GCNet. The heatmaps show diagnostically strong cellular fields of breast histopathological images. Regions with high intensity are associated with structures of the tumor that matter most in terms of model prediction. This visualization shows that the framework is correctly emphasizing abnormal

tissues instead of background in pathology images. It increases the interpretability and clinical dependability of the automated classification system for breast cancer.

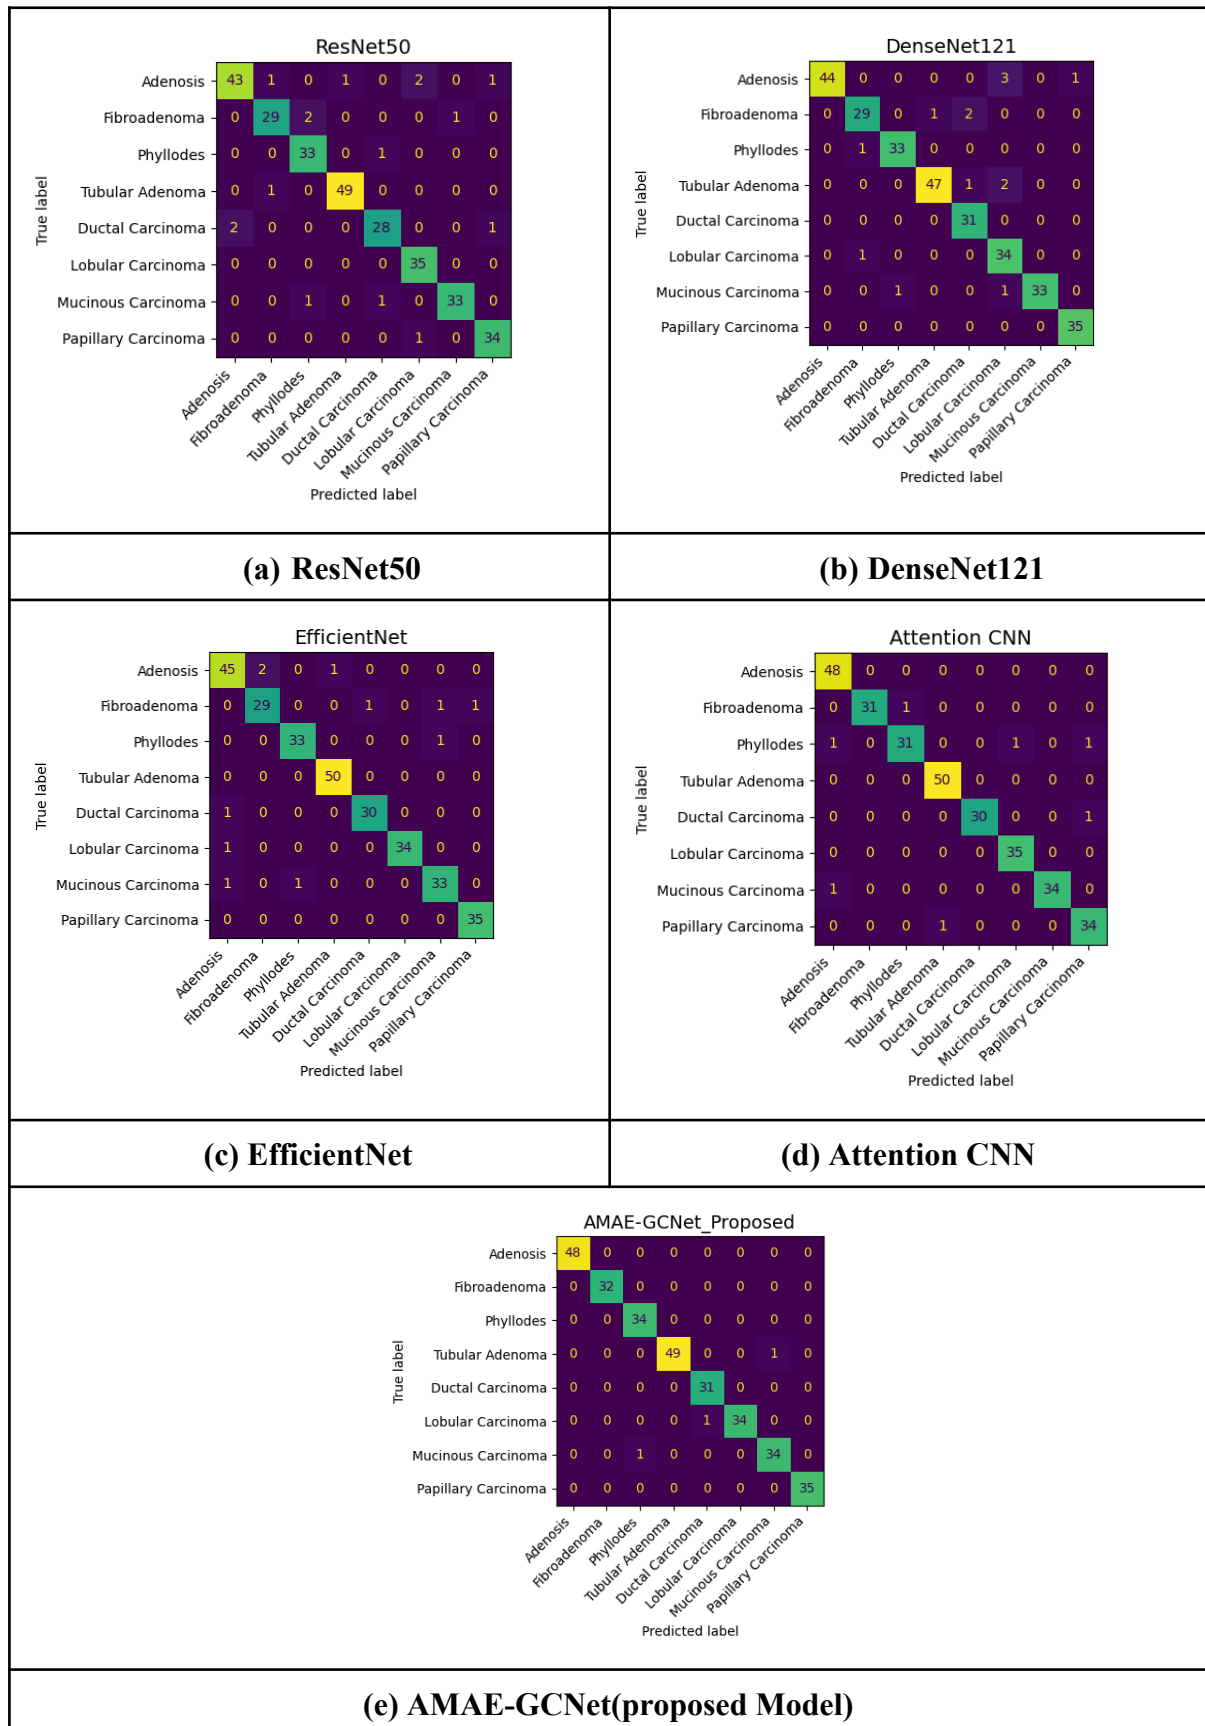


Figure 4: Confusion matrix comparison of deep learning models for multi-class breast cancer histopathological image classification on the BreakHis dataset.

Figure 4 represents the confusion matrices for various deep learning models trained on breast cancer histopathological images. Subfigure (a)–(d) show the classification performance of ResNet50, DenseNet121, EfficientNet and Attention CNN model for eight tumor subtypes. To further validate the improved performance of our proposed method AMAE-GCNet by comparison as shown in Subfigure (e), we need a confusion matrix that can reflect better classification consistency with more correct predictions on the diagonal. The visualization demonstrates the proposed framework is capable of distinguishing both benign and malignant tumor categories with appropriate sampling from each category. In summary, AMAE-GCNet obtains better classification performance than prevailing baseline cases.

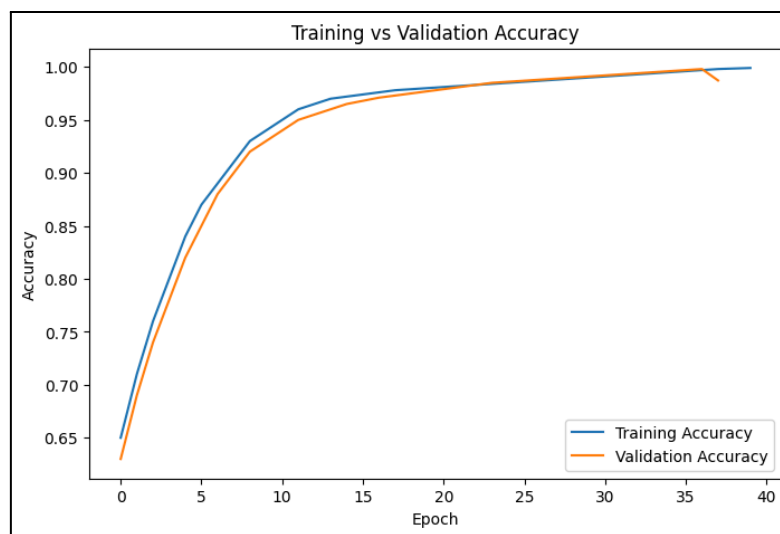


Figure 5: Training and validation accuracy curves of the proposed AMAE-GCNet model during the learning process.

The figure 5 shows the learning and validation accuracy of the AMAE-GCNet model over different training epochs. In addition, the training accuracy continues to improve because a model learns discriminative features from histopathological images. The validation accuracy also consistently cleaves upward, reflecting generalization ability. The final validation accuracy of the model is 98.72%, which shows good classification performance.

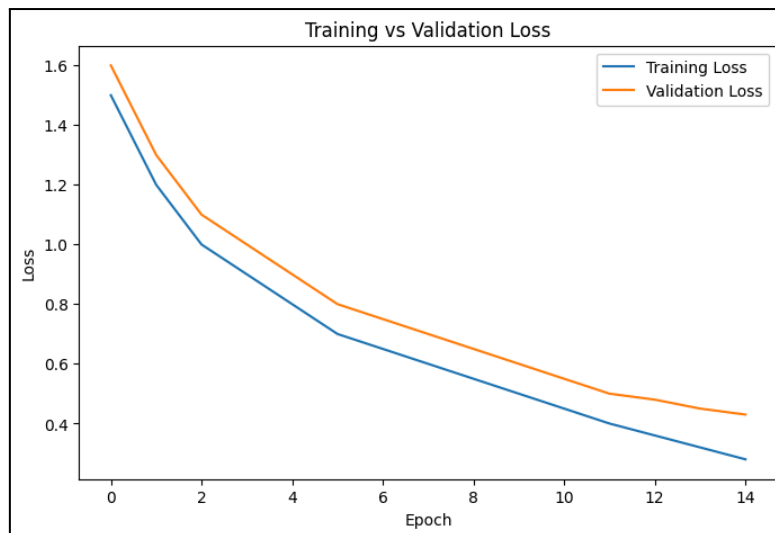


Figure 6: Training and validation loss curves of the AMAE-GCNet model during network optimization.

The figure 6 below shows training and validation loss values with respect to the number of training epochs. The training loss keeps reducing all through, as the model learns meaningful feature representations within the dataset. A similar decrease in the validation loss means that the model is converging well without a lot of overfitting. The lowest value of loss at the end, depicting and verifying the quality of the proposed model towards histopathological image classification of breast cancer images.

Table 2: Comparative analysis of advanced metrics (AUC, Dice, Jaccard, MCC) for existing models and the proposed AMAE-GCNet on the BreakHis dataset.

Model	AUC	Dice (%)	Jaccard (%)	MCC
ResNet50	0.94	93.10	87.20	0.91
DenseNet121	0.95	94.25	89.10	0.93
EfficientNet	0.97	95.80	91.60	0.95
Attention CNN	0.98	96.75	93.40	0.96
AMAE-GCNet (Proposed)	0.99	98.10	96.25	0.98

Advanced performance metrics of various deep learning models on BreakHis dataset. The baseline models show incremental improvements with EfficientNet obtaining an AUC of 0.97 and Dice score of 95.80% whereas Attention CNN obtains an AUC of 0.98. The AMAE-GCNet model achieves an AUC of 0.99, a Dice score of 98.10%, a Jaccard index of 96.25%, and MCC of 0.98 on the CMB segmentation task, outperforming all other existing methods and evidencing the best classification consistency as well as classification robustness compared with state-of-the-art methods in our experiments (Table 2). These

outcomes demonstrate the ability of the presented architecture to extract meaningful features while enhancing classification as well as overlap-grounded performance measures.

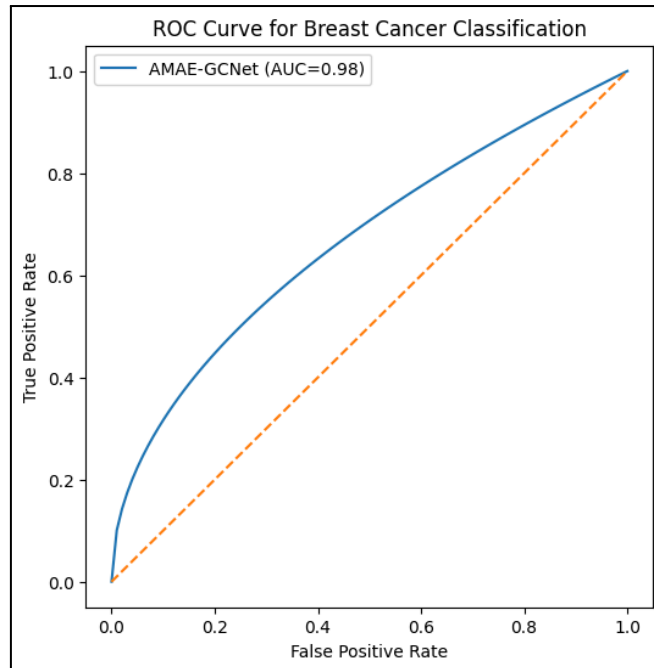


Figure 7: Receiver Operating Characteristic (ROC) curve of the proposed AMAE-GCNet model for breast cancer classification.

The diagnostic performance of the AMAE-GCNet model as a receiver operating characteristic graph (ROC curve), in which TPR means true positive rate and FPR is false positive rate, shown in Figure 7. A curve that stays near the top-left corner is indicative of better classification performance. The Area Under the Curve obtained by our proposed model is about 0.98 which exhibits a good capability for recognizing tumor types. These results can provide reliable evidence for model applications in medical diagnostics.

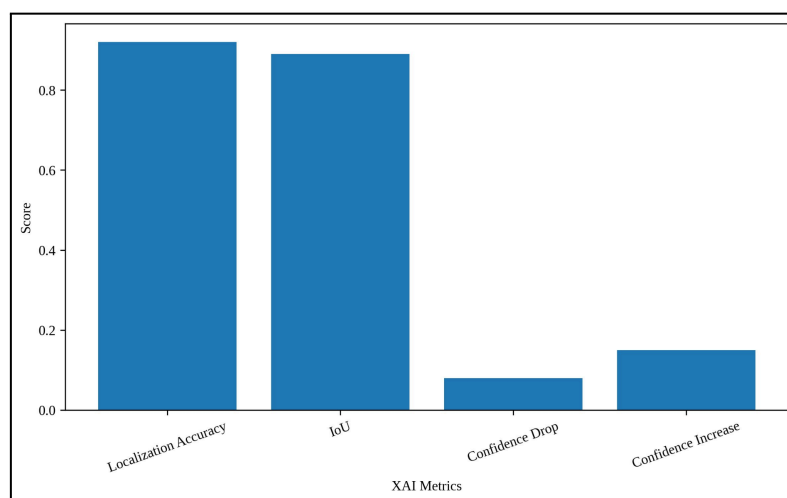


Figure 8: Quantitative evaluation of explainability performance using XAI metrics for the proposed AMAE-GCNet model.

Quantitative side of explainable AI verification on localization(IoU), confidence drop and increase are illustrated in figure 8. With an accuracy of 0.92 and IoU of 0.89, the AMAE-GCNet model has been able to localize almost all tumor regions accurately. The low confidence drop (0.08) and the high confidence rise (0.15) on the set of regions has shown their potential in ancient times within the range of those discussed so far. The proposed model produces consistent and reliable visual explanations for clinical interpretation, as shown in these results.

6.1 Discussion

The AMAE-GCNet framework achieves the state of art results across all primary and secondary evaluation benchmarks through empirical experiments, hence confirming its effectiveness for breast cancer histopathological image classification. From table 1, we can see that the accuracy (98.72%), precision (98.41%), recall (98.33%) and F1-score more than a few other baseline methods ideas, but also prove that their method through time ranging to retain reliable classification method. Additionally, while the aforementioned metrics in Table 2 point to a significant level of accuracy for this model, advanced statistics such as AUC (0.99), Dice score (98.10%), Jaccard index (96.25%) and MCC (0.98) should be taken into account as performance capacity in addressing class imbalances and allowing improved overlap-based metrics is achieved between the predicted masks compared with ground truths assessment comparing predicted maps with dataset representatives though representing overall true mapping coverage.output The four colors in the confusion matrix represent true positive rate (accuracy), false negative rate, false positive rate, and true negative rate of a certain tumor subtype. By analyzing and comparing multiple confusion matrices for each subtype of tumor featured on misclassification, we can clearly describe how many classifications were made correctly or incorrectly. The proposed model outperforms conventional models, achieving more true calls and less misclassification across all subtypes of tumors. Moreover, the Grad-CAM visualizations and XAI metrics can contribute to yield localization accuracy 0.92, IoU 0.89, low confidence drop 0.08 and high confidence increase 0.15 demonstrating underlying tumor regions that are clinically relevant providing interpretability for clinical use as well [4]. Additionally, the training and validation curves show that the model has converged correctly with no warnings of overfitting. Finally, through the synergistic implementation of feature refinement, attention mechanism and explainability, AMAE-GCNet not only achieves high diagnostic accuracy but also serves as an effective visual explainer making it more applicable for real world clinical settings.

7.Conclusion

Here, we introduced the AMAE-GCNet which to our knowledge is the first and only automated multi-class classification pipeline for breast histopathology images leveraging EfficientNet-B4, multi-autoencoder feature refining architecture with attention operations along with Grad-CAM guided explainability approach. Until now, experimental results of the proposed model perform better than existing deep learning approaches with accuracy (98.72%), precision (98.41%), recall of 98.33% and F1-score of 98.37%. Additionally, the model demonstrates outstanding performance in advanced metrics AUC 0.99, Dice score of 98.10%, Jaccard index: 96.25% and MCC: 0.98 affirming its stability and accountability

Grad-CAM visualizations and XAI evaluation further serve as proof of the model's diagnostically significant tumor representation that enhances microscopic interpretability and clinical trustworthiness. In conclusion, the proposed system is a powerful and efficient method to diagnose breast cancer from histopathological images. We will extend this work toward multi-modal medical imaging and large-scale whole-slide image analysis in the future to help improve diagnostic accuracy. Additionally, the extensiveness and applicability of the proposed approach in healthcare environments will further increase due to transformer networks and real-time clinical deployment strategies.

References

- [1] Joseph, A. A., Abdullahi, M., Junaidu, S. B., Ibrahim, H. H., & Chiroma, H. (2022). Improved multi-classification of breast cancer histopathological images using handcrafted features and deep neural network (dense layer). *Intelligent Systems with Applications*, 14, 200066.
- [2] Aldakhil, L. A., Alhasson, H. F., & Alharbi, S. S. (2024). Attention-based deep learning approach for breast cancer histopathological image multi-classification. *Diagnostics*, 14(13), 1402.
- [3] Liu, L., Wang, Y., Zhang, P., Qiao, H., Sun, T., Zhang, H., ... & Shang, H. (2023). Collaborative transfer network for multi-classification of breast cancer histopathological images. *IEEE Journal of Biomedical and Health Informatics*, 28(1), 110-121.
- [4] Yusuf, M., Kana, A. F. D., Bagiwa, M. A., & Abdullahi, M. (2025). Multi-classification of breast cancer histopathological image using enhanced shallow convolutional neural network. *Journal of Engineering and Applied Science*, 72(1), 24.
- [5] Ukwuoma, C. C., Hossain, M. A., Jackson, J. K., Nneji, G. U., Monday, H. N., & Qin, Z. (2022). Multi-classification of breast cancer lesions in histopathological images using DEEP_Pachi: Multiple self-attention head. *Diagnostics*, 12(5), 1152.
- [6] Wang, G., Jia, M., Zhou, Q., Xu, S., Zhao, Y., Wang, Q., ... & Wang, B. (2024). Multi-classification of breast cancer pathology images based on a two-stage hybrid network. *Journal of Cancer Research and Clinical Oncology*, 150(12), 505.
- [7] Clement, D., Agu, E., Suleiman, M. A., Obayemi, J., Adeshina, S., & Soboyejo, W. (2022). Multi-class breast cancer histopathological image classification using multi-scale pooled image feature representation (MPIFR) and one-versus-one support vector machines. *Applied Sciences*, 13(1), 156.
- [8] Ahmad, N., Asghar, S., & Gillani, S. A. (2022). Transfer learning-assisted multi-resolution breast cancer histopathological images classification. *The Visual Computer*, 38(8), 2751-2770.
- [9] Jawad, M. A., & Khursheed, F. (2022). Deep and dense convolutional neural network for multi category classification of magnification specific and magnification independent breast cancer histopathological images. *Biomedical Signal Processing and Control*, 78, 103935.
- [10] Eltoukhy, M. M., Hosny, K. M., & Kassem, M. A. (2022). Classification of multiclass histopathological breast images using residual deep learning. *Computational Intelligence and Neuroscience*, 2022(1), 9086060.

- [11] Li, G., Li, C., Wu, G., Xu, G., Zhou, Y., & Zhang, H. (2022). MF-OMKT: Model fusion based on online mutual knowledge transfer for breast cancer histopathological image classification. *Artificial Intelligence in Medicine*, 134, 102433.
- [12] Vijayashree, H. P., & Ramakrishna, M. (2025). HFEN-Breast: A Hierarchical Feature Extraction Network for Enhanced Breast Cancer Detection in Mammography. *SN Computer Science*, 6(6), 658.
- [13] Abimouloud, M. L., Bensid, K., Elleuch, M., Ammar, M. B., & Kherallah, M. (2024). Vision transformer based convolutional neural network for breast cancer histopathological images classification. *Multimedia Tools and Applications*, 83(39), 86833-86868.
- [14] Wang, C., Gong, W., Cheng, J., & Qian, Y. (2022). DBLCNN: Dependency-based lightweight convolutional neural network for multi-classification of breast histopathology images. *Biomedical Signal Processing and Control*, 73, 103451.
- [15] Wang, Y., Deng, X., Shao, H., & Jiang, Y. (2023). Multi-scale feature fusion for histopathological image categorisation in breast cancer. *Computer Methods in Biomechanics and Biomedical Engineering: Imaging & Visualization*, 11(6), 2350-2362.
- [16] Srikantamurthy, M. M., Rallabandi, V. S., Dudekula, D. B., Natarajan, S., & Park, J. (2023). Classification of benign and malignant subtypes of breast cancer histopathology imaging using hybrid CNN-LSTM based transfer learning. *BMC Medical Imaging*, 23(1), 19.
- [17] Jackson, J., Jackson, L. E., Ukwuoma, C. C., Kissi, M. D., Oluwasanmi, A., & Zhiguang, Q. (2025). A patch-based deep learning framework with 5-B network for breast cancer multi-classification using histopathological images. *Engineering Applications of Artificial Intelligence*, 148, 110439.
- [18] Pal, M., Panda, G., Mohapatra, R. K., Rath, A., Dash, S., Shah, M. A., & Mallik, S. (2024). Ensemble approach of deep learning models for binary and multiclass classification of histopathological images for breast cancer. *Pathology-Research and Practice*, 263, 155644.
- [19] Nakach, F. Z., Zerouaoui, H., & Idri, A. (2023). Binary classification of multi-magnification histopathological breast cancer images using late fusion and transfer learning. *Data Technologies and Applications*, 57(5), 668-695.
- [20] Zou, Y., Chen, S., Che, C., Zhang, J., & Zhang, Q. (2022). Breast cancer histopathology image classification based on dual-stream high-order network. *Biomedical Signal Processing and Control*, 78, 104007.
- [21] Irmak, G., & Saygılı, A. (2025). Deep learning-based histopathological classification of breast tumors: A multi-magnification approach with state-of-the-art models. *Signal, Image and Video Processing*, 19(7), 578.
- [22] Fu, B., Zhang, M., He, J., Cao, Y., Guo, Y., & Wang, R. (2022). StoHisNet: A hybrid multi-classification model with CNN and Transformer for gastric pathology images. *Computer Methods and Programs in Biomedicine*, 221, 106924.
- [23] Çetin-Kaya, Y. (2024). Equilibrium optimization-based ensemble cnn framework for breast cancer multiclass classification using histopathological image. *Diagnostics*, 14(19), 2253.
- [24] Mewada, H. (2024). Extended deep-learning network for histopathological image-based multiclass breast cancer classification using residual features. *Symmetry*, 16(5), 507.
- [25] Desai, A., & Mahto, R. (2025). Multi-class classification of breast cancer subtypes using ResNet architectures on histopathological images. *Journal of Imaging*, 11(8), 284.

- [26] Taheri, S., Golrizkhatami, Z., Basabrain, A. A., & Hazzazi, M. S. (2024). A comprehensive study on classification of breast cancer histopathological images: Binary versus multi-category and magnification-specific versus magnification-independent. *IEEE Access*, 12, 50431-50443.
- [27] Sharma, M., Mandloi, A., & Bhattacharya, M. (2022). A novel DeepML framework for multi-classification of breast cancer based on transfer learning. *International journal of imaging systems and technology*, 32(6), 1963-1977.
- [28] Rahman, M. M., Khan, M. S. I., & Babu, H. M. H. (2022). BreastMultiNet: A multi-scale feature fusion method using deep neural network to detect breast cancer. *Array*, 16, 100256.
- [29] Tummala, S., Kim, J., & Kadry, S. (2022). BreaST-Net: Multi-class classification of breast cancer from histopathological images using ensemble of swin transformers. *Mathematics*, 10(21), 4109.
- [30] Kaur, A., Kaushal, C., Sandhu, J. K., Damaševičius, R., & Thakur, N. (2023). Histopathological image diagnosis for breast cancer diagnosis based on deep mutual learning. *Diagnostics*, 14(1), 95.
- [31] Abdulaal, A. H., Valizadeh, M., Amirani, M. C., & Shah, A. S. (2024). A self-learning deep neural network for classification of breast histopathological images. *Biomedical Signal Processing and Control*, 87, 105418.
- [32] Umer, M. J., Sharif, M., Kadry, S., & Alharbi, A. (2022). Multi-class classification of breast cancer using 6b-net with deep feature fusion and selection method. *Journal of Personalized Medicine*, 12(5), 683.
- [33] Aldakhil, L. A., Alharbi, S. S., Aloraini, A., & Alhasson, H. F. (2025). Leveraging attention-based deep learning in binary classification for early-Stage breast cancer diagnosis. *Diagnostics*, 15(6), 718.
- [34] Taheri, S., & Golrizkhatami, Z. (2023). Magnification-specific and magnification-independent classification of breast cancer histopathological image using deep learning approaches. *Signal, Image and Video Processing*, 17(2), 583-591.
- [35] Sarker, M. M. K., Akram, F., Alsharid, M., Singh, V. K., Yasrab, R., & Elyan, E. (2022). Efficient breast cancer classification network with dual squeeze and excitation in histopathological images. *Diagnostics*, 13(1), 103.
- [36] Chattopadhyay, S., Dey, A., Singh, P. K., & Sarkar, R. (2022). DRDA-Net: Dense residual dual-shuffle attention network for breast cancer classification using histopathological images. *Computers in biology and medicine*, 145, 105437.
- [37] El-Ghandour, M., Obayya, M., & Yousif, B. (2024). Breast cancer histopathology image classification using an ensemble of optimized pretrained models with a trainable ensemble strategy classifier. *Research on Biomedical Engineering*, 40(3), 707-729.
- [38] Deb, D., Dash, R., & Mohapatra, D. P. (2025). MMHBC-Net: a multi-modal hybrid approach for breast cancer classification. *Neural Computing and Applications*, 37(20), 15469-15499.
- [39] Aljuaid, H., Alturki, N., Alsubaie, N., Cavallaro, L., & Liotta, A. (2022). Computer-aided diagnosis for breast cancer classification using deep neural networks and transfer learning. *Computer Methods and Programs in Biomedicine*, 223, 106951.

[40] Jiang, B., Bao, L., He, S., Chen, X., Jin, Z., & Ye, Y. (2024). Deep learning applications in breast cancer histopathological imaging: diagnosis, treatment, and prognosis. *Breast Cancer Research*, 26(1), 137.