Exp no: 8
Date: 10/9/26


NMAP to Discover Live Hosts Using Nmap Scans

Aim:

To discover live hosts in a network using Nmap Scans such as ARP, ICMP, TCP, and UDP on the TryHackMe platform.

Algorithm/procedure:

1. Open the TryHackMe platform and launch the assigned networking lab machine
2. Start the target machine and identify its IP address or authorized target network.
3. open the terminal in the provided Environment
4. perform an ARP Scan to identify active hosts on the local network.
5. perform an ICMP ping Scan to discover hosts responding to ping requests
6. perform TCP-based host discovery to identify hosts responding to TCP probes.
7. Perform UDP-based discovery to check for responses from UDP probes.
8. Compare the Scan results and record the discovered live hosts.

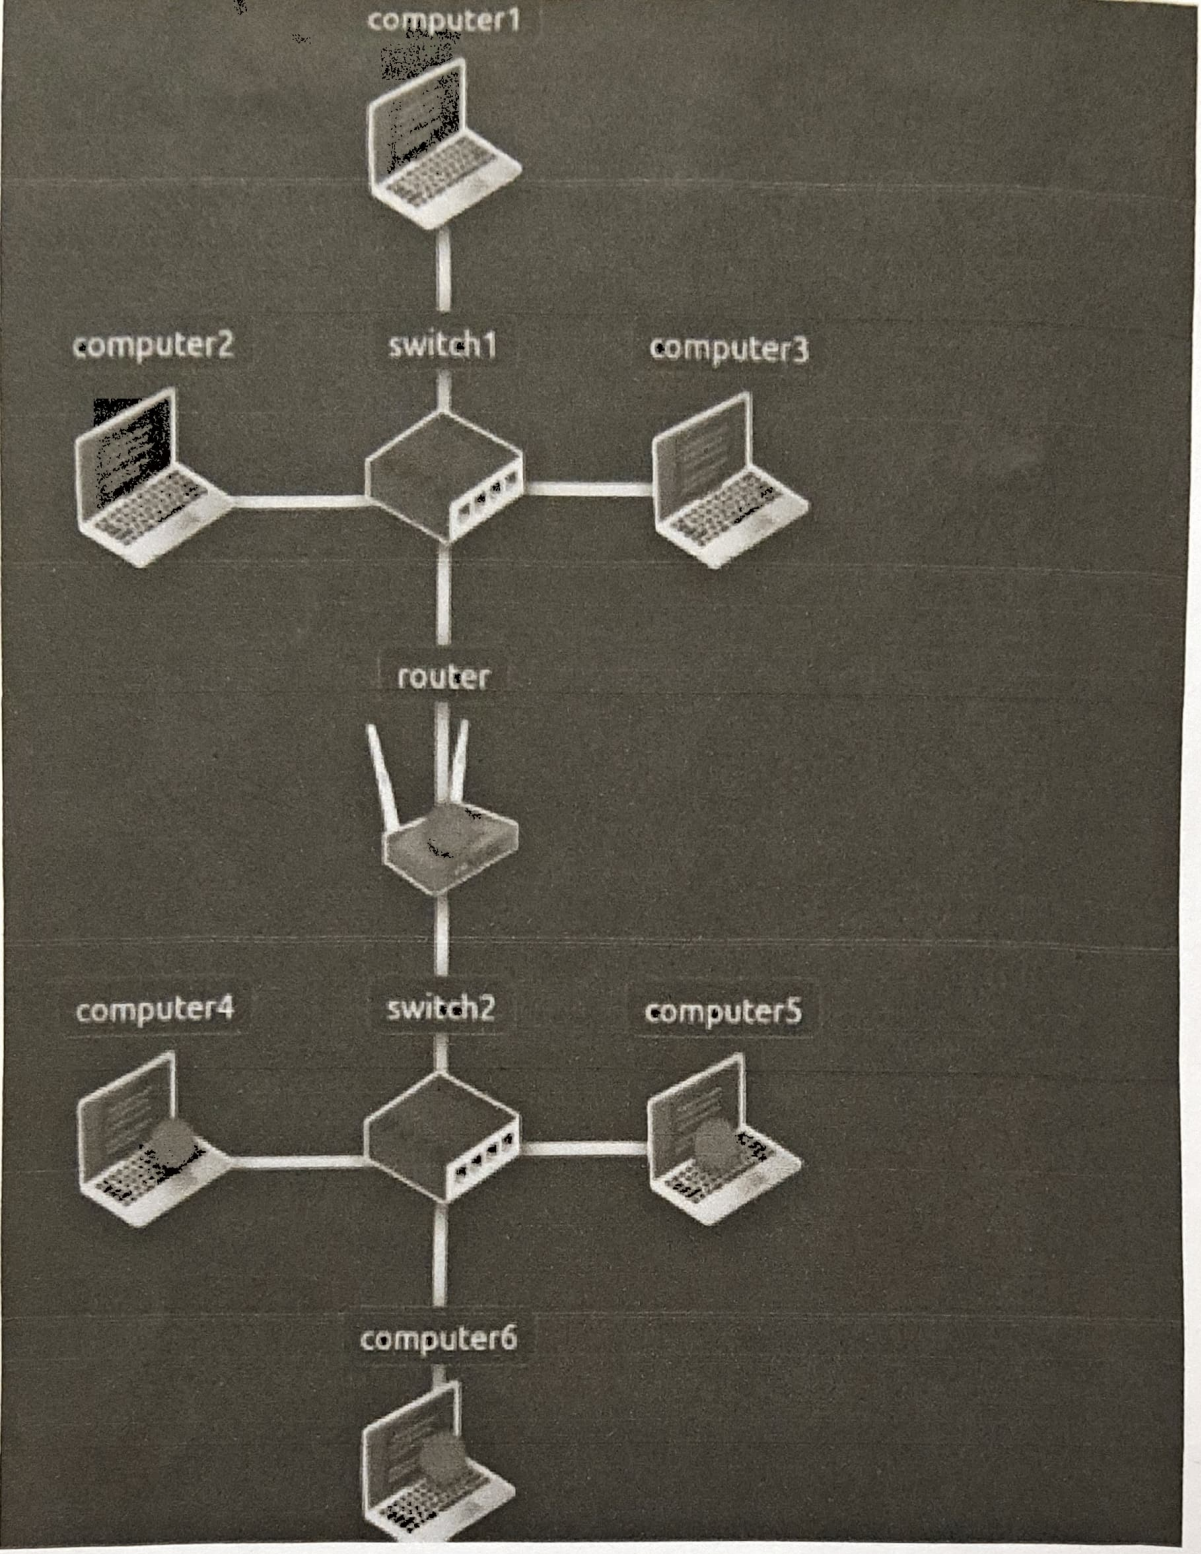

Pentester Terminal

```
pentester@tryhackme$ sudo nmap -PN -sn 10.10.210.6/24

Starting Nmap 7.60 ( https://nmap.org ) at 2021-09-02 07:12 BST
Nmap scan report for ip-10-10-210-75.eu-west-1.compute.internal (10.10.210.75)
Host is up (0.00012s latency).
MAC Address: 02:85:75:5A:F2:B9 (Unknown)
Nmap scan report for ip-10-10-210-100.eu-west-1.compute.internal (10.10.210.100)
Host is up (-0.100s latency).
MAC Address: 02:63:D0:18:2D:CD (Unknown)
Nmap scan report for ip-10-10-210-165.eu-west-1.compute.internal (10.10.210.165)
Host is up (0.00025s latency).
MAC Address: 02:98:79:40:17:B7 (Unknown)
Nmap scan report for ip-10-10-210-6.eu-west-1.compute.internal (10.10.210.6)
Host is up.
Nmap done: 256 IP addresses (4 hosts up) scanned in 3.12 seconds
```

9. Analyse the output and note the IP addresses of the detected hosts.

Result:

Live hosts were discovered using ARP, ICMP, TCP and UDP-based Nmap scans, and their responses were analysed successfully.