


Context API – Basic Model

Step 1: In src folder → create 2 Components(folder)

- ➔ 1. Components
 - Login.js
 - Profile.js
- ➔ 2. Contexts
 - LoginContext.js

Step 2: LoginContext.js

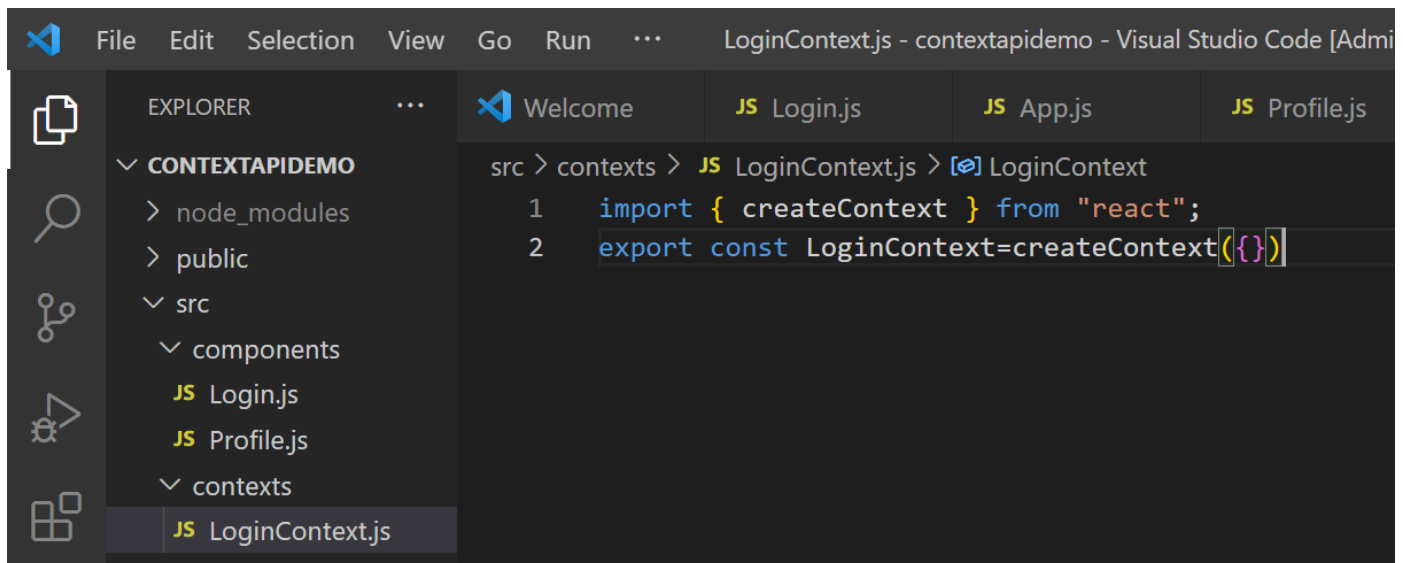

Step 3: Login.js (must implement useContext)

Syntax: useContext

```
import { useContext } from 'react'

import { LoginContext } from '../contexts/LoginContext'

function Login() {
  const {setName,setProfileInfo}=useContext(LoginContext)
```

full Program:(login.js)

```
import React from 'react'
import { useContext } from 'react'
import { LoginContext } from '../contexts/LoginContext'
function Login() {
  const {setName,setProfileInfo}=useContext(LoginContext)
  return (
    <div>
      <input type="text" onChange={(e)=>setName(e.target.value)} placeholder='Enter User
Name..'></input>
      <br></br>
      <input type="password" placeholder='Enter Password... '></input>
      <br></br>
      <input type="button" onClick={()=>setProfileInfo(true)} value="Login"></input>
    </div>
  )
}

export default Login
```

step 4: Profile.js (must implement useContext)

```
import React from 'react'
import { useContext } from 'react'
import { LoginContext } from '../contexts/LoginContext'
function Profile() {
  const { name } =useContext(LoginContext)
  return (
    <div>
      <h2>This is Profile Page</h2>
      <h2>Welcome!! {name}</h2>
    </div>
  )
}

export default Profile
```

step 5:App.js (this is parent component – don't use useContext)

must implement (provider and value)

```
import React from 'react'
import Login from './components/Login'
import { useState } from 'react'
import Profile from './components/Profile'
import { LoginContext } from './contexts/LoginContext'
function App() {
  const [name, setName]=useState("")
  const [profileinfo, setProfileInfo]=useState(false)
  return (
    <div>
      <LoginContext.Provider value={{name, setName, setProfileInfo}}>
        {profileinfo ? <Profile /> : <Login />}
      </LoginContext.Provider>
    </div>
  )
}

export default App
```

advanced with login credential:

same as LoginContext.js & Profile.js

login.js

```
import React from 'react'
import { useContext } from 'react'
import { LoginContext } from '../contexts/LoginContext'
//import { useState } from 'react'
function Login() {
  const
  {name, setName, pwd, setPwd, profileinfo, setProfileInfo}=useContext(LoginContext)
  //  const [name, setName]=useState("")
  //  const [pwd, setPwd]=useState("")
  //  const [profileinfo, setProfileInfo]=useState(false)
  const show=()=>{
    if (name==="gowthaman" && pwd==="admin@123")
      setProfileInfo(true)
    else
      setProfileInfo(false)
  }
  return (
    <div>
      <input type="text" onChange={(e)=>setName(e.target.value)}
placeholder='Enter User Name..'></input>
      <br></br>
      <input type="password" onChange={(e)=>setPwd(e.target.value)}
placeholder='Enter Password... '></input>
      <br></br>
      <input type="button" onClick={()=>show()} value="Login"></input>
      <br></br>
      {profileinfo===false && <font color='red'>Invalid User!!!!</font>}

    </div>
  )
}

export default Login
```

App.js

```
import React from 'react'
import Login from './components/Login'
import { useState } from 'react'
import Profile from './components/Profile'
import { LoginContext } from './contexts/LoginContext'
function App() {
  const [name, setName]=useState("")
  const [pwd, setPwd]=useState("")
  const [profileinfo, setProfileInfo]=useState(null)
  return (
    <div>
      <LoginContext.Provider
value={{name, setName, pwd, setPwd, profileinfo, setProfileInfo}}>
        {profileinfo ? <Profile /> : <Login />}
      </LoginContext.Provider>
    </div>
  )
}

export default App
```