Website Scanning Using Nmap
Fortune Hotel (https://www.fortunehotels.in/)

Project Description

The objective of this project is to conduct a complete vulnerability scan of a website and aiming to identify and address potential vulnerabilities by systematically scanning and analysing the website's infrastructure using Nmap. The project aims to identify potential security weaknesses and provide Security to enhance the website's security protects against potential threats. Project Goals:

(i) Identify Open Ports and Services: Discover all open ports and the services running on them to understand the attack surface.

(ii) Detect Vulnerabilities: Use Nmap scripts to detect common vulnerabilities in the website's infrastructure.

(iii) Generate Reports: Create detailed reports highlighting the findings and suggesting remediation measures.

(iv) Enhance Security: Provide recommendations to mitigate identified vulnerabilities and improve overall security.

Objective of the Project

The main objective of this project is to:

- Conduct a full vulnerability scan of a website
- Identify open ports and running services
- Detect possible security vulnerabilities
- Generate a detailed security report
- Provide recommendations to strengthen the website's security posture

Tool Used – Nmap

Nmap (Network Mapper) is an open-source network scanning tool used for:

- Port scanning
- Service detection
- Operating system detection
- Vulnerability detection using NSE scripts
- Network mapping and reconnaissance

Methodology

The vulnerability assessment was conducted in the following phases:

Phase 1: Target Identification

The website domain or IP address was identified for scanning.

Phase 2: Port Scanning

All open ports were scanned to determine exposed services.

Phase 3: Service & Version Detection

Identified services were analysed to determine their versions.

Phase 4: Vulnerability Scanning

Nmap NSE (Nmap Scripting Engine) scripts were used to detect common vulnerabilities.

Phase 5: Reporting & Recommendations

Findings were documented, and remediation measures were suggested.

Installation and Setup

Install Nmap

```
sudo apt update
sudo apt install nmap -y
```

Verify Installation

```
nmap –version
```

Identifying Open Ports and Services

```
nmap -sS www.fortunehotels.in
```

- -sS → TCP SYN scan (stealth scan), Identifies open ports

Service and Version Detection

```
nmap -sV www.fortunehotels.in
```

- -sV → Detects service versions

Operating System Detection

```
nmap -O www.fortunehotels.in
```

- Identifies the operating system running on the target server.

Vulnerability Detection Using NSE Scripts

Basic Vulnerability Scan

```
nmap --script vuln www.fortunehotels.in
nmap --script http-vuln* www.fortunehotels.in
```

- --script vuln → Runs vulnerability detection scripts
- Detects common issues like:
  - SQL Injection
  - XSS
  - Weak SSL configurations
  - Known CVEs

Generating Reports

Save Output to File

```
nmap -sV --script vuln www.fortunehotels.in -oN scan_report.txt
```

Save in XML Format

```
nmap -sV --script vuln www.fortunehotels.in -oX scan_report.xml
```

Save in All Formats

```
nmap -sV --script vuln www.fortunehotels.in -oA final_scan
```

Generated report includes

- Open ports
- Service versions
- Vulnerabilities detected
- Risk levels

Findings

- Open HTTP (Port 80) and HTTPS (Port 443) services
- SSH service exposed to the internet
- Outdated web server version
- Potential SSL misconfiguration
- Weak service exposure increasing attack surface

Enhance Security

Field	Information
Vulnerability Name	FTP server and potentially exploit
Port	21
Severity	Medium to High
Description	Weaknesses to gain unauthorized entry, steal data, disrupt services, or use your server for malicious activities
Impact	Brute-Force, Internal Pivoting attack possible
Evidence	Nmap screenshot
Recommendation	Implement the firewall, If not needed Disable the FTP

Field	Information
Vulnerability Name	HTTP Signifies a web server is running
Port	80
Severity	High
Description	To send unencrypted web pages and content to web browsers when you visit a website
Impact	MitM, SQL Injection, Cross-Site Scripting, Cross-Site Request Forgery, DDoS attack possible
Evidence	Nmap screenshot
Recommendation	Redirected to HTTPS, Close Unused ports

Field	Information
Vulnerability Name	HTTPS
Port	443
Severity	Low
Description	Misconfigured settings, unpatched software, or outdated SSL/TLS protocols
Impact	MitM, SQL Injection, DDoS attack possible
Evidence	Nmap screenshot
Recommendation	Enforce Modern TLS Versions, Regular Patching, Use a Web Application Firewall, Audit Certificates

Field	Information
Vulnerability Name	Cisco SCCP (Skinny Client Control Protocol)
Port	2000
Severity	Low to Medium
Description	DoS, Firmware vulnerabilities, Firewall Leakage
Impact	Information Leakage, Misconfiguration, DoS attack possible
Evidence	Nmap screenshot
Recommendation	Identify the service, Restrict Access via ACLs, update the patch, Audit Malware

Field	Information
Vulnerability Name	Significant vulnerability
Port	5060
Severity	Low to Medium
Description	Potentially risky service (specific services running behind it)
Impact	Toll Fraud, Registration Hijacking, SIP Message Tampering, DoS attack possible
Evidence	Nmap screenshot
Recommendation	Switch to Encrypted SIP, Restrict Access via Firewall, Disable SIP ALG, Implement Call Limits

Recommendations

To improve website security:

- Update all outdated software and services
- Restrict SSH access using firewall rules
- Implement strong SSL/TLS configuration
- Close unnecessary open ports
- Enable Web Application Firewall (WAF)
- Conduct periodic vulnerability assessments

Conclusion

The vulnerability assessment using Nmap provided valuable insights into the website's security posture. By identifying exposed services and potential vulnerabilities, proactive measures can be implemented to reduce security risks. Regular scanning and patch management are essential to maintain a secure infrastructure.

Sample Codes are using

1. Basic Vulnerability Scan
2. Vulnerability Scan with Service Detection
3. Web Application Vulnerability Scan
4. SSL / TLS Vulnerability Scan
5. Specific Vulnerability Scan
6. Aggressive Vulnerability Scan

nmap www.fortunehotels.in

nmap 202.21.38.115

nmap -p- 202.21.38.115

nmap -p 202.21.38.115

nmap -sV 202.21.38.115

nmap -A 202.21.38.115

nmap -sS 202.21.38.115

nmap -sU 202.21.38.115

nmap -sV --script vulners 202.21.38.115 (I Found the error CVE2014-3704)

nmap --script vuln 202.21.38.115

nmap --script http-vuln* 202.21.38.115

nmap --script ssl-enum-ciphers 202.21.38.115

nmap --script smb-vuln* 202.21.38.115

nmap -A --script vuln 202.21.38.115

nmap -A -Pn --script vuln 202.21.38.115

nmap -sV --script vuln 202.21.38.115 -oA vulnerability_scan

nmap --script=http-vuln-cve2014-3704 202.21.38.115

nmap --script=ssl-enum-ciphers,ssl-heartbleed 202.21.38.115

xsltproc vul_scan.xml -o vul_scan.html

xdg-open vul_scan.html

firefox vul_scan.html

xsltproc web_security_report.xml -o web_security_report.html

xdg-open web_security_report.html

mv /root/web_security_report.html /home/kali/

nmap www.fortunehotels.in

nmap -sS -sV -p- 202.21.38.115 -oA vul_analysis

nmap -sS -sC -sV -p- --script vuln 202.21.38.115 -oX vul_report

cat vul_report

cat vul_analysis.xml

xsltproc vul_report.xml -o vul_report.html

xsltproc vul_report -o vul_report.html

xsltproc vul_analysis.xml -o vul_analysis.html

mv /root/vul_report.html vul_analysis.html /home/kali/

ls

Screenshot

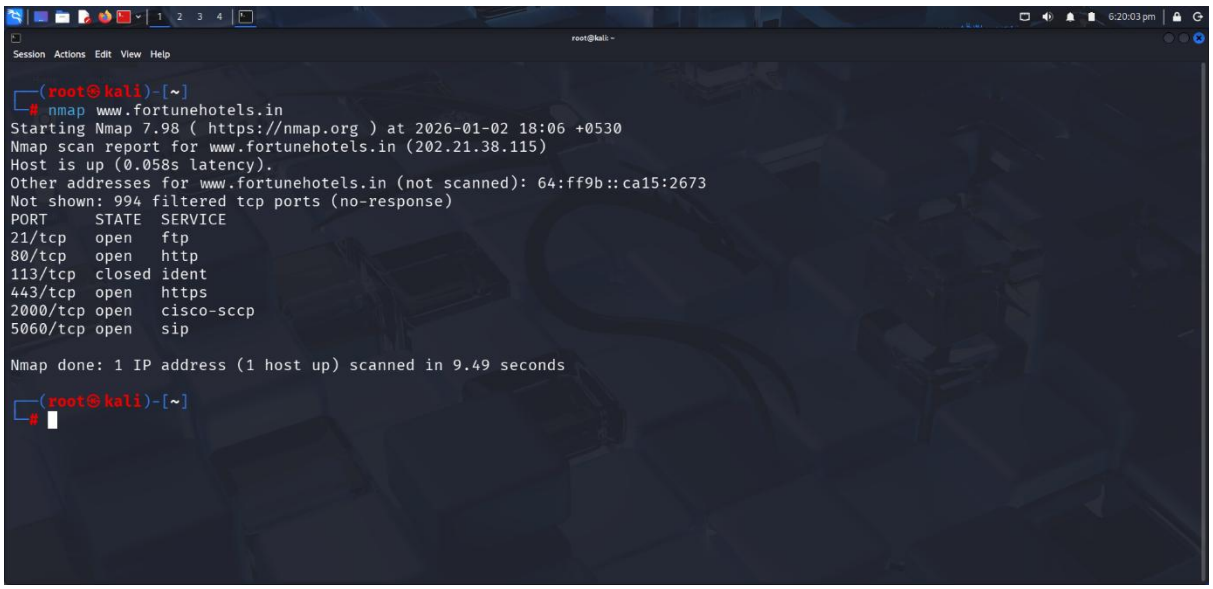

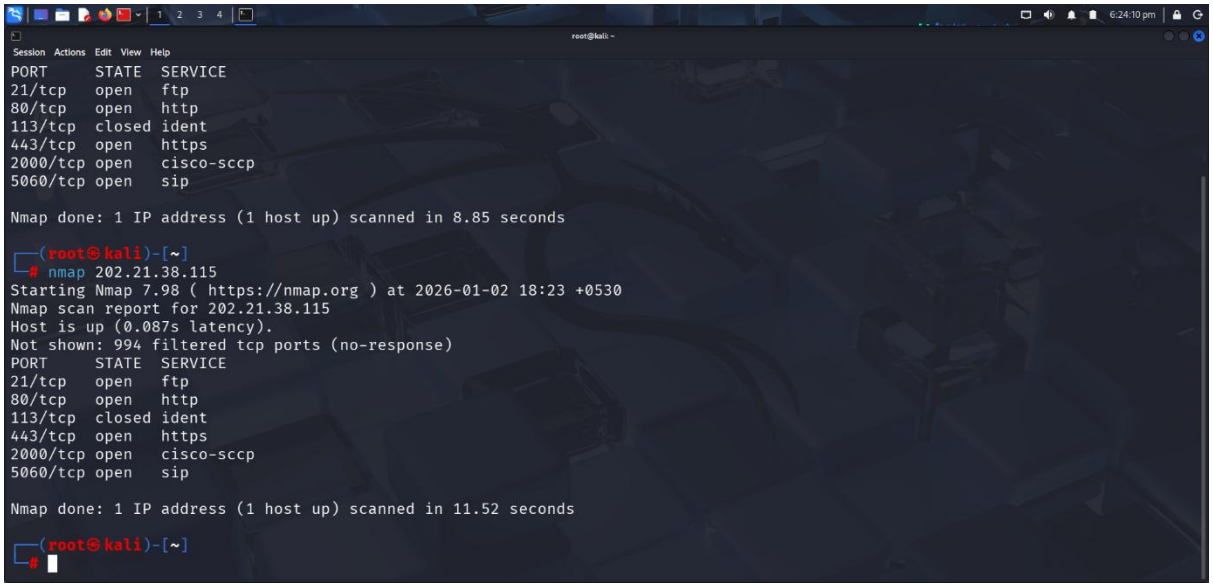

```
Nmap done: 1 IP address (1 host up) scanned in 160.26 seconds

┌──(root㉿kali)-[~]
└─# nmap -p 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-02 21:23 +0530
Error #487: Your port specifications are illegal.  Example of proper form: "-100,200-1024,T:3000-4000,U:60000-"
QUITTING!

┌──(root㉿kali)-[~]
└─# nmap -sV 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-02 21:23 +0530
Nmap scan report for 202.21.38.115
Host is up (0.031s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE     VERSION
21/tcp   open   ftp         Microsoft ftpd
80/tcp   open   http        Microsoft HTTPAPI httpd 2.0 (SSDP/UPnP)
113/tcp  closed ident
443/tcp  open   https?
2000/tcp open   cisco-sccp?
5060/tcp open   sip?
Service Info: OS: Windows; CPE: cpe:/o:microsoft:windows

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 169.81 seconds

┌──(root㉿kali)-[~]
└─#
```

```
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE
21/tcp   open   ftp
80/tcp   open   http
113/tcp  closed ident
443/tcp  open   https
2000/tcp open   cisco-sccp
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 6.57 seconds

┌──(root㉿kali)-[~]
└─# nmap -p- 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-02 21:19 +0530
Nmap scan report for 202.21.38.115
Host is up (0.032s latency).
Not shown: 65529 filtered tcp ports (no-response)
PORT     STATE  SERVICE
21/tcp   open   ftp
80/tcp   open   http
113/tcp  closed ident
443/tcp  open   https
2000/tcp open   cisco-sccp
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 160.26 seconds

┌──(root㉿kali)-[~]
└─#
```

```
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 11.52 seconds

┌──(root㉿kali)-[~]
└─# nmap -p-202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-02 18:24 +0530
Error #488: Your port specifications are illegal.  Example of proper form: "-100,200-1024,T:3000-4000,U:60000-"
QUITTING!

┌──(root㉿kali)-[~]
└─# nmap -p- 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-02 18:24 +0530
Nmap scan report for 202.21.38.115
Host is up (0.036s latency).
Not shown: 65529 filtered tcp ports (no-response)
PORT     STATE  SERVICE
21/tcp   open   ftp
80/tcp   open   http
113/tcp  closed ident
443/tcp  open   https
2000/tcp open   cisco-sccp
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 133.80 seconds

┌──(root㉿kali)-[~]
└─#
```

```
┌──(root㉿kali)-[~]
└─# nmap -sS 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-02 21:34 +0530
Nmap scan report for 202.21.38.115
Host is up (0.030s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE
21/tcp   open   ftp
80/tcp   open   http
113/tcp  closed ident
443/tcp  open   https
2000/tcp open   cisco-sccp
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 4.88 seconds

┌──(root㉿kali)-[~]
└─# nmap -sU 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-02 21:34 +0530
Nmap scan report for 202.21.38.115
Host is up (0.021s latency).
All 1000 scanned ports on 202.21.38.115 are in ignored states.
Not shown: 1000 open|filtered udp ports (no-response)

Nmap done: 1 IP address (1 host up) scanned in 5.58 seconds

┌──(root㉿kali)-[~]
└─#
```

```
TRACEROUTE (using port 80/tcp)
HOP RTT      ADDRESS
1   6.23 ms  10.195.60.7
2   ...
3   45.48 ms 255.0.0.2
4   45.70 ms 255.0.0.3
5   45.42 ms 202.21.38.115

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 208.45 seconds

┌──(root㉿kali)-[~]
└─# nmap -sS 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-02 21:34 +0530
Nmap scan report for 202.21.38.115
Host is up (0.030s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE
21/tcp   open   ftp
80/tcp   open   http
113/tcp  closed ident
443/tcp  open   https
2000/tcp open   cisco-sccp
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 4.88 seconds

┌──(root㉿kali)-[~]
└─#
```

```
┌──(root㉿kali)-[~]
└─# nmap -A 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-02 21:28 +0530
Nmap scan report for 202.21.38.115
Host is up (0.042s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE     VERSION
21/tcp   open   ftp         Microsoft ftpd
| ftp-syst:
|_  SYST: Windows_NT
80/tcp   open   http        Microsoft HTTPAPI httpd 2.0 (SSDP/UPnP)
|_http-server-header: Fortune Hotels
|_http-title: Did not follow redirect to https://202.21.38.115/
113/tcp  closed ident
443/tcp  open   https?
2000/tcp open   cisco-sccp?
5060/tcp open   sip?
OS fingerprint not ideal because: Didn't receive UDP response. Please try again with -sSU
No OS matches for host
Network Distance: 5 hops
Service Info: OS: Windows; CPE: cpe:/o:microsoft:windows

TRACEROUTE (using port 80/tcp)
HOP RTT      ADDRESS
1   6.23 ms  10.195.60.7
2   ...
3   45.48 ms 255.0.0.2
4   45.70 ms 255.0.0.3
5   45.42 ms 202.21.38.115

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 208.45 seconds
```

```
┌──(root㉿kali)-[~]
└─# nmap --script=http-sql-injection 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-05 22:19 +0530
Nmap scan report for 202.21.38.115
Host is up (0.040s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE
21/tcp   open   ftp
80/tcp   open   http
113/tcp  closed ident
443/tcp  open   https
2000/tcp open   cisco-sccp
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 7.01 seconds

┌──(root㉿kali)-[~]
└─# nmap --script=ssl-enum-ciphers,ssl-heartbleed 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-05 22:20 +0530
Nmap scan report for 202.21.38.115
Host is up (0.041s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE
21/tcp   open   ftp
80/tcp   open   http
113/tcp  closed ident
443/tcp  open   https
2000/tcp open   cisco-sccp
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 41.92 seconds

┌──(root㉿kali)-[~]
└─#
```

```
Host is up (0.039s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE
21/tcp   open   ftp
80/tcp   open   http
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
113/tcp  closed ident
443/tcp  open   https
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
2000/tcp open   cisco-sccp
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 13.56 seconds

┌──(root㉿kali)-[~]
└─# nmap --script=http-vuln-cve2014-3704 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-05 22:18 +0530
Nmap scan report for 202.21.38.115
Host is up (0.046s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE
21/tcp   open   ftp
80/tcp   open   http
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
113/tcp  closed ident
443/tcp  open   https
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
2000/tcp open   cisco-sccp
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 14.41 seconds

┌──(root㉿kali)-[~]
└─#
```

```
Nmap done: 1 IP address (1 host up) scanned in 7.10 seconds

┌──(root㉿kali)-[~]
└─# nmap -sV --script vuln 202.21.38.115 -oA vulnerability_scan
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-05 21:44 +0530
Nmap scan report for 202.21.38.115
Host is up (0.061s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE     VERSION
21/tcp   open   ftp         Microsoft ftpd
80/tcp   open   http        Microsoft HTTPAPI httpd 2.0 (SSDP/UPnP)
|_http-csrf: Couldn't find any CSRF vulnerabilities.
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
|_http-dombased-xss: Couldn't find any DOM based XSS.
|_http-stored-xss: Couldn't find any stored XSS vulnerabilities.
|_http-server-header: Fortune Hotels
113/tcp  closed ident
443/tcp  open   https?
|_ssl-ccs-injection: No reply from server (TIMEOUT)
|_http-stored-xss: Couldn't find any stored XSS vulnerabilities.
|_http-csrf: Couldn't find any CSRF vulnerabilities.
|_http-dombased-xss: Couldn't find any DOM based XSS.
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
|_http-aspnet-debug: ERROR: Script execution failed (use -d to debug)
2000/tcp open   cisco-sccp?
5060/tcp open   sip?
Service Info: OS: Windows; CPE: cpe:/o:microsoft:windows

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 336.66 seconds

┌──(root㉿kali)-[~]
└─#
```

```
┌──(root㉿kali)-[~]
└─# nmap --script ssl-enum-ciphers 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-05 21:30 +0530
Nmap scan report for 202.21.38.115
Host is up (0.042s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE
21/tcp   open   ftp
80/tcp   open   http
113/tcp  closed ident
443/tcp  open   https
2000/tcp open   cisco-sccp
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 33.12 seconds

┌──(root㉿kali)-[~]
└─# nmap --script smb-vuln* 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-05 21:34 +0530
Nmap scan report for 202.21.38.115
Host is up (0.053s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE
21/tcp   open   ftp
80/tcp   open   http
113/tcp  closed ident
443/tcp  open   https
2000/tcp open   cisco-sccp
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 6.94 seconds

┌──(root㉿kali)-[~]
└─#
```

```
443/tcp  open   https
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
|_http-aspnet-debug: ERROR: Script execution failed (use -d to debug)
|_ssl-ccs-injection: No reply from server (TIMEOUT)
|_http-csrf: Couldn't find any CSRF vulnerabilities.
|_http-stored-xss: Couldn't find any stored XSS vulnerabilities.
|_http-dombased-xss: Couldn't find any DOM based XSS.
2000/tcp open   cisco-sccp
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 194.59 seconds

┌──(root㉿kali)-[~]
└─# nmap --script http-vuln* 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-05 21:25 +0530
Nmap scan report for 202.21.38.115
Host is up (0.044s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE
21/tcp   open   ftp
80/tcp   open   http
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
113/tcp  closed ident
443/tcp  open   https
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
2000/tcp open   cisco-sccp
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 100.05 seconds

┌──(root㉿kali)-[~]
└─# nmap --script ssl-enum-ciphers 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-05 21:30 +0530
```

```
┌──(root㉿kali)-[~]
└─# nmap -sV --script vulners [--script-args mincvss=<arg_val>] 202.21.38.115
zsh: bad pattern: [--script-args

┌──(root㉿kali)-[~]
└─# nmap -sV --script vulners 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-05 21:15 +0530
Nmap scan report for 202.21.38.115
Host is up (0.035s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE     VERSION
21/tcp   open   ftp         Microsoft ftpd
80/tcp   open   http        Microsoft HTTPAPI httpd 2.0 (SSDP/UPnP)
|_http-server-header: Fortune Hotels
113/tcp  closed ident
443/tcp  open   https?
2000/tcp open   cisco-sccp?
5060/tcp open   sip?
Service Info: OS: Windows; CPE: cpe:/o:microsoft:windows

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 145.66 seconds

┌──(root㉿kali)-[~]
└─# nmap --script vuln 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-05 21:19 +0530
Nmap scan report for 202.21.38.115
Host is up (0.037s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE
21/tcp   open   ftp
80/tcp   open   http
|_http-stored-xss: Couldn't find any stored XSS vulnerabilities.
```

```
5060/tcp open   sip?
Service Info: OS: Windows; CPE: cpe:/o:microsoft:windows

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 145.66 seconds

┌──(root㉿kali)-[~]
└─# nmap --script vuln 202.21.38.115
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-05 21:19 +0530
Nmap scan report for 202.21.38.115
Host is up (0.037s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE
21/tcp   open   ftp
80/tcp   open   http
|_http-stored-xss: Couldn't find any stored XSS vulnerabilities.
|_http-csrf: Couldn't find any CSRF vulnerabilities.
|_http-dombased-xss: Couldn't find any DOM based XSS.
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
113/tcp  closed ident
443/tcp  open   https
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
|_http-aspnet-debug: ERROR: Script execution failed (use -d to debug)
|_ssl-ccs-injection: No reply from server (TIMEOUT)
|_http-csrf: Couldn't find any CSRF vulnerabilities.
|_http-stored-xss: Couldn't find any stored XSS vulnerabilities.
|_http-dombased-xss: Couldn't find any DOM based XSS.
2000/tcp open   cisco-sccp
5060/tcp open   sip

Nmap done: 1 IP address (1 host up) scanned in 194.59 seconds

┌──(root㉿kali)-[~]
└─#
```

```
Nmap done: 1 IP address (1 host up) scanned in 10.69 seconds

┌──(root㉿kali)-[~]
└─# sudo nmap -sV --script vuln 202.21.38.115 -oA vul_scan
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-06 21:09 +0530
Nmap scan report for 202.21.38.115
Host is up (0.038s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE     VERSION
21/tcp   open   ftp         Microsoft ftpd
80/tcp   open   http        Microsoft HTTPAPI httpd 2.0 (SSDP/UPnP)
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
|_http-server-header: Fortune Hotels
|_http-dombased-xss: Couldn't find any DOM based XSS.
|_http-csrf: Couldn't find any CSRF vulnerabilities.
|_http-stored-xss: Couldn't find any stored XSS vulnerabilities.
| http-slowloris-check:
|   VULNERABLE:
|   Slowloris DOS attack
|     State: LIKELY VULNERABLE
|     IDs:  CVE:CVE-2007-6750
|       Slowloris tries to keep many connections to the target web server open and hold
|       them open as long as possible.  It accomplishes this by opening connections to
|       the target web server and sending a partial request. By doing so, it starves
|       the http server's resources causing Denial Of Service.
|
|     Disclosure date: 2009-09-17
|     References:
|       http://ha.ckers.org/slowloris/
```

```
┌──(root㉿kali)-[~]
└─# cat web_security_report.nmap
# Nmap 7.98 scan initiated Tue Jan  6 17:40:14 2026 as: /usr/lib/nmap/nmap -sV -A --script=vuln -oA web_security_report 202.21.38.115
Nmap scan report for 202.21.38.115
Host is up (0.081s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE     VERSION
21/tcp   open   ftp         Microsoft ftpd
80/tcp   open   http        Microsoft HTTPAPI httpd 2.0 (SSDP/UPnP)
|_http-csrf: Couldn't find any CSRF vulnerabilities.
|_http-dombased-xss: Couldn't find any DOM based XSS.
|_http-server-header: Fortune Hotels
|_http-stored-xss: Couldn't find any stored XSS vulnerabilities.
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
113/tcp  closed ident
443/tcp  open   https?
|_ssl-ccs-injection: No reply from server (TIMEOUT)
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
|_http-stored-xss: Couldn't find any stored XSS vulnerabilities.
|_http-csrf: Couldn't find any CSRF vulnerabilities.
|_http-aspnet-debug: ERROR: Script execution failed (use -d to debug)
|_http-dombased-xss: Couldn't find any DOM based XSS.
2000/tcp open   cisco-sccp?
5060/tcp open   sip?
OS fingerprint not ideal because: maxTimingRatio (1.402000e+00) is greater than 1.4
No OS matches for host
Network Distance: 5 hops
Service Info: OS: Windows; CPE: cpe:/o:microsoft:windows

TRACEROUTE (using port 80/tcp)
HOP RTT      ADDRESS
1   12.43 ms 10.195.60.7
2   ...
```

```
┌──(root㉿kali)-[~]
└─# nmap -sV -A --script=vuln 202.21.38.115 -oA web_security_report
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-06 17:40 +0530
Nmap scan report for 202.21.38.115
Host is up (0.081s latency).
Not shown: 994 filtered tcp ports (no-response)
PORT     STATE  SERVICE     VERSION
21/tcp   open   ftp         Microsoft ftpd
80/tcp   open   http        Microsoft HTTPAPI httpd 2.0 (SSDP/UPnP)
|_http-csrf: Couldn't find any CSRF vulnerabilities.
|_http-dombased-xss: Couldn't find any DOM based XSS.
|_http-server-header: Fortune Hotels
|_http-stored-xss: Couldn't find any stored XSS vulnerabilities.
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
113/tcp  closed ident
443/tcp  open   https?
|_ssl-ccs-injection: No reply from server (TIMEOUT)
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
|_http-stored-xss: Couldn't find any stored XSS vulnerabilities.
|_http-csrf: Couldn't find any CSRF vulnerabilities.
|_http-aspnet-debug: ERROR: Script execution failed (use -d to debug)
|_http-dombased-xss: Couldn't find any DOM based XSS.
2000/tcp open   cisco-sccp?
5060/tcp open   sip?
OS fingerprint not ideal because: maxTimingRatio (1.402000e+00) is greater than 1.4
No OS matches for host
Network Distance: 5 hops
Service Info: OS: Windows; CPE: cpe:/o:microsoft:windows

TRACEROUTE (using port 80/tcp)
HOP RTT      ADDRESS
1   12.43 ms 10.195.60.7
2   ...
```

```
┌──(root㉿kali)-[~]
└─# nmap -sS -sC -sV -p-  --script vuln 202.21.38.115 -oX vul_report
Starting Nmap 7.98 ( https://nmap.org ) at 2026-01-06 22:11 +0530
Nmap scan report for 202.21.38.115
Host is up (0.027s latency).
Not shown: 65529 filtered tcp ports (no-response)
PORT     STATE  SERVICE     VERSION
21/tcp   open   ftp         Microsoft ftpd
80/tcp   open   http        Microsoft HTTPAPI httpd 2.0 (SSDP/UPnP)
|_http-server-header: Fortune Hotels
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
|_http-stored-xss: Couldn't find any stored XSS vulnerabilities.
|_http-dombased-xss: Couldn't find any DOM based XSS.
|_http-csrf: Couldn't find any CSRF vulnerabilities.
113/tcp  closed ident
443/tcp  open   https?
|_http-csrf: Couldn't find any CSRF vulnerabilities.
|_http-dombased-xss: Couldn't find any DOM based XSS.
|_http-stored-xss: Couldn't find any stored XSS vulnerabilities.
|_ssl-ccs-injection: No reply from server (TIMEOUT)
|_http-aspnet-debug: ERROR: Script execution failed (use -d to debug)
|_http-vuln-cve2014-3704: ERROR: Script execution failed (use -d to debug)
2000/tcp open   cisco-sccp?
5060/tcp open   sip?
Service Info: OS: Windows; CPE: cpe:/o:microsoft:windows

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 475.33 seconds

┌──(root㉿kali)-[~]
└─# ls
```