


main/msg\_reader.h

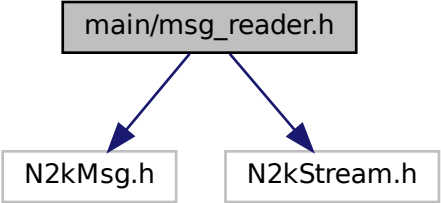

```
graph TD; A[main/msg_reader.h] --> B[N2kMsg.h]; A --> C[N2kStream.h];
```

The diagram illustrates a header file dependency. At the top, a box labeled 'main/msg\_reader.h' has two blue arrows pointing downwards to two separate boxes below it. The left box is labeled 'N2kMsg.h' and the right box is labeled 'N2kStream.h'. This indicates that 'main/msg\_reader.h' includes both 'N2kMsg.h' and 'N2kStream.h'.

N2kMsg.h

N2kStream.h