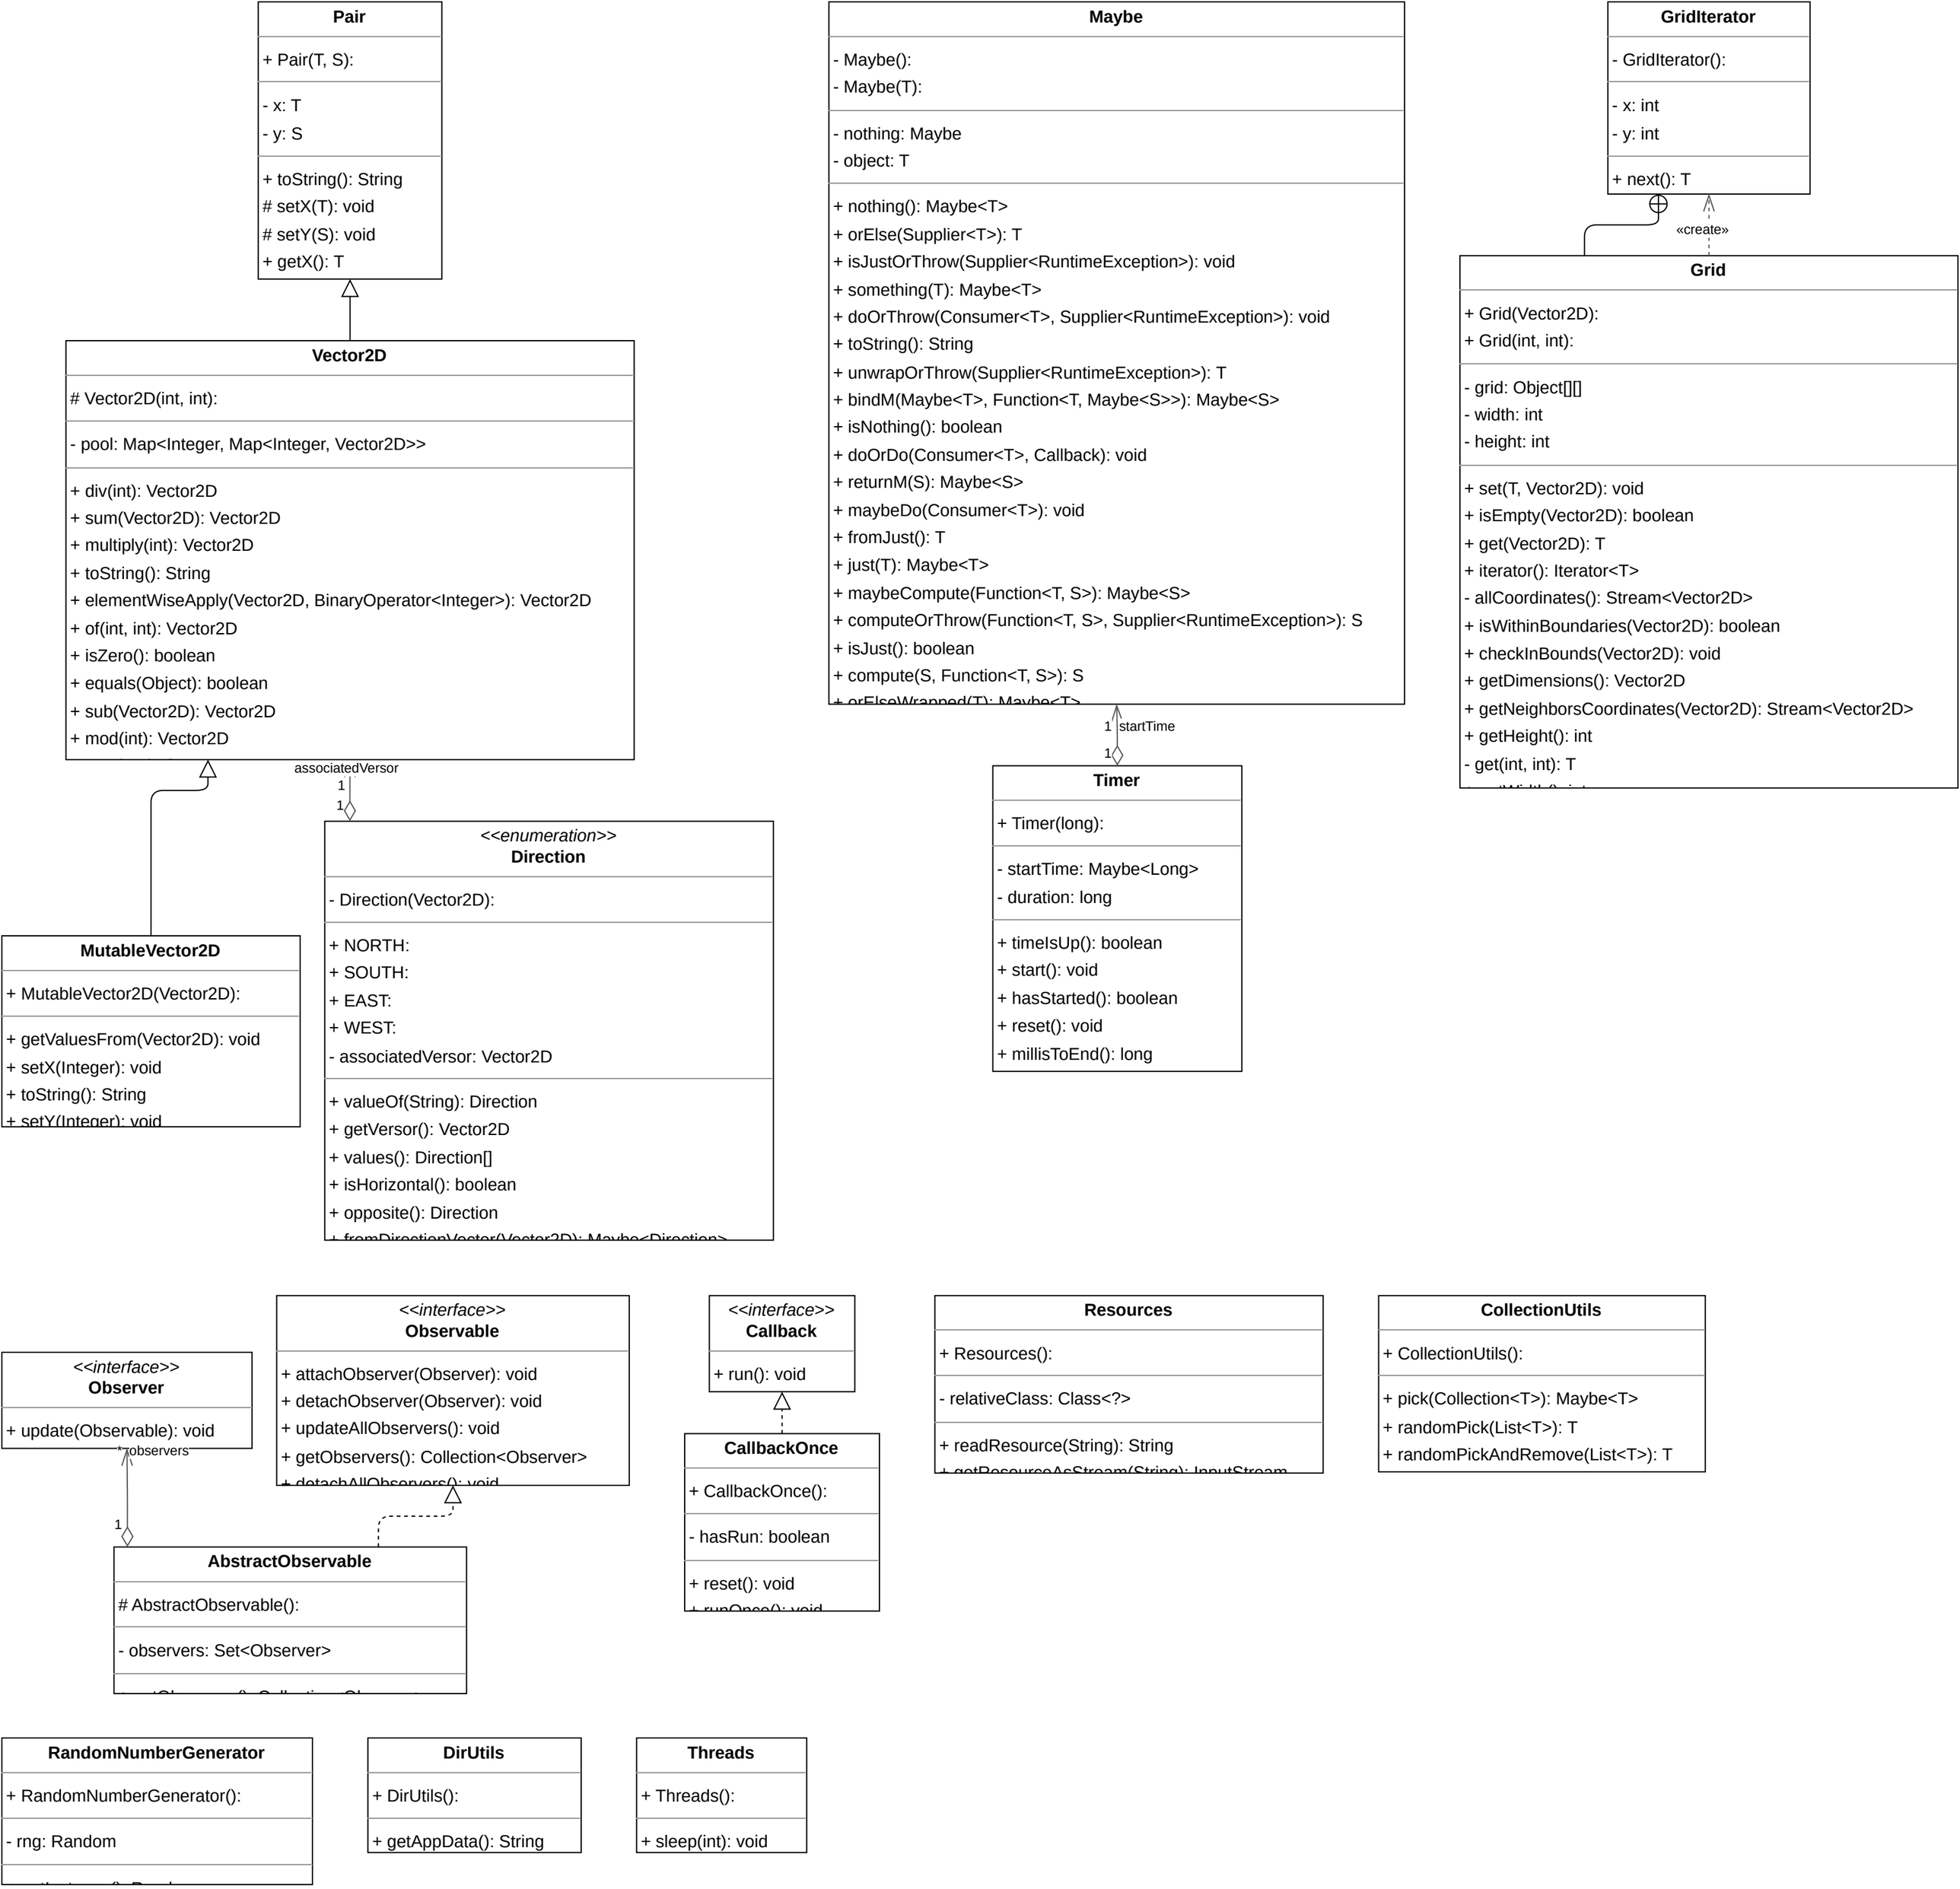
Pair
+ Pair(T, S):
- x: T
- y: S
+ toString(): String
# setX(T): void
# setY(S): void
+ getX(): T
Vector2D
Vector2D(int, int):
- pool: Map<Integer, Map<Integer, Vector2D>>
+ div(int): Vector2D
+ sum(Vector2D): Vector2D
+ multiply(int): Vector2D
+ toString(): String
+ elementWiseApply(Vector2D, BinaryOperator<Integer>): Vector2D
+ of(int, int): Vector2D
+ isZero(): boolean
+ equals(Object): boolean
+ sub(Vector2D): Vector2D
+ mod(int): Vector2D
associatedVersor
1
1
MutableVector2D
+ MutableVector2D(Vector2D):
+ getValuesFrom(Vector2D): void
+ setX(Integer): void
+ toString(): String
<<enumeration>>
Direction
- Direction(Vector2D):
+ NORTH:
+ SOUTH:
+ EAST:
+ WEST:
- associatedVersor: Vector2D
+ valueOf(String): Direction
+ getVersor(): Vector2D
+ values(): Direction[]
+ isHorizontal(): boolean
+ opposite(): Direction
Maybe
- Maybe():
- Maybe(T):
- nothing: Maybe
- object: T
+ nothing(): Maybe<T>
+ orElse(Supplier<T>): T
+ isJustOrThrow(Supplier<RuntimeException>): void
+ something(T): Maybe<T>
+ doOrThrow(Consumer<T>, Supplier<RuntimeException>): void
+ toString(): String
+ unwrapOrThrow(Supplier<RuntimeException>): T
+ bindM(Maybe<T>, Function<T, Maybe<S>>): Maybe<S>
+ isNothing(): boolean
+ doOrDo(Consumer<T>, Callback): void
+ returnM(S): Maybe<S>
+ maybeDo(Consumer<T>): void
+ fromJust(): T
+ just(T): Maybe<T>
+ maybeCompute(Function<T, S>): Maybe<S>
+ computeOrThrow(Function<T, S>, Supplier<RuntimeException>): S
+ isJust(): boolean
+ compute(S, Function<T, S>): S
1
startTime
1
Timer
+ Timer(long):
- startTime: Maybe<Long>
- duration: long
+ timeIsUp(): boolean
+ start(): void
+ hasStarted(): boolean
+ reset(): void
+ millisToEnd(): long
GridIterator
- GridIterator():
- x: int
- y: int
+ next(): T
«create»
Grid
+ Grid(Vector2D):
+ Grid(int, int):
- grid: Object[][]
- width: int
- height: int
+ set(T, Vector2D): void
+ isEmpty(Vector2D): boolean
+ get(Vector2D): T
+ iterator(): Iterator<T>
- allCoordinates(): Stream<Vector2D>
+ isWithinBoundaries(Vector2D): boolean
+ checkInBounds(Vector2D): void
+ getDimensions(): Vector2D
+ getNeighborsCoordinates(Vector2D): Stream<Vector2D>
+ getHeight(): int
- get(int, int): T
<<interface>>
Observer
+ update(Observable): void
* observers
1
<<interface>>
Observable
+ attachObserver(Observer): void
+ detachObserver(Observer): void
+ updateAllObservers(): void
+ getObservers(): Collection<Observer>
AbstractObservable
AbstractObservable():
- observers: Set<Observer>
<<interface>>
Callback
+ run(): void
CallbackOnce
+ CallbackOnce():
- hasRun: boolean
+ reset(): void
Resources
+ Resources():
- relativeClass: Class<?>
+ readResource(String): String
CollectionUtils
+ CollectionUtils():
+ pick(Collection<T>): Maybe<T>
+ randomPick(List<T>): T
+ randomPickAndRemove(List<T>): T
RandomNumberGenerator
+ RandomNumberGenerator():
- rng: Random
DirUtils
+ DirUtils():
+ getAppData(): String
Threads
+ Threads():
+ sleep(int): void