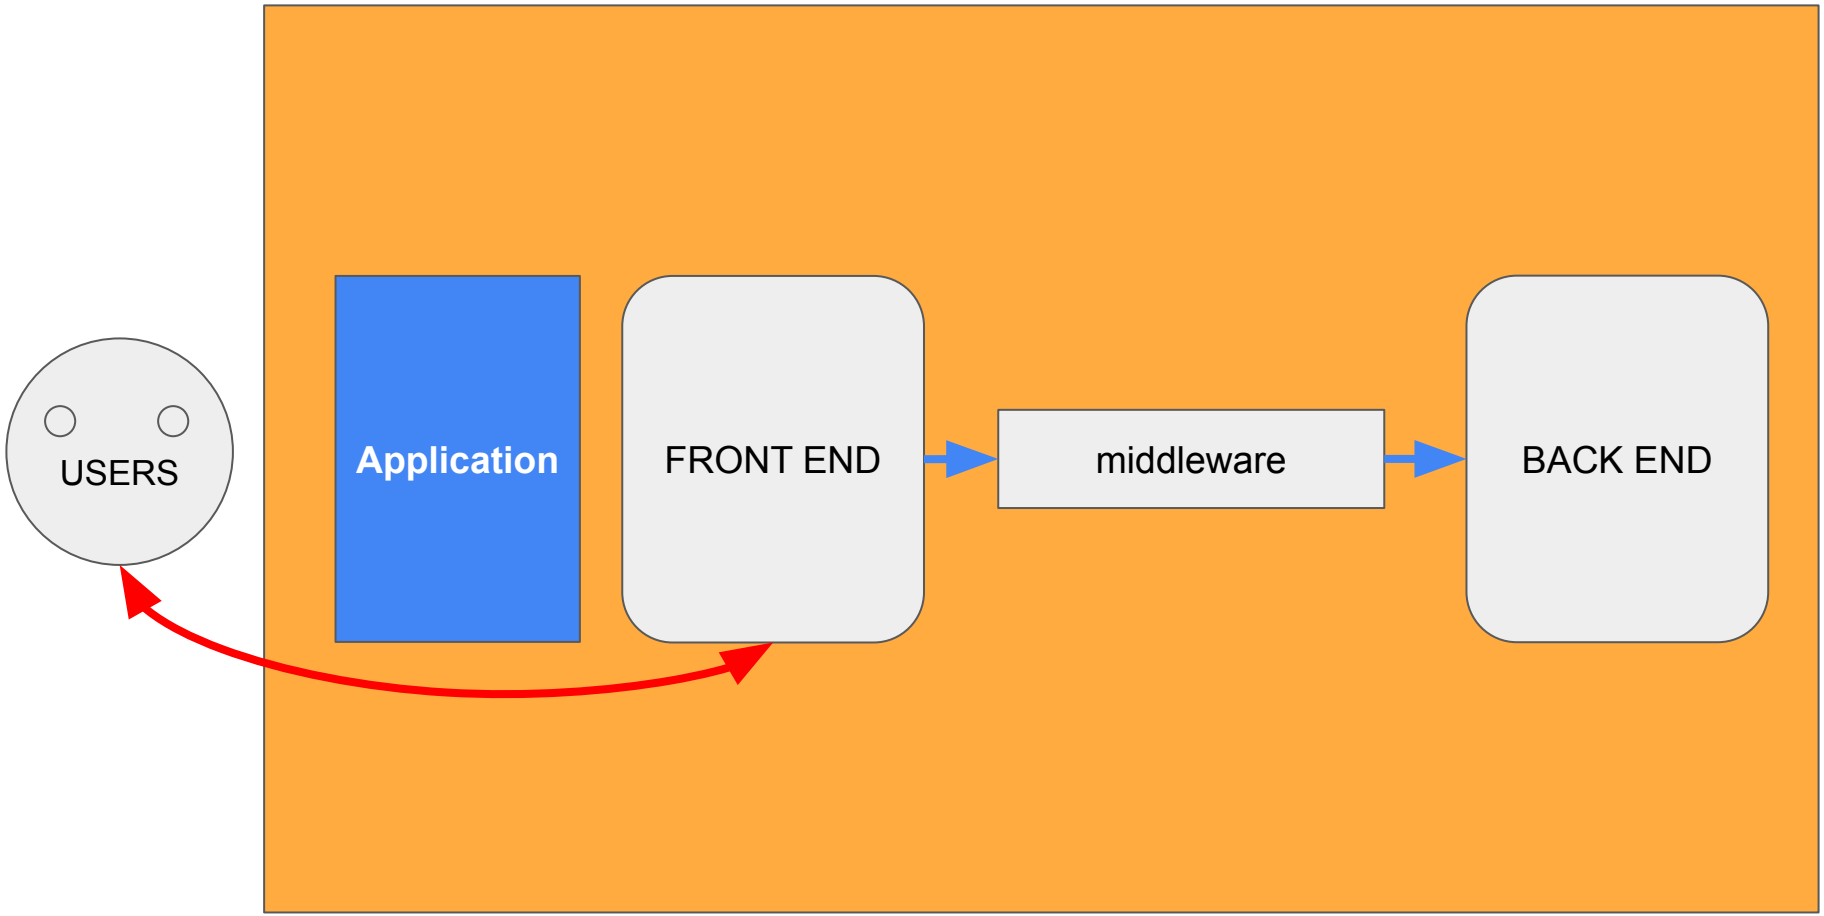
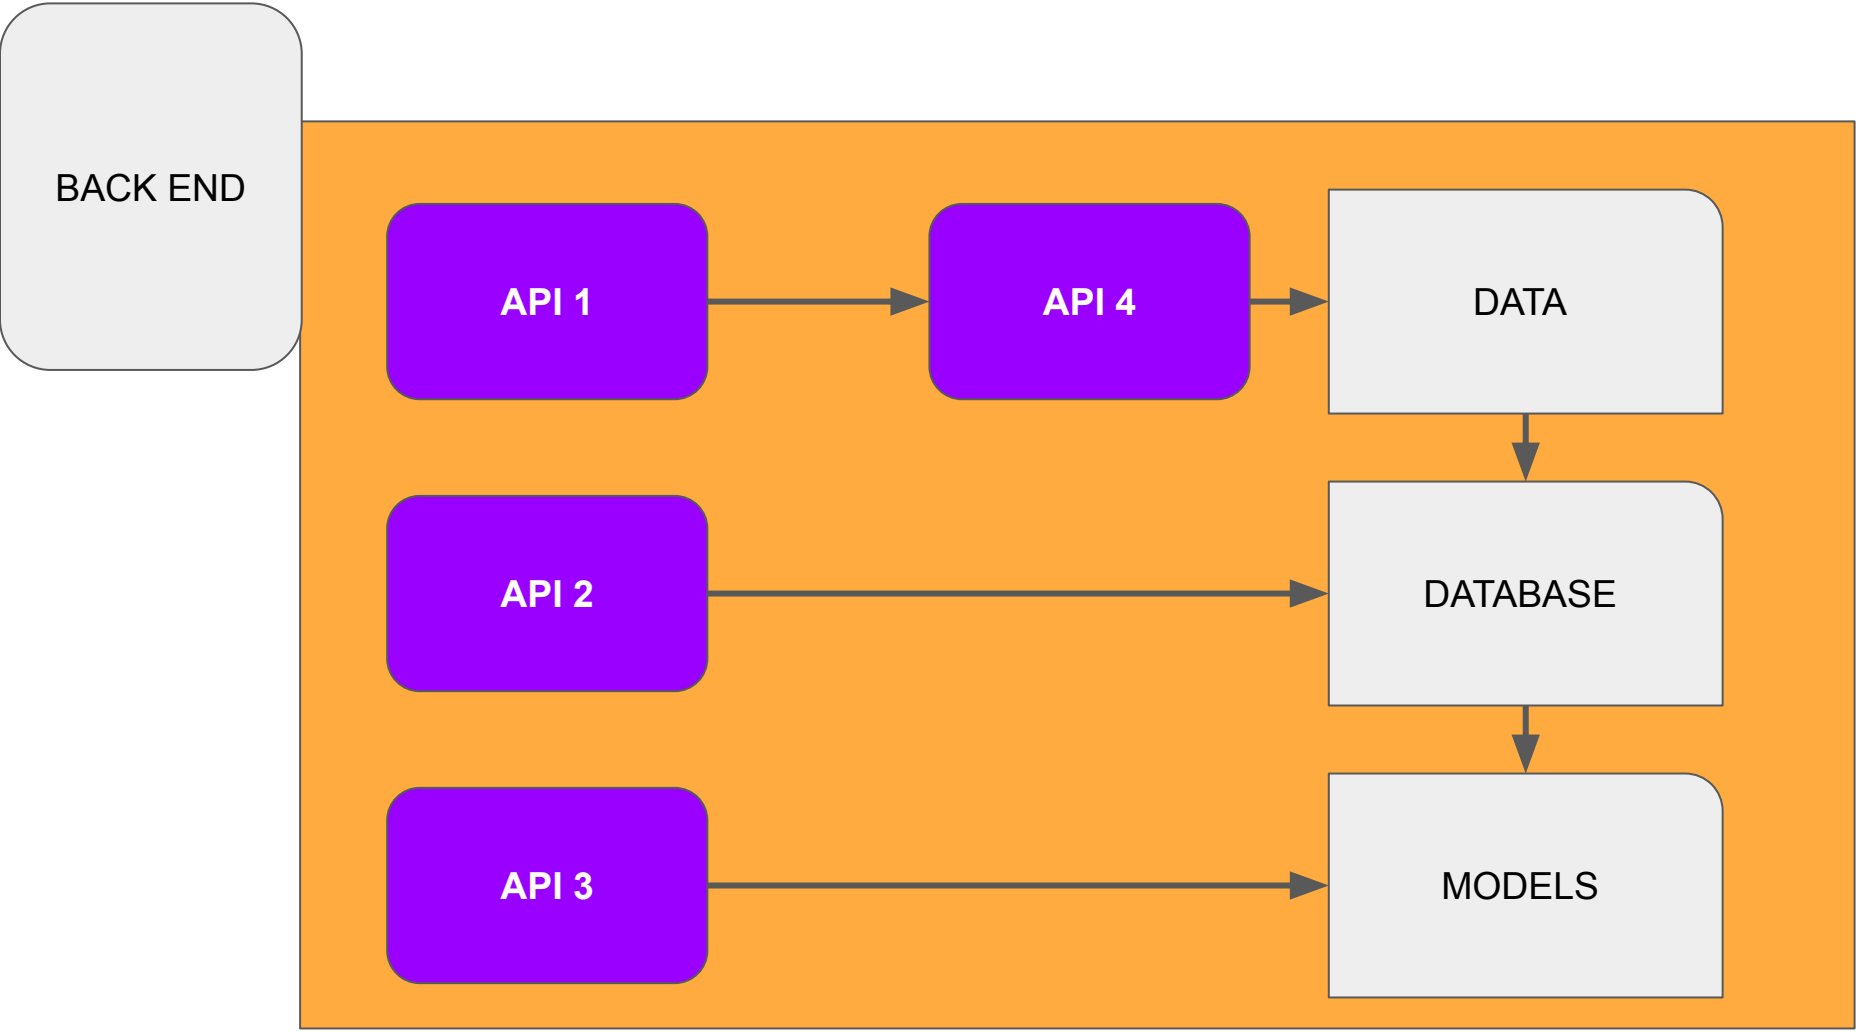
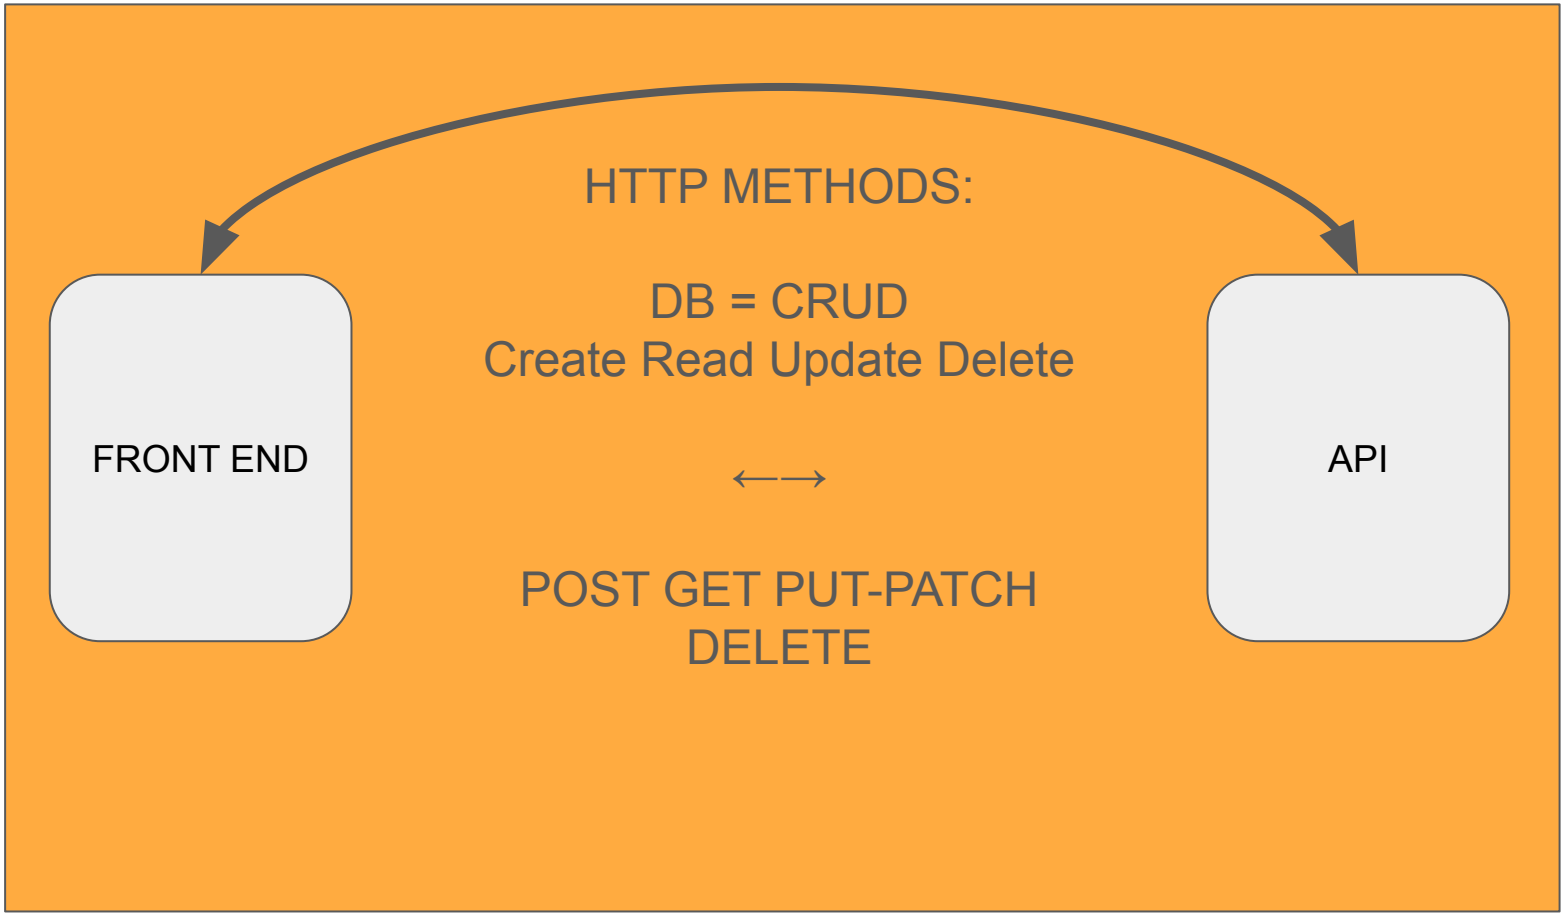
BACK END FRONT END




BACK END
API 1
API 4
DATA
API 2
DATABASE
API 3
MODELS


HTTP METHODS:
DB = CRUD
Create Read Update Delete
FRONT END
API
POST GET PUT-PATCH
DELETE


DANS FAST API

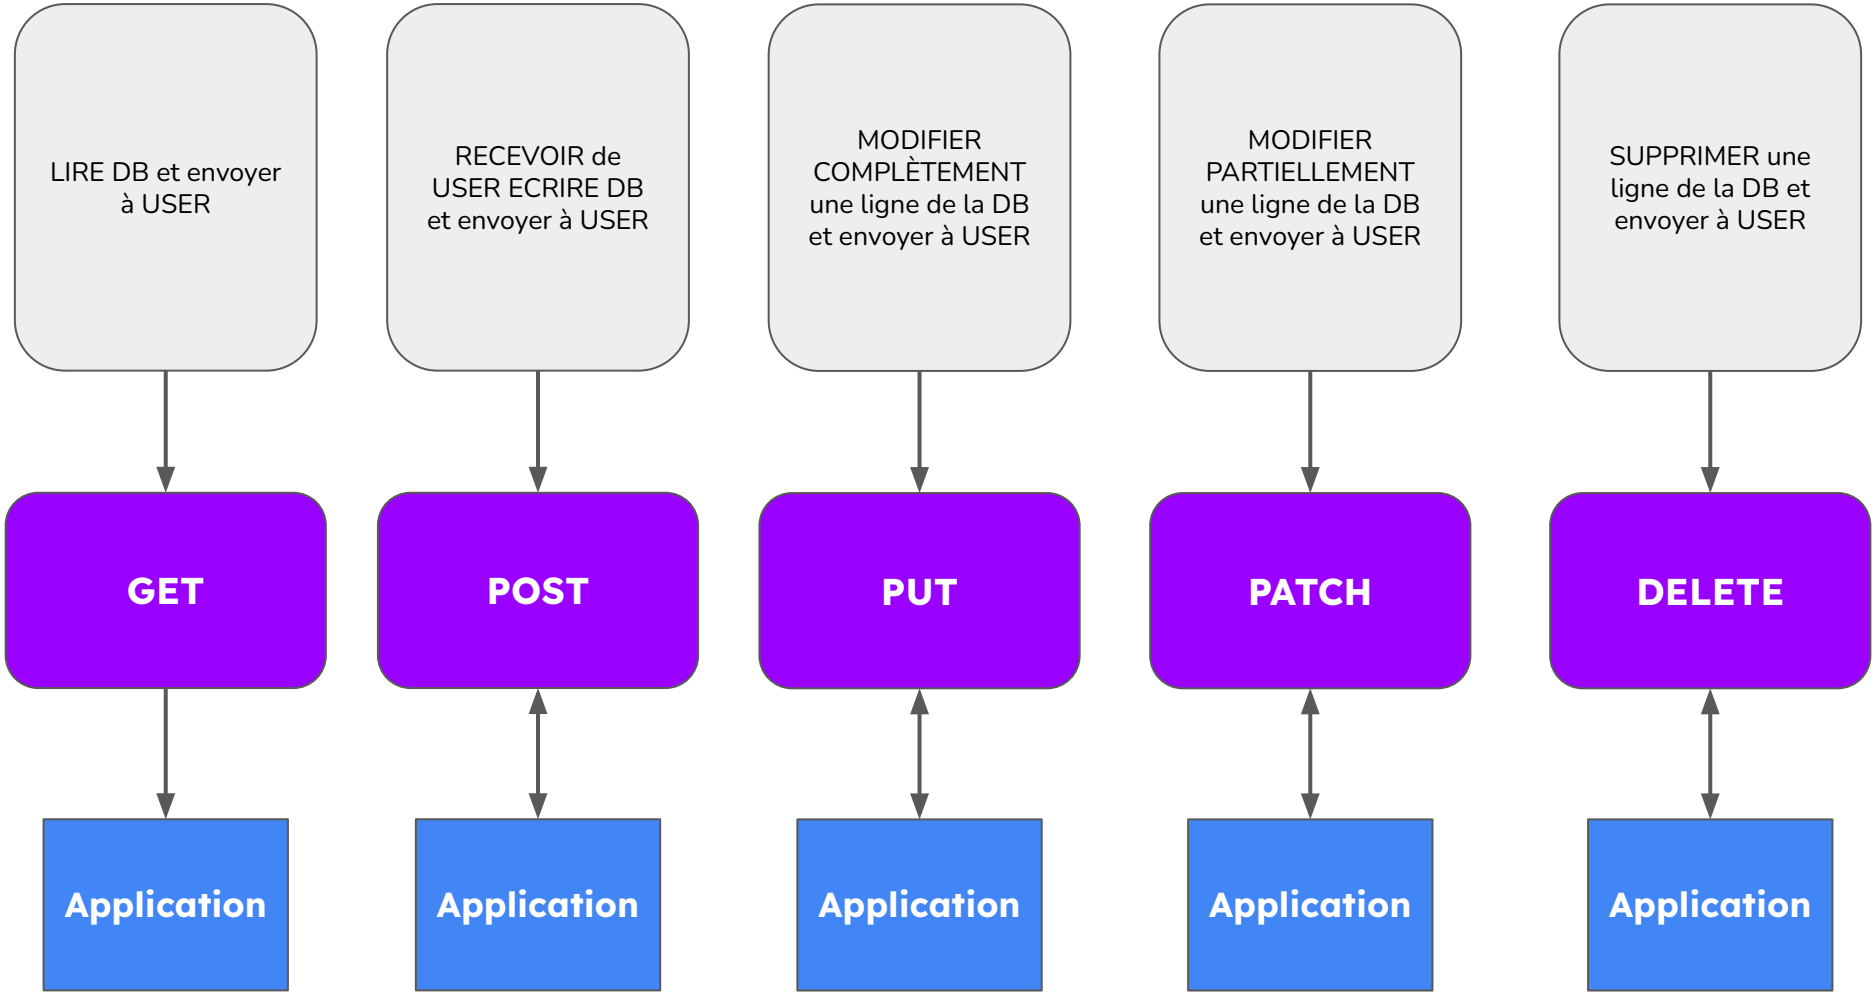
En fonction de ce que l'on veut faire on va utiliser 'un décorateur' lié à la méthode HTTP que l'on veut appliquer.

Appliquer comment? avec une fonction

`@identifiant_de_l_api.Methode_HTTP`(parametres)

le décorateur s'applique à la fonction suivante, ca englobe




LIRE DB et envoyer à USER
RECEVOIR de USER ECRIRE DB et envoyer à USER
MODIFIER COMPLÈTEMENT une ligne de la DB et envoyer à USER
MODIFIER PARTIELLEMENT une ligne de la DB et envoyer à USER
SUPPRIMER une ligne de la DB et envoyer à USER
GET
POST
PUT
PATCH
DELETE
Application
Application
Application
Application
Application

```python
@app.get("/user/")
def func():
    . . .

@app.get("/user/{id}")
def func():
    . . .

@app.post("/user/")
def func():
    . . .


@app.delete("/user/{id}")
def func():
    . . .
```

http://127.0.0.1:9091/read

```python
response = requests.get(API_URL)
```

http://127.0.0.1:9091/read/1

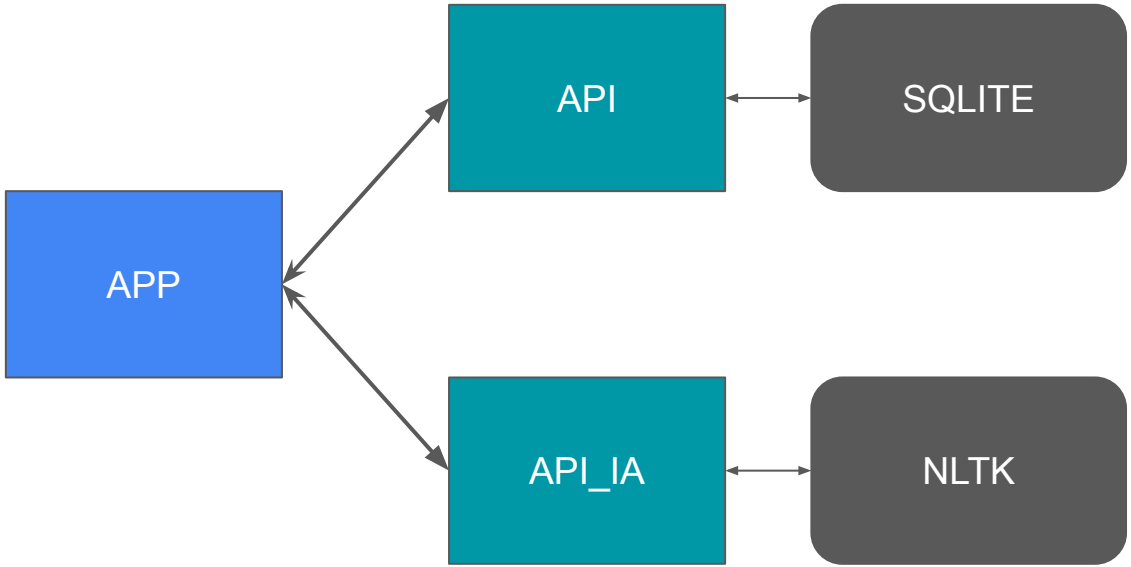
```python
response = requests.get( API_URL + str(user_id) )
```

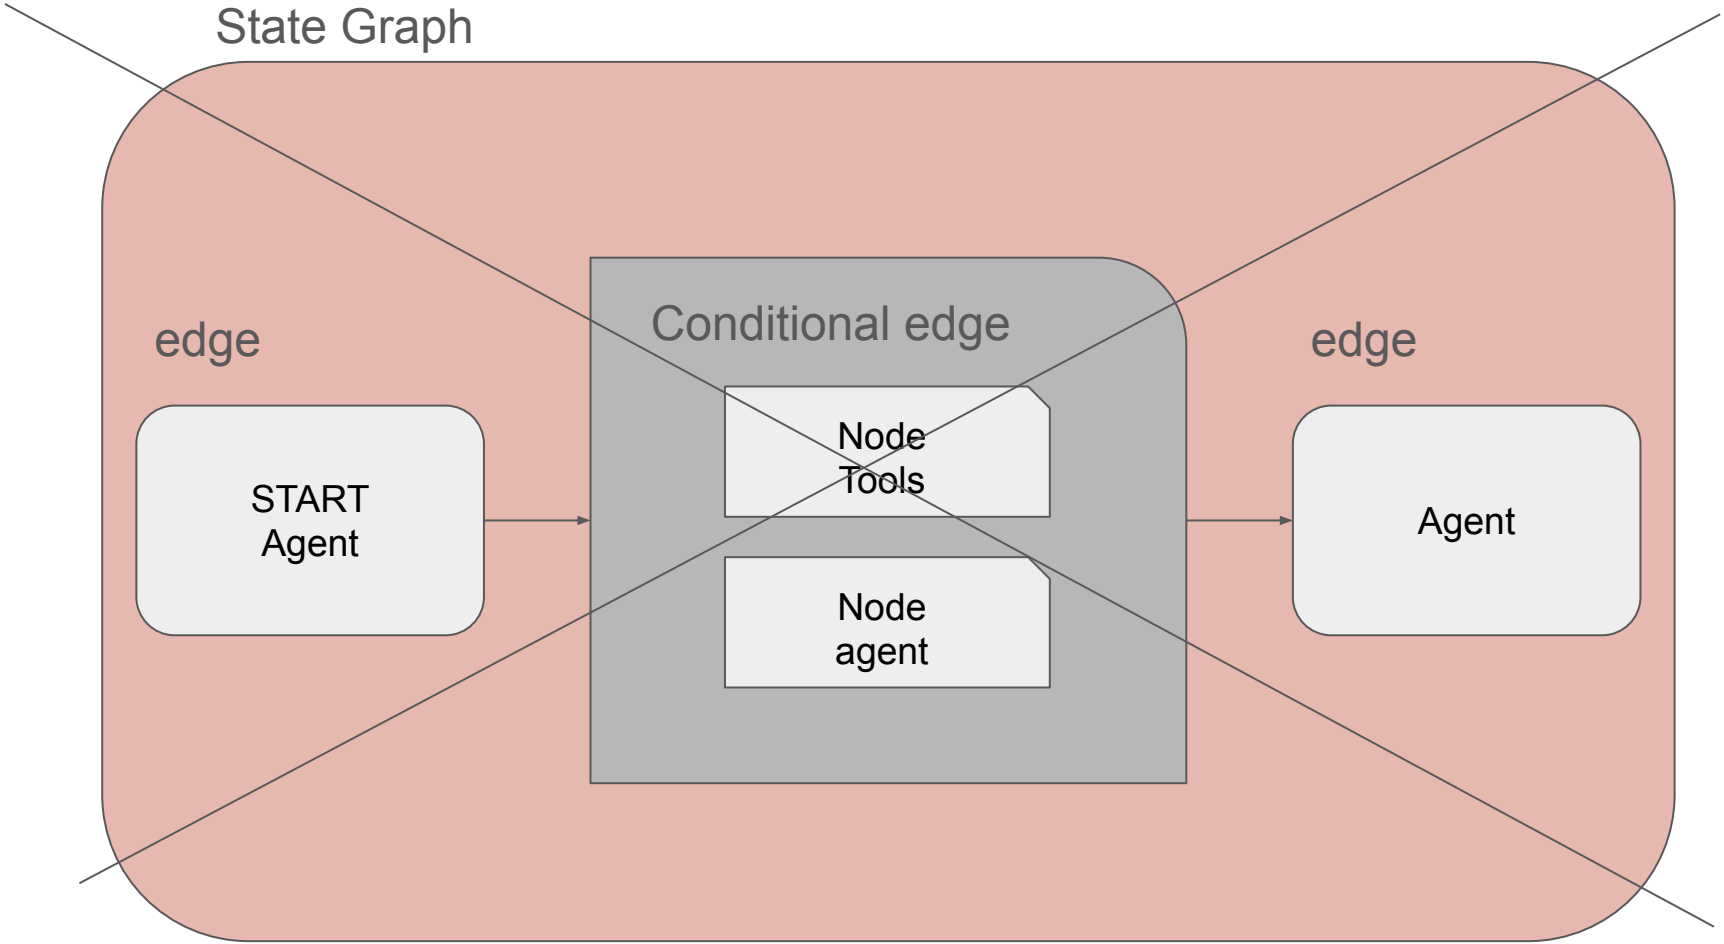
http://127.0.0.1:9091/read/

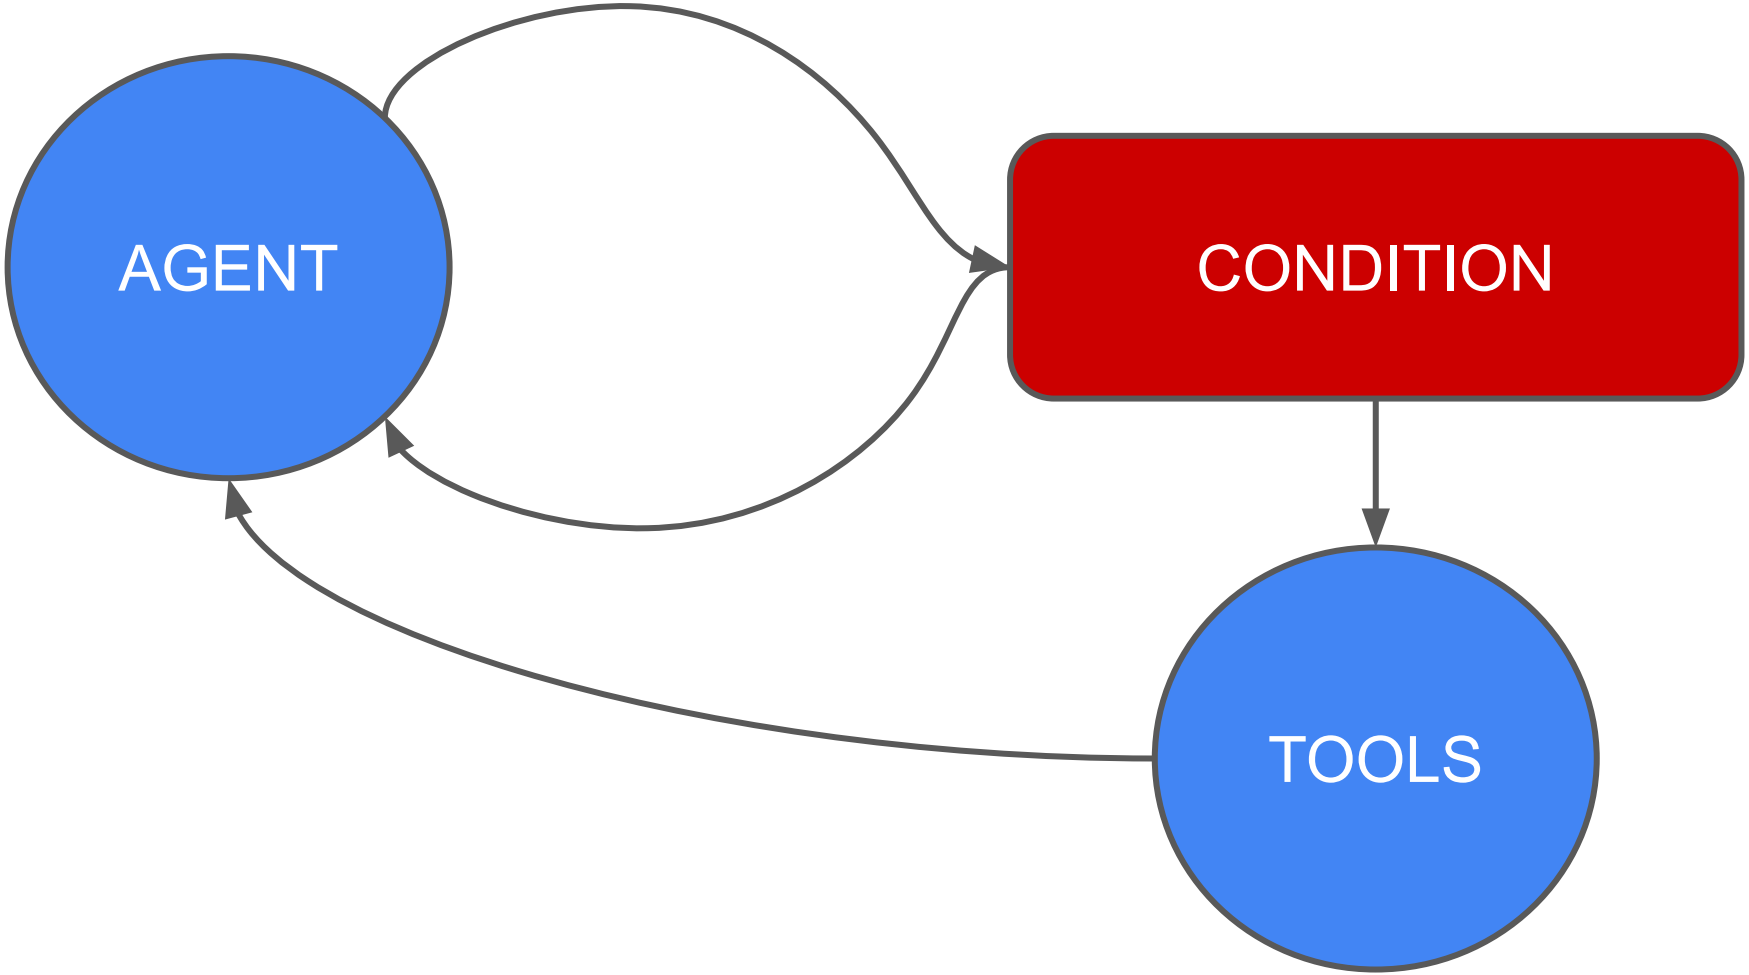
```python
response = requests.post(API_URL, json=data)
```

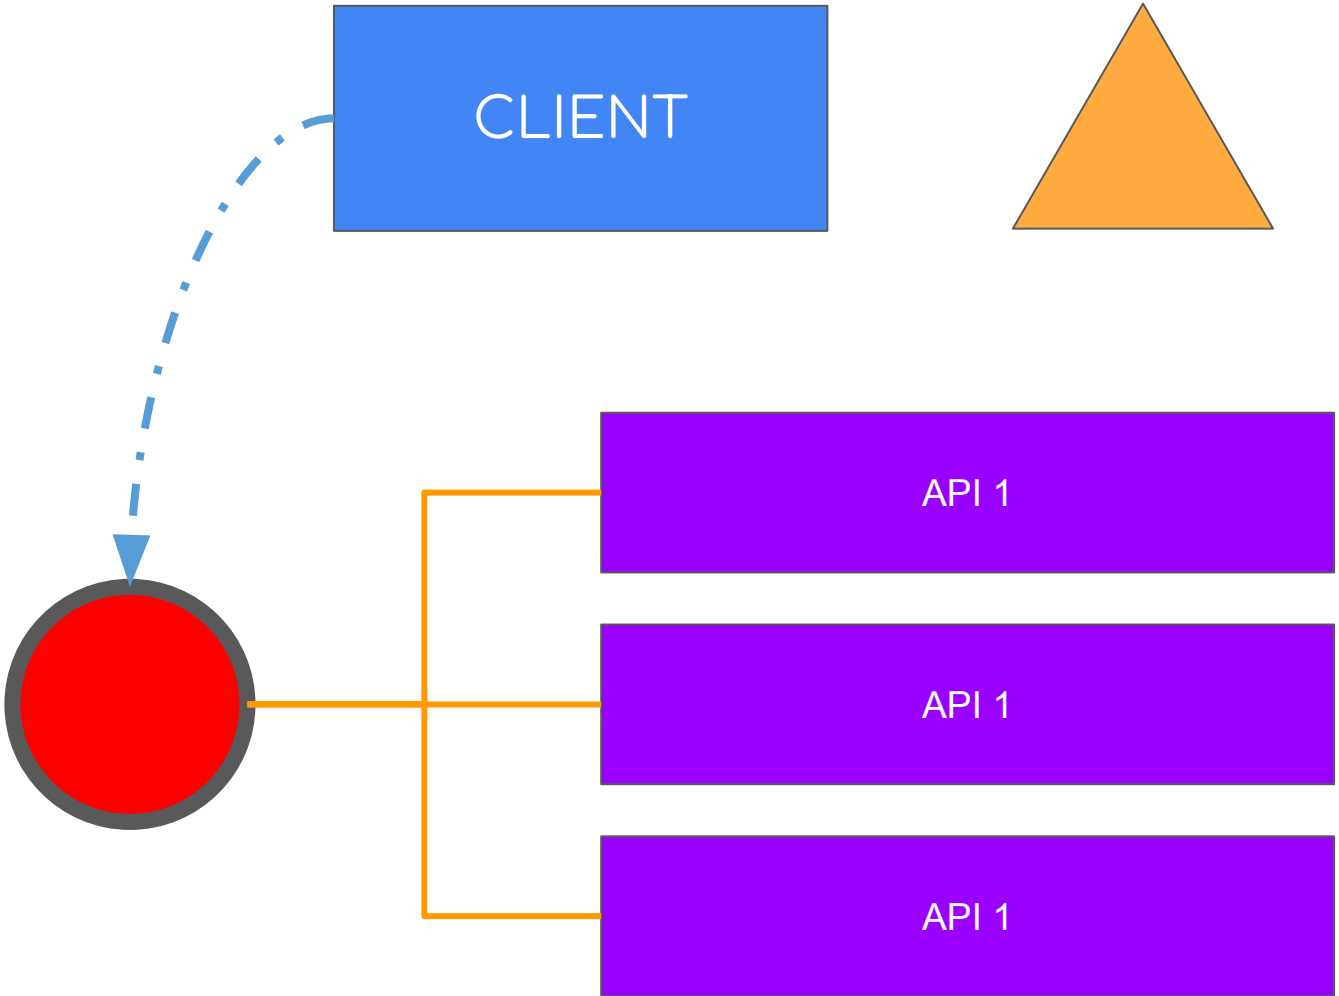
http://127.0.0.1:9091/read/1

```python
response = requests.delete( API_URL + str(user_id) )
```


API
SQLITE
APP
API_IA
NLTK


State Graph
edge
Conditional edge
edge
START
Agent
Node
Tools
Node
agent
Agent


AGENT
CONDITION
TOOLS


CLIENT
API 1
API 1
API 1