


NOTE:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS
- 2.MATERIAL:STAINLESS STEEL
- 3.THICKNESS :1mm
- 4.LETTER COLOR: BLACK

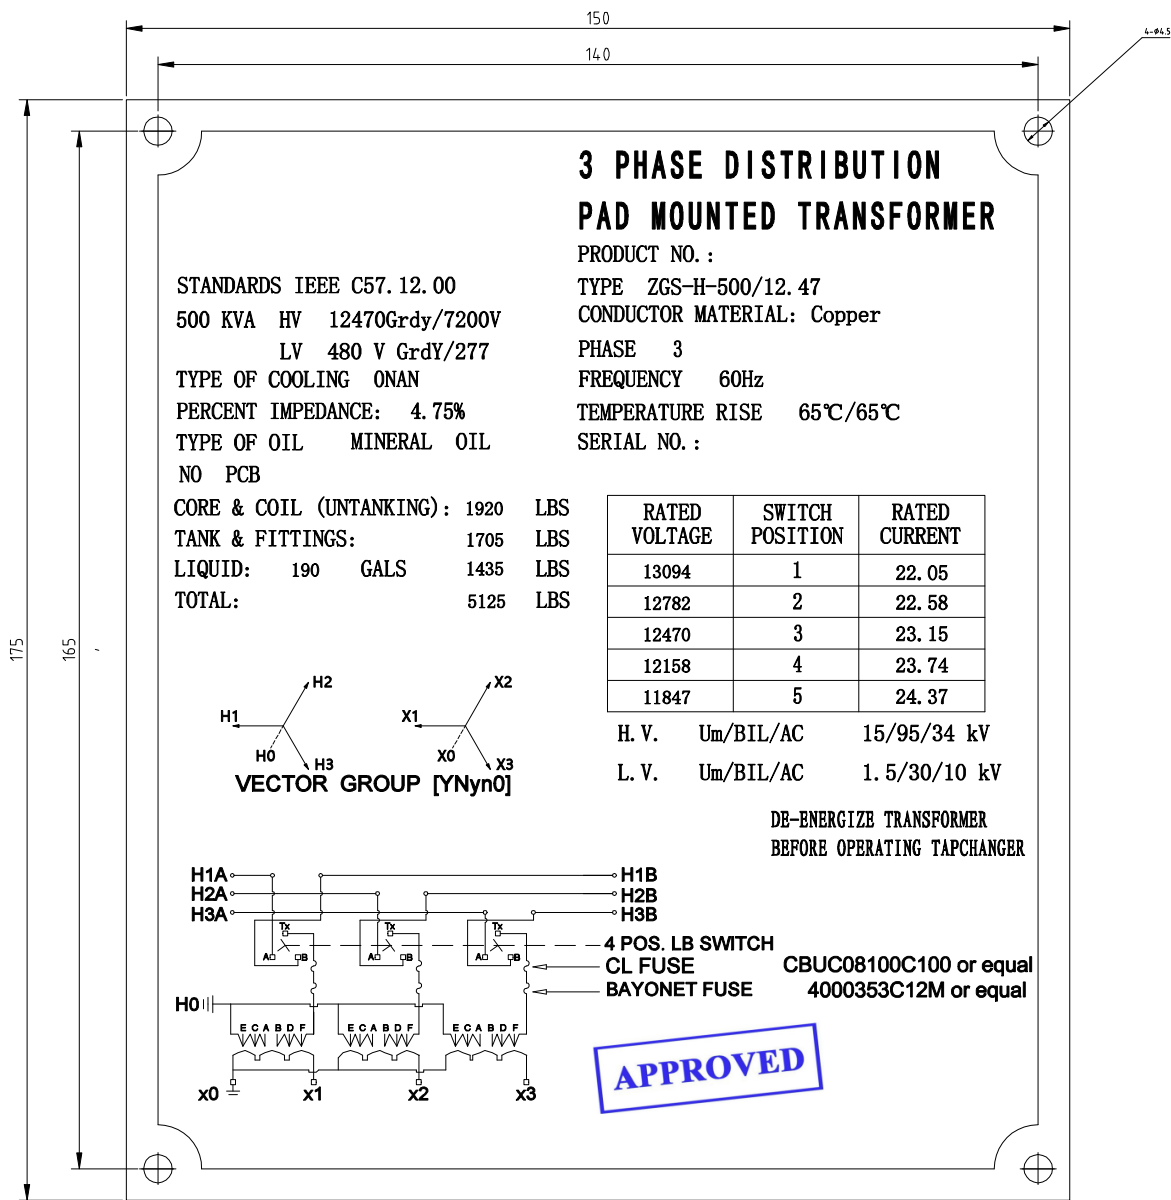

CHANGE

TYPE
ZGS-H-500/12.47/0.48

DWG. NAME
Name Plate

FIRST ANGLE PROJECTION SCALE 1 2

DRAWN CHECKED CHECKED APPROVED

Mike Jack Iris

JZP
POWER TRANSFORMER




REF. DWG. NO.

DWG. NO.


JZP-H-500-20240617-001

REV. NO.




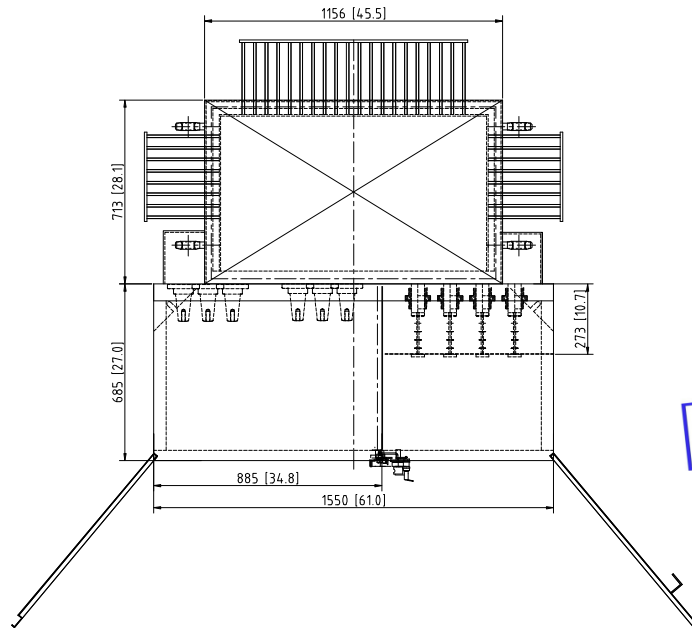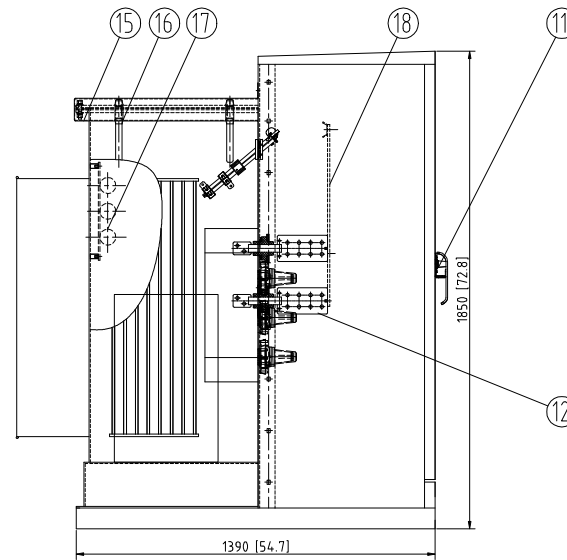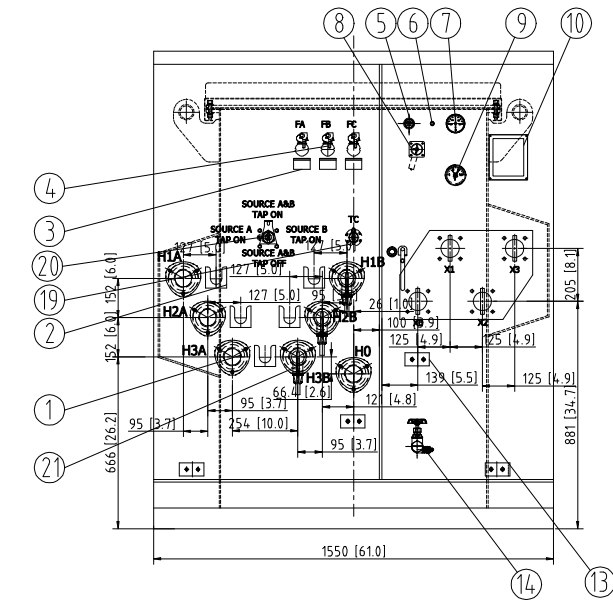


L.V. TERMINAL



APPROVED

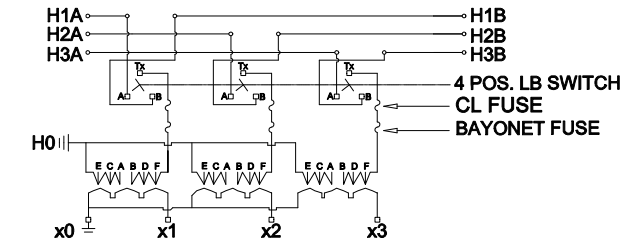

GROUND PAD
STAINLESS STEEL



ITEM	WEIGHT(LBS)
CORE WEIGHT	1920 LBS
TOTAL OIL WEIGHT	190 GALS
TOTAL WEIGHT	5125 LBS

TECHNICAL DATA

RATING	500KVA
PRIMARY VOLTAGE(V)	12470Grdy/7200V
SECONDARY VOLTAGE(V)	480Grdy/277
FREQUENCY	60Hz
VECTOR GROUP	YNyn0
CONDUCTOR	Copper
PRIMARY BIL VOLTAGE	95kV
SECONDARY BIL VOLTAGE	30kV
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	5000 W
NO LOAD LOSSES	700 W
IMPEDANCE	4.75%
ALTITUDE	≤1000m
COLOR	MUBSELL NO.7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE THREE-COLUMN

PARTS LIST

ITEM	DESCRIPTION	QTY
1	HV BUSHING (25kV,200A)	6
2	PARKING STAND BRACKET	5
3	DRIP TRAY	1
4	BAYONET FUSE (4000353C12M or equal)	3
5	FILL PLUG	1
6	PRESSURE RELIEF VALVE	1
7	VACUUM PRESSURE GAUGE	1
8	OIL LEVEL GAUGE	1
9	OIL TEMPERATURE GAUGE	1
10	NAMEPLATE	1
11	DOOR HANDLE	1
12	LV BUSHING(FTG1-1/1000,8 HOLE,BIL:30kV)	4
13	GROUND STEEL PADS	3
14	1"DRAIN VALVE WITH 3/8" SAMPLER	1
15	FLIP TOP COVER	1
16	LIFTING LUG	4
17	ELSP FUSE (CBUC08100C100 or equal)	3
18	BUSHING SPADE SUPPORT	4
19	TAP CHANGER(WSLI3 63/20-6x5)	1
20	FOUR POSITION LOADBRAKE SWITCH	1
21	ELBOW ARRESTERS	3

TYPE ZGSL-H-500/12.47/0.48					DWG. NAME General Assembly Drawing		
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1
Mike	Jack	Iris		Sam	JZP POWER TRANSFORMER		
JZP-H-500-20240617-001							
					REV. NO. △ 0		