
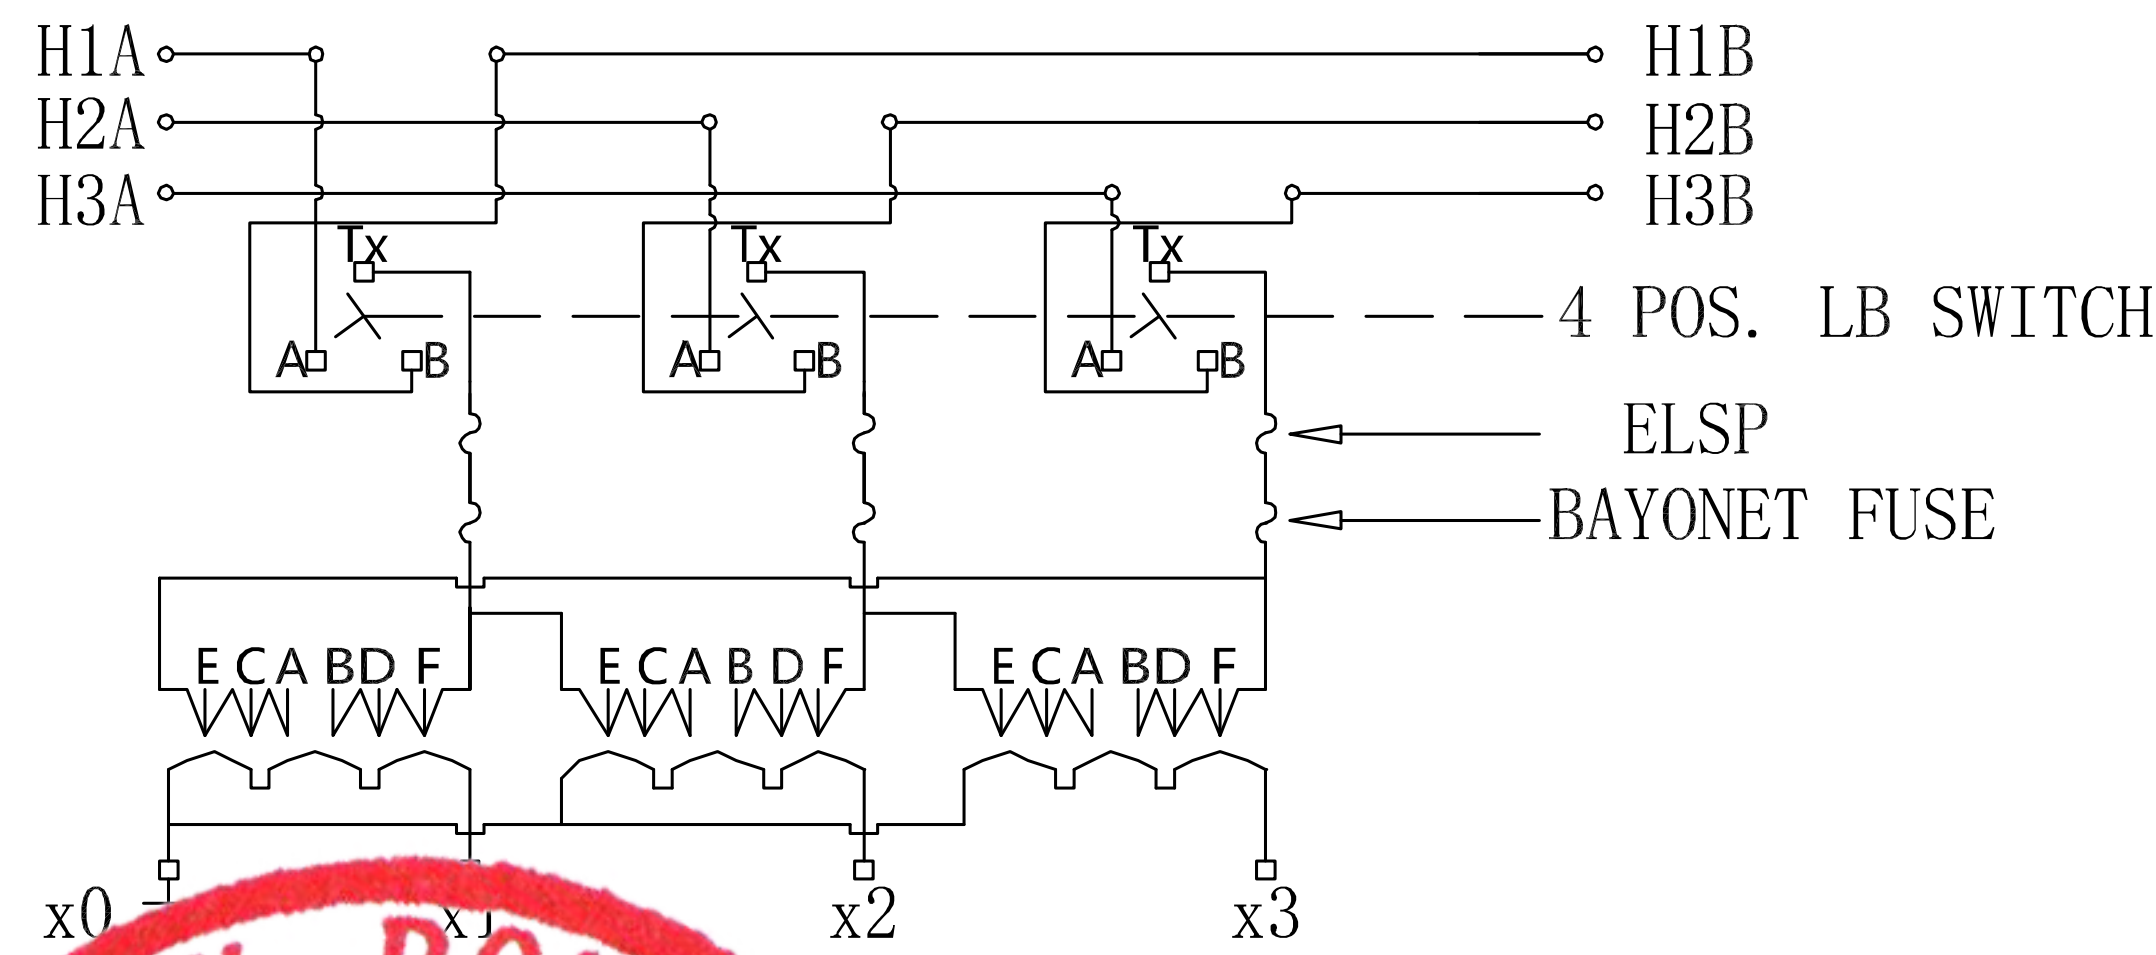
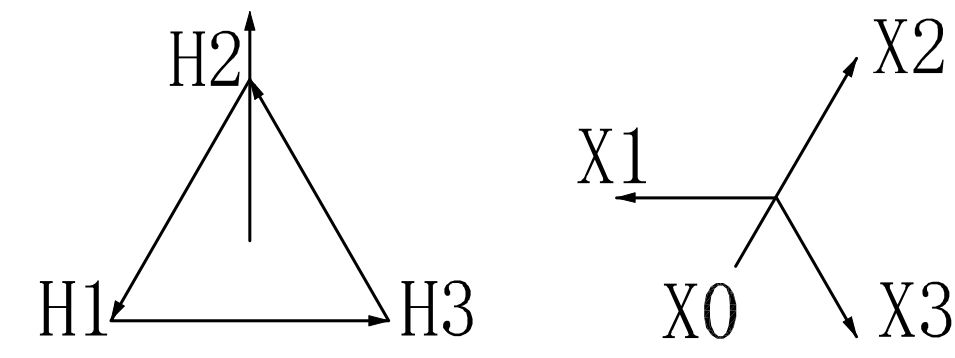
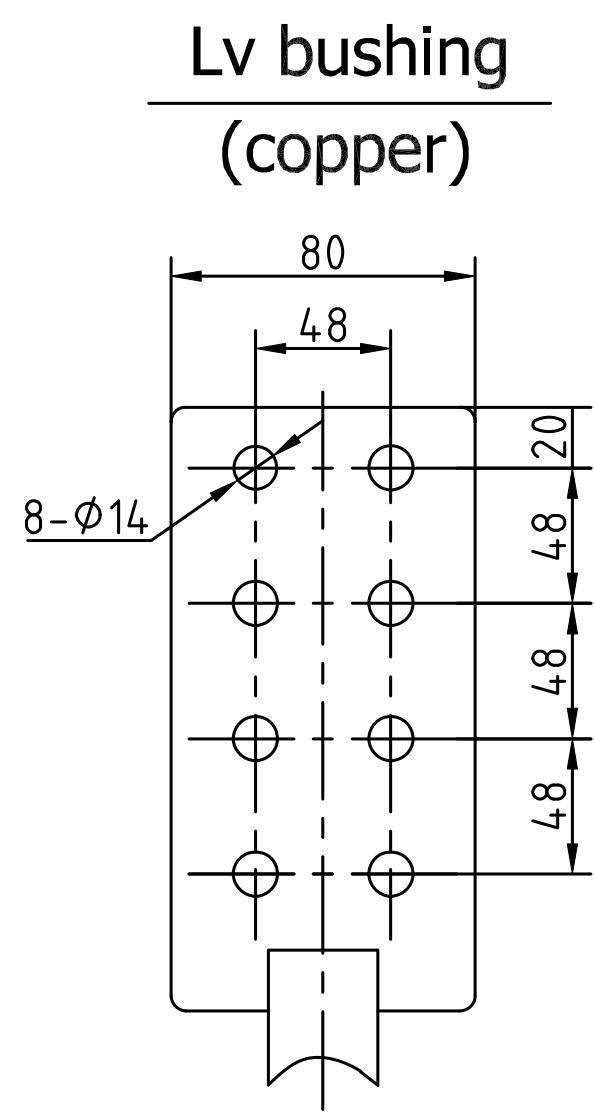
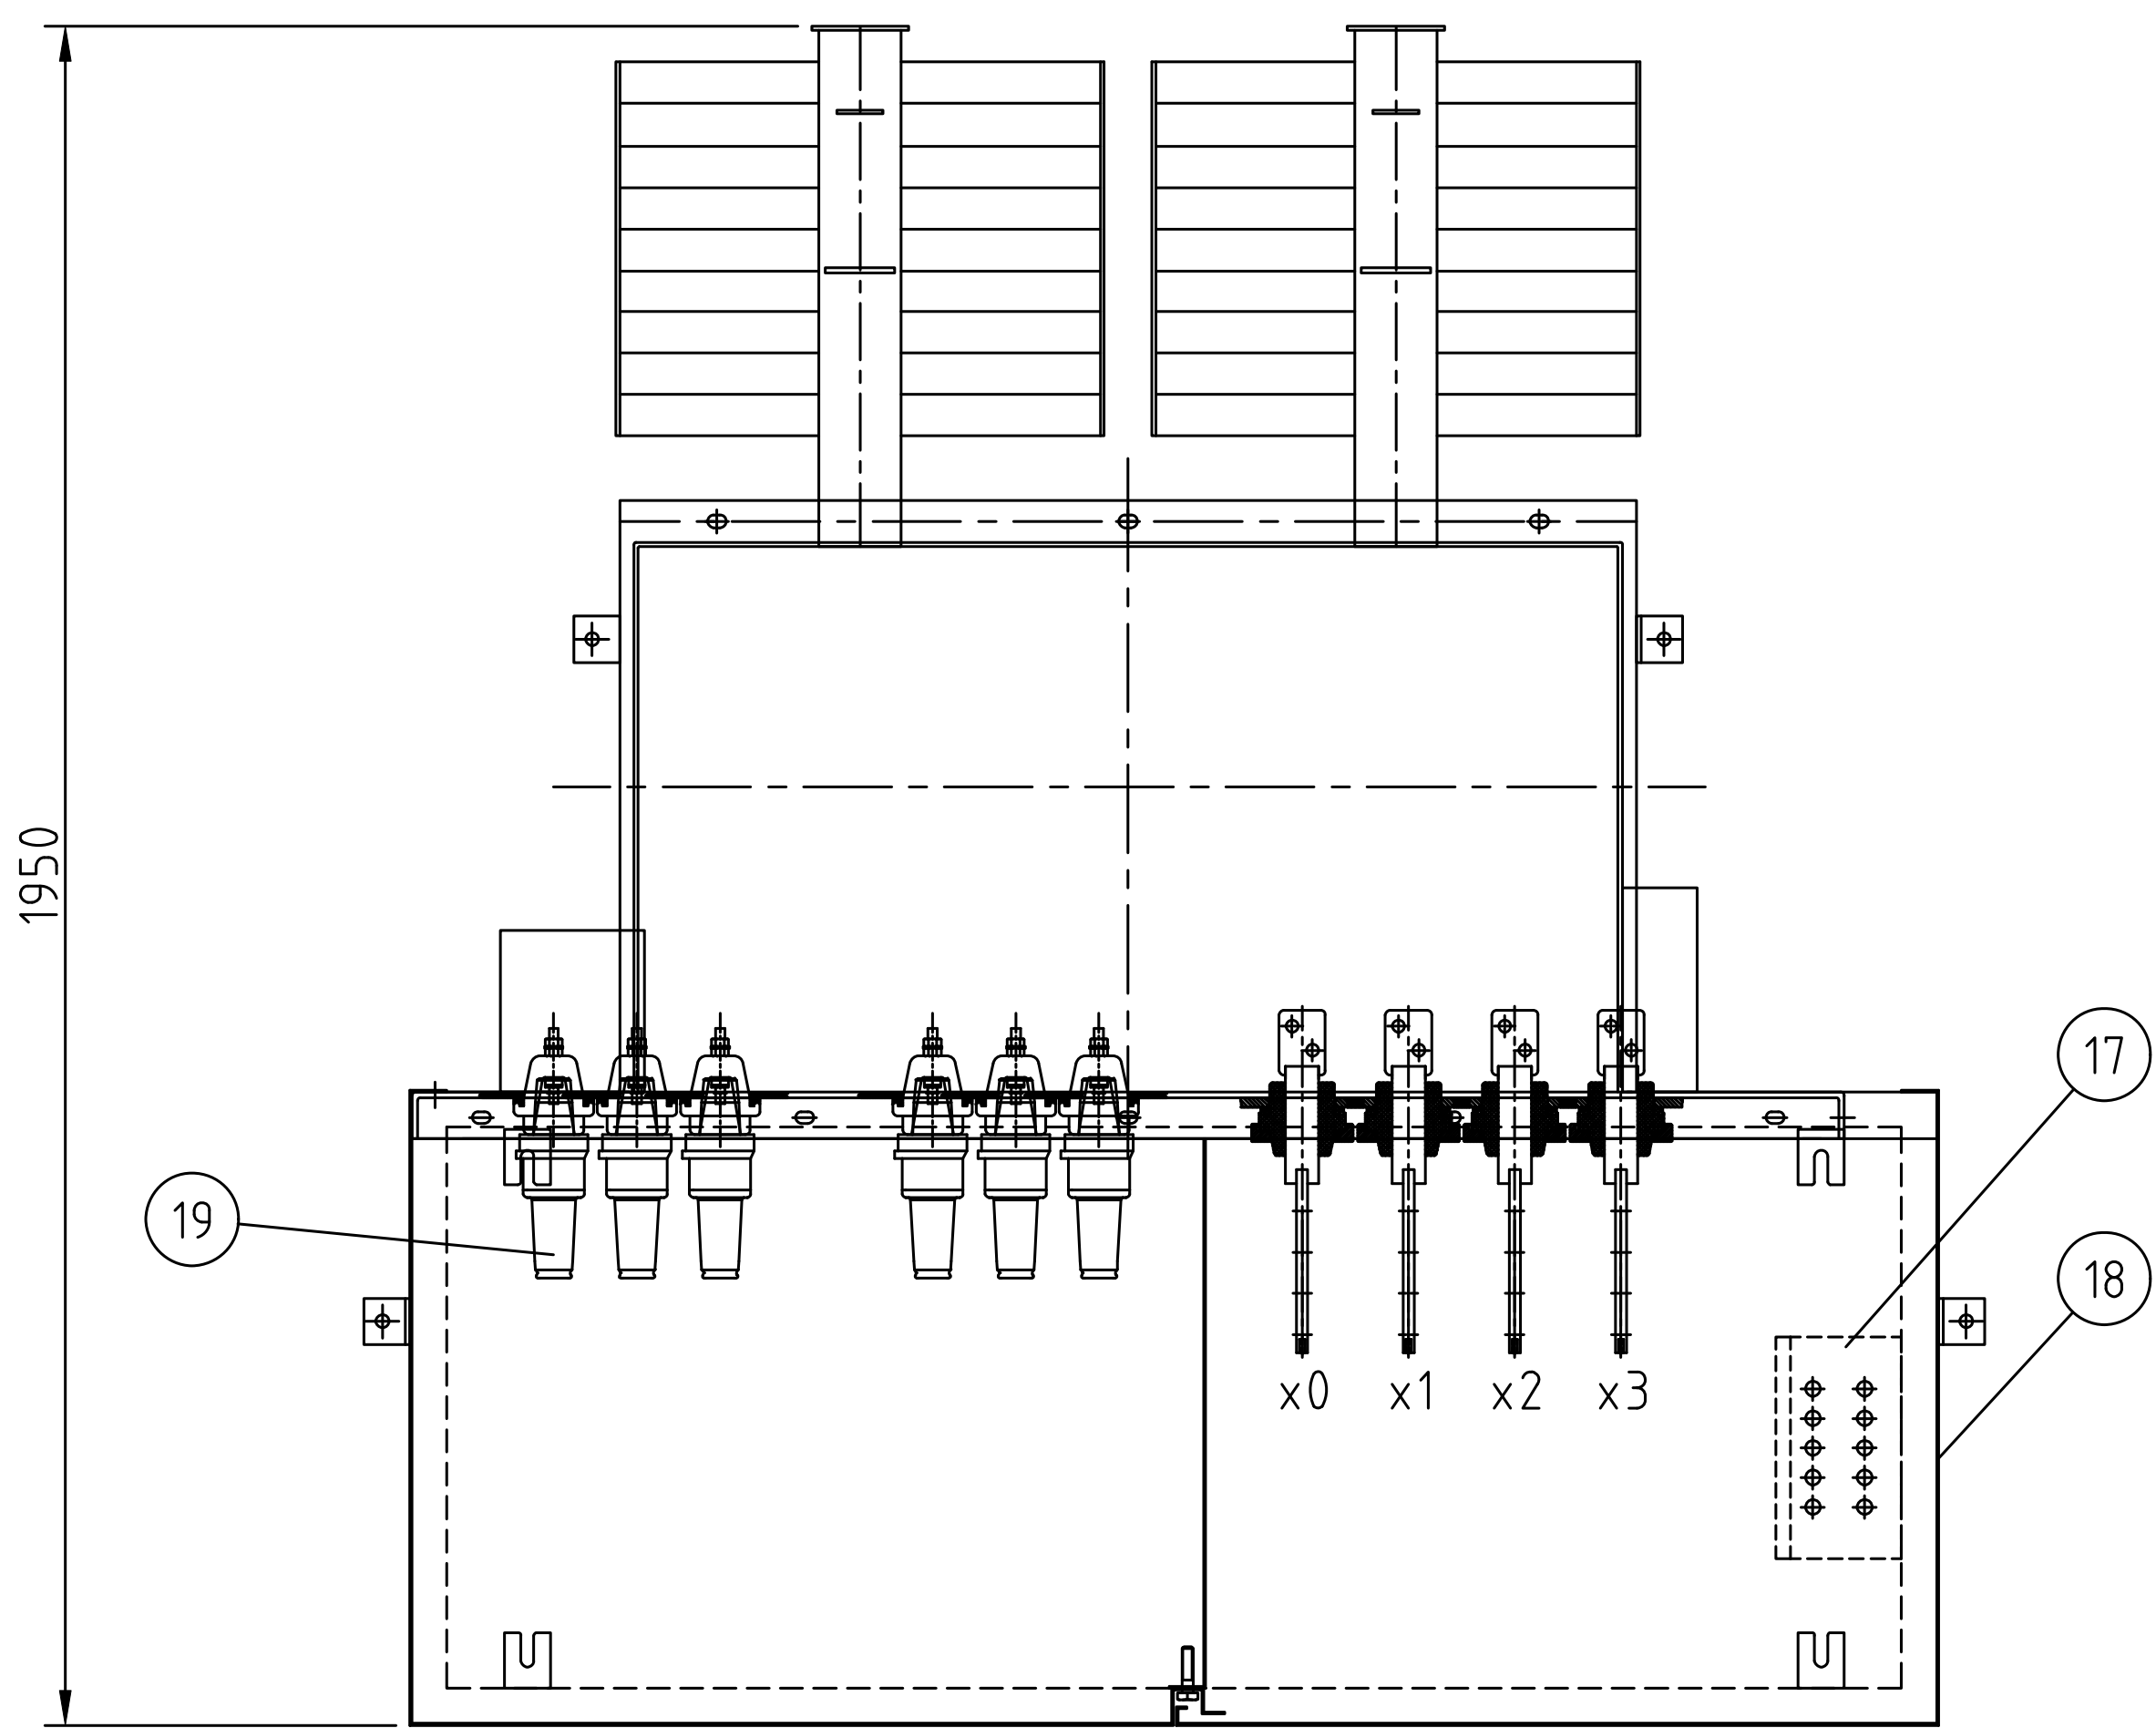
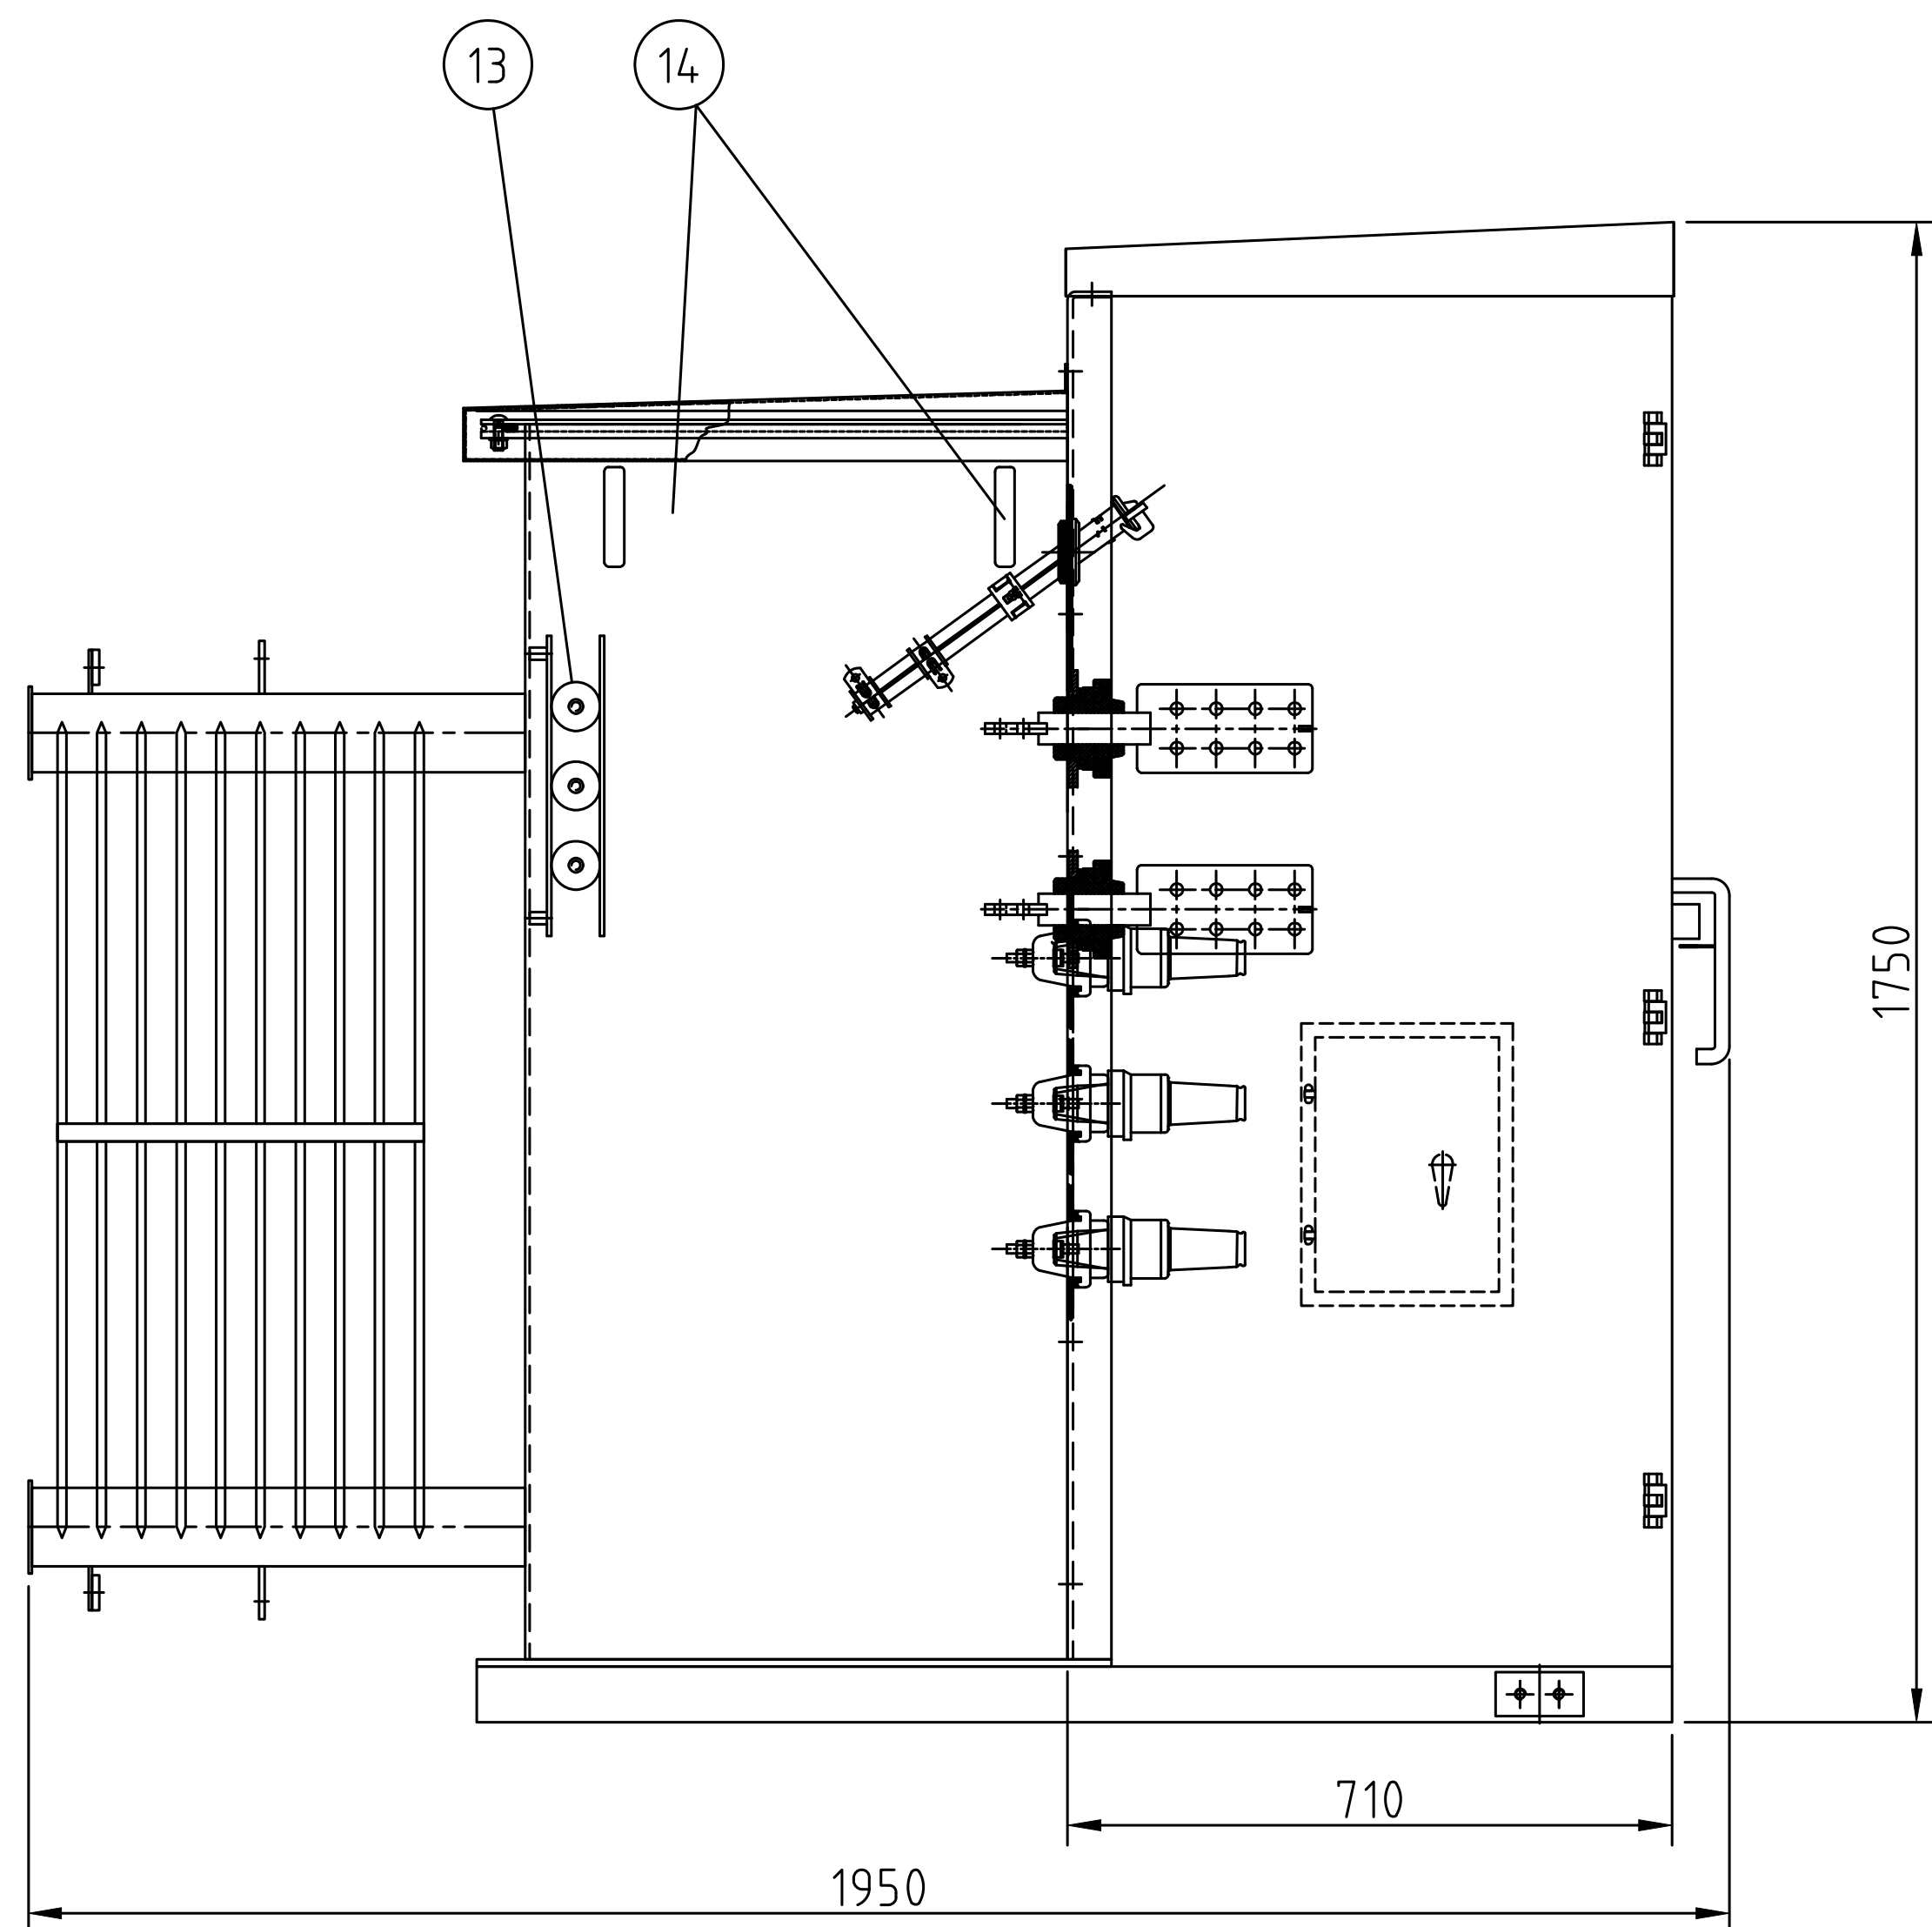


DWG. NO.

ZGS-H500-231016-01

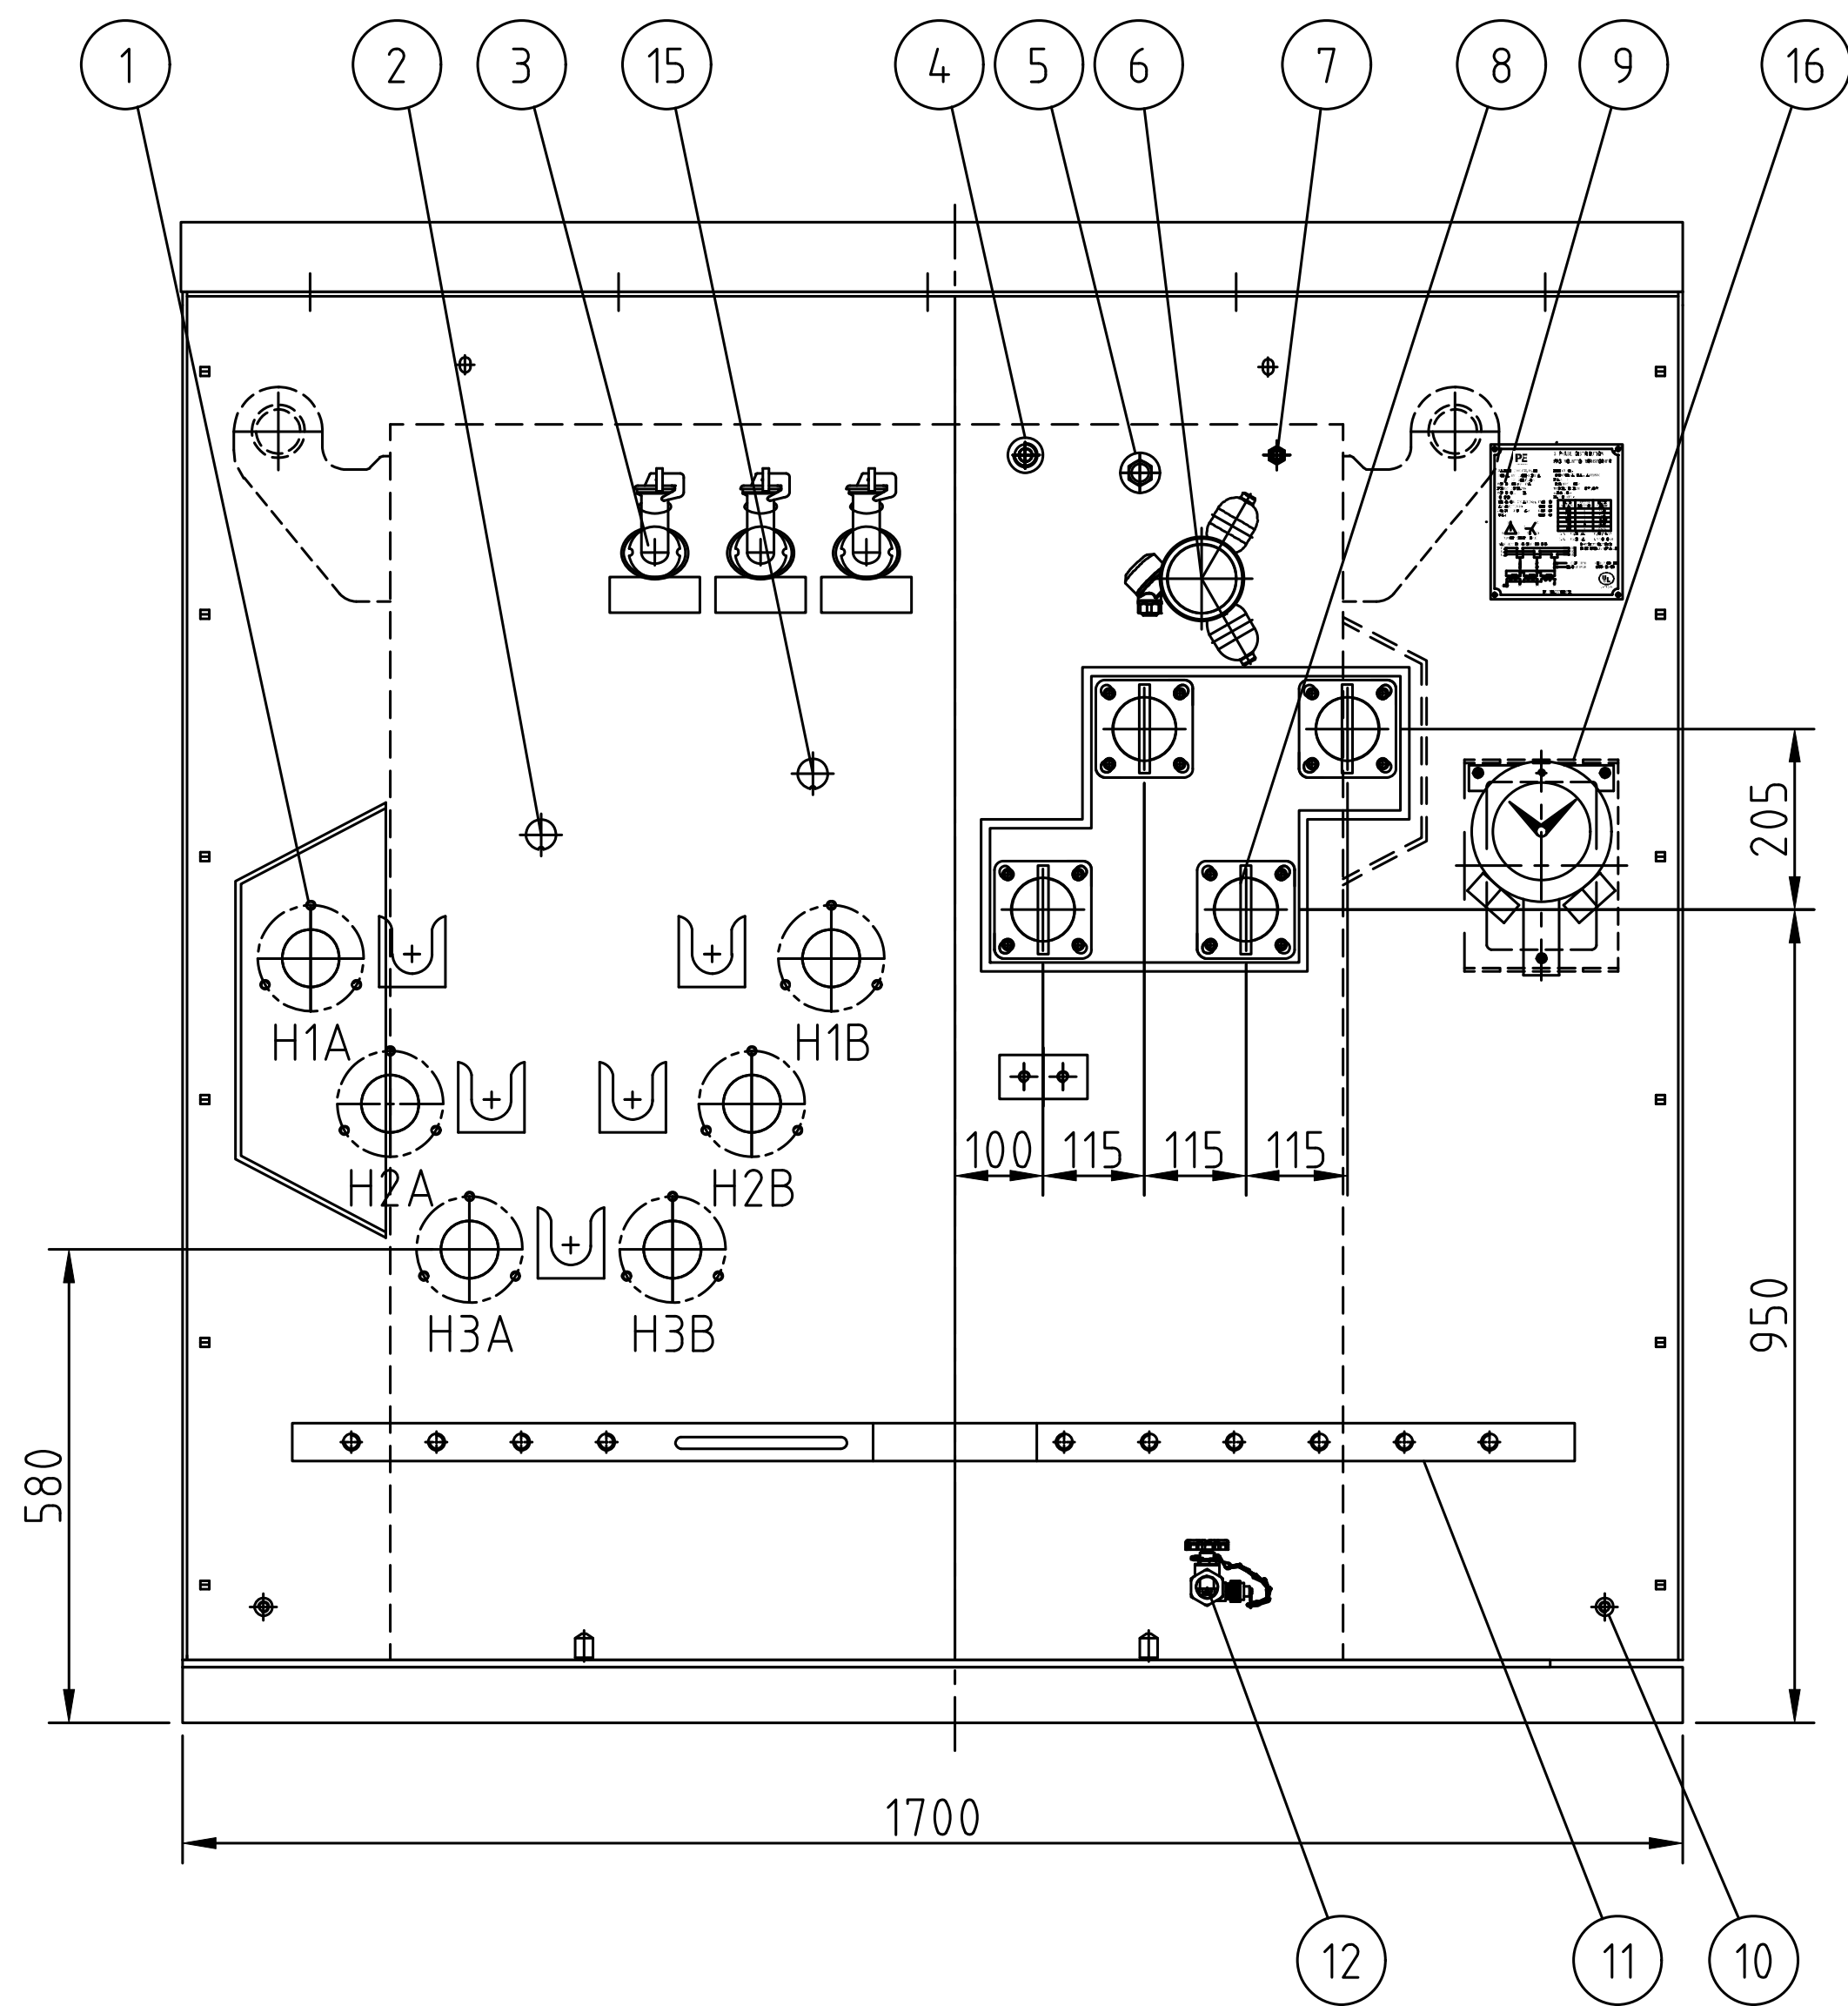

ITEM	WEIGHT(LBS)
Body weight	2025
Tank & accesories	2630
Total oil weight	1565
Total weight	6215

Rating	kVA	500
Phase		3
Frequency	Hz	60
H.V.	V	24940
L.V.	V	600Y/346
Vector Group		Dyn1
Material Of Winding		Aluminium
No Load Loss	W	880 (+10%)
Load Loss@85°C	W	5940 (+10%)
Impedance	%	5.0 (±10%)
Altitude		<1000m
Insulating Oil		Mineral oil NON-PCB (45#)

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	Hv bushing (200A 28kV, Cooper)	6
2	4 POS. LB SWITCH (FYN33-24/630)	1
3	Bayonet fuse (4000358C08M, Cooper)	3
4	Pressure vacuum Gauge	1
5	Oil fill plug (1 inch)	1
6	Oil level indicator (YZF2-90TH,With contact)	1
7	Vent valve (YSF)	1
8	Lv bushing (1.0KV 1600A)	4
9	Nameplate	1
10	Ground terminal	2
11	Ground bar	1
12	Drain valve c/w sampler valve	1
13	Elsp fuse (CBUC23080C100, Cooper)	3
14	Lifting lug (1½-inch hole,4EA)	4
15	Tap changer (WSLII3-63/24-6x5)	1
16	Oil thermometer (BWY-803A,With contact)	1
17	Control box	1
18	Front compartment	1
19	Bushing insert (28kV,200A,Cooper)	6



TYPE
ZGSL-H-500/24.94/0.6

DWG. NAME
General Assembly Drawing

DRAWN	CHECKED	CHECKED		APPROVED
Mike W.	Ella W	Iris J.		Sam S.

ZGS-H500-231016-01

FIRST ANGLE
PROJECTION

SCALE
1

JZP
SINCE 1989 FROM USA

REV.
NO.

1

CHANGE

NOTE:

1. ALL DIMENSIONS ARE IN MILLMETERS & [INCHES]
2. MATERIAL:STAINLESS STEEL
3. THICKNESS :1mm
4. LETTER COLOR: BLACK

