
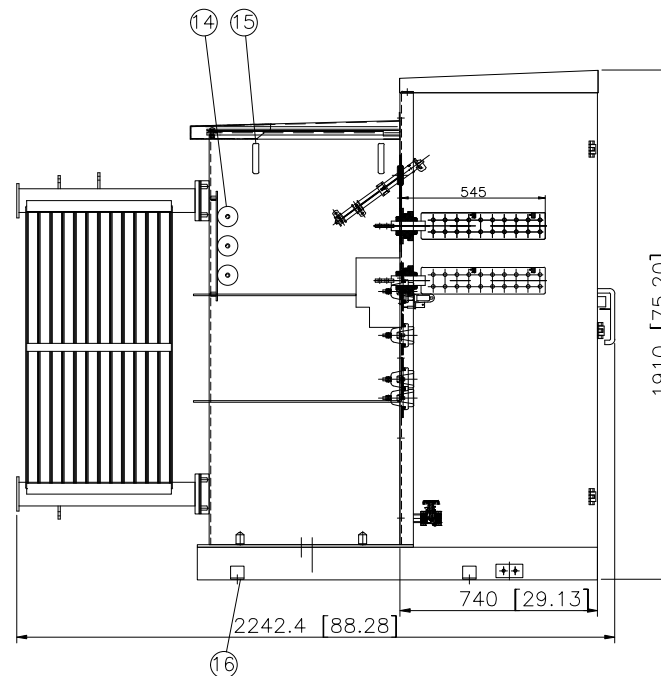
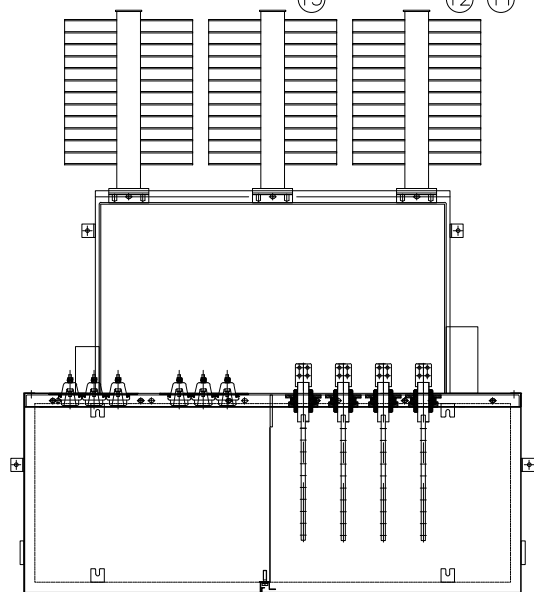


ITEM	WEIGHT(Kg)
Body weight	1540
Tank & accessories	1550
Total oil weight	970
Total weight	4060

Rating	kVA	1500
Phase		3
Frequency	Hz	60
H.V.	V	12470Y/7200
L.V.	V	480Y/277
Vector Group		YNyn0
Core Limbs		★ 3 legged core
Material Of Winding		aluminium
No Load Loss	W	1400(+10%)
Load Loss	W	14000(+6%)
Impedance	%	6.3 (±7.5%)
Altitude		<1000m
Insulating Oil		FR3

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	HV bushing (TGZ-15/200)	7
2	Bayonet fuse(4038361C04 CB)	3
3	Tap changer (WSLI3-125/20-6×5)	1
4	Oil thermometer(BWS-70)	1
5	Vacuum pressure gauge(YZ-70)	1
6	Oil fill valve	1
7	Oil- level indicator(UHZ-01)	1
8	Hand valve(YSF)	1
9	LV bushing (1.0KV 2500A)	4
10	Nameplate	1
11	Ground terminal	3
12	2-hole horiz nema grd pad	5
13	Drain valve	1
14	Elsp fuse(CBUC15165 D100)	3
15	Lifting lug	4
16	Connected steel-plate	4
17	Load Switch	1
18		

TYPE PE-R-1500/12.47/0.48					DWG. NAME General Assembly Drawing				
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1		
Mike W.	Iris J.	Ella W.		Sam S.					
PE.3PD.1500.12470.R.480					PE TRANSFORMER				REV. NO. 1

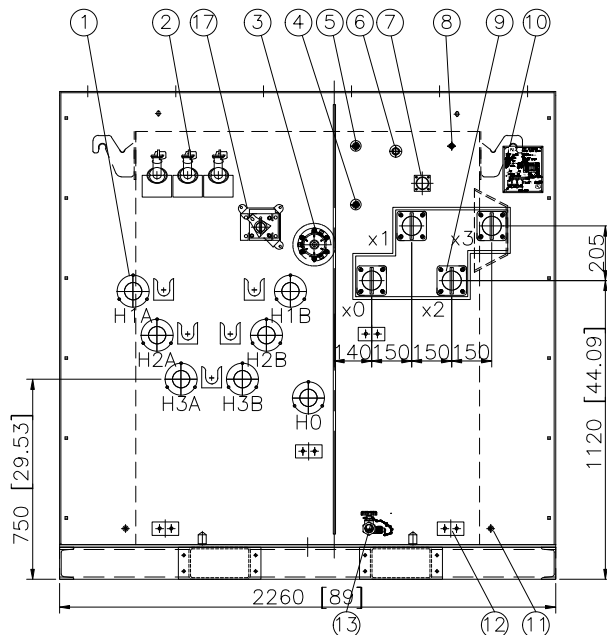