
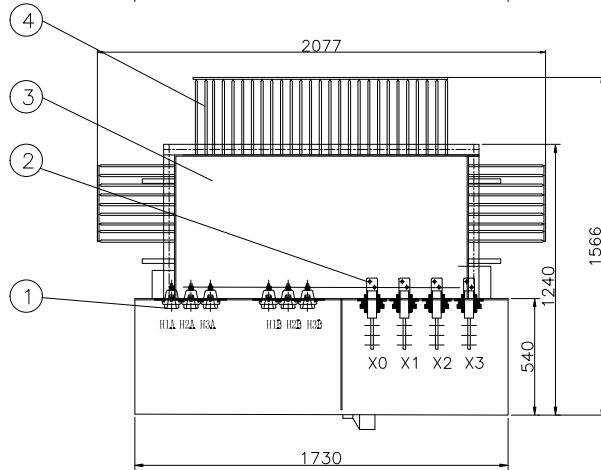
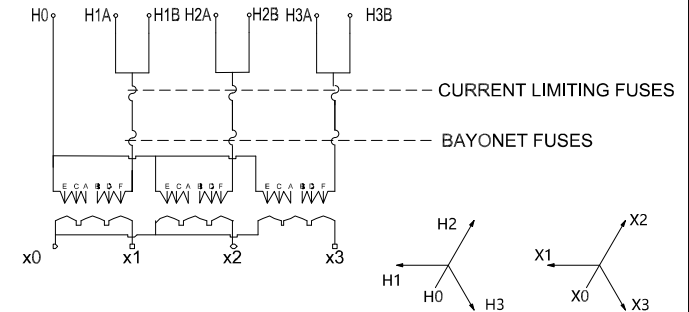



ITEM	WEIGHT(Kg)
TANK & ACCESORIES	1250
TOTAL OIL WEIGHT	1000
TOTAL WEIGHT	3400

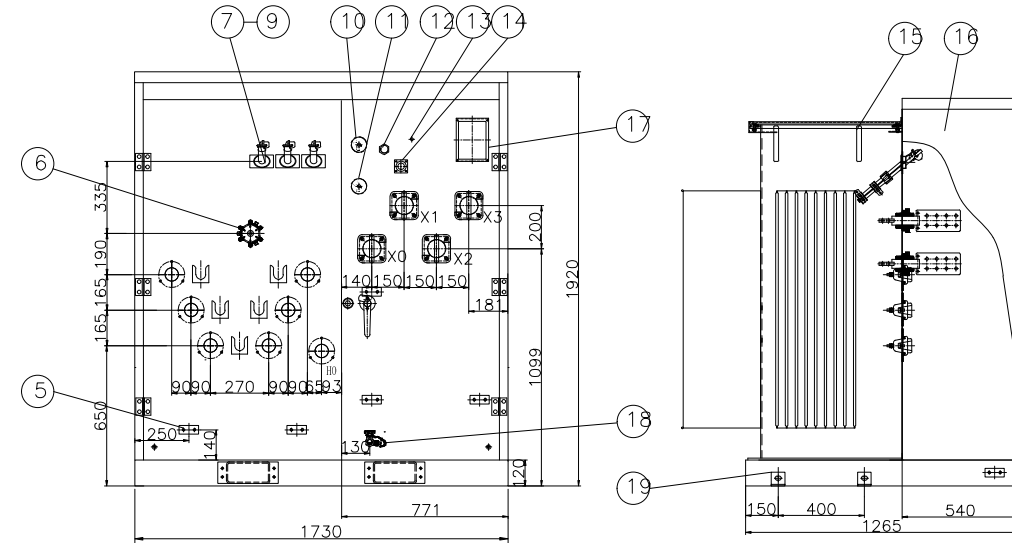

TECHNICAL DATA	
RATING	1000kVA
PRIMARY VOLTAGE	12470Grd Y/7200V
SECONDARY VOLTAGE	480Y/277V
FREQUENCY	60Hz
VECTOR GROUP	YNyn0
WINDING MATERIAL	Aluminum
LOAD LOSS AT RATED VOLTAGE	10300W Tol -10%~+10%
NO LOAD LOSSES	1000W Tol -10%~+10%
IMPEDANCE	6.3% Tol±10%
ALTITUDE	≤1000m
No. OF TAPPOSITION	5
COLOR	Munsell No.7.0 GY3.29/1.5G
CORE FORM	Three-phase Three column

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	Casing well (15kV,200A), Cooper	7
2	LV bushing (1.0KV 2000A)	4
3	Tank and cover assembly	3
4	Radiators	1
5	Ground Stainless steel	7
6	Tap changer (WSLII3-63/10-6×5)	1
7	High voltage overload fuse, Cooper	3
8	High voltage backup current-limiting fuse, Cooper	3
9	Oil storage box	3
10	Vacuum manometer(YZ-70)	1
11	Thermometer	1
12	Oil fill valve (1 inch)	1
13	Vent valve	1
14	Oil-level indicator	1
15	Lifting lugs	4
16	Front compartment	1
17	Nameplate	2
18	Oil drain valve(1 inch)	1
19	Dead plate	4

TYPE					DWG. NAME			
ZGS-H-1000/12.47					General Assembly Drawing			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1	
Mike	Jack	Iris		Sam				REV. NO.
								0