

Common Interface



Message Container

Untyped data object

| Interface Propert Interfa | | Methods Eve | ents Ty | pes | | lemer | nted / Active |
|------------------------------|---------|-------------|---------|----------|------------|-------|---|
| Parameters of Method | 101 - | GE1 | r_ENTI | IY8I | ET [0] | | rope ties Fo Fo 6 CD Co |
| Poremeter | | Type | Pa | Q | Typing Met | hod | Associated Type |
| IC TECH REQUES: | CONTEXT | Importing | 9 🗆 | | Type Rei | To | /INBED/IF MOW RBQ ENTITYSET |
| TO MODEL | | Importing | 0 🗆 | | Type Ref | To | ECL GW MODEL |
| IC MESSAGE CONT | DAINER | Importing | g 🗆 | 4 | Type Ref | To | /INBEF/IF_MESSAGE_CONTAINER |
| NI_INTITYSET | | Exporting | | | Type | | DATA |
| ES_RESPONSE_COI | TXXT | Exporting | | | Type | | /INDEF/IF_MGW_APPL_SRV_RUNTINE=>7Y_S_MGM_RESPONSE_CONTEXT |










SAP Australian Common Interface

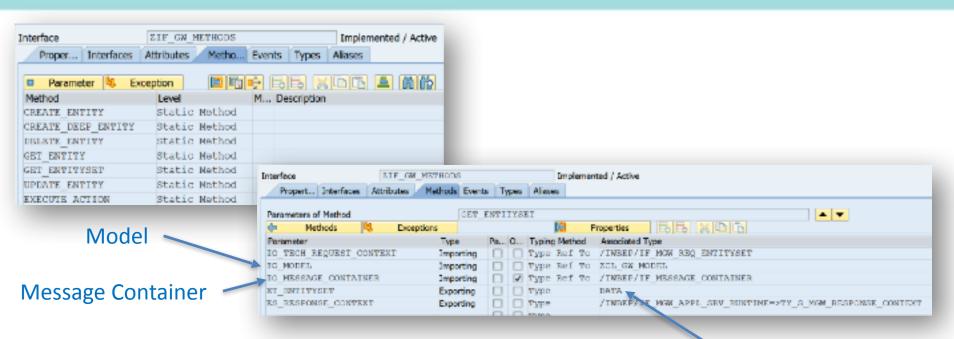


Untyped data object





SAP Australian ZCL_GW_MODEL

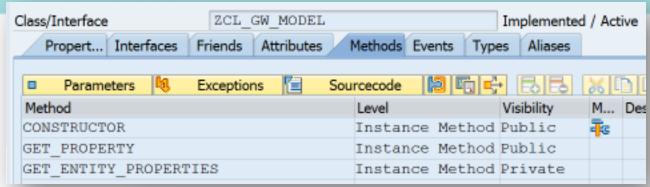

METHOD constructor.

```
DATA: lr_facade TYPE REF TO /iwbep/cl_mgw_dp_facade.
lr_facade ?= runtime->get_dp_facade().

mpc ?= lr_facade->/iwbep/if_mgw_dp_int_facade~get_model().

ENDMETHOD.
```

