




Week -9

Name: Sai Lasya

Roll no : 2520030538

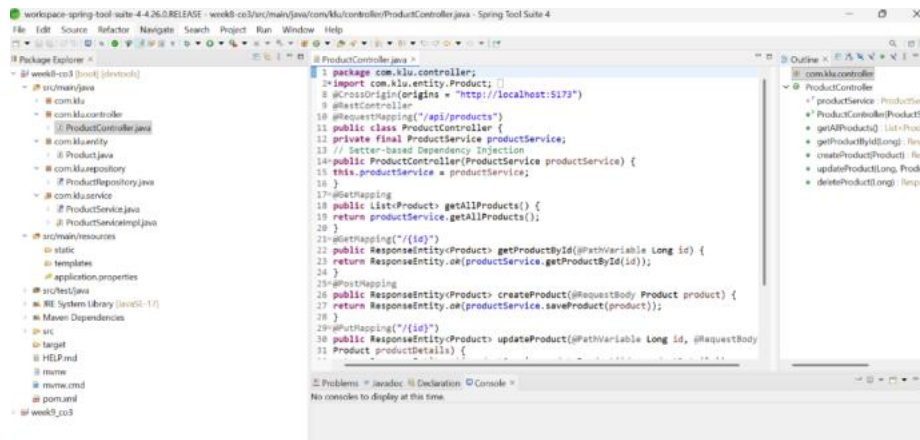

MySQL Workbench

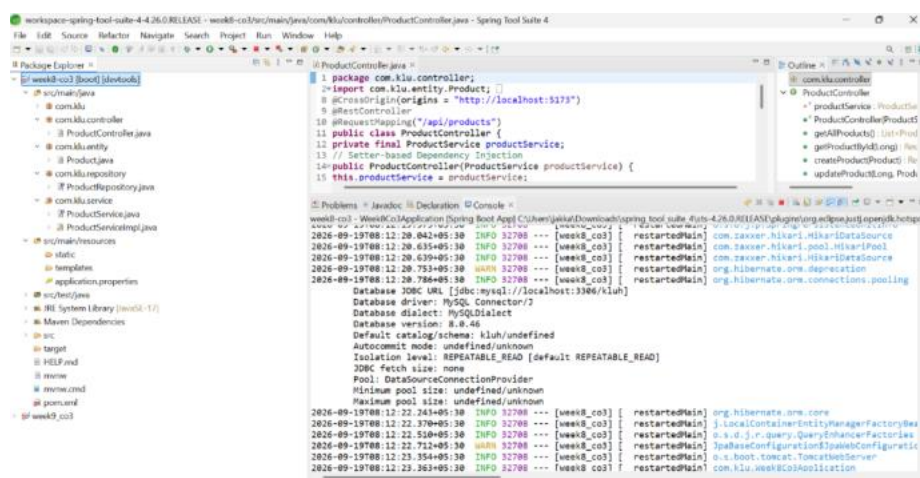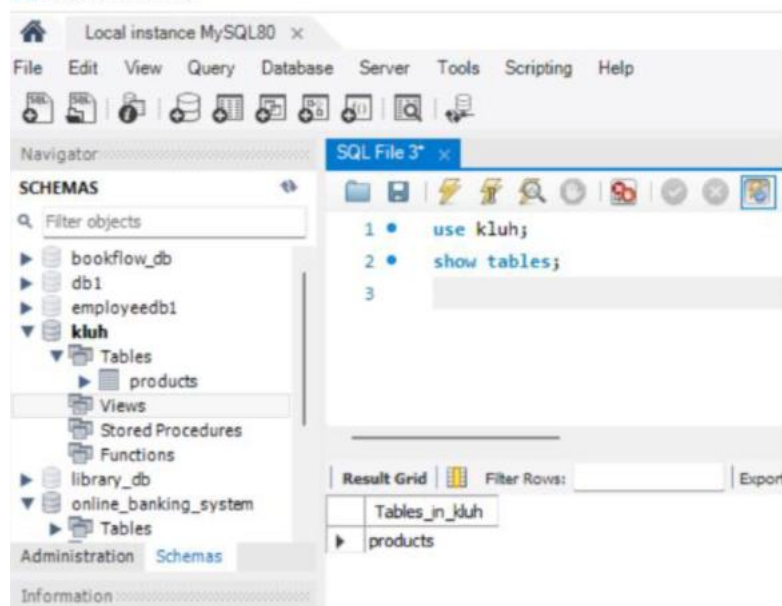

The image shows a VS Code editor window with the file explorer on the left and the AddProduct.jsx file open in the editor. The file contains the following code:

```
1 import React, { useState } from 'react';
2 import { addProduct } from '../services/ProductService';
3 const AddProduct = () => {
4   const [product, setProduct] = useState({ name: '', description: '', price: '', quantity: '' });
5   const handleChange = (e) => {
6     setProduct({ ...product, [e.target.name]: e.target.value });
7   };
8   const handleSubmit = (e) => {
9     e.preventDefault();
10    addProduct(product).then(() => {
11      alert("Product added successfully!");
12    });
13  };
14  return (
```

The terminal window at the bottom shows the command `npm run dev` being executed, and the output indicates that Vite is running on `http://localhost:5173/`.



The image shows the Chrome DevTools console with the JSON data for the Product List. The data is an array of objects, each representing a product with its name, description, price, quantity, and id.

```
1 [
2   {
3     "name": "Tablet",
4     "description": "Apple iPad Pro",
5     "price": 799.0,
6     "quantity": 15,
7     "id": 3
8   },
9   {
10    "name": "Laptop",
11    "description": "Dell XPS 13",
12    "price": 1200.0,
13    "quantity": 10,
14    "id": 5
15  },
16  {
17    "name": "Smartphone",
18    "description": "Samsung Galaxy S21",
19    "price": 999.0,
20    "quantity": 20,
21    "id": 7
22  },
23  {
24    "name": "Tablet",
```

