(a) filtered adjacency lists

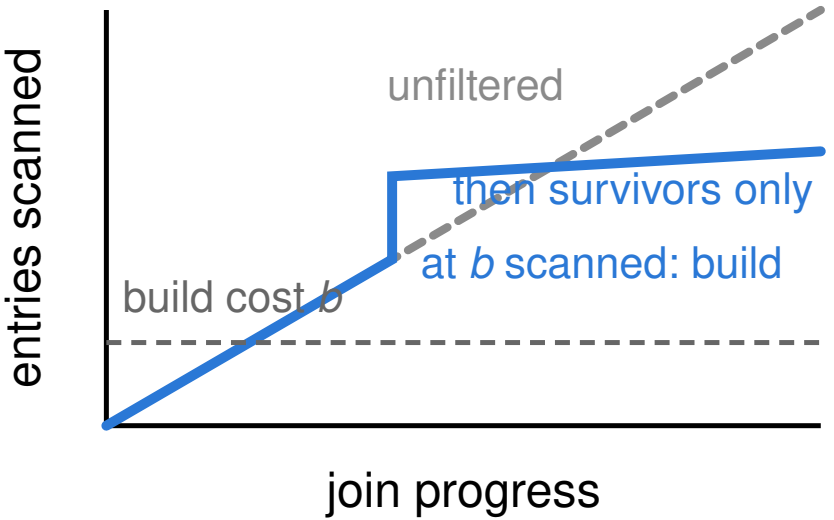

a step that has scanned b entries builds the filtered lists: at most twice the better choice whatever the estimate said

(b) counting against enumeration

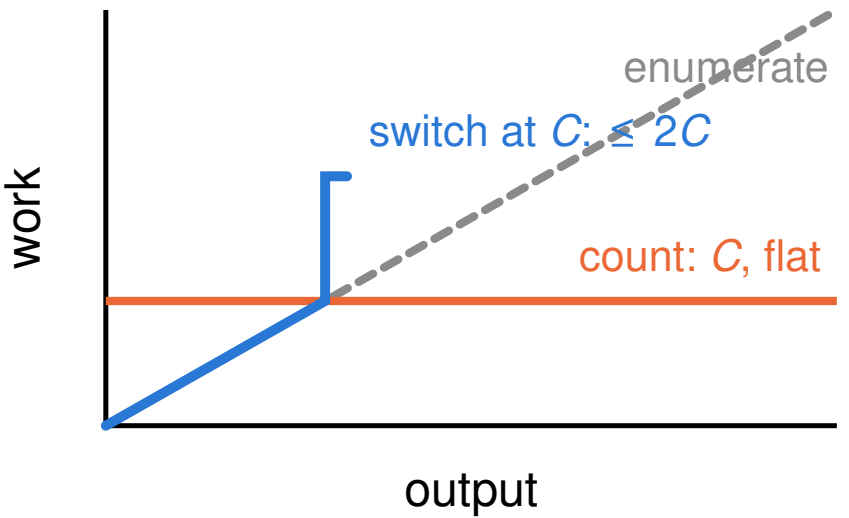

example: C = 62K entries against 118K scanned for 2.6M matches; an estimate above ϕC counts at once, else the join switches at C