



FEATURES SUMMARY

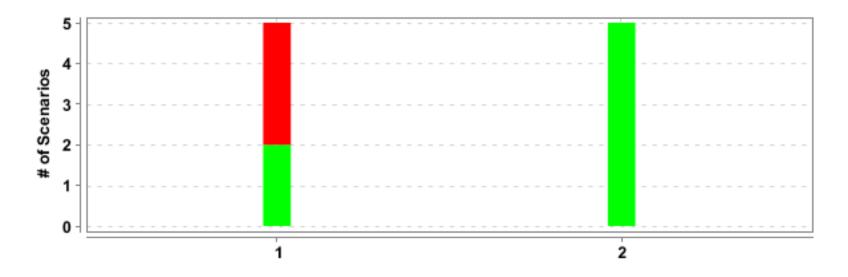


| # | Feature Name | T | P | F | S | Duration |
|---|------------------|---|---|---|---|----------|
| 1 | Get book by ISBN | 5 | 2 | 3 | 0 | 9.415 s |
| 2 | Get city airdata | 5 | 5 | 0 | 0 | 3.542 s |

SCENARIOS SUMMARY -- 3 --

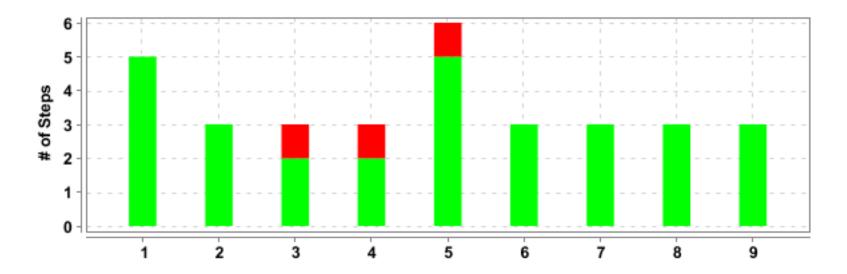

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|------------------|---|---|---|---|---|----------|
| 1 | Get book by ISBN | User calls web service to get a book by its ISBN | 5 | 5 | 0 | 0 | 5.455 s |
| 2 | Get book by ISBN | ISBN Google Base | 3 | 3 | 0 | 0 | 0.816 s |
| 3 | Get book by ISBN | ISBN Google Base | 3 | 2 | 1 | 0 | 0.719 s |
| 4 | Get book by ISBN | User calls web service to get a non existant book by its ISBN | 3 | 2 | 1 | 0 | 0.688 s |
| 5 | Get book by ISBN | User ISBN 2 calls | 6 | 5 | 1 | 0 | 1.456 s |
| 6 | Get city airdata | Simple cuke test | 3 | 3 | 0 | 0 | 0.000 s |
| 7 | Get city airdata | User calls web service to get london air data | 3 | 3 | 0 | 0 | 0.875 s |
| 8 | Get city airdata | User calls web service to get munich air data | 3 | 3 | 0 | 0 | 0.943 s |
| 9 | Get city airdata | User calls web service to get paris air data | 3 | 3 | 0 | 0 | 0.859 s |

SCENARIOS SUMMARY -- 4 -

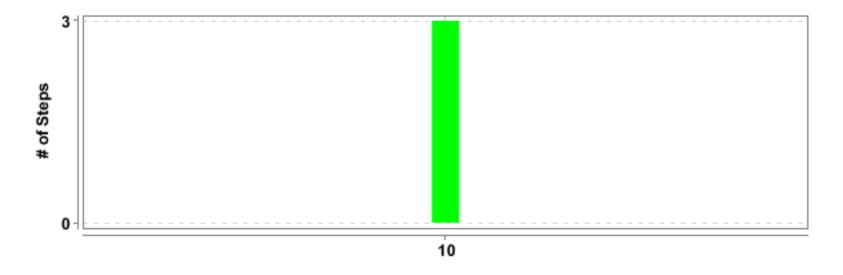


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|------------------|---|---|---|---|---|----------|
| 10 | Get city airdata | User calls web service to get rome air data | 3 | 3 | 0 | 0 | 0.834 s |

DETAILED SECTION -- 5 --

(F)- Get book by ISBN

| FAILED | DURATION - 9.415 s | Scenarios | | Steps | |
|-------------------|------------------------|-----------|---|------------|----|
| | | Total - 5 | | Total - 20 | |
| / 11:06:29.764 PI | M // 11:06:39.179 PM / | Pass - 2 | 5 | Pass - 17 | 20 |
| @books | | Fail - 3 | | Fail - 3 | |
| @ 5001K5 | | Skip - 0 | | Skip - 0 | |

(S)- User calls web service to get a book by its ISBN

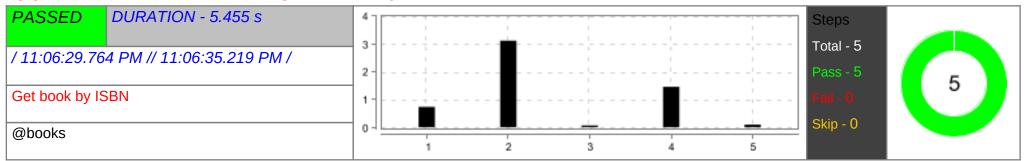


| GET | 200 | https://www.googleapis.com/books/v1/volumes?q=isbn%3A9781451648546 | | | | | |
|---------|---------|--|----------|------|---------|--|--|
| Request | Headers | | Response | Body | Headers | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given a book exists with an isbn of 9781451648546 | PASSED | 0.734 s |
| 2 | When a user retrieves the book by isbn | PASSED | 3.112 s |
| 3 | Then the status code is 200 | PASSED | 0.062 s |
| 4 | And response includes the following | PASSED | 1.453 s |
| | totalitems 1 books#volumes | | |
| 5 | And response includes the following in any order | PASSED | 0.094 s |
| | items.volumeInfo.titleSteve Jobsitems.volumeInfo.publisherSimon and Schusteritems.volumeInfo.pageCount630 | | |

DETAILED SECTION -- 6 --


(S)- ISBN Google Base

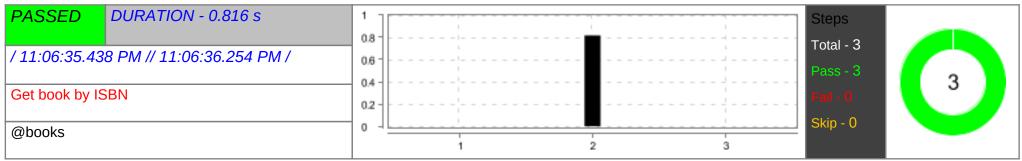

| GET | 200 | https://www.googleapis.com/books/v1/volumes?q=isbn%3A9781451648546 | | | | | |
|---------|------|--|----------|------|---------|--|--|
| Request | Head | ers | Response | Body | Headers | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given a book exists with an isbn of 9781451648546 | PASSED | 0.000 s |
| 2 | When a user retrieves the book by isbn | PASSED | 0.816 s |
| 3 | Then the status code is 200 | PASSED | 0.000 s |

(S)- ISBN Google Base

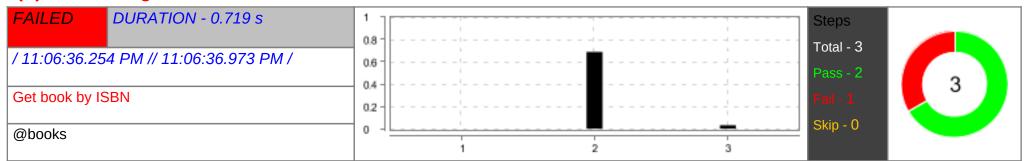


| GET | 200 | https://www.googleapis.com/books/v1/volumes?q=isbn | ttps://www.googleapis.com/books/v1/volumes?q=isbn%3A432877 | | | | |
|---------|------|--|--|------|---------|--|--|
| Request | Head | ers | Response | Body | Headers | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given a book exists with an isbn of 432877 | PASSED | 0.000 s |
| 2 | When a user retrieves the book by isbn | PASSED | 0.688 s |
| 3 | Then the status code is 404 | FAILED | 0.031 s |
| | java.lang.AssertionError: 1 expectation failed. Expected status code <404> but was <200>. | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at sun.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at sun.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) | | |
| | at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.lang.reflect.Constructor.newInstance(Constructor.java:423) | | |
| | at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:72) | | |
| | at org.codehaus.groovy.reflection.CachedConstructor.doConstructorInvoke(CachedConstructor.java:59) | | |
| | at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrap.callConstructor(ConstructorSite.java:84) | | |
| | at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallConstructor(CallSiteArray.java:59) | | |
| | at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:263) | | |
| | at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) | | |
| | at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:493) | | |
| | at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure\$validate\$1.call(Unknown Source) | | |
| | at io.restassured.internal.ResponseSpecificationImpl.validateResponseIfRequired(ResponseSpecificationImpl.groovy:674) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) | | |
| | at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.lang.reflect.Method.invoke(Method.java:498) | | |
| | at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.doInvoke(PlainObjectMetaMethodSite.java:43) | | |
| | at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite\$PogoCachedMethodSiteNoUnwrapNoCoerce.invoke(PogoMetaMethodSite. | | |
| | java:193) | | |
| | at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:61) | | |
| | at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) | | |
| | at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:126) | | |
| | at io.restassured.specification.ResponseSpecification\$statusCode\$0.callCurrent(Unknown Source) | | |
| | at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:134) | | |
| | at io.restassured.internal.ValidatableResponseOptionsImpl.statusCode(ValidatableResponseOptionsImpl.java:89) | | |
| | at io.restassured.internal.ValidatableResponseImpl.super\$2\$statusCode(ValidatableResponseImpl.groovy) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) | | |
| | at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.lang.reflect.Method.invoke(Method.java:498) | | |
| | at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:107) | | |
| | at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:323) | | |
| | at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1268) | | |
| | at org.codehaus.groovy.runtime.ScriptBytecodeAdapter.invokeMethodOnSuperN(ScriptBytecodeAdapter.java:144) | | |
| | at io.restassured.internal.ValidatableResponseImpl.statusCode(ValidatableResponseImpl.groovy:142) | | |
| | at io.restassured.internal.ValidatableResponseImpl.statusCode(ValidatableResponseImpl.groovy) | | |
| | at stepdefs.BookStepDefinitions.verify_status_code(BookStepDefinitions.java:40) | | |
| | at ?.the status code is 404(classpath:stepdefs/book.feature:19) | | |
| | * Not displayable characters are replaced by '?'. | | |

DETAILED SECTION -- 8 --

(S)- User calls web service to get a non existant book by its ISBN

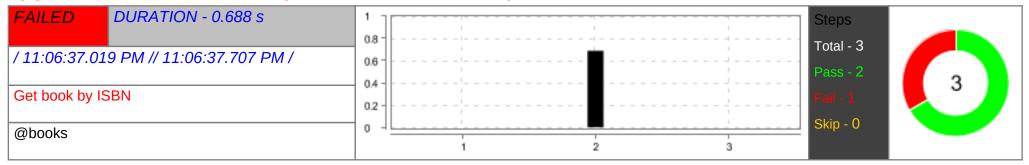


| GET | 200 | https://www.googleapis.com/books/v1/volumes?q=isbn%3A432877 | | | | |
|---------|------|---|----------|------|---------|--|
| Request | Head | ers | Response | Body | Headers | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given a book exists with an isbn of 432877 | PASSED | 0.000 s |
| 2 | When a user retrieves the book by isbn | PASSED | 0.688 s |
| 3 | Then the status code is 404 | FAILED | 0.000 s |
| | java.lang.AssertionError: 1 expectation failed. Expected status code <404> but was <200>. | | |
| | at sun.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at sun.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) | | |
| | at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.lang.reflect.Constructor.newInstance(Constructor.java:423) | | |
| | at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:72) | | |
| | at org.codehaus.groovy.reflection.CachedConstructor.doConstructorInvoke(CachedConstructor.java:59) | | |
| | at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrap.callConstructor(ConstructorSite.java:84) | | |
| | at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) | | |
| | at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:493) | | |
| | at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure\$validate\$1.call(Unknown Source) | | |
| | at io.restassured.internal.ResponseSpecificationImpl.validateResponseIfRequired(ResponseSpecificationImpl.groovy:674) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) | | |
| | at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.lang.reflect.Method.invoke(Method.java:498) | | |
| | at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.doInvoke(PlainObjectMetaMethodSite.java:43) | | |
| | at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite\$PogoCachedMethodSiteNoUnwrapNoCoerce.invoke(PogoMetaMethodSite. | | |
| | java:193) | | |
| | at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:61) | | |
| | at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) | | |
| | at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:126) | | |
| | at io.restassured.specification.ResponseSpecification\$statusCode\$0.callCurrent(Unknown Source) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:134) | | |
| | at io.restassured.internal.ValidatableResponseOptionsImpl.statusCode(ValidatableResponseOptionsImpl.java:89) | | |
| | at io.restassured.internal.ValidatableResponseImpl.super\$2\$statusCode(ValidatableResponseImpl.groovy) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) | | |
| | at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.lang.reflect.Method.invoke(Method.java:498) | | |
| | at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:107) | | |
| | at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:323) | | |
| | at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1268) | | |
| | at org.codehaus.groovy.runtime.ScriptBytecodeAdapter.invokeMethodOnSuperN(ScriptBytecodeAdapter.java:144) | | |
| | at io.restassured.internal.ValidatableResponseImpl.statusCode(ValidatableResponseImpl.groovy:142) | | |
| | at io.restassured.internal.ValidatableResponseImpl.statusCode(ValidatableResponseImpl.groovy) | | |
| | at stepdefs.BookStepDefinitions.verify_status_code(BookStepDefinitions.java:40) | | |
| | at ?.the status code is 404(classpath:stepdefs/book.feature:29) | | |
| | * Not displayable characters are replaced by '?'. | | |

(S)- User ISBN 2 calls

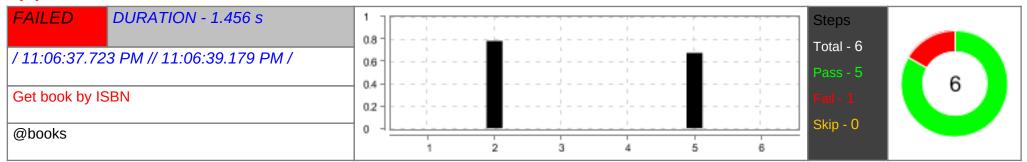

| GET | 200 | https://www.googleapis.com/books/v1/volumes?q=isbn | %3A97814516485 | 46 | | |
|---------|---------------|--|----------------|------|---------|--|
| Request | quest Headers | | Response | Body | Headers | |
| | | | | | | |

| GET | 200 | https://www.googleapis.com/books/v1/volumes?q=isbn | %3A432877 | | |
|---------|------|--|-----------|------|---------|
| Request | Head | ers | Response | Body | Headers |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given a book exists with an isbn of 9781451648546 | PASSED | 0.000 s |
| 2 | When a user retrieves the book by isbn | PASSED | 0.781 s |
| 3 | Then the status code is 200 | PASSED | 0.000 s |
| 4 | Given a book exists with an isbn of 432877 | PASSED | 0.000 s |


DETAILED SECTION -- 10 --

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 5 | When a user retrieves the book by isbn | PASSED | 0.675 s |
| 6 | Then the status code is 404 | FAILED | 0.000 s |
| | java.lang.AssertionError: 1 expectation failed. Expected status code <404> but was <200>. | | |
| | at sun.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at sun.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) | | |
| | at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.lang.reflect.Constructor.newInstance(Constructor.java:423) | | |
| | at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:72) | | |
| | at org.codehaus.groovy.reflection.CachedConstructor.doConstructorInvoke(CachedConstructor.java:59) | | |
| | at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrap.callConstructor(ConstructorSite.java:84) | | |
| | at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) | | |
| | at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:493) | | |
| | at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure\$validate\$1.call(Unknown Source) | | |
| | at io.restassured.internal.ResponseSpecificationImpl.validateResponseIfRequired(ResponseSpecificationImpl.groovy:674) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) | | |
| | at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.lang.reflect.Method.invoke(Method.java:498) | | |
| | at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.doInvoke(PlainObjectMetaMethodSite.java:43) | | |
| | at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite\$PogoCachedMethodSiteNoUnwrapNoCoerce.invoke(PogoMetaMethodSite. | | |
| | java:193) | | |
| | at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:61) | | |
| | at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) | | |
| | at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:126) | | |
| | at io.restassured.specification.ResponseSpecification\$statusCode\$0.callCurrent(Unknown Source) | | |
| | at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:134) | | |
| | at io.restassured.internal.ValidatableResponseOptionsImpl.statusCode(ValidatableResponseOptionsImpl.java:89) | | |
| | at io.restassured.internal.ValidatableResponseImpl.super\$2\$statusCode(ValidatableResponseImpl.groovy) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) | | |
| | at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.lang.reflect.Method.invoke(Method.java:498) | | |
| | at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:107) | | |
| | at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:323) | | |
| | at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1268) | | |
| | at org.codehaus.groovy.runtime.ScriptBytecodeAdapter.invokeMethodOnSuperN(ScriptBytecodeAdapter.java:144) | | |
| | at io.restassured.internal.ValidatableResponseImpl.statusCode(ValidatableResponseImpl.groovy:142) | | |
| | at io.restassured.internal.ValidatableResponseImpl.statusCode(ValidatableResponseImpl.groovy) | | |
| | at stepdefs.BookStepDefinitions.verify_status_code(BookStepDefinitions.java:40) | | |
| | at ?.the status code is 404(classpath:stepdefs/book.feature:37) | | |
| | * Not displayable characters are replaced by '?'. | | |

(F)- Get city airdata


| PASSED | DURATION - 3.542 s | Scenarios | | Steps | |
|-------------------|------------------------|-----------|---|------------|----|
| | | Total - 5 | | Total - 15 | |
| / 11:06:39.195 PI | M // 11:06:42.737 PM / | Pass - 5 | 5 | Pass - 15 | 15 |
| @city | | Fail - 0 | | Fail - 0 | |
| (Gotty | | Skip - 0 | | Skip - 0 | |

(S)- Simple cuke test

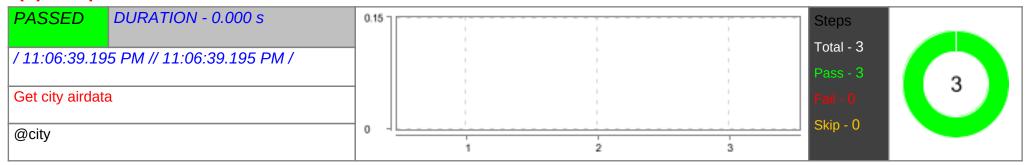

| # | Step / Hook Details | Status | Duration |
|---|---------------------|--------|----------|
| 1 | Given step one | PASSED | 0.000 s |
| 2 | When step two | PASSED | 0.000 s |
| 3 | Then step three | PASSED | 0.000 s |

(S)- User calls web service to get london air data

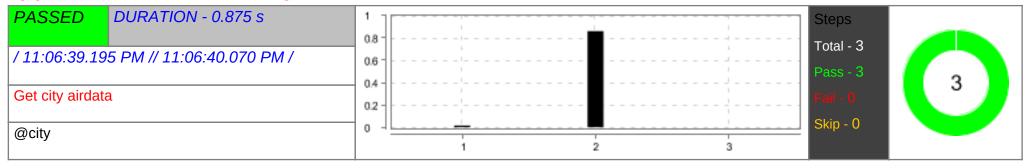


| | GET | 200 | https://api.wagi.info/feed/london/?token=1a5d8f027e344fa191b88e966bdb5d4aa4853d4a |
|-----|-----|-----|---|
| - 1 | | 1 | ' ' ' ' |

| Request | Headers Cookies | Response | Body | Headers |
|---------|-----------------|----------|------|---------|

| # | Step / Hook Details | Status | Duration |
|---|--------------------------------------|--------|----------|
| 1 | Given air data for london exists | PASSED | 0.015 s |
| 2 | When retrieve the air data | PASSED | 0.860 s |
| 3 | Then the air data status code is 200 | PASSED | 0.000 s |


(S)- User calls web service to get munich air data

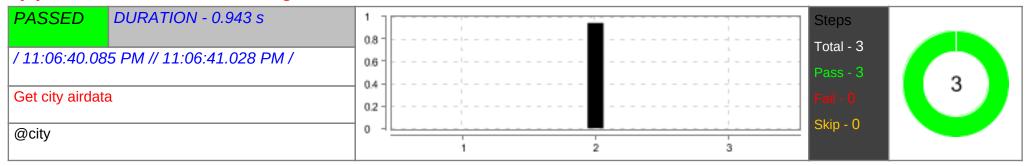

| GET | 200 | https://api.waqi.info/feed/munich/?token=1a5d8f027e344fa191b88e966bdb5d4aa4853d4a | | | | |
|---------|------|---|----------|------|---------|--|
| Request | Head | ers Cookies | Response | Body | Headers | |

| # | Step / Hook Details | Status | Duration |
|---|--------------------------------------|--------|----------|
| 1 | Given air data for munich exists | PASSED | 0.000 s |
| 2 | When retrieve the air data | PASSED | 0.943 s |
| 3 | Then the air data status code is 200 | PASSED | 0.000 s |

(S)- User calls web service to get paris air data

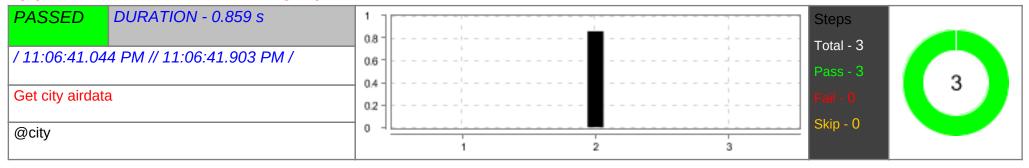


| GET | 200 | https://api.waqi.info/feed/paris/?token=1a5d8f027e344fa191b88e966bdb5d4aa4853d4a |
|-----|-----|--|
| 1 | 1 | |

| Request | Headers Cookies | Response | Body | Headers |
|---------|-----------------|----------|------|---------|
| · ' | | | , | |

| # | Step / Hook Details | Status | Duration |
|---|--------------------------------------|--------|----------|
| 1 | Given air data for paris exists | PASSED | 0.000 s |
| 2 | When retrieve the air data | PASSED | 0.859 s |
| 3 | Then the air data status code is 200 | PASSED | 0.000 s |

(S)- User calls web service to get rome air data

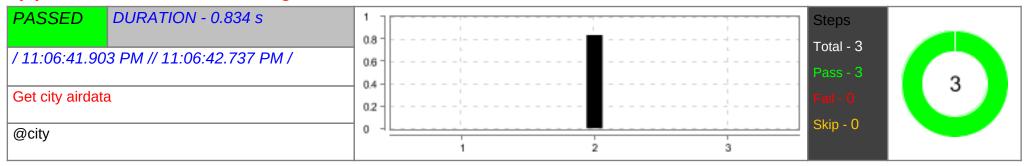

| GET | 200 https://api.waqi.info/feed/rome/?token=1a5d8f027e344fa191b88e966bdb5d4aa4853d4a | | | a | |
|---------|--|-------------|----------|------|---------|
| Request | Head | ers Cookies | Response | Body | Headers |

| # | Step / Hook Details | Status | Duration |
|---|--------------------------------------|--------|----------|
| 1 | Given air data for rome exists | PASSED | 0.000 s |
| 2 | When retrieve the air data | PASSED | 0.834 s |
| 3 | Then the air data status code is 200 | PASSED | 0.000 s |