

Lab 5: *Firewall Linux*


Lab Report Submission

Name: Greemesh Basnet


Student Number: 130525223

Screenshots of Lab 5

1. Using `sudo iptables -L` command

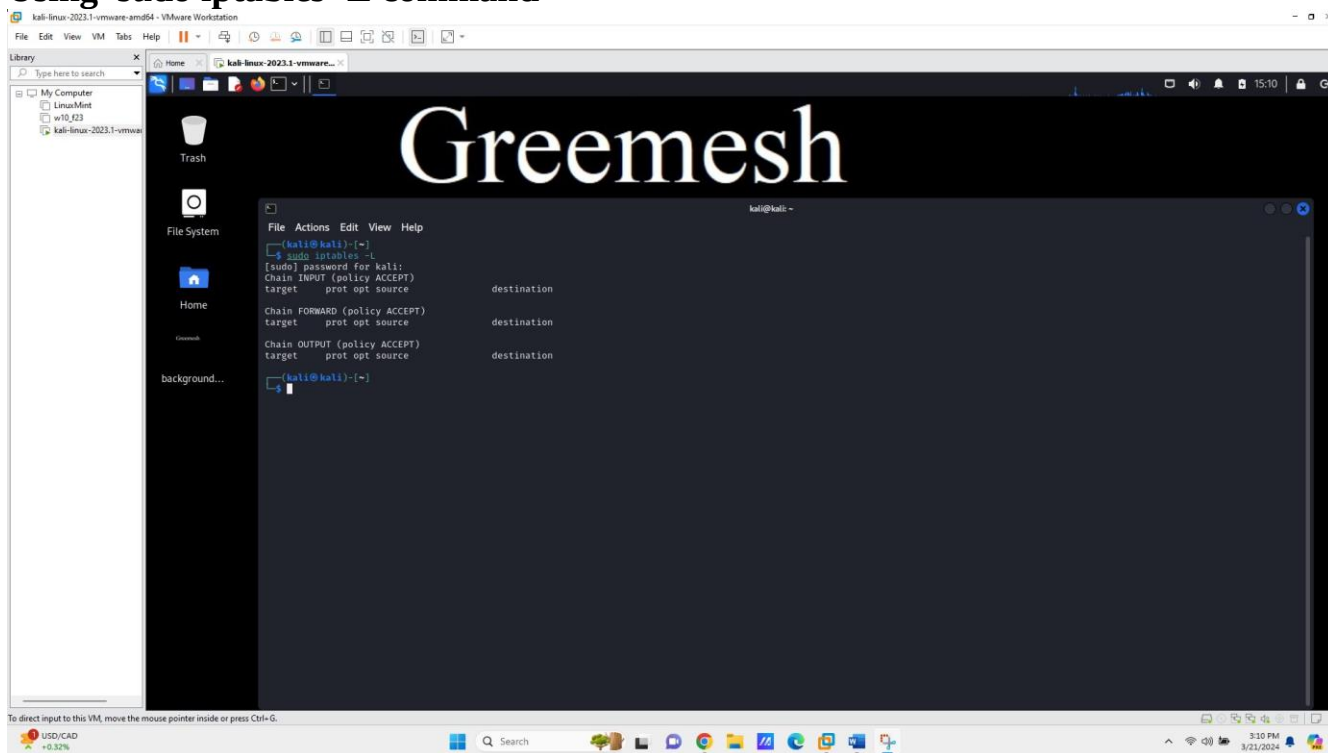

2. Using sudo iptables -P FORWARD DROP command

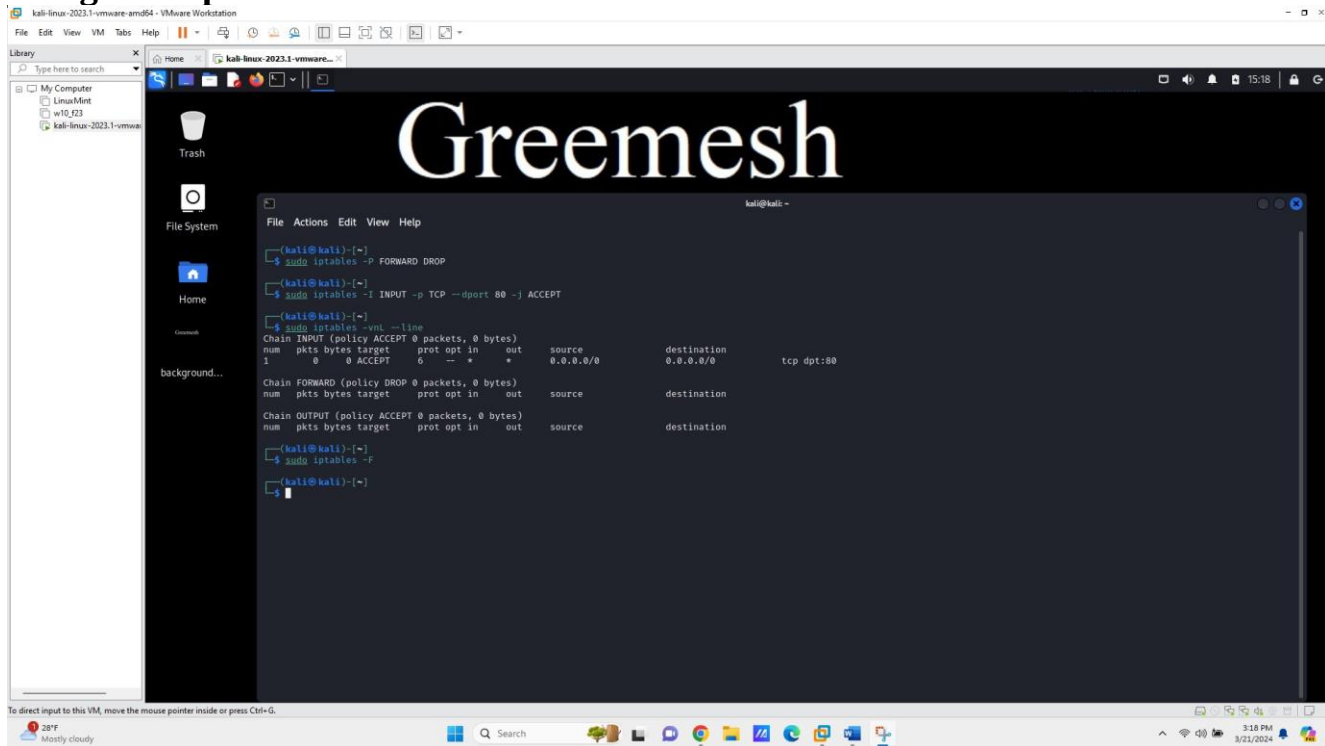

The screenshot shows a Kali Linux virtual machine window titled "kali-linux-2023.1-vmware-amd64 - VMware Workstation". The desktop background features the "Greemesh" logo. A terminal window is open, displaying the following commands and their output:

```
kali@kali:~$ sudo iptables -P FORWARD DROP
kali@kali:~$ sudo iptables -I INPUT -p TCP --dport 80 -j ACCEPT
kali@kali:~$ sudo iptables -vnL --line
Chain INPUT (policy ACCEPT 0 packets, 0 bytes)
num  pkts bytes target     prot opt in     out     source            destination
1      0      0 ACCEPT    tcp  --  *      *      0.0.0.0/0         0.0.0.0/0         tcp dpt:80


Chain FORWARD (policy DROP 0 packets, 0 bytes)
num  pkts bytes target     prot opt in     out     source            destination

Chain OUTPUT (policy ACCEPT 0 packets, 0 bytes)
num  pkts bytes target     prot opt in     out     source            destination

kali@kali:~$ sudo iptables -F
kali@kali:~$
```

The terminal output shows the configuration of iptables rules. The FORWARD chain is set to DROP, and the INPUT chain is configured to accept TCP traffic on port 80. The OUTPUT chain remains in its default ACCEPT policy. The terminal also shows the output of the iptables -vnL --line command, which displays the current ruleset in a detailed format.

3. Using Iptables -vnL --line

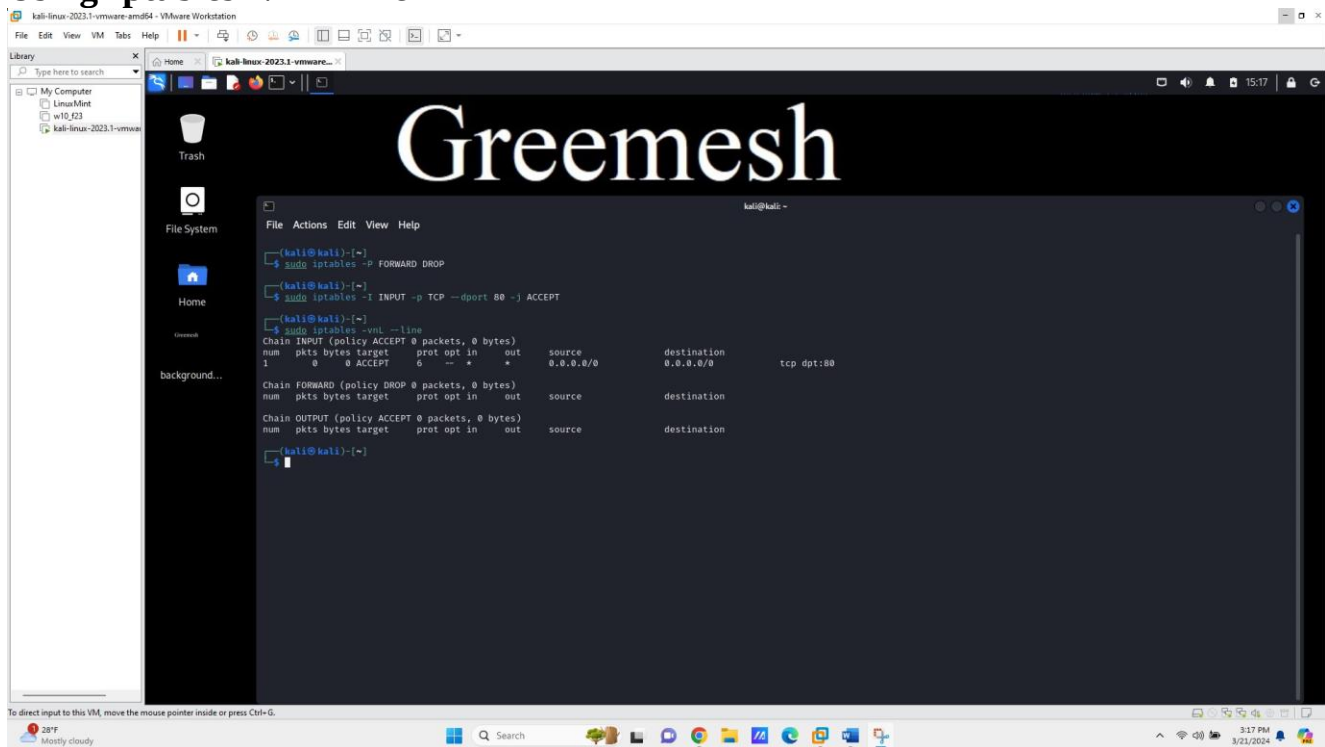

The screenshot shows a Kali Linux virtual machine window titled "kali-linux-2023.1-vmware-amd64 - VMware Workstation". The desktop background features the "Greemesh" logo. A terminal window is open, displaying the following commands and their output:

```
kali@kali:~$ sudo iptables -P FORWARD DROP
kali@kali:~$ sudo iptables -I INPUT -p TCP --dport 80 -j ACCEPT
kali@kali:~$ sudo iptables -vnL --line
Chain INPUT (policy ACCEPT 0 packets, 0 bytes)
num  pkts bytes target     prot opt in     out     source            destination
1      0      0 ACCEPT    tcp  --  *      *      0.0.0.0/0         0.0.0.0/0         tcp dpt:80


Chain FORWARD (policy DROP 0 packets, 0 bytes)
num  pkts bytes target     prot opt in     out     source            destination

Chain OUTPUT (policy ACCEPT 0 packets, 0 bytes)
num  pkts bytes target     prot opt in     out     source            destination


kali@kali:~$
```

The terminal output shows the configuration of iptables rules. The FORWARD chain is set to DROP, and the INPUT chain is configured to accept TCP traffic on port 80. The OUTPUT chain remains in its default ACCEPT policy. The terminal also shows the output of the iptables -vnL --line command, which displays the current ruleset in a detailed format.


4. Clearing the Rules

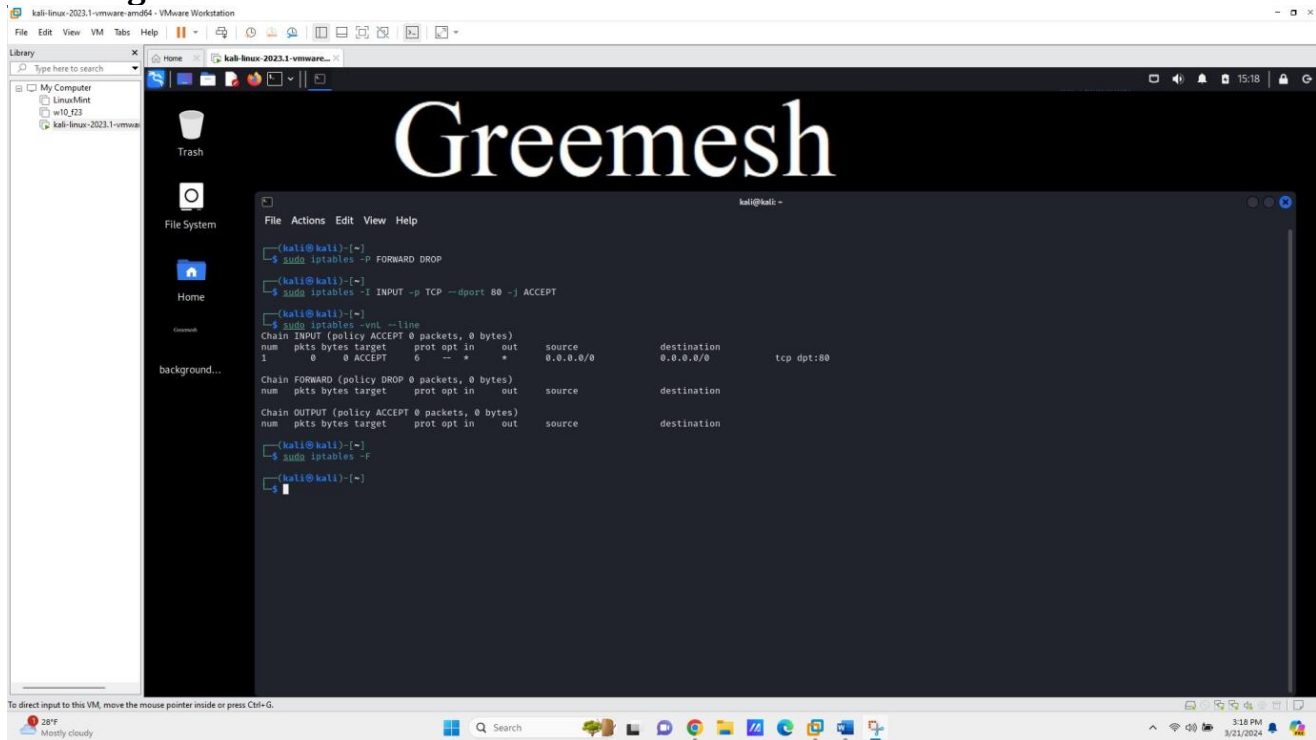


5. Implementing a DROP rule screenshot

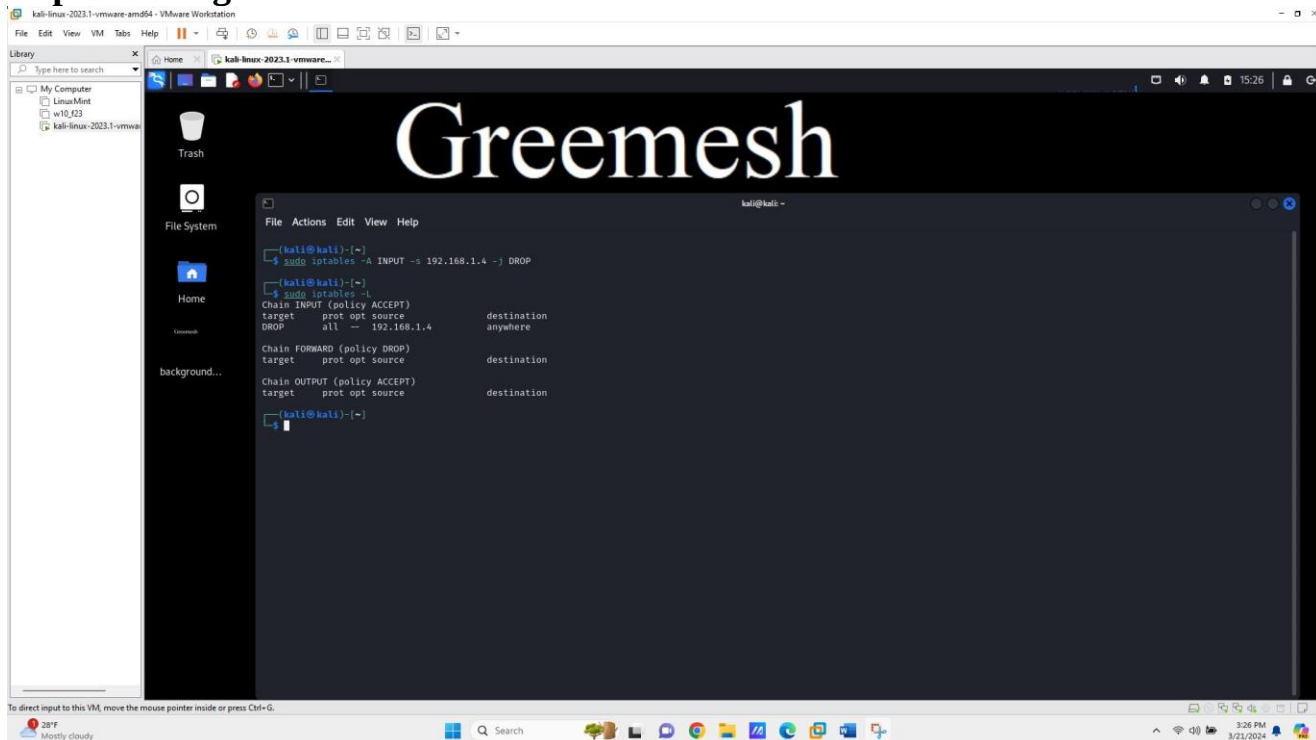


6. Using sudo iptables -L

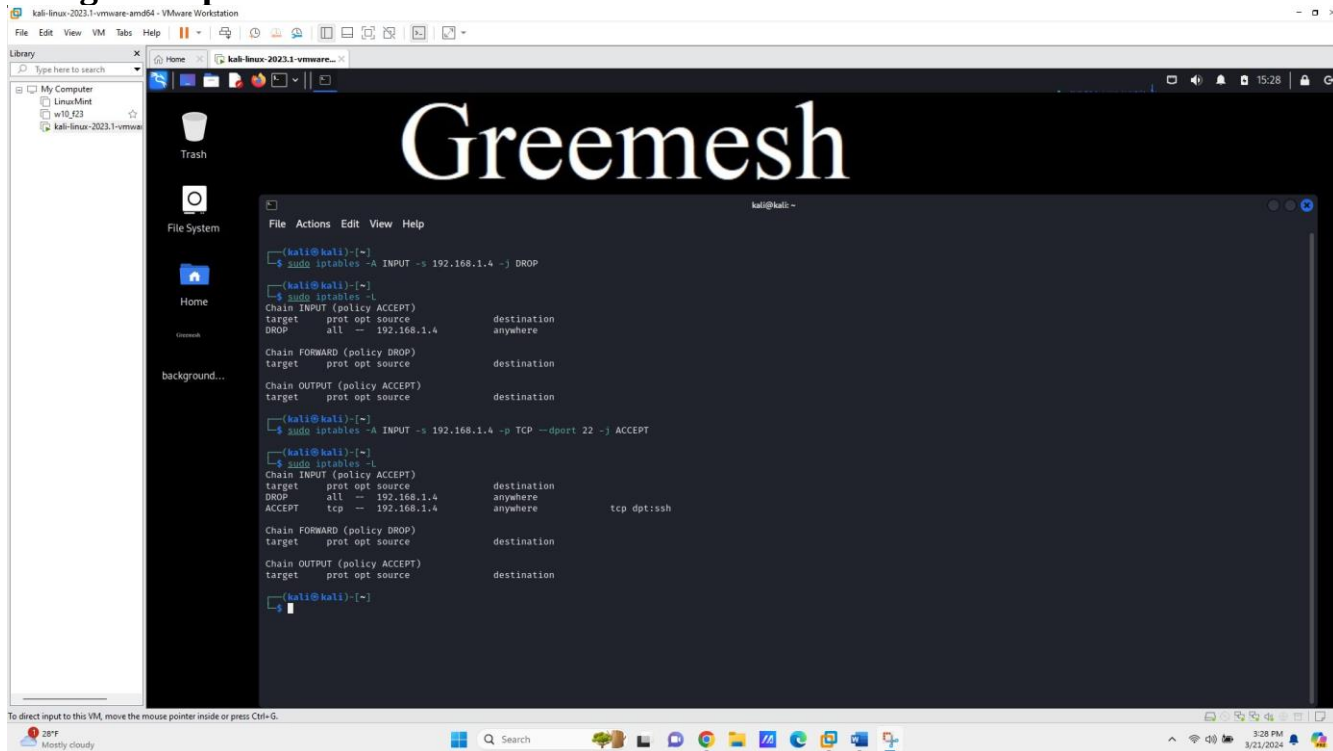

7. Implementing an ACCEPT rule

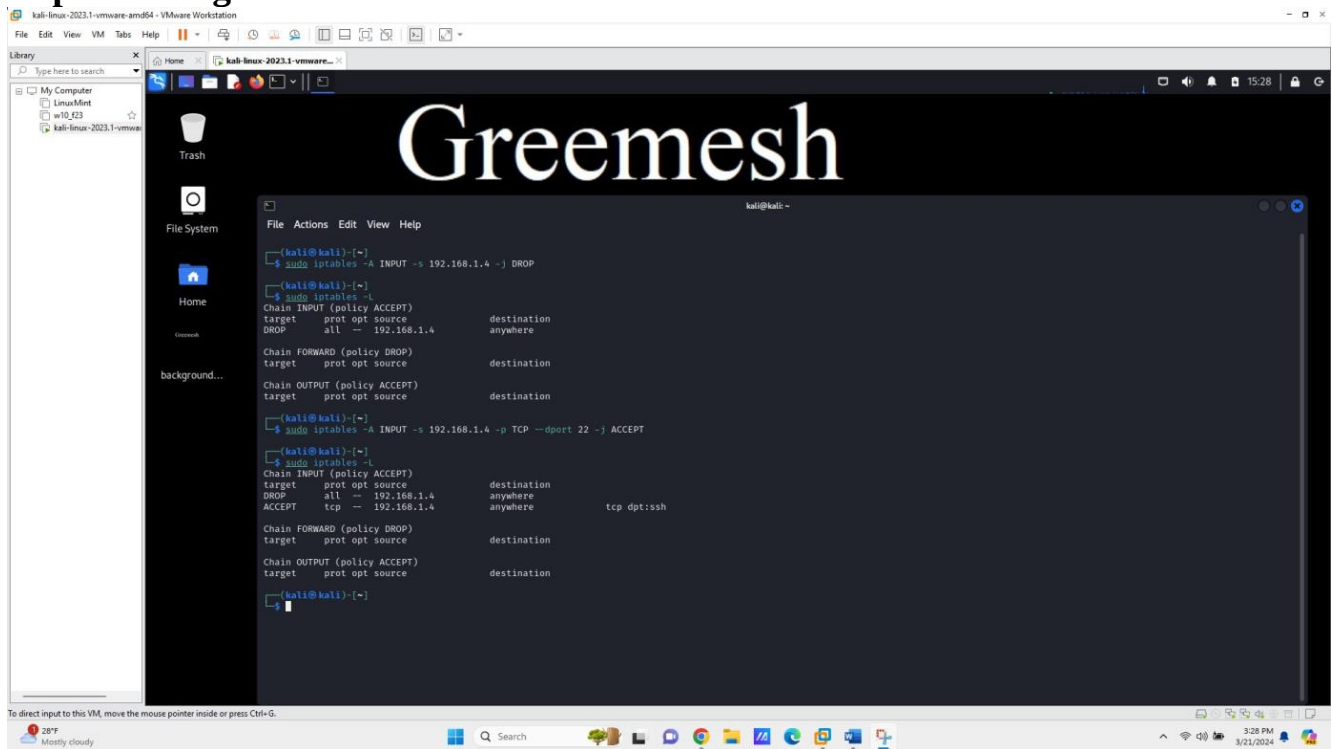

8. Deleting a rule from the iptables

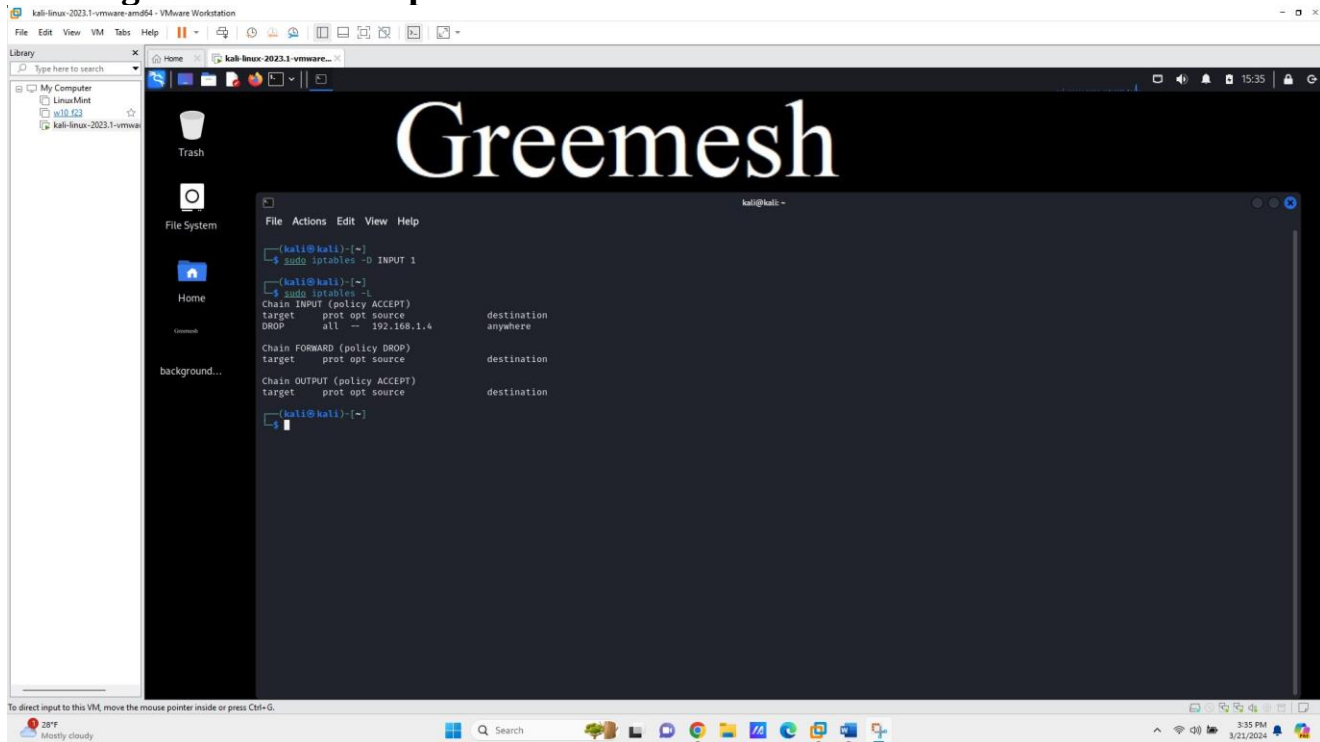

9. Clearing/flush out all the existing rules

