


Hacker Kid — Write up

1-Reconnaissance

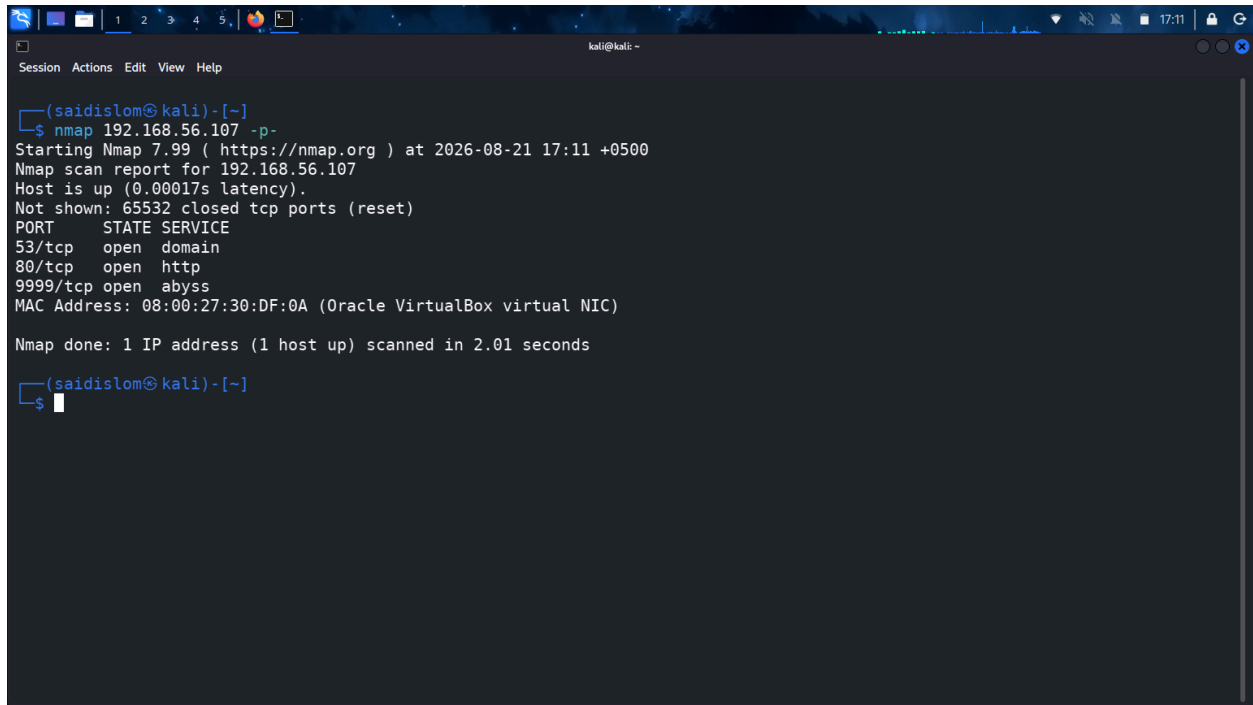


```
(saidislom@kali)-[~]
└─$ nmap 192.168.56.107 -p-
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-21 17:11 +0500
Nmap scan report for 192.168.56.107
Host is up (0.00017s latency).
Not shown: 65532 closed tcp ports (reset)
PORT      STATE SERVICE
53/tcp    open  domain
80/tcp    open  http
9999/tcp  open  abyss
MAC Address: 08:00:27:30:DF:0A (Oracle VirtualBox virtual NIC)


Nmap done: 1 IP address (1 host up) scanned in 2.01 seconds


(saidislom@kali)-[~]
└─$
```

nmap natijasi

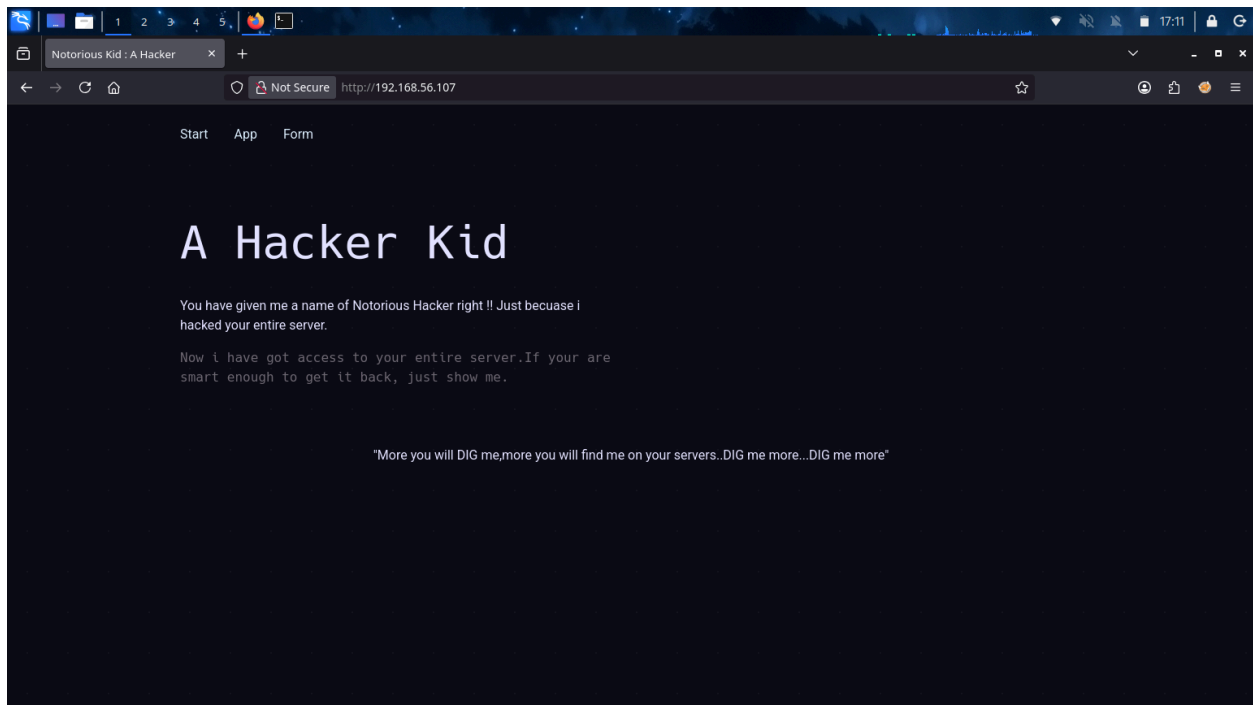


web sayt korinishi

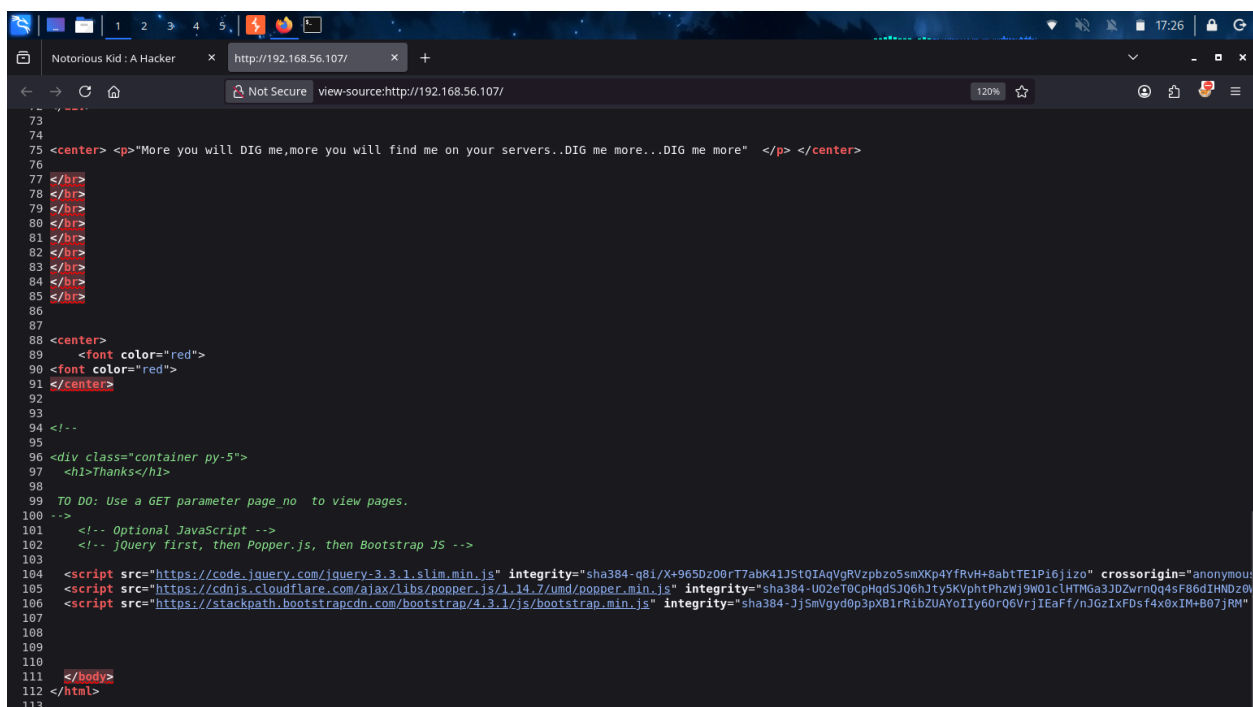

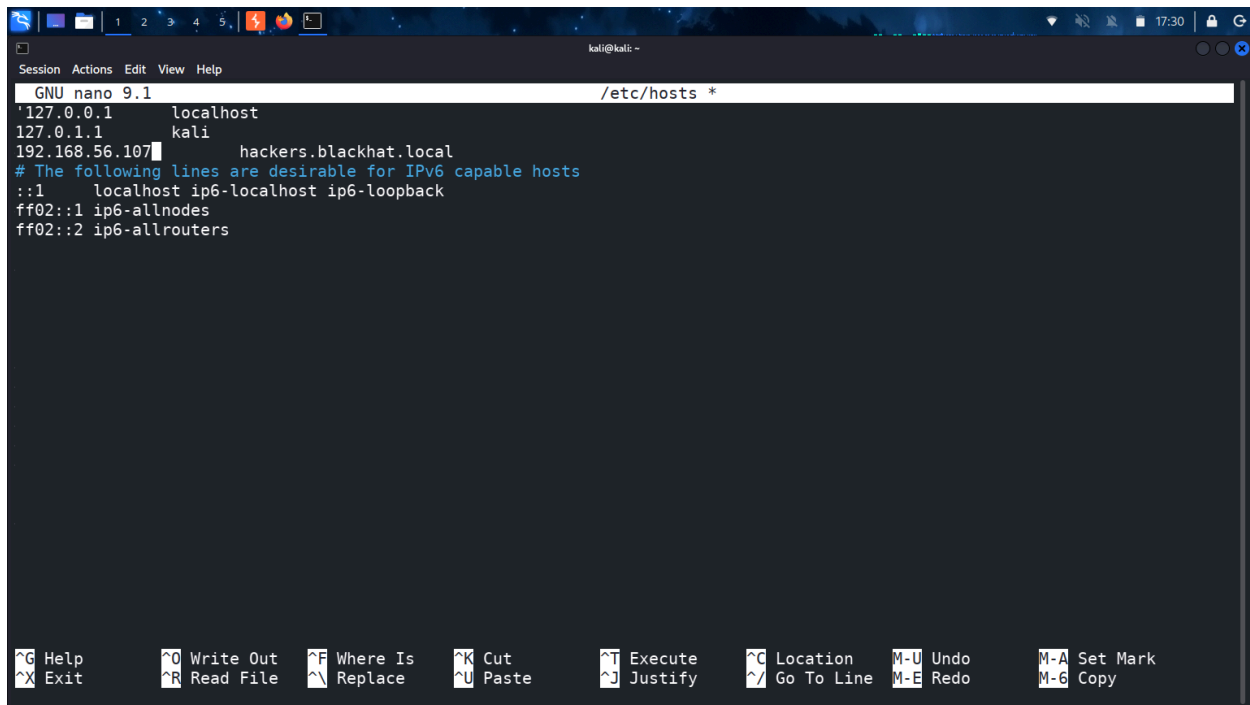

```
GNU nano 9.1 /etc/hosts *
127.0.0.1 localhost
127.0.1.1 kali
192.168.56.107 hackers.blackhat.local
# The following lines are desirable for IPv6 capable hosts
::1 localhost ip6-localhost ip6-loopback
ff02::1 ip6-allnodes
ff02::2 ip6-allrouters
```


/etc/hosts ichiga qoshib qoydik

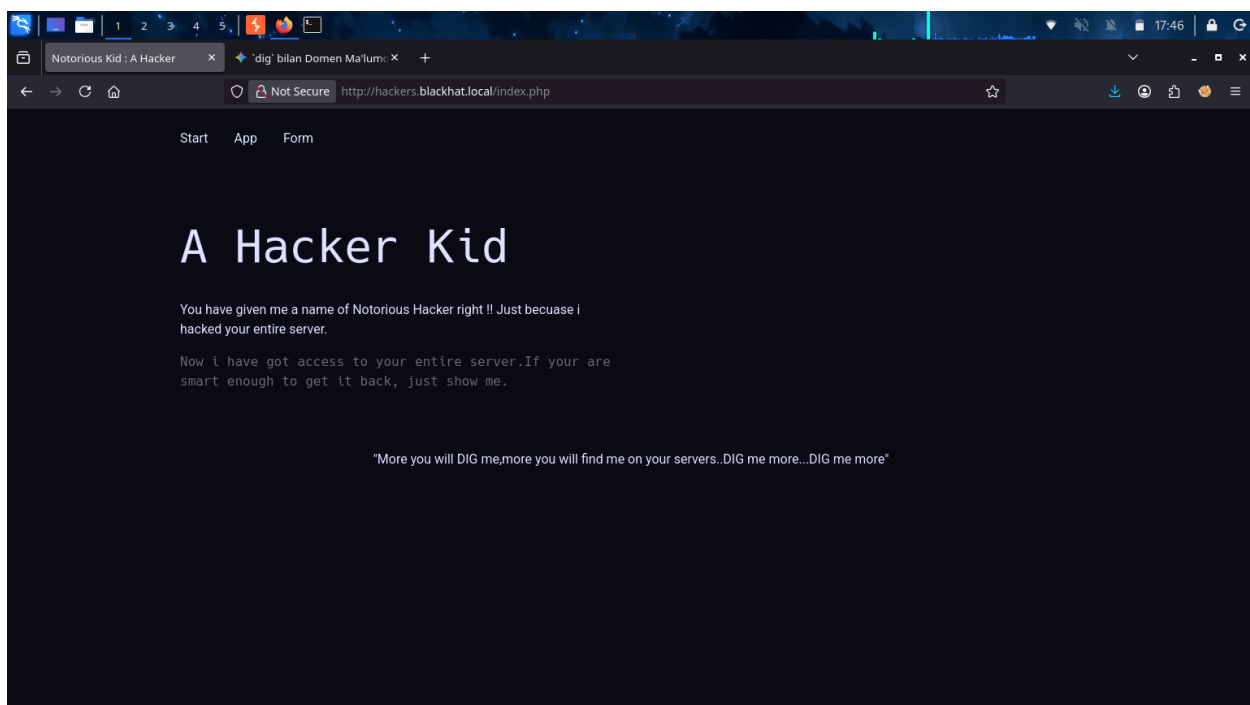


saytning vizual korinishi

```
kali@kali: ~  
^C  
  
(saidislom@kali)-[~]  
$ dig @ns1.blackhat.local hackers.blackhat.local AXFR  
dig: couldn't get address for 'ns1.blackhat.local': not found  
  
(saidislom@kali)-[~]  
$ dig @192.168.56.107 blackhat.local AXFR  
  
; <>> DiG 9.20.26-1-Debian <>> @192.168.56.107 blackhat.local AXFR  
; (1 server found)  
;; global options: +cmd  
blackhat.local.      10800  IN      SOA      blackhat.local. hackerkid.blackhat.local. 1 10800 3600 604800 3600  
blackhat.local.      10800  IN      NS       ns1.blackhat.local.  
blackhat.local.      10800  IN      MX       10 mail.blackhat.local.  
blackhat.local.      10800  IN      A        192.168.14.143  
ftp.blackhat.local.  10800  IN      CNAME     blackhat.local.  
hacker.blackhat.local. 10800  IN      CNAME     hacker.blackhat.local.blackhat.local.  
mail.blackhat.local. 10800  IN      A        192.168.14.143  
ns1.blackhat.local.  10800  IN      A        192.168.14.143  
ns2.blackhat.local.  10800  IN      A        192.168.14.143  
www.blackhat.local.  10800  IN      CNAME     blackhat.local.  
blackhat.local.      10800  IN      SOA      blackhat.local. hackerkid.blackhat.local. 1 10800 3600 604800 3600  
;; Query time: 0 msec  
;; SERVER: 192.168.56.107#53(192.168.56.107) (TCP)  
;; WHEN: Sat Aug 22 00:15:19 +05 2026  
;; XFR size: 11 records (messages 1, bytes 353)  
  
(saidislom@kali)-[~]  
$
```


53-port ochiq edi shu sababli dig orqali zone transfer qilib sensitive information chiqarib oldik

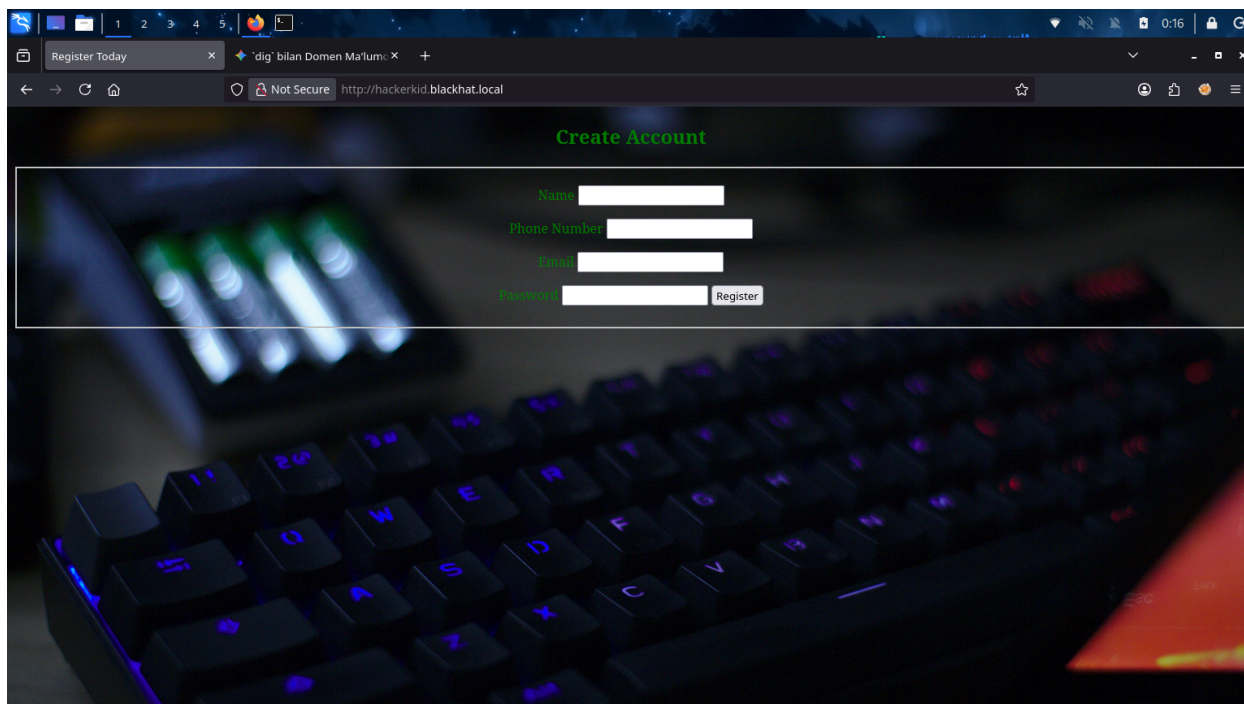


topilgan domenga kirib kordik

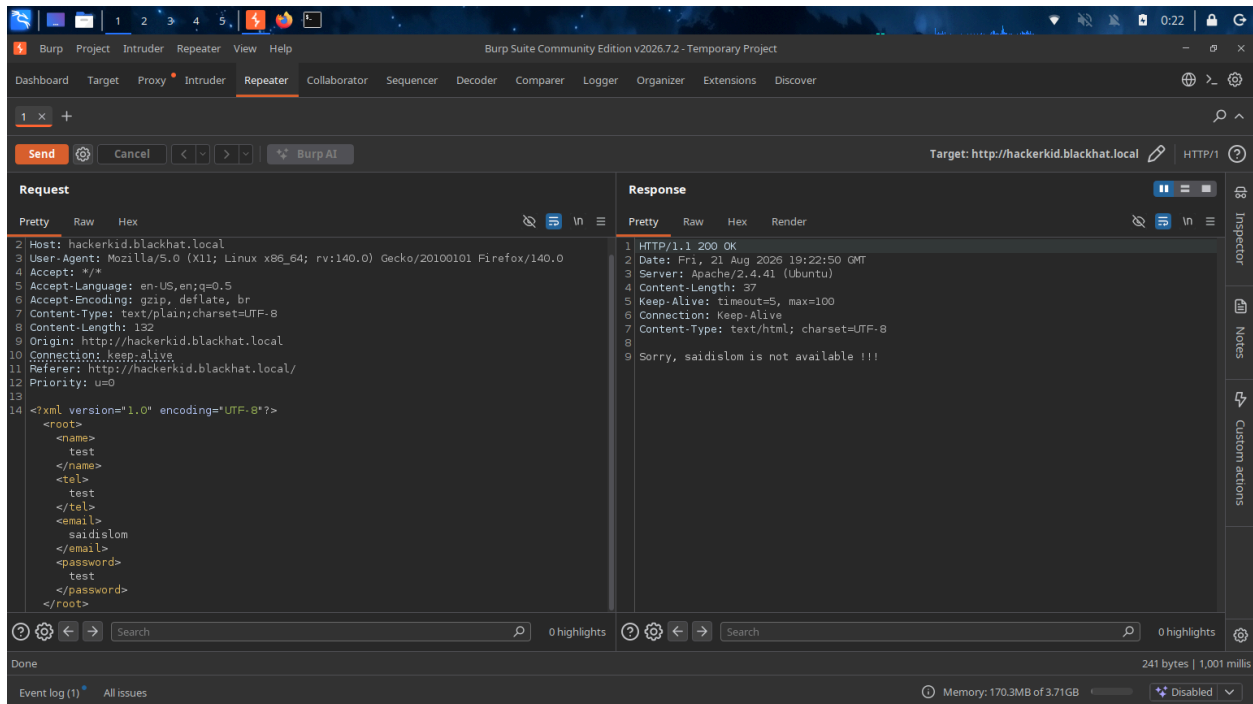


kiritilgan ma'lumotlar xml da ketar ekan xxe zaifligiga ga tekshirib kordik

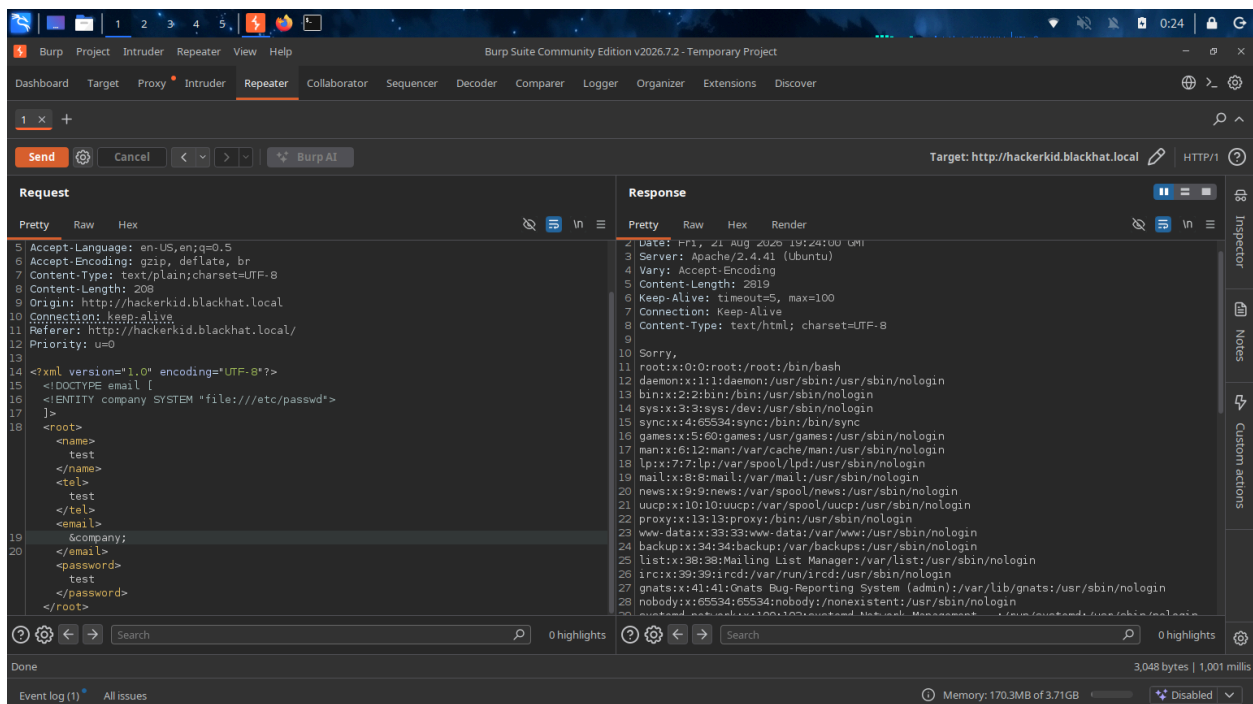


ishladi

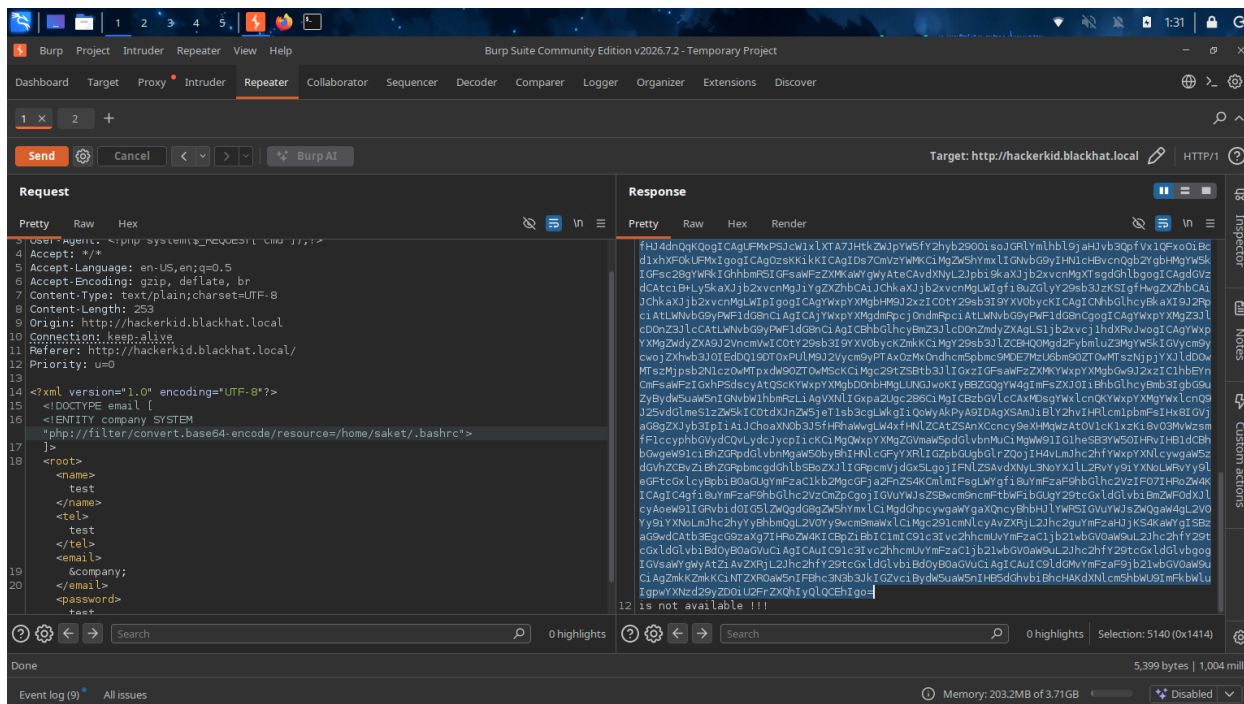

saket userining .bashrc faylini chiqarib oldik

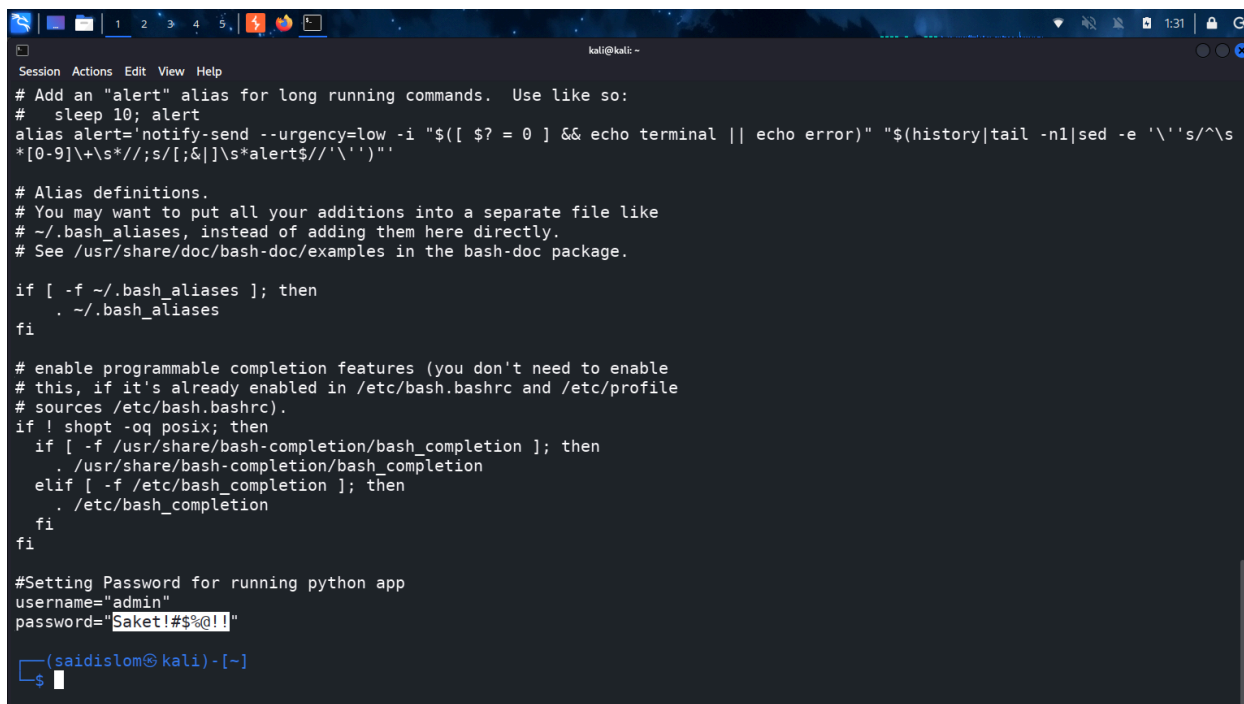


username va parol chiqdi

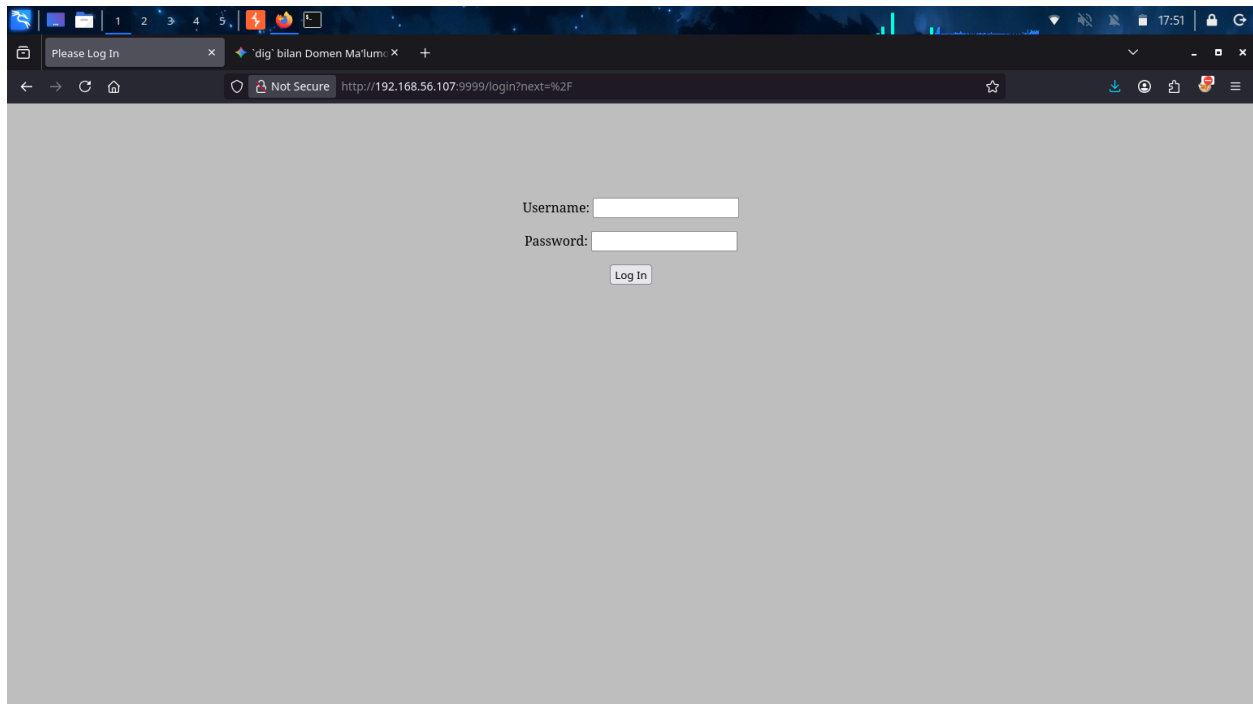


9999 port ochiq edi shu yerga username va parol kiritdik


p.s username admin kiritsak ishlamadi shuning uchun saket kiritdik va ishladi.
parol esa ozgarmadi

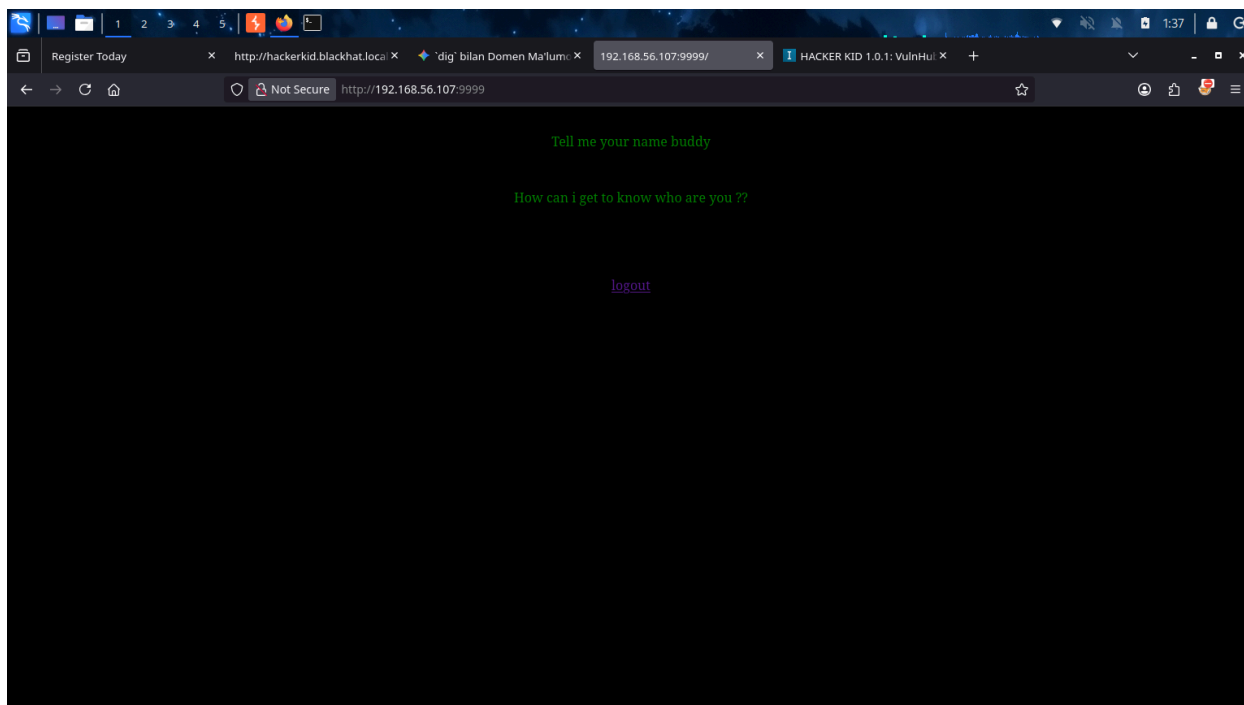


ismimizni soramoqda balki parametr kiritib korarmiz

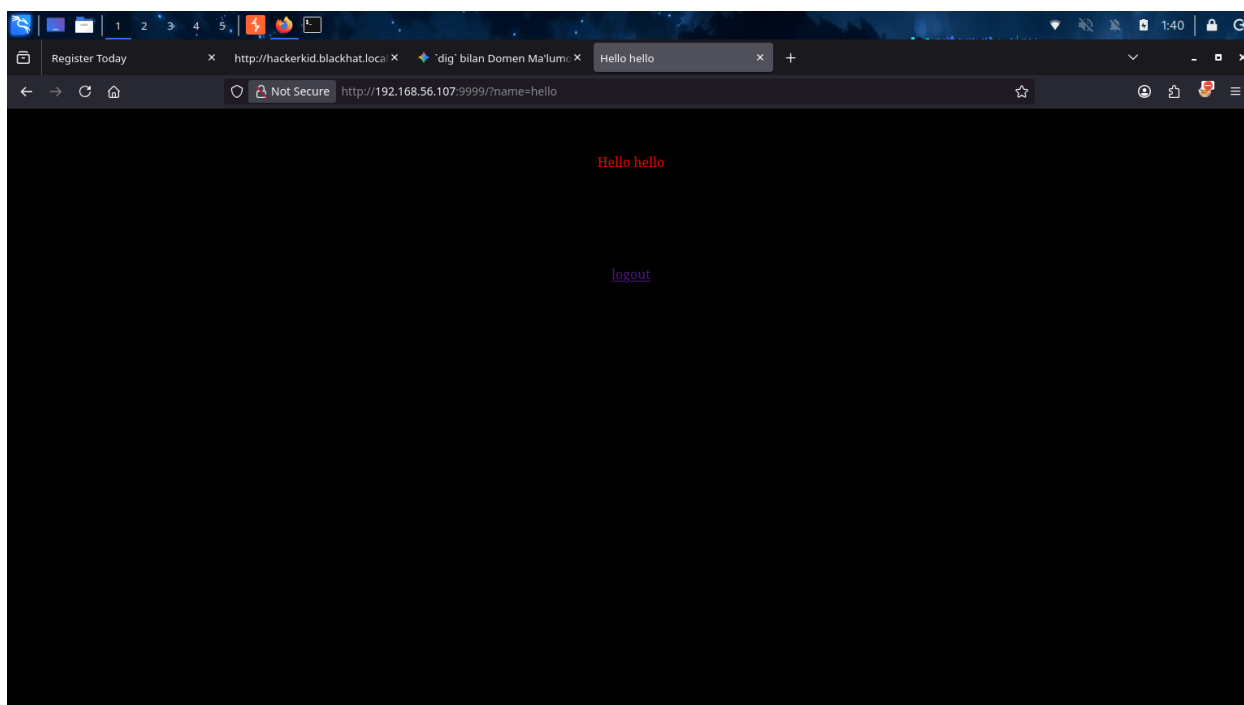

ismimizni kiritib korgan edik uni ekranga chiqardi

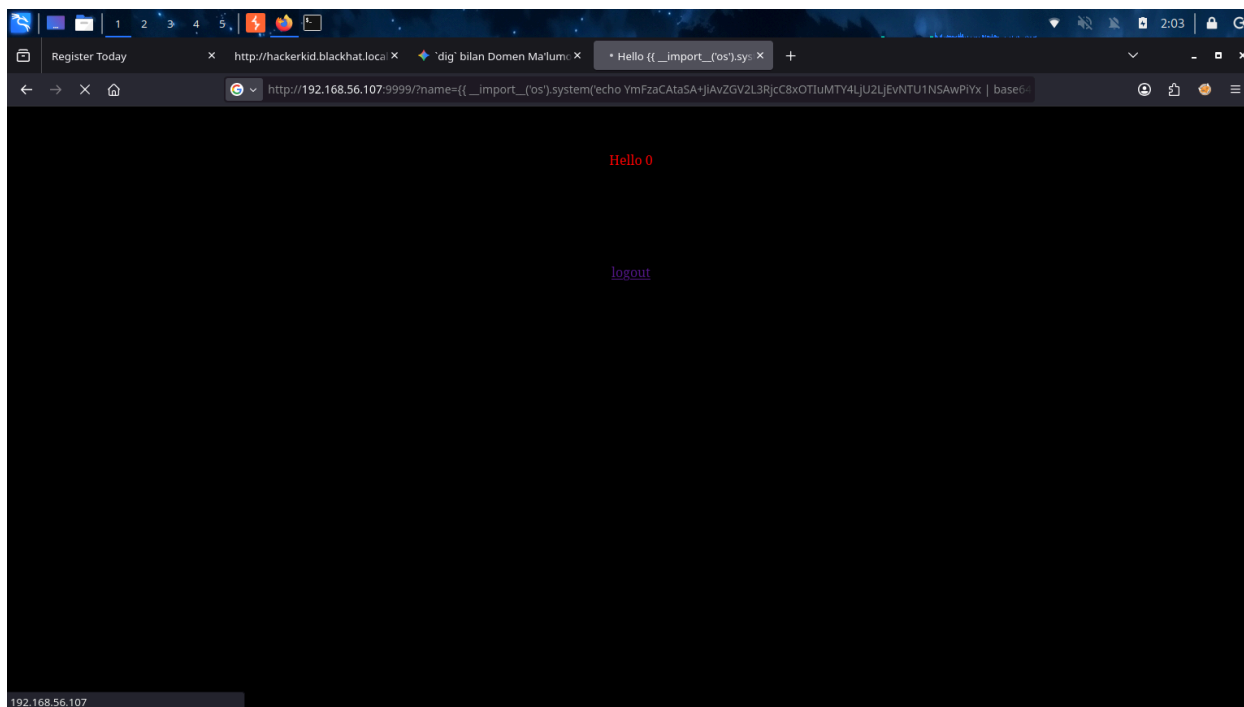


ssti ga zaifligi borligini bilganimizdan song togrida togr reverse shell oldik

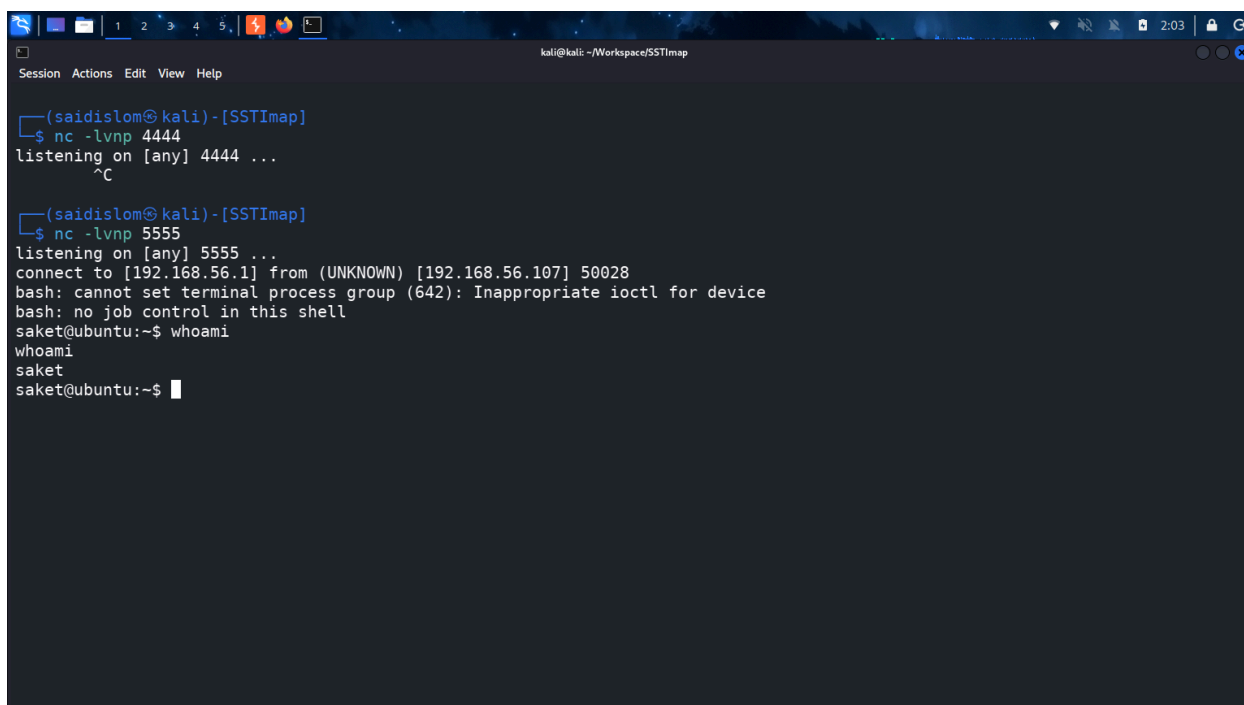

tizimda CAP_SYS_PTRACE+ep zaifligi borligini korganimzdan song google search qilib u zaiflikni organib python skript ornatib uni ishga tushirdik va yana reverse

shell oldik bu safar root nomidan

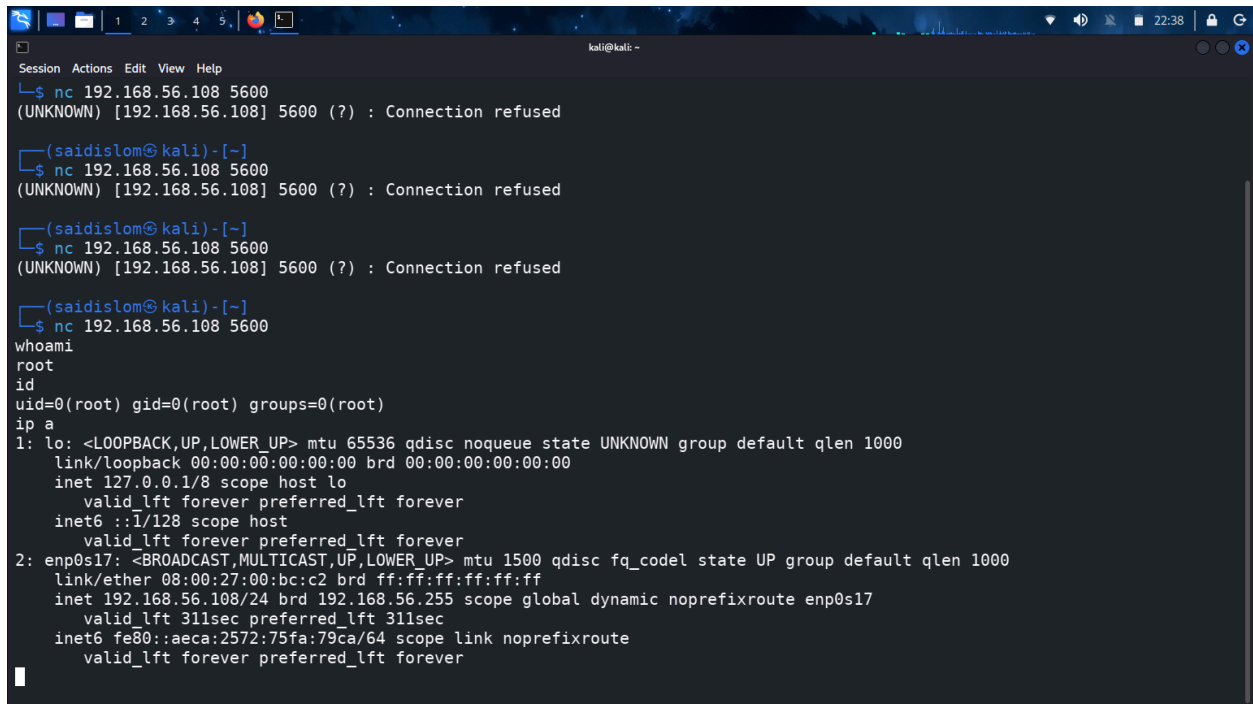

```
kali@kali: ~  
Session Actions Edit View Help  
└─$ nc 192.168.56.108 5600  
(UNKNOWN) [192.168.56.108] 5600 (?): Connection refused  
  
└─(saidislom@kali)-[~]  
└─$ nc 192.168.56.108 5600  
(UNKNOWN) [192.168.56.108] 5600 (?): Connection refused  
  
└─(saidislom@kali)-[~]  
└─$ nc 192.168.56.108 5600  
(UNKNOWN) [192.168.56.108] 5600 (?): Connection refused  
  
└─(saidislom@kali)-[~]  
└─$ nc 192.168.56.108 5600  
whoami  
root  
id  
uid=0(root) gid=0(root) groups=0(root)  
ip a  
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000  
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00  
    inet 127.0.0.1/8 scope host lo  
        valid_lft forever preferred_lft forever  
    inet6 ::1/128 scope host  
        valid_lft forever preferred_lft forever  
2: enp0s17: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000  
    link/ether 08:00:27:00:bc:c2 brd ff:ff:ff:ff:ff:ff  
    inet 192.168.56.108/24 brd 192.168.56.255 scope global dynamic noprefixroute enp0s17  
        valid_lft 311sec preferred_lft 311sec  
    inet6 fe80::aeca:2572:75fa:79ca/64 scope link noprefixroute  
        valid_lft forever preferred_lft forever
```

root olindi