

Machine Learning

(機器學習)

Lecture 2: The Learning Problems

Hsuan-Tien Lin (林軒田)

`htlin@csie.ntu.edu.tw`

Department of Computer Science
& Information Engineering

National Taiwan University
(國立台灣大學資訊工程系)




Roadmap

1 When Can Machines Learn?




Lecture 2: The Learning Problems

- Learning with Different Output Space \mathcal{Y}
- Learning with Different Data Label y_n
- Learning with Different Protocol $f \Rightarrow (\mathbf{x}_n, y_n)$
- Learning with Different Input Space \mathcal{X}

Credit Approval Problem Revisited

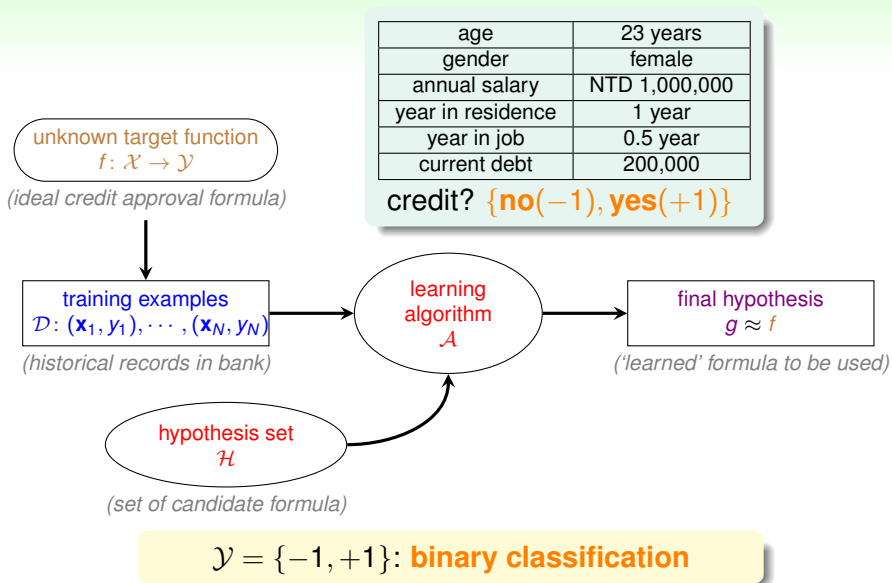


More Binary Classification Problems



- credit **approve/disapprove**
- email **spam/non-spam**
- patient **sick/not sick**
- ad **profitable/not profitable**
- answer **correct/incorrect** (KDDCup 2010)

core and important problem with
many tools as **building block of other tools**

Multiclass Classification: Coin Recognition Problem



- classify US coins (1c, 5c, 10c, 25c) by (size, mass)
- $\mathcal{Y} = \{1c, 5c, 10c, 25c\}$, or
 $\mathcal{Y} = \{1, 2, \dots, K\}$ (**abstractly**)
- binary classification: special case with $K = 2$

Other Multiclass Classification Problems

- written digits $\Rightarrow 0, 1, \dots, 9$
- emails \Rightarrow spam, primary, social, promotion, update (Google)

many applications in practice

Multiclass Classification for Object Recognition:

Which Fruit?



?

(image by Robert-Owen-Wahl from Pixabay)



apple



orange



strawberry



kiwi

(images by Pexels, PublicDomainPictures, 192635, Rob van der Meijden from Pixabay)

$$\mathcal{Y} = \{\text{apple, orange, strawberry, kiwi}\}$$

Which Fruits?



?: {apple, orange, kiwi}

(image by Michal Jarmoluk from Pixabay)



apple



orange



strawberry



kiwi


(images by Pexels, PublicDomainPictures, 192635, Rob van der Meijden from Pixabay)

multilabel classification:

classify input to **multiple (or no)** categories

$$\mathcal{Y} = 2^{\{\text{apple, orange, strawberry, kiwi}\}}$$

What Tags?

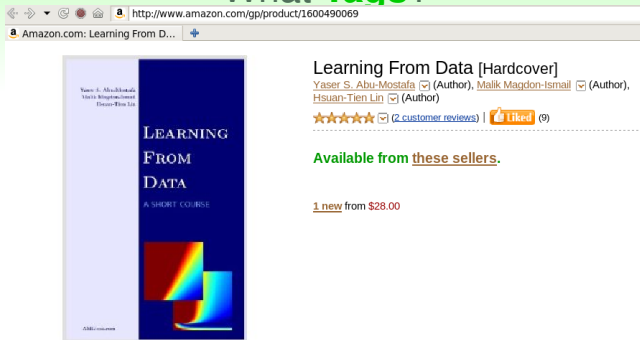

?: { machine learning, data-structure, data mining, object oriented-programming, artificial intelligence, compiler, architecture, chemistry, textbook, children-book, ... etc. }

another **multilabel** classification problem:
tagging input to multiple categories

Binary Relevance: Multilabel Classification via Yes/No

binary
classification

{yes, no}

multilabel w/ L classes: L yes/no
questions

machine learning (Y), data structure (N), data
mining (Y), OOP (N), AI (Y), compiler (N),
architecture (N), chemistry (N), textbook (Y),
children book (N), etc.

- Binary Relevance (BR): reduction (transformation) to **multiple isolated binary classification**
- disadvantages (addressed by more sophisticated models):
 - **isolation**—hidden relations not exploited
(e.g. ML and DM **highly correlated**, ML **subset of** AI, textbook & children book **disjoint**)
 - **imbalanced**—few yes, many no

BR for multilabel classification:
uses **binary classification** as a core tool

Regression: Patient Recovery Prediction Problem

- binary classification: patient features \Rightarrow sick or not
- multiclass classification: patient features \Rightarrow which type of cancer
- regression: patient features \Rightarrow **how many days before recovery**
- $\mathcal{Y} = \mathbb{R}$ or $\mathcal{Y} = [\text{lower}, \text{upper}] \subset \mathbb{R}$ (bounded regression)
 - **deeply studied in statistics**

Other Regression Problems

- company data \Rightarrow stock price
- climate data \Rightarrow temperature

also core and important with many ‘statistical’ tools as **building block of other tools**

Sophisticated Output: Image Generation Problems

Style Transfer



(Leonardo da Vinci,
in Public Domain)

+



(Van Gogh,
in Public Domain)

\Rightarrow



(Pjfinlay,
with CC0)

all images are downloaded from Wikipedia

Other Image Generation Problems


- noisy image \Rightarrow clean image
- low-resolution image \Rightarrow high-resolution image

\mathcal{Y} : a 'manifold' $\subset \mathbb{R}^{w \times h \times c}$,
arguably **not just multi-pixel regression**

Mini Summary

Learning with Different Output Space \mathcal{Y}


- **binary classification**: $\mathcal{Y} = \{-1, +1\}$
- multiclass classification: $\mathcal{Y} = \{1, 2, \dots, K\}$
- multilabel classification: $\mathcal{Y} = 2^{\{1, 2, \dots, K\}}$
- **regression**: $\mathcal{Y} = \mathbb{R}$
- image generation: $\mathcal{Y} \subset \mathbb{R}^{w \times h \times c}$
- ... and a lot more!!

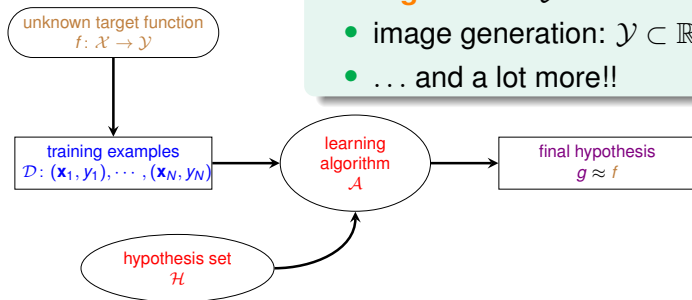

core tools: binary classification and regression


Questions?

Supervised: Coin Recognition Revisited

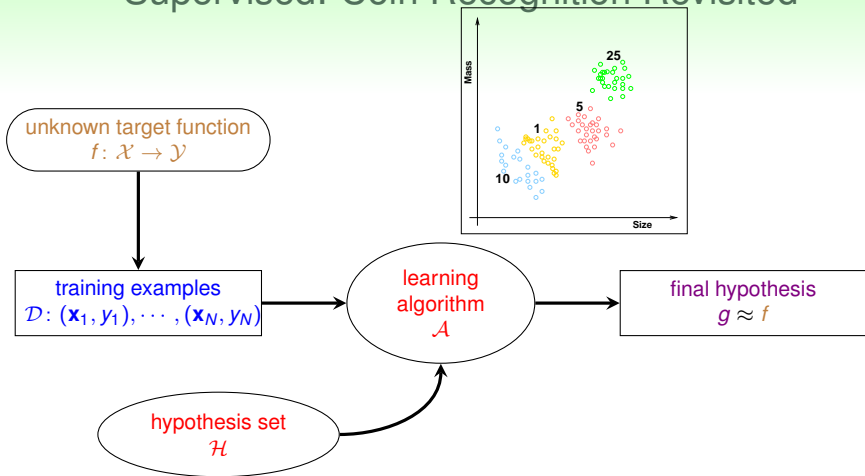


supervised learning:
every \mathbf{x}_n comes with corresponding y_n

Unsupervised: Coin Recognition without y_n



supervised multiclass classification




unsupervised multiclass classification
 \iff 'clustering'

Other Clustering Problems


- articles \Rightarrow topics
- consumer profiles \Rightarrow consumer groups

clustering: a challenging but useful problem

Unsupervised: Coin Recognition without y_n



supervised multiclass classification



unsupervised multiclass classification
 \Leftrightarrow 'clustering'

Other Clustering Problems

- articles \Rightarrow topics
- consumer profiles \Rightarrow consumer groups

clustering: a challenging but useful problem

Unsupervised: Learning without y_n


Other Unsupervised Learning Problems

- clustering: $\{\mathbf{x}_n\} \Rightarrow \text{cluster}(\mathbf{x})$
(\approx 'unsupervised multiclass classification')
—i.e. articles \Rightarrow topics
- **density estimation**: $\{\mathbf{x}_n\} \Rightarrow \text{density}(\mathbf{x})$
(\approx 'unsupervised bounded regression')
—i.e. traffic reports with location \Rightarrow dangerous areas
- **outlier detection**: $\{\mathbf{x}_n\} \Rightarrow \text{unusual}(\mathbf{x})$
(\approx extreme 'unsupervised binary classification')
—i.e. Internet logs \Rightarrow intrusion alert
- ... and a lot more!!

unsupervised learning: diverse, with possibly very different performance goals

Self-supervised: Unsupervised + Self-defined Goal(s)

jigsaw puzzle: pieces \rightarrow full picture

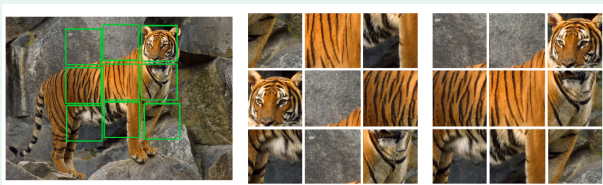

(Figure 1 of Noroozi and Favaro,


Unsupervised Learning of Visual Representations by Solving Jigsaw Puzzles. ECCV 2016)

Other Popular Goals


- colorization: grayscale image \rightarrow colored image
- center word prediction: chunk of text \rightarrow center word
- next sentence prediction: sentence A \rightarrow is sentence B next?

self-supervised learning: recipe to **learn**
‘physical knowledge’ before actual task


Semi-supervised: Coin Recognition with Some y_n



supervised



semi-supervised



unsupervised (clustering)

Other Semi-supervised Learning Problems

- face images with a few labeled \Rightarrow face identifier (Facebook)
- medicine data with a few labeled \Rightarrow medicine effect predictor

semi-supervised learning: leverage unlabeled data to avoid 'expensive' labeling

Weakly-supervised: Learning without True y_n

complementary label: \bar{y}_n ('not' label) instead of y_n



(Figure 1 of Yu et al., Learning with Biased Complementary Labels, ECCV 2018)

Other Weak Supervisions

- partial label: a set Y_n that contains true y_n
- noisy label: y'_n , a noisy version of true y_n
- proportion label: aggregated statistics of a set of y_n

weakly-supervised learning: another **realistic** family to reduce labeling burden

Reinforcement Learning


a 'very different' but natural way of learning

Teach Your Dog: Say 'Sit Down'

The dog pees on the ground.

BAD DOG. THAT'S A VERY WRONG ACTION.

- cannot easily show the dog that $y_n = \text{sit}$ when $\mathbf{x}_n = \text{'sit down'}$
- but can 'punish' to say $\tilde{y}_n = \text{pee is wrong}$



Other Reinforcement Learning Problems Using $(\mathbf{x}, \tilde{y}, \text{goodness})$

- (customer, ad choice, ad click earning) \Rightarrow ad system
- (cards, strategy, winning amount) \Rightarrow black jack agent

reinforcement: learn with '**partial/implicit information**' (often sequentially)

Reinforcement Learning


a 'very different' but natural way of learning

Teach Your Dog: Say 'Sit Down'

The dog sits down.

Good Dog. Let me give you some cookies.

- still cannot show $y_n = \text{sit}$ when $\mathbf{x}_n = \text{'sit down'}$
- but can 'reward' to say $\tilde{y}_n = \text{sit}$ is good



Other Reinforcement Learning Problems Using $(\mathbf{x}, \tilde{y}, \text{goodness})$

- (customer, ad choice, ad click earning) \Rightarrow ad system
- (cards, strategy, winning amount) \Rightarrow black jack agent

reinforcement: learn with '**partial/implicit information**' (often sequentially)


THE Most Well-known Reinforcement Learning Agent



(Public Domain, from Wikipedia; used here for education purpose; all other rights still belong to Google DeepMind)

Non-ML Techniques


Monte C. Tree Search
 \approx **move simulation** in
 brain



(CC-BY-SA 3.0 by Stannered on
 Wikipedia)

ML Techniques

Deep Learning
 \approx **board analysis** in
 human brain



(CC-BY-SA 2.0 by Frej Bjøn on
 Wikipedia)

Reinforcement Learn.
 \approx **(self)-practice** in
 human training




(Public Domain, from Wikipedia)

good AI: important to use the **right**
 techniques—ML **& others, including human**

Mini Summary

Learning with Different Data Label y_n


- **supervised**: all y_n
- unsupervised: no y_n
- self-supervised: self-defined y'_n from \mathbf{x}_n
- semi-supervised: some y_n
- weakly-supervised: no true y_n
- reinforcement: implicit y_n by goodness(\tilde{y}_n)
- ... and more!!

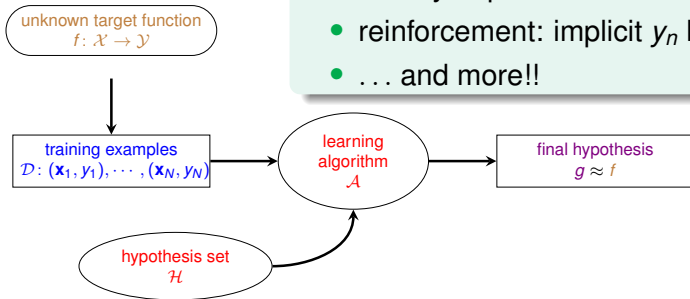

core tool: supervised learning



Questions?

Batch Learning: Coin Recognition Revisited

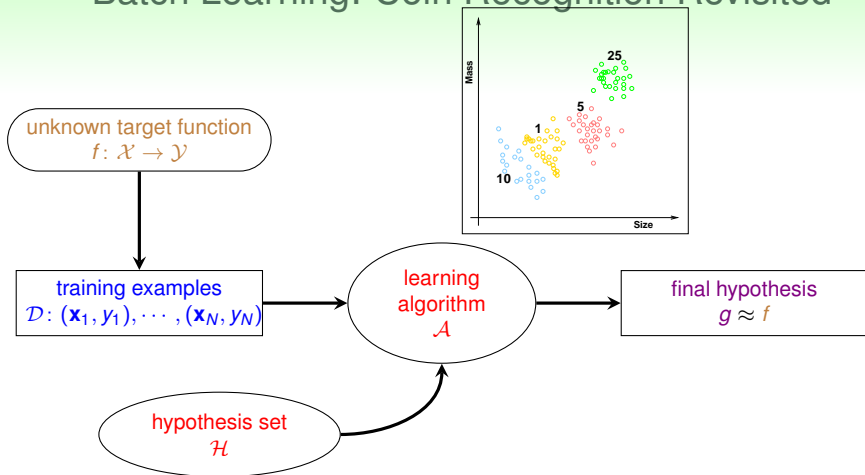

batch supervised multiclass classification:
learn from **all known** data

More Batch Learning Problems



- batch of (email, spam?) \Rightarrow spam filter
- batch of (patient, cancer) \Rightarrow cancer classifier
- batch of patient data \Rightarrow group of patients

batch learning: **a very common protocol**

Online: Spam Filter that 'Improves'


- batch spam filter:
learn with known (email, spam?) pairs, and predict with fixed g
- **online** spam filter, which **sequentially**:
 - 1 observe an email \mathbf{x}_t
 - 2 predict spam status with current $g_t(\mathbf{x}_t)$
 - 3 receive 'desired label' y_t from user, and then update g_t with (\mathbf{x}_t, y_t)

Connection to What We Have Learned

- PLA can be easily adapted to online protocol (how?)
- reinforcement learning is often done online (why?)

online: hypothesis 'improves' through receiving
data instances **sequentially**

Online + Batch for Real-World Applications

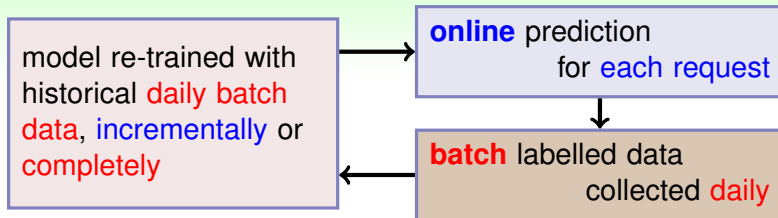

purely online

- **incremental update** costly online
- **delayed labels** hard to handle properly

purely batch


- cannot capture **drifts/trends** well
- **complete re-training** possibly costly

real-world ML system
different from **textbook settings**

Active Learning: Learning by 'Asking'


Protocol \Leftrightarrow Learning Philosophy

- batch: 'duck feeding'
- online: 'passive sequential'
- **active: 'question asking'** (sequentially)
—query the y_n of the **chosen** \mathbf{x}_n

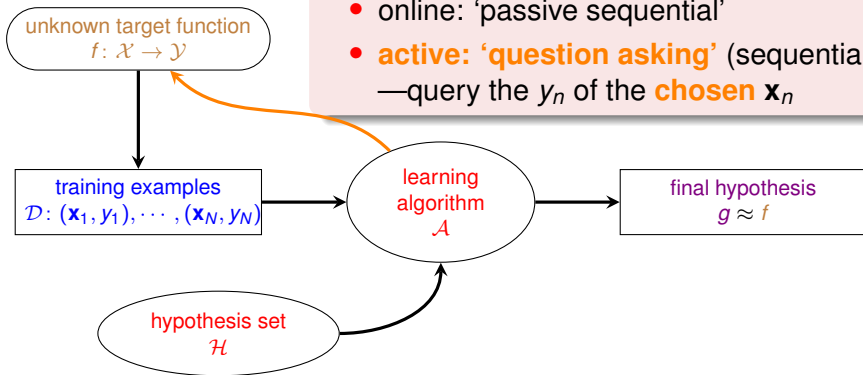

active: improve hypothesis with fewer labels
(hopefully) by asking questions **strategically**

Making Active Learning More Realistic

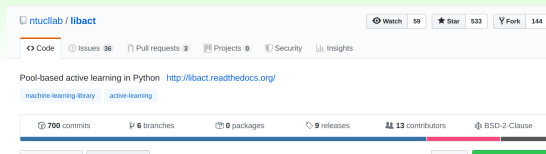

open-source tool `libact` developed by NTU CLLab (Yang, 2017)
<https://github.com/ntucllab/libact>


- including many popular strategies
- received **> 500 stars** and continuous **issues**

“`libact` is a Python package designed to **make active learning easier** for real-world users”

Mini Summary

Learning with Different Protocol $f \Rightarrow (\mathbf{x}_n, y_n)$


- **batch**: all known data
- online: sequential (passive) data
- online + batch: best of both worlds
- **active**: strategically-observed data
- ... and more!!

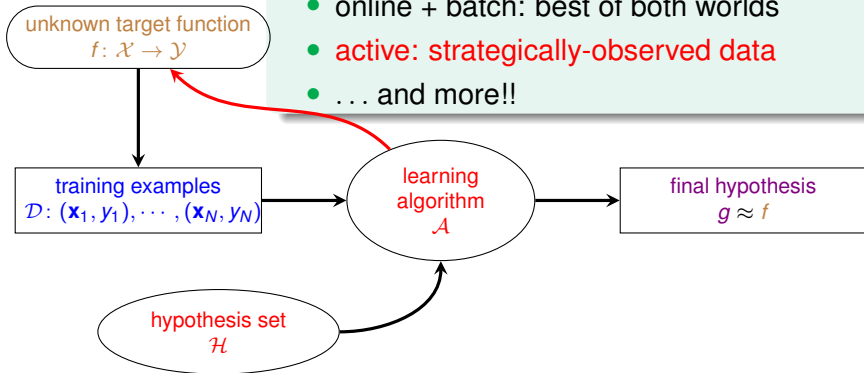

core protocol: batch

Questions?


Credit Approval Problem Revisited

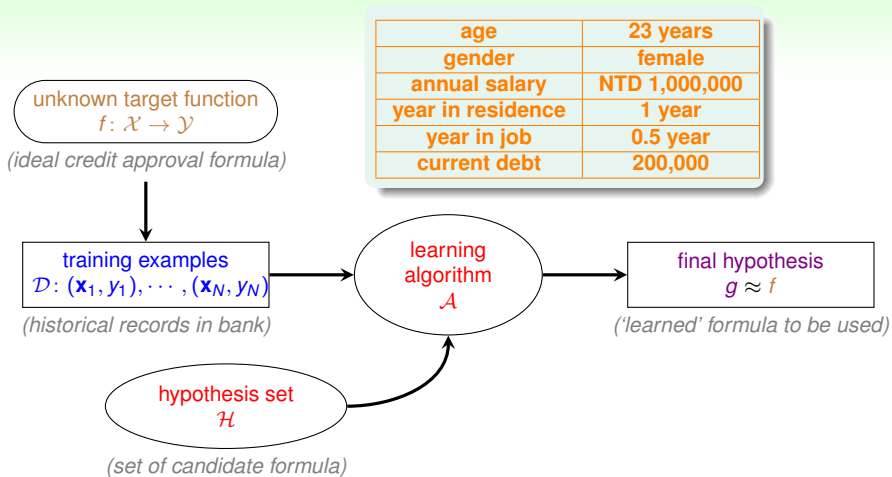

concrete features: each dimension of $\mathcal{X} \subseteq \mathbb{R}^d$ represents ‘sophisticated physical meaning’


More on Concrete Features

- **(size, mass)** for coin classification
- **customer info** for credit approval
- **patient info** for cancer diagnosis
- often including ‘human intelligence’ on the learning task



concrete features: the ‘easy’ ones for ML


Raw Features: Digit Recognition Problem (1/2)

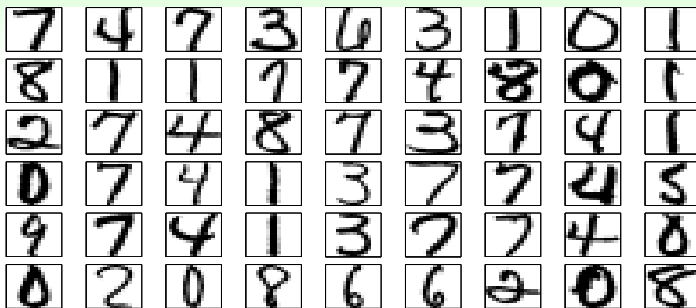

- digit recognition problem: features \Rightarrow meaning of digit
- a typical supervised multiclass classification problem

Raw Features: Digit Recognition Problem (2/2)

by Concrete Features

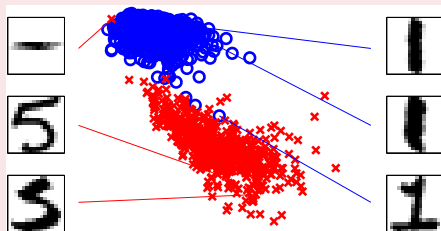

$\mathbf{x} = (\text{symmetry}, \text{density})$

by Raw Features


- 16 by 16 gray image $\mathbf{x} \equiv (0, 0, 0.9, 0.6, \dots) \in \mathbb{R}^{256}$
- ‘**simple** physical meaning’; thus more difficult for ML than concrete features

Other Problems with Raw Features

- image pixels, speech signal, etc.

raw features: often need human (‘feature engineering’) or machines to **convert to concrete ones**

Deep Learning: 'Automatic' Conversion from Raw to Concrete

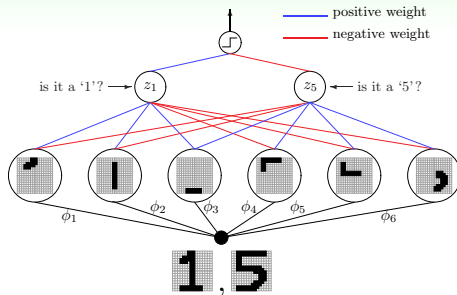

- layered extraction: **simple** to **complex** features
- natural for **difficult** learning task with **raw features**, like **vision**

deep learning: currently popular in
vision/speech/...

Abstract Features: Rating Prediction Problem

Rating Prediction Problem (KDDCup 2011)

- given previous (userid, itemid, rating) tuples, predict the rating that some userid would give to itemid?
- a regression problem with $\mathcal{Y} \subseteq \mathbb{R}$ as rating and $\mathcal{X} \subseteq \mathbb{N} \times \mathbb{N}$ as (userid, itemid)
- ‘no physical meaning’; thus even more difficult for ML

Other Problems with Abstract Features


- student ID in online tutoring system (KDDCup 2010)
- advertisement ID in online ad system

abstract: again need ‘**feature conversion**/extraction/construction’

Mini Summary

Learning with Different Input Space \mathcal{X}

- **concrete**: sophisticated (and related) physical meaning
- raw: simple physical meaning
- abstract: no (or little) physical meaning
- ... and more!!

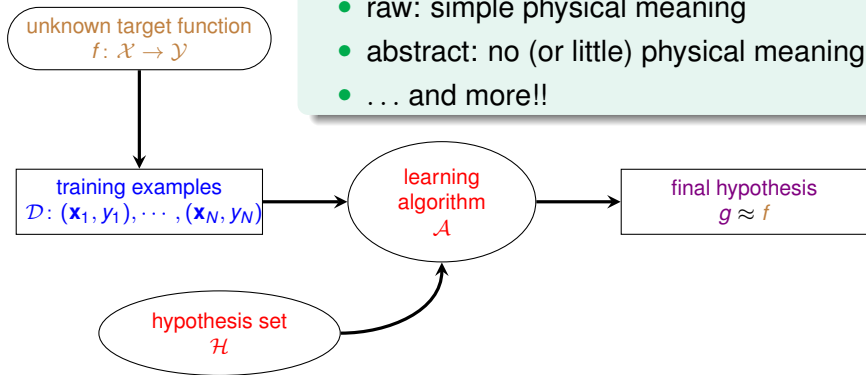

'easy' input: concrete

Questions?

Summary

1 When Can Machines Learn?

Lecture 1: Basics of Machine Learning

Lecture 2: The Learning Problems

- Learning with Different Output Space \mathcal{Y}
[classification], [regression], others
 - Learning with Different Data Label y_n
[supervised], un/semi/weakly-sup., reinforcement
 - Learning with Different Protocol $f \Rightarrow (\mathbf{x}_n, y_n)$
[batch], online, active
 - Learning with Different Input Space \mathcal{X}
[concrete], raw, abstract
- next: learning is impossible?!