
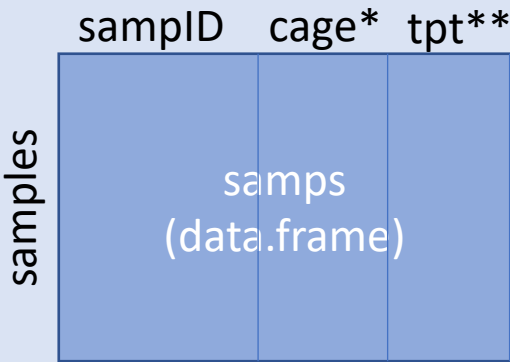
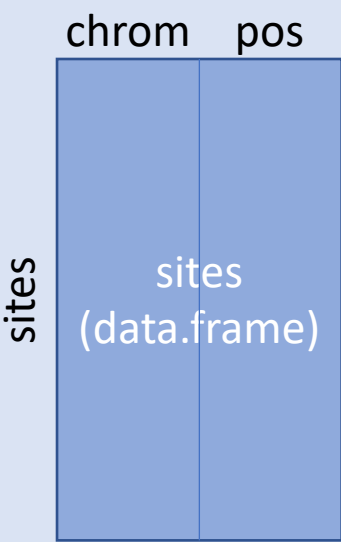


--HAFs [HAFs.Rdata]

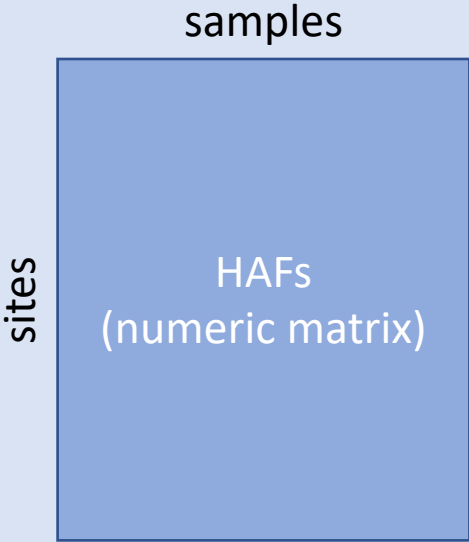


* you can pass a column name into `--repName` to treat a different variable as the replicate identifier; default is 'cage'

** you can pass any column name into `--mainEffect` to run the GLM on a different variable; default is 'tpt'

**--effectiveCov
[integer]**

150

**--effectiveCov
[effCov.csv]**

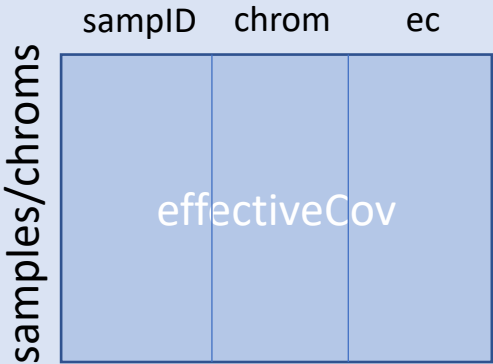

OR

**--readDepth
[readDepth.RDS]**

