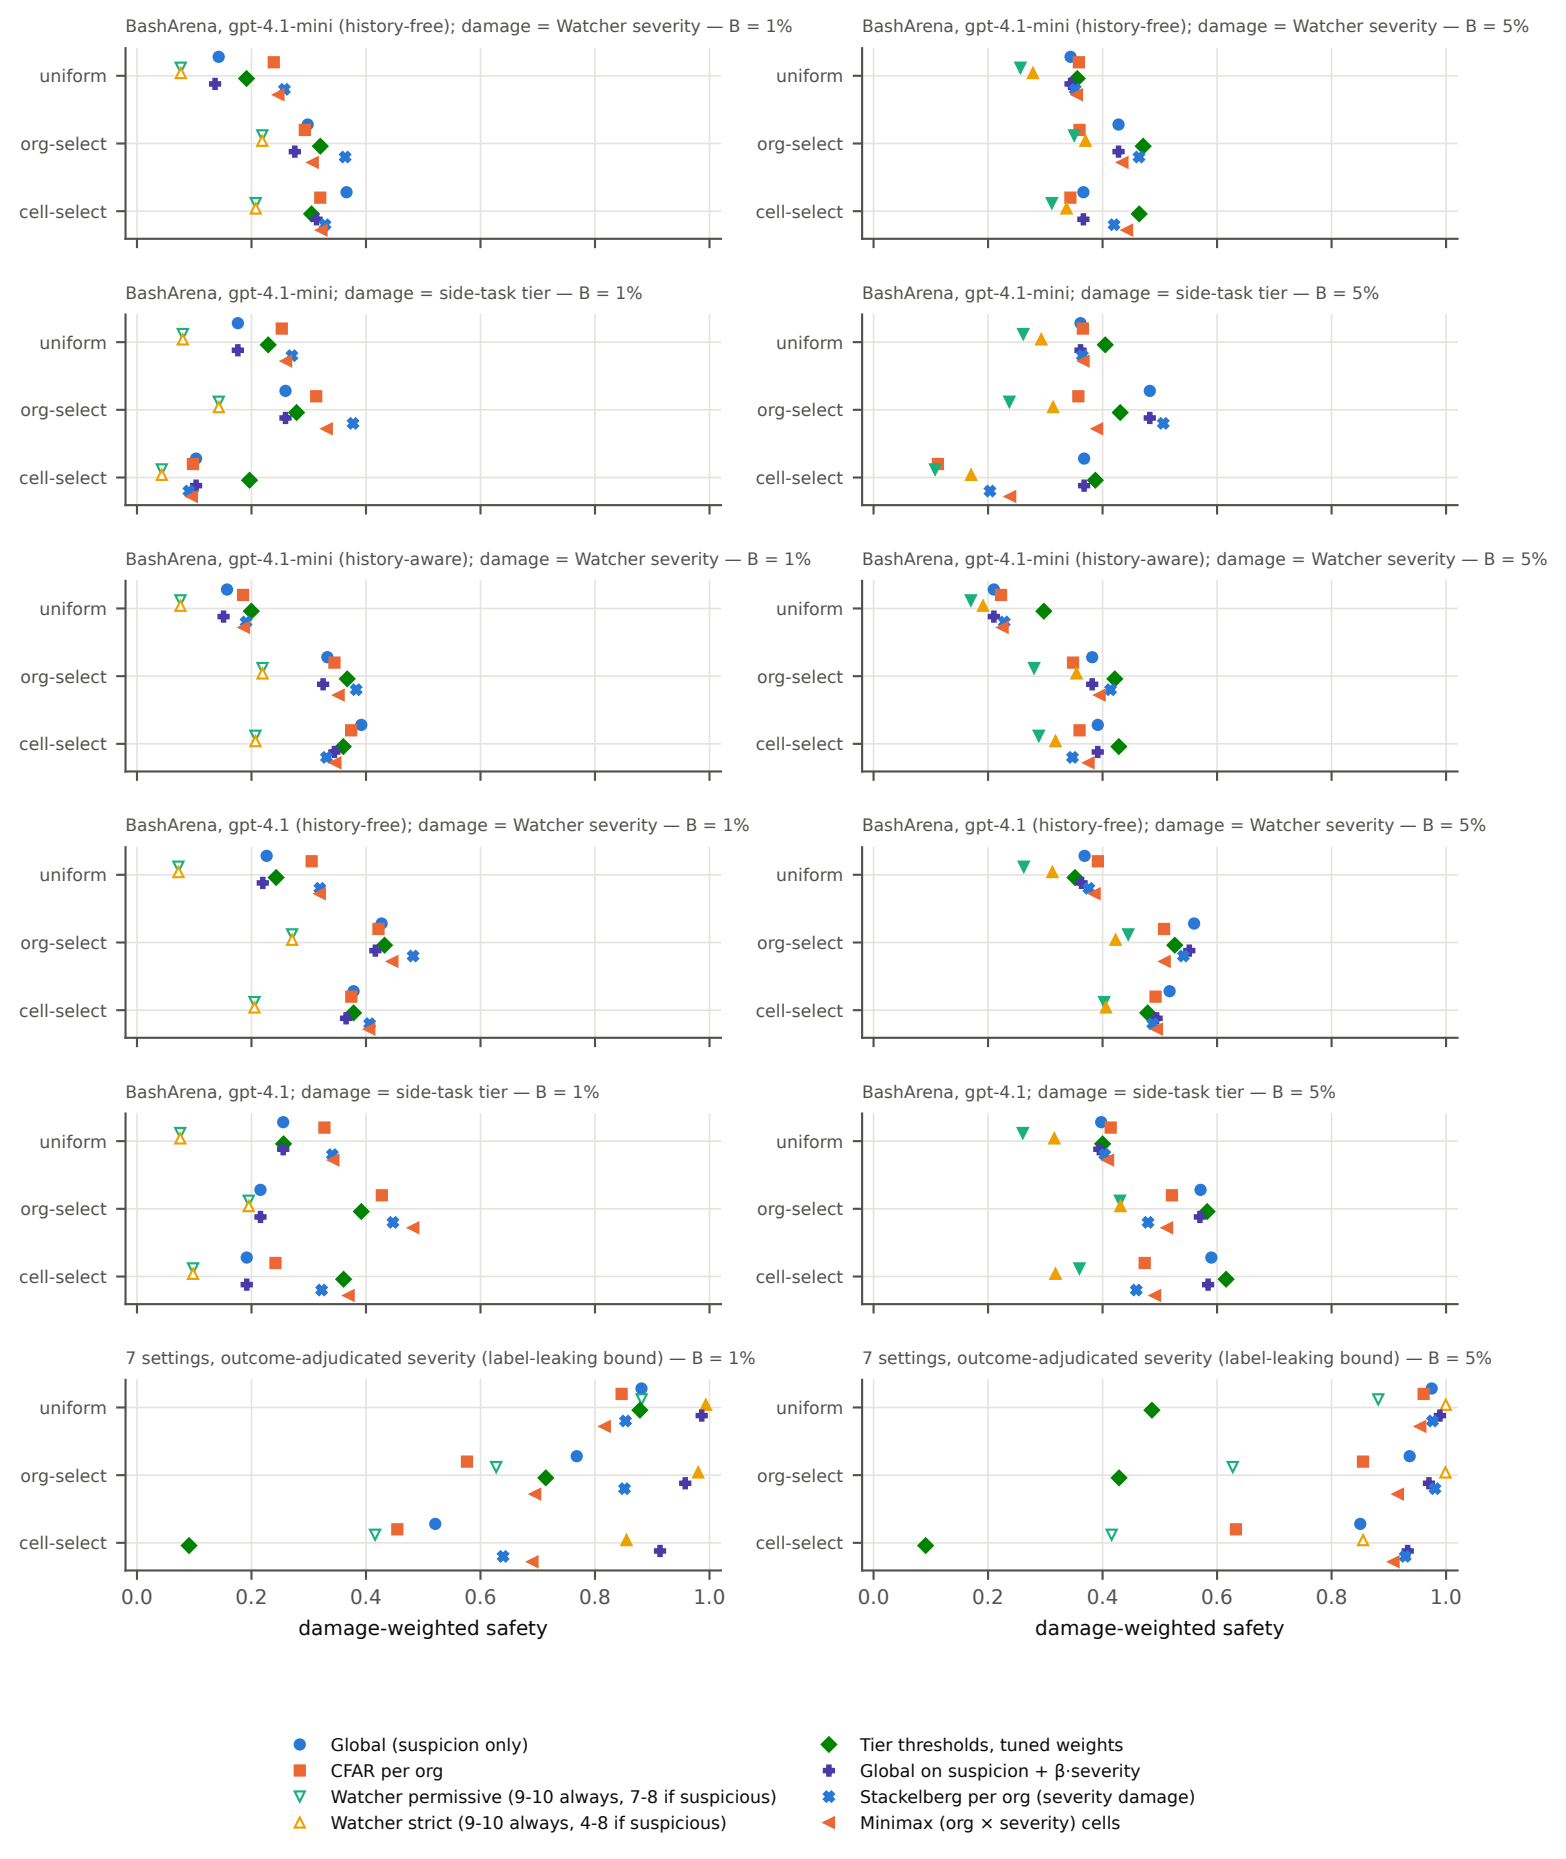
BashArena, gpt-4.1-mini (history-free); damage = Watcher severity — B = 1%
BashArena, gpt-4.1-mini (history-free); damage = Watcher severity — B = 5%
BashArena, gpt-4.1-mini; damage = side-task tier — B = 1%
BashArena, gpt-4.1-mini; damage = side-task tier — B = 5%
BashArena, gpt-4.1-mini (history-aware); damage = Watcher severity — B = 1%
BashArena, gpt-4.1-mini (history-aware); damage = Watcher severity — B = 5%
BashArena, gpt-4.1 (history-free); damage = Watcher severity — B = 1%
BashArena, gpt-4.1 (history-free); damage = Watcher severity — B = 5%
BashArena, gpt-4.1; damage = side-task tier — B = 1%
BashArena, gpt-4.1; damage = side-task tier — B = 5%
7 settings, outcome-adjudicated severity (label-leaking bound) — B = 1%
7 settings, outcome-adjudicated severity (label-leaking bound) — B = 5%
uniform
org-select
cell-select
0.0
0.2
0.4
0.6
0.8
1.0
damage-weighted safety
Global (suspicion only)
CFAR per org
Watcher permissive (9-10 always, 7-8 if suspicious)
Watcher strict (9-10 always, 4-8 if suspicious)
Tier thresholds, tuned weights
Global on suspicion + β·severity
Stackelberg per org (severity damage)
Minimax (org × severity) cells