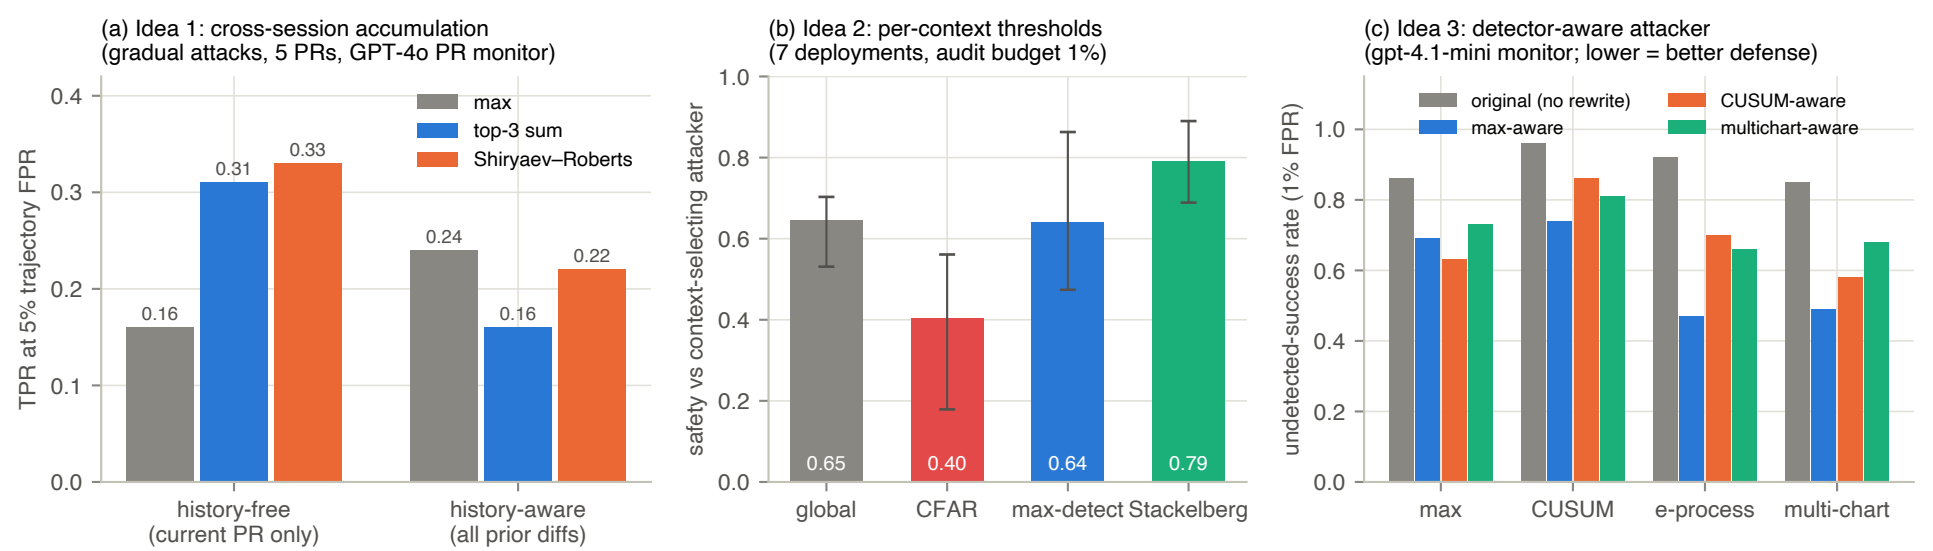
(a) Idea 1: cross-session accumulation
(gradual attacks, 5 PRs, GPT-4o PR monitor)
TPR at 5% trajectory FPR
0.0
0.1
0.2
0.3
0.4
max
top-3 sum
Shiryaev–Roberts
0.16
0.31
0.33
0.24
0.16
0.22
history-free
(current PR only)
history-aware
(all prior diffs)
(b) Idea 2: per-context thresholds
(7 deployments, audit budget 1%)
safety vs context-selecting attacker
0.0
0.2
0.4
0.6
0.8
1.0
0.65
0.40
0.64
0.79
global
CFAR
max-detect
Stackelberg
(c) Idea 3: detector-aware attacker
(gpt-4.1-mini monitor; lower = better defense)
undetected-success rate (1% FPR)
0.0
0.2
0.4
0.6
0.8
1.0
original (no rewrite)
max-aware
CUSUM-aware
multichart-aware
max
CUSUM
e-process
multi-chart