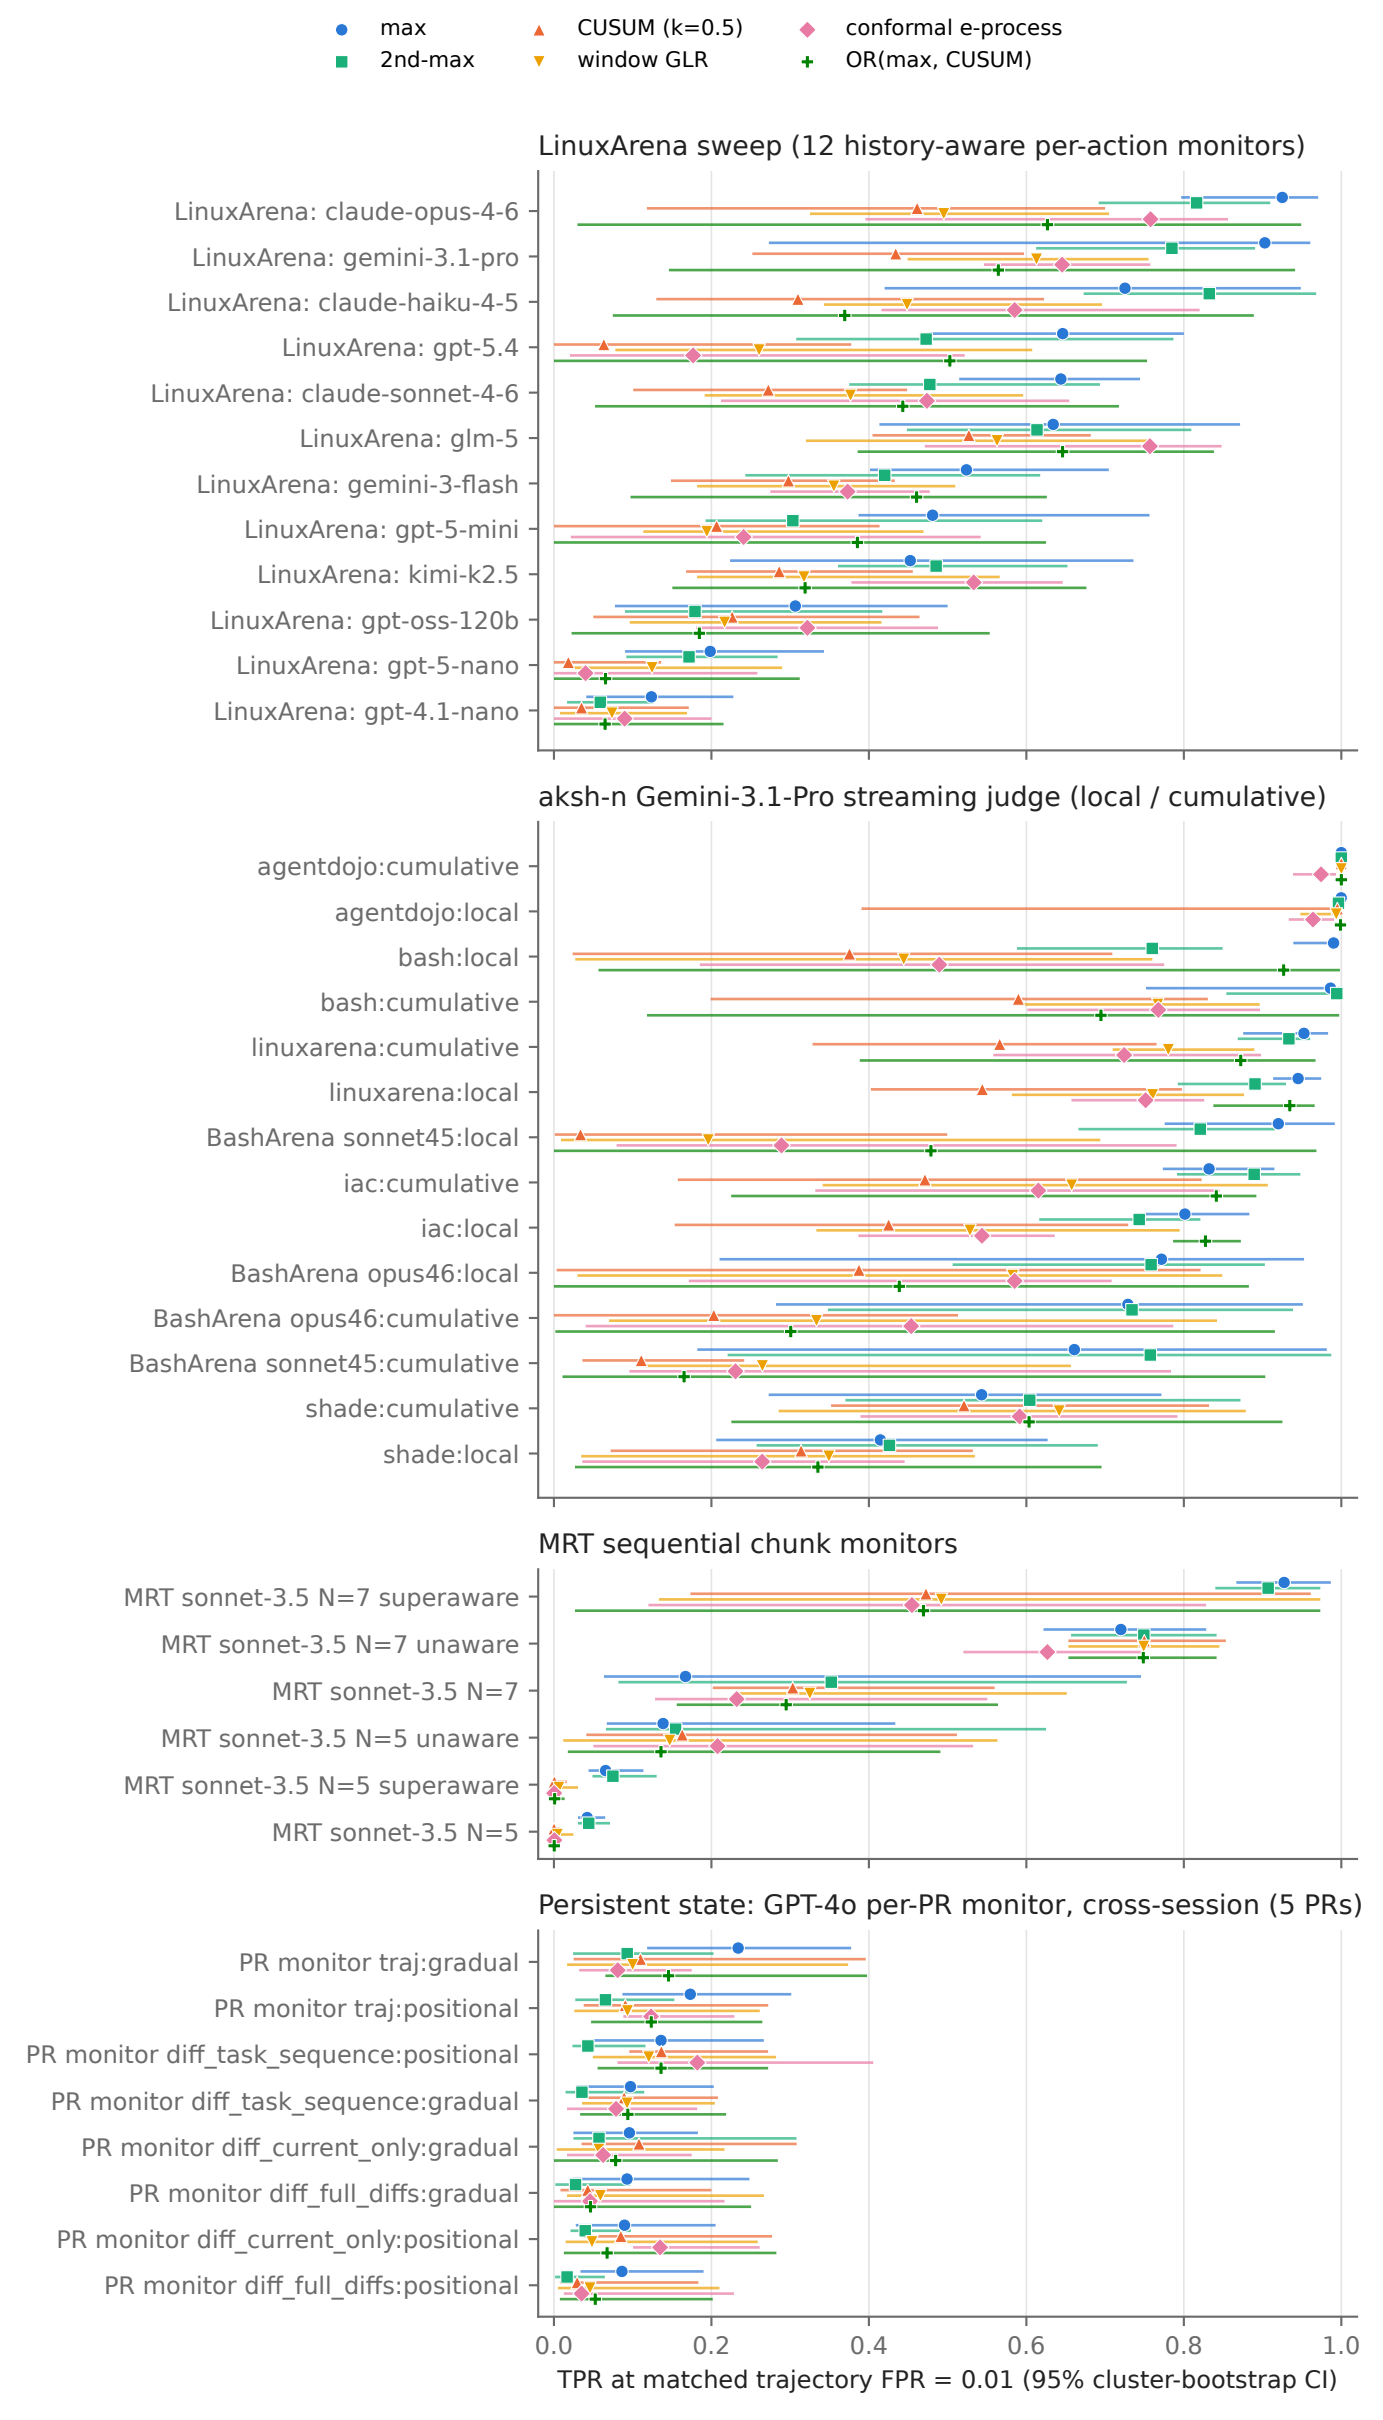
max
2nd-max
CUSUM (k=0.5)
window GLR
conformal e-process
OR(max, CUSUM)
LinuxArena sweep (12 history-aware per-action monitors)
LinuxArena: claude-opus-4-6
LinuxArena: gemini-3.1-pro
LinuxArena: claude-haiku-4-5
LinuxArena: gpt-5.4
LinuxArena: claude-sonnet-4-6
LinuxArena: glm-5
LinuxArena: gemini-3-flash
LinuxArena: gpt-5-mini
LinuxArena: kimi-k2.5
LinuxArena: gpt-oss-120b
LinuxArena: gpt-5-nano
LinuxArena: gpt-4.1-nano
aksh-n Gemini-3.1-Pro streaming judge (local / cumulative)
agentdojo:cumulative
agentdojo:local
bash:local
bash:cumulative
linuxarena:cumulative
linuxarena:local
BashArena sonnet45:local
iac:cumulative
iac:local
BashArena opus46:local
BashArena opus46:cumulative
BashArena sonnet45:cumulative
shade:cumulative
shade:local
MRT sequential chunk monitors
MRT sonnet-3.5 N=7 superaware
MRT sonnet-3.5 N=7 unaware
MRT sonnet-3.5 N=7
MRT sonnet-3.5 N=5 unaware
MRT sonnet-3.5 N=5 superaware
MRT sonnet-3.5 N=5
Persistent state: GPT-4o per-PR monitor, cross-session (5 PRs)
PR monitor traj:gradual
PR monitor traj:positional
PR monitor diff_task_sequence:positional
PR monitor diff_task_sequence:gradual
PR monitor diff_current_only:gradual
PR monitor diff_full_diffs:gradual
PR monitor diff_current_only:positional
PR monitor diff_full_diffs:positional
0.0
0.2
0.4
0.6
0.8
1.0
TPR at matched trajectory FPR = 0.01 (95% cluster-bootstrap CI)