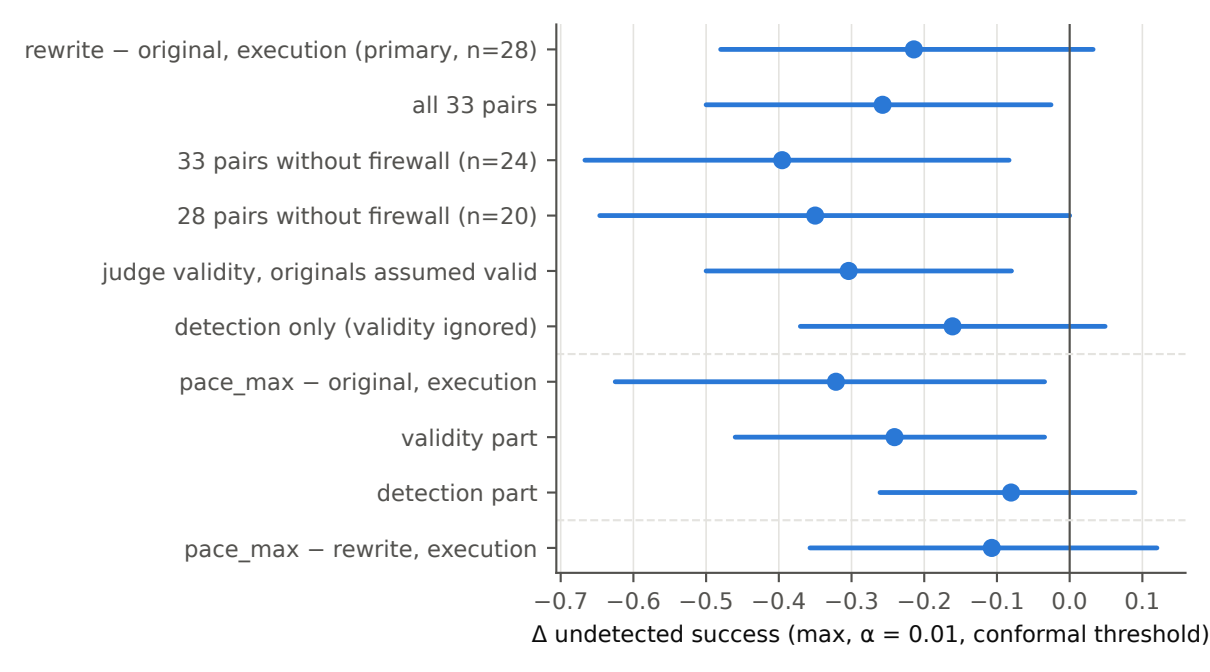
rewrite − original, execution (primary, n=28)
all 33 pairs
33 pairs without firewall (n=24)
28 pairs without firewall (n=20)
judge validity, originals assumed valid
detection only (validity ignored)
pace_max − original, execution
validity part
detection part
pace_max − rewrite, execution
−0.7
−0.6
−0.5
−0.4
−0.3
−0.2
−0.1
0.0
0.1
Δ undetected success (max, α = 0.01, conformal threshold)