


4/3/2002

Apache Authentication

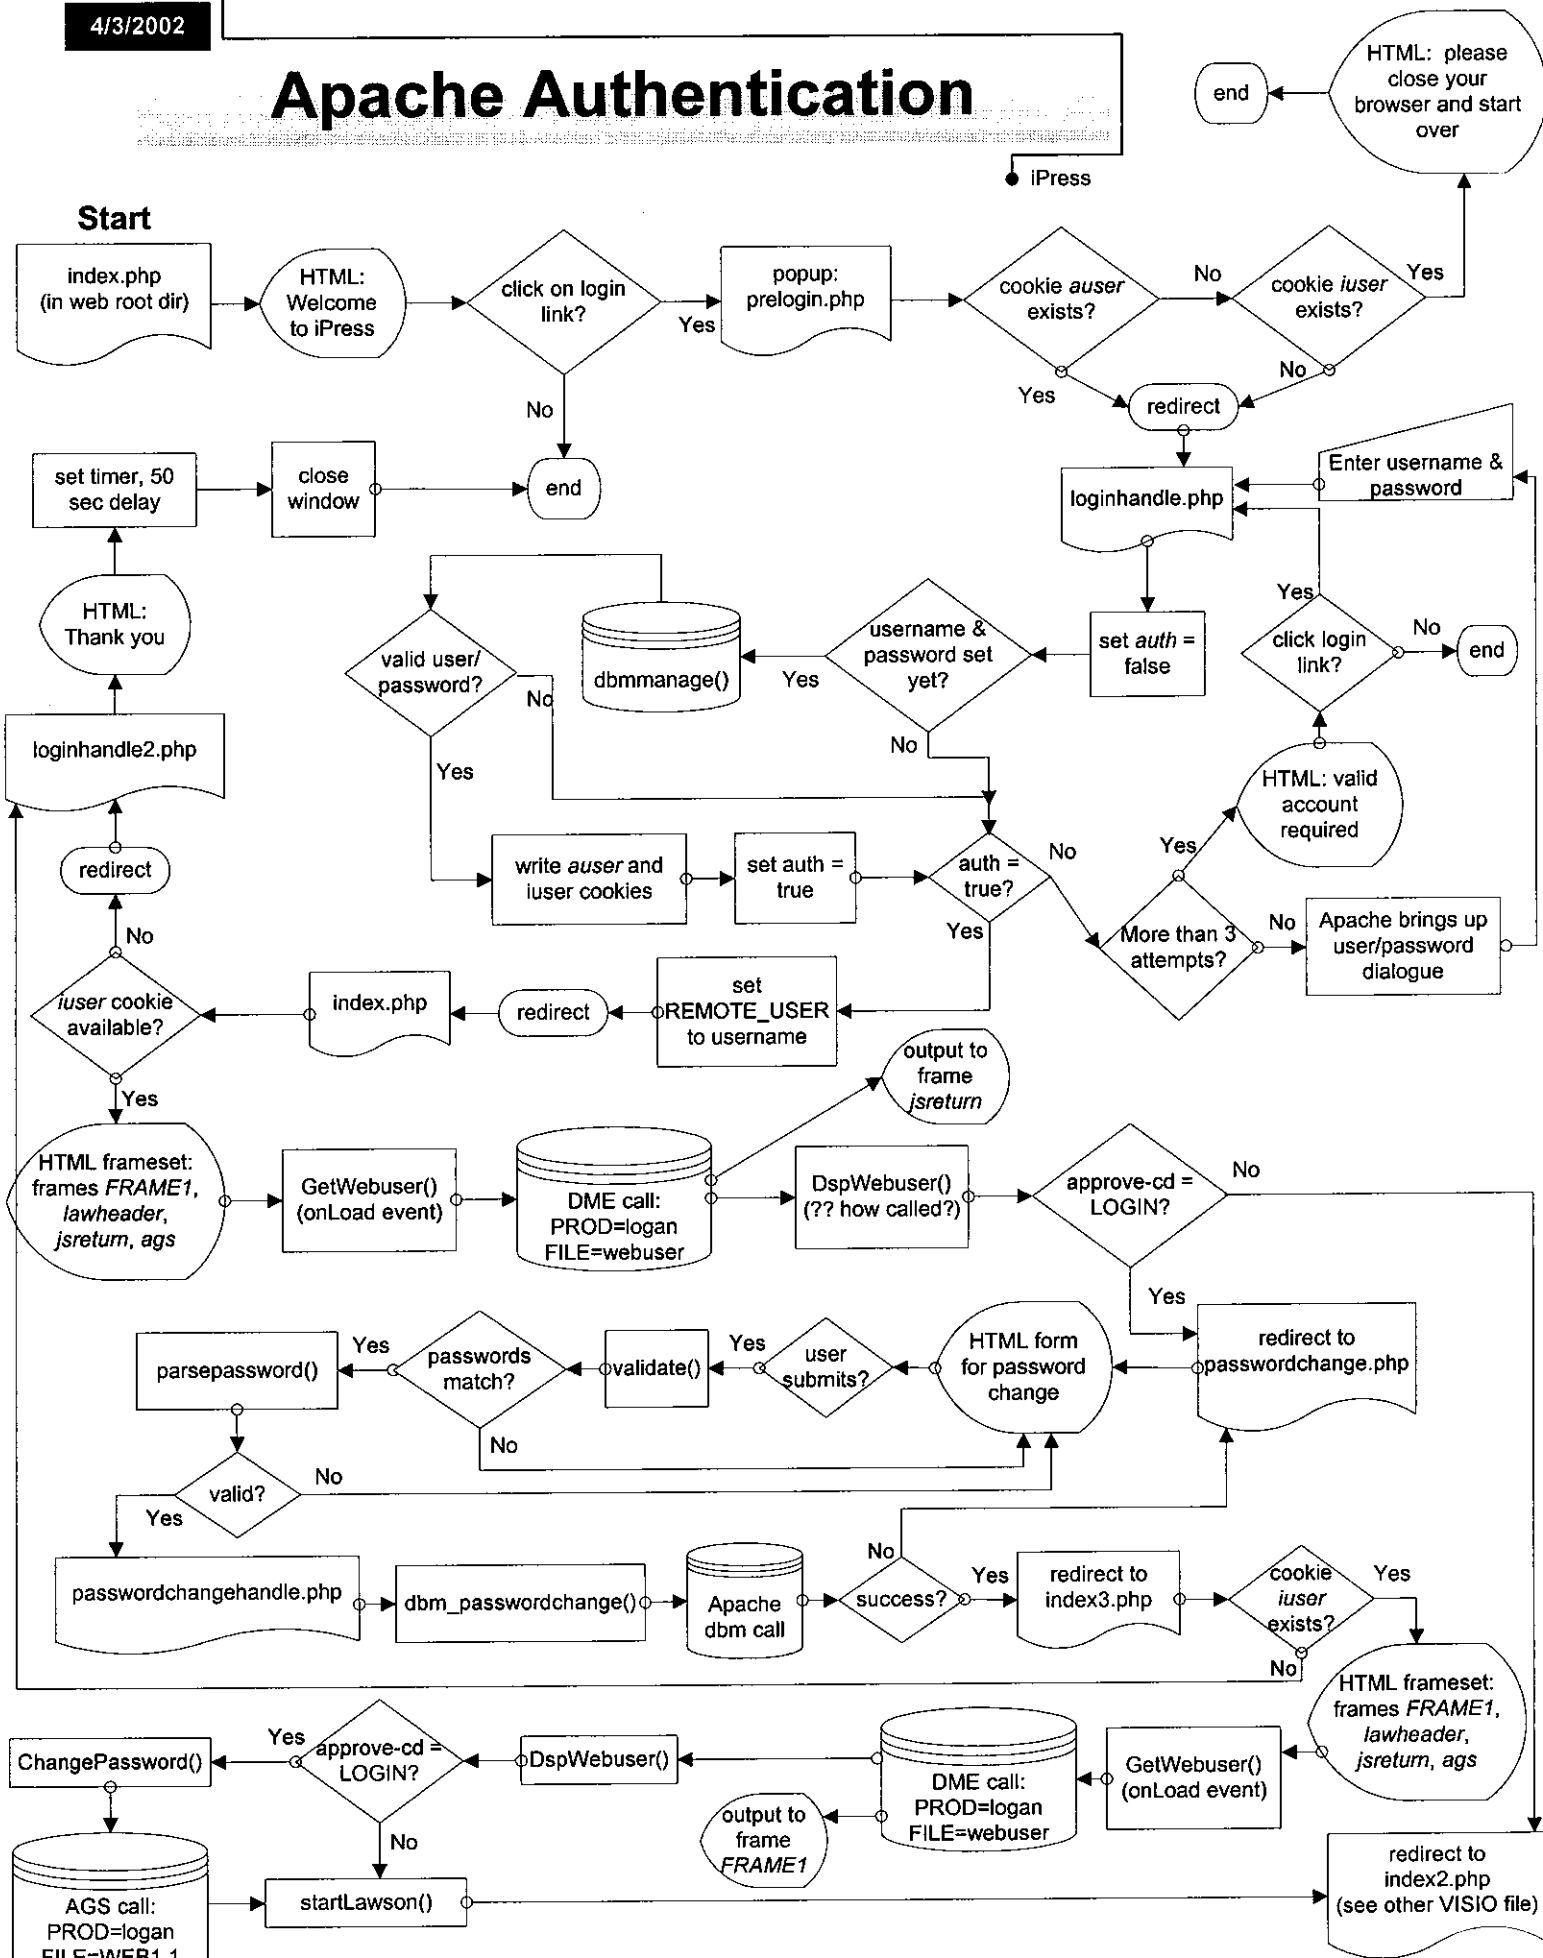

index2.php

iPress

Begin

index2.php

HTML frames: PRE,
officeAuth, skins,
lawheader, ags, xlogin

OFFICEauthUser()
(called by frameset's
onLoad)

authenticate()
(in authenticate.js)

doCGIAuthentication()
(in authenticate.js)

callTAUTHEN()
(in authenticate.js)

cgi-lawson/
authen.exe

returnToAuthen()
(in authenticate.js)
Sets global var
authUser to point to
same datastructure in
frame *officeAuth*

finishUp()
(in authenticate.js)

End

Browser waits for user
input

hello()
writes data to
WORKAREA

DspOffice() continues
writes data to *OFFICEOF*,
WELCOME1 and *WELCOME*

generateNewFrameset()

setSkinVars()

output to
officeAuth
frame

DspOffice()
called by onLoad
event in *skins*
frame

output to
skins frame

DME call:
PROG=logan
FILE=skins

StartLogoutTimerProcedure()
(see Timouts VISIO diagram)

getSkin()

startApp()
(back in
index2.php now)

HTML frames:
OFFICEOF,
WELCOME1,
WELCOME and
WORKAREA