

Object Detection in Hyperspectral Image via Unified Spectral–Spatial Feature Aggregation

Xiao He^{ID}, Chang Tang^{ID}, *Senior Member, IEEE*, Xinwang Liu^{ID}, *Senior Member, IEEE*,
Wei Zhang^{ID}, Kun Sun^{ID}, *Member, IEEE*, and Jiangfeng Xu

Abstract—Deep learning-based hyperspectral image (HSI) classification and object detection techniques have gained significant attention due to their vital role in image content analysis, interpretation, and broader HSI applications. However, current hyperspectral object detection approaches predominantly emphasize spectral or spatial information, overlooking the valuable complementary relationship between these two aspects. In this study, we present a novel spectral–spatial aggregation (S2ADet) object detector that effectively harnesses the rich spectral and spatial complementary information inherent in the HSI. S2ADet comprises a hyperspectral information decoupling (HID) module, a two-stream feature extraction network, and a one-stage detection head. The HID module processes hyperspectral data by aggregating spectral and spatial information via band selection and principal components analysis, consequently reducing redundancy. Based on the acquired spectral and spatial aggregation information, we propose a feature aggregation two-stream network for interacting spectral–spatial features. Furthermore, to address the limitations of existing databases, we annotate an extensive dataset, designated as HOD3K, containing 3242 HSIs captured across diverse real-world scenes, and encompassing three object classes. These images possess a resolution of 512×256 pixels and cover 16 bands ranging from 470 to 620 nm. Comprehensive experiments on two datasets demonstrate that S2ADet surpasses existing state-of-the-art methods, achieving robust, and reliable results. The demo code and dataset of this work are publicly available at <https://github.com/hexiao-cs/S2ADet>.

Index Terms—Deep learning, feature fusion, hyperspectral image (HSI) object detection, spectral–spatial aggregation (SSA).

I. INTRODUCTION

OBJECT detection is a crucial task that involves identifying objects belonging to specific classes within images.

Manuscript received 17 July 2023; accepted 17 August 2023. Date of publication 21 August 2023; date of current version 8 September 2023. This work was supported in part by the National Natural Science Foundation of China under Grant 62076228 and Grant 62176242 and in part by the Natural Science Foundation of Shandong Province under Grant ZR2021LZH001. (Corresponding author: Chang Tang.)

Xiao He, Chang Tang, and Kun Sun are with the School of Computer, China University of Geosciences, Wuhan 430074, China (e-mail: xiaoh@cug.edu.cn; tangchang@cug.edu.cn; sunkun@cug.edu.cn).

Xinwang Liu is with the School of Computer, National University of Defense Technology, Changsha 410073, China (e-mail: xinwangliu@nudt.edu.cn).

Wei Zhang is with the Shandong Provincial Key Laboratory of Computer Networks, Shandong Computer Science Center (National Supercomputing Center in Jinan), Qilu University of Technology (Shandong Academy of Sciences), Jinan 250000, China (e-mail: wzhang@qlu.edu.cn).

Jiangfeng Xu is with Hexagon AB, Qingdao 266100, China (e-mail: jiangfeng.xu@hexagon.com).

Digital Object Identifier 10.1109/TGRS.2023.3307288

It has a wide range of applications in various domains, including remote sensing [1], autonomous driving [2], and medical analysis [3]. Over the past few decades, significant efforts have been made to improve object detection performance for RGB images [4], [5], [6]. However, hyperspectral data offer several advantages over RGB data, which can capture more intrinsic properties of object materials, enabling fine-grained object detection [7], [8], [9], [10]. Hence, hyperspectral detection has garnered substantial attention in the community.

Hyperspectral detection exhibits a pivotal role in remote sensing applications by identifying specific materials or objects through spectral features. Recent research by Rui et al. [11], Chang [12], and Dong et al. [13] primarily rely on either pixel-level spectral information or correlation information between neighboring pixels. These approaches are divided into two main categories: statistical distribution and subspace models. Statistical distribution models, as described by Shang et al. [14] and Chang [15], assume that the background of the image conforms to a multivariate normal distribution. These models detect anomalous pixels by comparing them to the center of the background distribution, enabling the detection of potential objects within the anomalous pixel region. On the other hand, subspace models [14], [16], [17] typically involve designing a linear filter that minimizes the output energy while satisfying a constraint equation. This approach allows for identifying subspaces containing the signal of interest, leading to accurate hyperspectral target detection.

Object detection in hyperspectral images (HSIs) is a broader concept that does not require knowledge of the spectral characteristics of the target of interest. Recently, Yan et al. [18] introduced a pioneering deep learning method for leveraging the spatial attributes of hyperspectral data. Moreover, they created a HOD-1 dataset for object detection in HSIs, comprising 454 images with annotated bounding boxes that tightly encircle the edges of the objects. To the best of our knowledge, HOD-1 is the first object detection dataset for HSIs.

However, most current hyperspectral detection methods primarily rely on the spectral information of specific image bands to identify materials, neglecting the critical semantic information contained in the spatial dimension. In contrast, existing deep learning-based object detection methods in HSIs focus on spatial information and do not consider the rich spectral semantic information available. Furthermore, the HSI

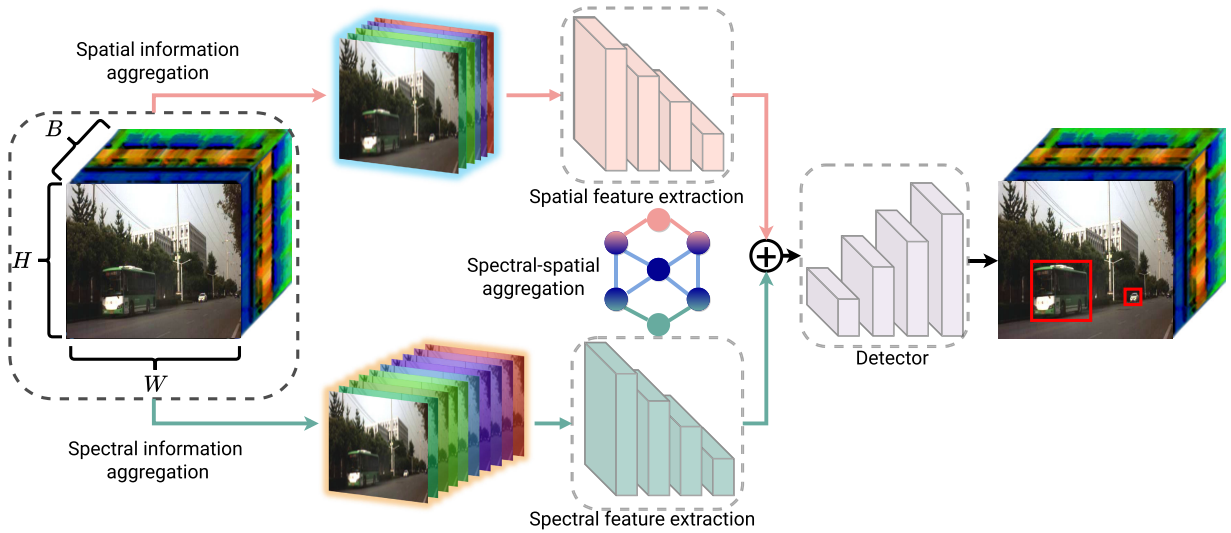


Fig. 1. Illustration of the S2ADet. The S2ADet is purposely designed to handle object detection in hyperspectral data.

in neighboring bands is highly similar and contains a large amount of redundant information between neighboring bands, and simply feeding them into the feature extractor can significantly hinder the detection performance.

To address this challenge, we propose S2ADet, a novel object detector with a two-stream spectral–spatial feature aggregation approach to detect objects in hyperspectral data. S2ADet leverages complementary spatial and semantic information to learn better semantic features of objects. The detector comprises a hyperspectral information decoupling (HID) module, a two-stream feature extraction network, a spectral–spatial aggregation (SSA) module, and a one-stage detection head. First, to address the issue of hyperspectral information redundancy and aggregate the spectral and spatial information, the HID module uses principal component analysis (PCA) to obtain **SpE**ctral (SE) information by aggregating spectral dimension data, as shown in Fig. 1. Furthermore, we employ a band selection algorithm to select representative bands that retain high-quality spatial information, generating **SpA**tial (SA) information as another input to the network. Next, the spectral and spatial semantic information is extracted separately using a two-stream network. An SSA module is embedded in the network to facilitate the spatial interaction and aggregation of the spectrum between the two network streams. Finally, the aggregated features are input to a one-stage object detector to obtain fine-grained object bounding boxes and classification results.

Furthermore, current hyperspectral datasets suffer from limited background distribution and small dataset sizes, as observed in HYDICE, San Diego [19], and Cuprite [20], as illustrated in Fig. 2. To overcome this shortcoming and promote the development of object detection in HSIs, we have annotated a dataset, namely HOD3K, comprising 3242 HSIs of urban roads, campuses, and residential areas, containing 15 149 objects classified into three categories. HOD3K is an extensive hyperspectral dataset that provides a valuable resource for researchers to enhance the effectiveness of object detection methods.

The main contributions of this article are summarized as follows.

- 1) We propose a novel detector dedicated to hyperspectral object detection, namely S2ADet. It contains a HID module, a two-stream network, and a SSA module. The detector achieves the most superior performance and provides uniform input to the network during training and inference.
- 2) We design the HID module to decouple HSIs, thereby reducing redundancy and aggregating the spectral and spatial information.
- 3) We designed a two-stream network and facilitated the aggregation of spectral and spatial information by the SSA module, thus extracting refined features.
- 4) We annotated a comprehensive large-scale object detection dataset in HSIs. It can provide profound insights for developing detection.

The remainder of this article is structured as follows. In Section II, we provide a brief review of the most related work. Section III elaborates on the specifics of the proposed method. Next, in Section IV, we provide a detailed description of the proposed dataset. Section V comprises a series of experiments, discussions, and model analyses. Finally, we conclude this article in Section VI.

II. RELATED WORK

A. General Object Detection

Object detection aims to perform edge regression and class classification on detected objects, and it has found numerous applications, such as in autonomous driving [21] and anomaly detection [22]. Object detection methods can be categorized based on the number of stages involved in the detection head, which are two-stage methods [23], [24] and one-stage methods [25], [26]. Two-stage object detection methods have been rapidly evolving since the introduction of RCNN by Girshick et al. [27], and a series of detectors based on the faster R-CNN [28] method have been proposed and achieved notable results. Although the two-stage detector has higher accuracy

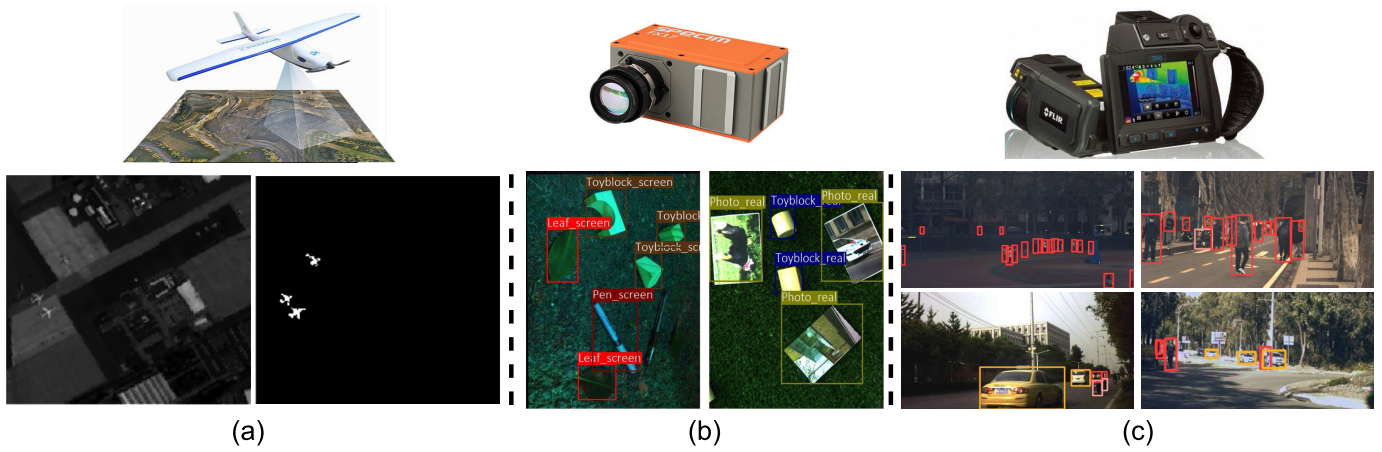


Fig. 2. Comparison of existing benchmarks and datasets. (a) Hyperspectral target detection dataset. (San Diego as an example) where targets are represented as pixel-level categories and annotations. (b) Example of HOD-1 dataset. The annotations are boxes and categories immediately adjacent to the edges of the objects. Its scene is constructed by posing objects. (c) Example of our HOD3K dataset with diverse scenes.

than the one-stage detector, the region proposal step in the detection process reduces the speed of object detection [29].

Several highly efficient one-stage object detectors have emerged to facilitate scene applications requiring high detection speed. One-stage detectors have found widespread use in industrial scenarios [30]. Feng et al. [31] have proposed task-aligned one-stage object detection (TOOD) to address the problem of conflicting classification and regression tasks by aligning them into unified parallel tasks. In recent years, anchor-free approaches have received considerable attention, and fully convolutional one-stage object detection (FCOS) [32] has proposed replacing the anchored frames with anchored points for object detection. To enable end-to-end object detection, Carion et al. [33] have proposed end-to-end object detection with transformers (DETR), which uses learnable queries to detect objects.

B. Intelligent Interpretation of HSI

With the advent of sensor technology, hyperspectral imaging has emerged as a key area of interest for numerous researchers [34], [35], [36], [37]. Hyperspectral data capture objects or scenes across a broad range of wavelengths in the electromagnetic spectrum. Compared to conventional color images, hyperspectral data can provide more detailed and accurate information [38], [39], [40]. Intuitively, RGB images are composed of three channels. In contrast, HSIs usually consist of numerous channels or bands (B). Images containing more than ten bands are generally classified, while images with more than three but fewer than ten bands are considered multispectral images [41]. Compared with RGB images, HSIs contain many bands, with each pixel containing a representative feature of the captured substance. Its finds widespread use in applications such as crop monitoring [42], target tracking [43], military surveillance [44], and many others.

1) *Dataset*: In recent years, several hyperspectral datasets have been proposed for target detection, such as Muufl Gulfport, Nuance Cri, and San Diego, mainly consisting of a single remote sensing image [46], [47], [48]. Fang et al. [45] annotated an instance segmentation dataset consisting of 56 HSIs to

address the gap in hyperspectral data. Yan et al. [18] created a dataset for camouflage object detection by constructing scenes with posed objects, leveraging the ability to analyze the physics using hyperspectral spectral dimensional feature information. However, these datasets are restricted in size and scene diversity [49], [50]. To address this issue, we propose a new hyperspectral object detection dataset, namely HOD3K, with annotations in practical application to meet the requirements of various practical applications. Example images from the HOD3K dataset and existing representative datasets (San Diego and HOD-1) are shown in Fig. 2. As shown in Table I, our proposed dataset is distinct from others in that it contains ten times more images and annotations than the most prominent existing hyperspectral dataset (HOD-1) and includes diverse scenes such as campuses, roads, and living areas. The HOD3K dataset is explicitly designed for object detection in HSIs, making it a valuable resource for studying detection in large-scale scenes. A detailed comparison of the HOD3K dataset with other related datasets for object detection is presented in Table I.

2) *Hyperspectral Detection*: Hyperspectral imaging captures rich image feature information employing dozens of contiguous spectral bands. However, the information redundancy between adjacent spectral bands increases the computational cost, making it challenging to leverage HSIs on a large scale, especially with equipment limitations. To eliminate redundant information in HSIs, Wang et al. [51] mapped the bands into subspaces and selected a combination of bands with more information, less correlation, and better category differentiability. Chen et al. [52] utilized PCA to extract the representative features of hyperspectral data. However, due to the limitation of sensors, the available HSI dataset could be more robust. Thus, research on HSI intelligence interpretation has mainly focused on image classification and semantic segmentation, with less research on object detection.

Existing methods for hyperspectral target detection mainly rely on pixel-level spectral information or simple correlation information between neighboring pixels. For instance, Chang [12] proposed a statistical distribution model that detects anomalous pixels by comparing them with the center

TABLE I

COMPARISON OF EXISTING DATASETS. WHERE THE MARK IS PIXEL-LEVEL CLASSIFICATION AND ANNOTATION, THE RESOLUTION IS THE MAXIMUM RESOLUTION OF THE VIDEO/IMAGE CONTAINED IN THE DATASET, AND HBB DENOTES THE HORIZONTAL BOUNDING BOX. PLACE INDICATES A SCENE CONSTRUCTED BY PLACING OBJECTS, WHICH GENERALLY DOES NOT APPEAR IN REAL LIFE, AS SHOWN IN FIG. 2(B)

Hyperspectral datasets	Scene	Categories	Resolution	Bands	#Images	Annotations	Avg. #lables/images	Labeling method	Year
Mufl Gulfport	aerial	1	337×325	72	1	-	-	mark	-
Nuance Cri	aerial	1	400×400	46	1	-	-	mark	-
San Diego	aerial	1	400×400	224	1	3	3	mark	1998
HS-ISD [45]	aerial	1	301×298	48	56	1085	19.37	mark	2023
HOD-1 [18]	place	8	467×336	96	454	1657	3.65	HBB	2021
HOD3K	natural	3	512×256	16	3242	15149	4.37	HBB	2023

of the background distribution. This method assumes that the background follows a multivariate normal distribution and can detect possible objects in the region of anomalous pixels. Similarly, the subspace model involves designing a linear filter that minimizes the output energy while satisfying the constraint equations [53].

To leverage in-depth information from HSIs using deep learning, Yu et al. [54] proposed a CNN-based object detector that integrates HSIs into existing object detection models using 3-D convolutional layers. However, The aforementioned methods ignore the rich contextual semantic complementary information in the spectral and spatial dimension information. To address these limitations, we propose a HID module that decouples hyperspectral data from a spectral and spatial perspective and a two-stream network to interact with spectral and spatial dimensional information. Thus, we aim to aggregate the rich contextual semantic information in the spatial dimension with the spectral dimension information.

III. HOD3K DATESET

Hyperspectral imaging has been extensively utilized in remote sensing applications for many years, typically satellite sensors. However, recent advancements in sensor technology have facilitated the acquisition of hyperspectral data from natural scenes to a considerable extent. The hyperspectral object detection dataset, HOD-1, introduced by Yan et al. [18], has played a crucial role in detecting camouflaged objects by providing 454 HSIs captured in 96 spectral bands, featuring 1657 annotations. However, the limitations of the dataset size and single scene availability pose significant challenges to developing large-scale hyperspectral object detection datasets for natural scenes.

To promote the development of hyperspectral data, we have developed the HOD3K dataset, inspired by [55]. We have transformed HSIs into pseudo-color images and annotated them using Labelme [56]. The HOD3K dataset includes 3242 HSIs of natural scenes acquired using an XIMEA snapshot vision (VIS) camera. Each HSI contains 512×256 pixels with 16 bands arranged in a mosaic pattern spanning the range of 470–620 nm. The dataset includes various scenarios, such as urban roads and campuses, presenting challenges like occlusion, small objects, and scale changes. We have provided finely annotated bounding boxes for all objects belonging to the three categories: people, cars, and bikes, resulting in a total of 15 149 objects, with an average of 4.67 objects per image. Specifically, the dataset comprises 12 144 people, 817 cars, and 2188 bikes. Table II shows

TABLE II

DISTRIBUTION OF ANNOTATED BOUNDING BOXES BY CATEGORY IN THE HOD3K DATASET

Dataset	Annotation	People	Car	Bike	All
HOD3K	Number	12,144	817	2,188	15,149
	Ratio	80.2%	14.4%	5.4%	100%

the distribution of the number of tags in each category. The availability of the dataset provides researchers with a more extensive and diverse set of natural scene images and presents new challenges for developing and evaluating object detection algorithms. Moreover, we use pseudo-color images for refined annotation, allowing researchers to develop and test new techniques to advance the field of hyperspectral detection further.

IV. PROPOSED METHOD

In this section, we present an overview of the proposed method. Subsequently, we shall expound upon the intricate workings of the HID module, SSA module, the two-stream network, and the detector. Finally, we elucidate the construction of the loss function.

A. Framework Overview

Fig. 3 shows the overall architecture of our novel object detection detector, named S2ADet, which leverages the rich spectral and spatial information in HSIs. To this end, we employ a feature pyramid network (FPN) [57] and detector head inspired by the one-stage object detector [30]. For the sake of brevity, we omit the FPN and detector head from the figure.

First, the problem of redundant hyperspectral information is solved by band selection and PCA, which decouples hyperspectral information into SE information and SA information. Then, we introduce a two-stream backbone network that utilizes a recursive structure to extract the features of the aggregated images. The network comprises five stages, with the features of the SA information in each stage denoted as $a^1, a^2, \dots, a^5$, and the features of the SE information in each stage denoted as $e^1, e^2, \dots, e^5$. The two-stream backbone is illustrated at the bottom of Fig. 3, and the structure of the first three layers of the feature extraction network is described as follows:

$$a^{i+1} = \text{Stage}_i(a^i), \quad e^{i+1} = \text{Stage}_i(e^i) \quad (1)$$

where Stage_i is the feature extraction of the i th stage. And then, to effectively integrate both the spectral and spatial

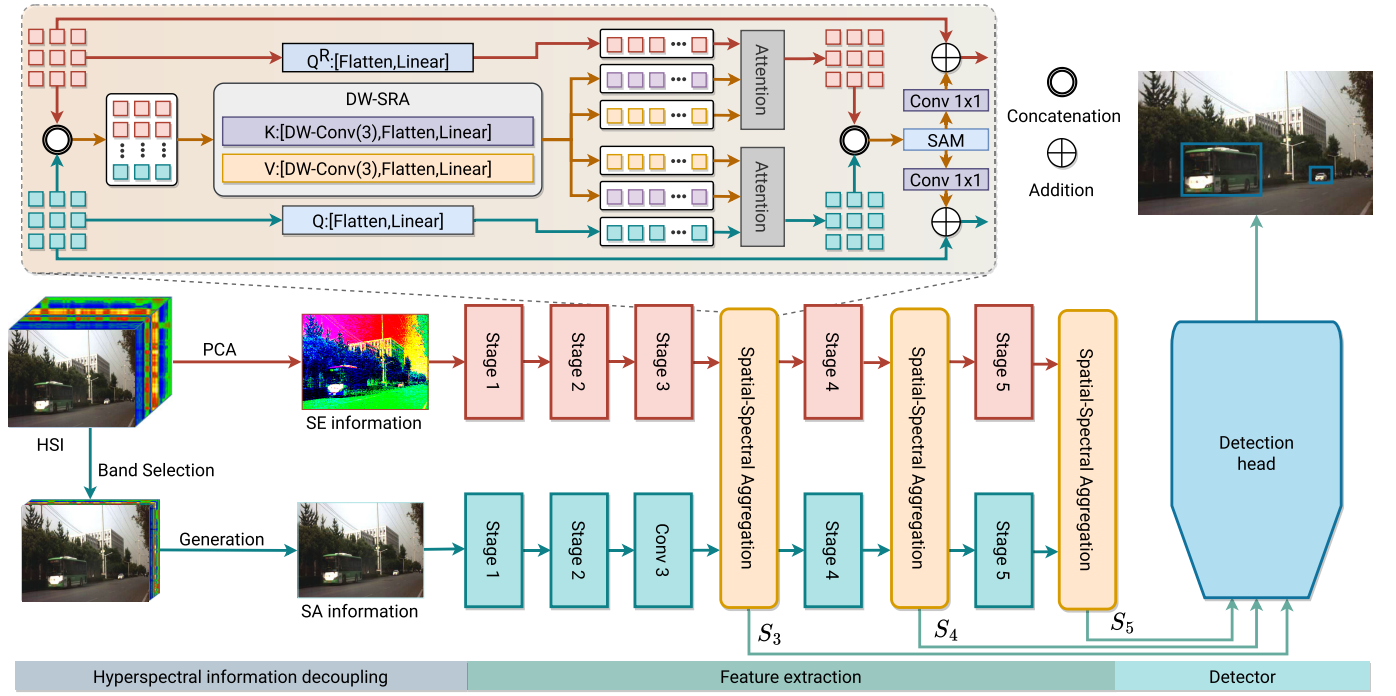


Fig. 3. Structure of S2ADet. It contains a HID module, a two-stream network, a SSA module, and a one-stage detection head. The HID module is used to remove redundant information. We designed a two-stream feature extraction network embedded with SSA modules for interacting with the spectral and spatial dimensional features of HSIs.

information from the HSI, we introduce a SSA module to facilitate interactions between spectral and spatial features. The SSA module is inserted into the last three layers of a two-stream network and operates on a tensor containing both spectral and spatial features. The module outputs two tensors, one for aggregated spectral information and another for aggregated spatial information. Specifically, we use a stagewise approach, where the aggregated information is added to the feature maps in each stage. The equation represents it

$$\begin{aligned} \begin{bmatrix} a_T^i \\ e_T^i \end{bmatrix} &= \text{SSA} \left(\begin{bmatrix} a^i \\ e^i \end{bmatrix} \right) \\ \begin{bmatrix} a^{i+1} \\ e^{i+1} \end{bmatrix} &= \text{Stage}_i \left(\begin{bmatrix} a^i \\ e^i \end{bmatrix} + \begin{bmatrix} a_T^i \\ e_T^i \end{bmatrix} \right) \end{aligned} \quad (2)$$

where a^i and e^i denote the spectral and spatial feature maps at stage i , respectively. The output of the SSA module, denoted as a_T^i and e_T^i , is concatenated to the input feature maps before being passed to the next stage. Then, the resulting features are subsequently fed into the detection head. This operation is mathematically represented as

$$S_i = \text{Add}(\tilde{a}^i, \tilde{e}^i) \quad (3)$$

where S_3 , S_4 , and S_5 are the resulting features utilized as input to the object detector module. After passing through the object detector, the final detection result is obtained.

B. Hyperspectral Information Decoupling

Hyperspectral imaging instruments demonstrate variability in capturing spectral bands, leading to high information redundancy within HSIs. Hence, the direct processing of HSIs using the detector (H) limits the detector's performance. To overcome this challenge, we decouple the HSI from spectral and

spatial perspectives and process the raw data by an HID module, as shown in Fig. 3. This process can be expressed as follows:

$$a = \text{SpatialFilter}(H), \quad e = \text{SpectralFilter}(H). \quad (4)$$

1) *Spatial Aggregated Information*: Hyperspectral imaging is characterized by a high correlation between adjacent spectral bands, leading to significant spatial data redundancy. To reduce the redundancy between hyperspectral bands, we introduce a parameter-free method known as optimal neighborhood reconstruction (ONR) [51] is employed to select the most informative spectral bands from the hyperspectral data. This band selection step creates a spatial dimension aggregation image that preserves the most relevant spectral information. Furthermore, to further refine the spatial information, we employ a technique known as color mapping to generate SA information (a).

2) *Spectral Aggregated Information*: The HSI contains more than ten times the number of bands in natural images, leading to a considerable reduction in the object detection speed. To address this challenge posed by the redundancy of spectral data in HSIs, we have utilized PCA [58] for compressing these images based on their spectral dimensions. Through dimensionality reduction, we obtained SE information (e).

C. Spectral–Spatial Aggregation Module

After creating the HID module, the SE and SA information can be acquired. In order to extract the features of the interacted images in both spectral and spatial dimensions, we have designed a two-stream network. As shown in the top of Fig. 3, the network performs feature extraction from

the SE and SA information, combining attention operations to form the SSA module.

The input $a^i \in \mathbb{R}^{n \times d}$ is the feature input from the SA information, while $e^i \in \mathbb{R}^{n \times d}$ denotes the SE information. Here, n denotes the number of patches, which is equal to the product of the height (h) and width (w) of the image, and d denotes the dimension of the features. First, to achieve contextual information aggregation of spectral-spatial image features, we concatenate together two image features as follows:

$$f^i = \text{Concat}(a^i, e^i). \quad (5)$$

Then, f^i as the common $f^i W_K \in \mathbb{R}^{n \times d_k \times 2}$ and $f^i W_V \in \mathbb{R}^{n \times d_v \times 2}$, a^i as $a^i W_Q \in \mathbb{R}^{n \times d_v}$, and e^i as $e^i W_Q \in \mathbb{R}^{n \times d_v}$, and feed into the separate transformer modules. Since calculating attention directly through hyperspectral features would entail high computational effort, we use spatial reduction attention [59] to reduce the dimension of the key and value

$$\begin{aligned} f^i \tilde{W}_K &= \text{DWConv}(f^i W_K) \in \mathbb{R}^{\frac{n}{r^2} \times d_k \times 2} \\ f^i \tilde{W}_V &= \text{DWConv}(f^i W_V) \in \mathbb{R}^{\frac{n}{r^2} \times d_k \times 2} \end{aligned} \quad (6)$$

where r is the spatial reduction rate of the SRA. Then, $a^i W_Q$, $e^i W_Q$, $f^i \tilde{W}_K$, and $f^i \tilde{W}_V$ are put into the attention block separately to calculate

$$\begin{aligned} \text{Attn}_1(a^i W_Q, f^i \tilde{W}_K, f^i \tilde{W}_V) &= \text{Softmax}\left(\frac{\text{att}(a^i, f^i)}{\sqrt{d_k}}\right) f^i \tilde{W}_V \\ \text{Attn}_2(e^i W_Q, f^i \tilde{W}_K, f^i \tilde{W}_V) &= \text{Softmax}\left(\frac{\text{att}(e^i, f^i)}{\sqrt{d_k}}\right) f^i \tilde{W}_V \end{aligned} \quad (7)$$

where $\text{att}(x, y) = (x W_Q)(y W_K)^T$. Then, the FFN layer is sent to add nonlinear transformations. The overall architecture after transformers is expressed formally as

$$\begin{aligned} \begin{bmatrix} \tilde{a}^i \\ \tilde{e}^i \end{bmatrix} &= \begin{bmatrix} a^i \\ e^i \end{bmatrix} + \text{Att}\left(\begin{bmatrix} a^i \\ e^i \end{bmatrix}\right) \\ \begin{bmatrix} \tilde{a}^i \\ \tilde{e}^i \end{bmatrix} &= \begin{bmatrix} \tilde{a}^i \\ \tilde{e}^i \end{bmatrix} + \text{FFN}\left(\begin{bmatrix} \tilde{a}^i \\ \tilde{e}^i \end{bmatrix}\right). \end{aligned} \quad (8)$$

We coupled interactive hyperspectral information by leveraging transformer global and dynamic modeling capabilities. Hence, this process ultimately aggregates contextual information based on spectral-spatial dimensions.

1) *Spectral Attention Module*: In order to interact with the information of spectral dimensions, we further used the SAM module [60] to calculate the channel attention (shown in Fig. 4), and the module can be formulated as

$$\begin{aligned} \tilde{f}^i &= \text{Concat}(\tilde{a}^i, \tilde{e}^i) \\ \tilde{f}_c^i &= M_c(\tilde{f}^i) \otimes \tilde{f}^i \\ \tilde{f}_s^i &= M_s(\tilde{f}_c^i) \otimes \tilde{f}_c^i \end{aligned} \quad (9)$$

where $M_c(\cdot)$ is the channel attention map, $M_s(\cdot)$ is the spatial attention map, and $\otimes$ stands for elementwise multiplication. Then, we mapped them into the respective feature extraction networks by 1×1 convolution, aligning the number of feature extraction network channels and continuing the extraction operation

$$a_T^i = \text{Conv}_{1 \times 1}(\tilde{f}_s^i), \quad e_T^i = \text{Conv}_{1 \times 1}(\tilde{f}_c^i) \quad (10)$$

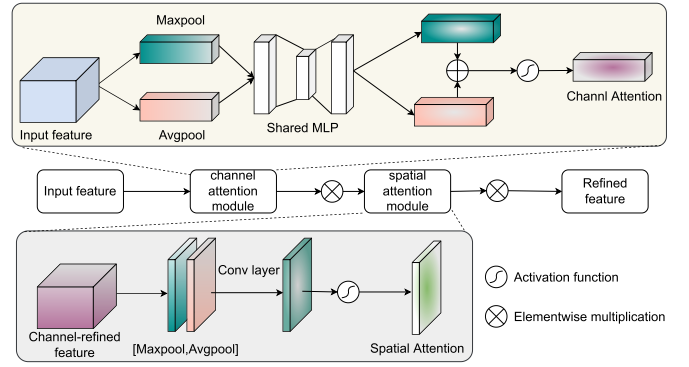


Fig. 4. Illustration of SAM module. The SAM module comprises a channel attention module and a spatial attention module.

where $\tilde{f}^i \in \mathbb{R}^{n \times d \times 2}$, $a_T^i, e_T^i \in \mathbb{R}^{n \times d}$. Through this operation, the spectral and spatial information of the HSI is aggregation.

2) *Loss Function*: For the task of HSI object detection, the multitask loss function is defined as follows during training:

$$L = L_{\text{cls}} + L_{\text{box}} \quad (11)$$

where L_{cls} is the classification loss and L_{box} is the bounding-box loss. The decouples box and class prediction differ from common practice when applied to object detection. Several experimental results from previous work have proved that the loss function is the key to good object detection results. Our subsequent experiments show that this loss function applies to hyperspectral object detection.

V. EXPERIMENTS

In this section, we present our experimental settings, ablation study, extensive results with in-depth analysis, and comparisons with competing methods in detail.

A. Experimental Setting

1) *Implementation Details*: We used DarkNet-FPN as the two-stream backbone network, and the pretrained DarkNet-50 was used for initialization. We conducted comprehensive experiments on two datasets to demonstrate the effectiveness of our proposed method. All experiments trained 50 epochs. We use a mosaic of data enhancement techniques. For a fair comparison, all experiments were trained and tested on a single NVIDIA RTX 3090, using an SGD optimizer with a learning rate of 0.01. The poly learning scheme is adopted so that the learning rate is adjusted as $(1 - (\text{epoch}/\text{max_epoch}))^{\text{power}} \times lr$, where power = 0.9. The threshold for nonmaximum suppression (NMS) IoU in testing was 0.6.

2) *Evaluation Metrics*: We evaluate S2ADet on the two datasets using the average precision (AP) evaluation metric. According to the IoU threshold (i.e., 0.50:0.95, 0.50, and 0.75), AP makes a finer division of the evaluation metrics.

B. Datasets and Evaluation Metrics

In our experiments, we use two hyperspectral object detection benchmark datasets. The detailed information is listed as follows.

TABLE III
COMPARISON TO METHODS ON HOD3K DATASET WITH RESOLUTION AT 512×256 . SA DENOTES THE IMAGE OF SPECTRAL AGGREGATED INFORMATION, AND SE DENOTES THE IMAGE OF SPECTRAL AGGREGATED INFORMATION

Detectors	Backbone	Type	people	bike	car	mAP50	mAP	FLOPs	Param.	Input
Faster RCNN [28]	ResNet50	two-stage	81.8	94.5	91.7	89.4	56.9	206.68	41.14M	SA
Libra RCNN [61]	ResNet50	two-stage	83.6	95.0	90.8	89.8	56.6	207.73	41.40M	SA
FCOS [32]	ResNet50	one-stage	55.0	19.7	69.8	48.2	23.7	196.81	31.84M	SA
YOLOF [62]	ResNet50	one-stage	60.8	67.8	67.6	65.4	28.6	98.23	42.13M	SA
Deformable DETR [63]	ResNet50	one-stage	52.8	56.3	64.9	58.0	22.3	195.23	39.82M	SA
Retinanet [64]	ResNet50	one-stage	85.6	94.8	92.6	91.2	53.3	205.69	36.17M	SA
TOOD [31]	ResNet50	one-stage	85.1	87.0	89.6	87.2	55.4	180.66	31.80M	SA
YOLOv5	DarkNet53	one-stage	79.3	94.0	91.2	88.1	54.4	48.30	20.88M	SA
YOLOv5†	DarkNet53	one-stage	83.6	96.4	95.2	91.7	56.3	89.72	35.49M	SA + SE
S2ADet*	S2ANet	one-stage	83.8	94.3	92.7	90.3	55.5	169.20	48.64M	SA + SA
S2ADet(Ours)	S2ANet	one-stage	87.2	97.7	95.3	93.4	59.8	169.20	48.64M	SA + SE

TABLE IV
COMPARISON TO METHODS ON HOD-1 DATASET. THE SCREEN IS DENOTED AS S, AND REAL IS DENOTED AS R. HSI IS DENOTED AS THE HYPERSPECTRAL IMAGE

Detectors	Backbone	toyblock S	photo S	pen S	photo R	toyblock R	pen R	leaf S	leaf R	mAP
FCOS [32]	ResNet50	-	-	-	-	-	-	-	-	80.9
Double-Head RCNN [65]	ResNet50	-	-	-	-	-	-	-	-	81.2
FoveaBox [66]	ResNet50	-	-	-	-	-	-	-	-	80.2
YOLOv5	DarkNet53	82.4	80.3	34.0	97.7	97.6	76.9	81.1	93.3	80.4
YOLOv5	DarkNet53	81.6	83.0	33.3	98.6	97.3	77.0	79.6	94.7	80.7
HOD-1 [18]	VGG16	-	-	-	-	-	-	-	-	83.5
S2ADet (Ours)	DarkNet53	83.1	88.3	51.5	98.4	98.0	91.2	83.3	98.7	86.6

1) *HOD3K*: The HOD3K dataset consists of 16 bands and includes various natural scenes. In constructing the dataset partitioning protocol, we considered two primary factors. First, we ensured that the distribution of objects within each category was consistent across all sets (training, validation, and test). Second, we randomly selected images from different scenes to create a ratio of 7:1:2 for the training, validation, and test sets, respectively. Subsequently, we obtained segmented training, validation, and test sets. We trained the methods on the training set for all experiments and evaluated them on the test set.

2) *HOD-1*: The HOD-1 dataset is a recently introduced hyperspectral object detection dataset comprising 1657 HSIs, categorized into eight distinct categories, with a band count of 96. The dataset generates an object detection scene by strategically placing objects, which are then captured using a hyperspectral camera. The dataset also features a camouflaged scene, created by initially photographing the real scene with an iPadAir camera and then capturing the image on the iPadAir screen using the hyperspectral camera. Thus, both the real and camouflaged images are available for analysis.

3) *Evaluation Metrics*: We employ the standard metric of mean average precision (mAP) to assess the accuracy of multi-spectral object detection. For mAP calculations, an intersection over union (IoU) threshold of 0.5 is utilized to determine true positives (TP) and false positives (FP).

C. Comparative Methods

1) *Performance on HOD3K Dataset*: We compared our proposed S2ADet method with state-of-the-art advanced object detection methods, including faster RCNN [28], FCOS [32], deformable DETR [63], YOLOF [62], YOLOv5, TOOD [31],

and Libra RCNN [61], which mainly focus on local features. In contrast, our method captures rich global semantic relational information, which enables it to outperform these six methods. The experimental results are presented in Table III. Specifically, our method captures rich spectral and spatial semantic relationship information, which makes it superior to the aforementioned methods.

Compared to the state-of-the-art method, our S2ADet method improves 2.9% mAP over faster RCNN, which currently holds the best performance in mAP. Moreover, compared to the one-stage object detection method, our method achieves a 3.5% mAP improvement over the current best method. In addition, when compared to the highest accuracy in each category of the compared methods, our S2ADet method achieves the highest detection accuracy across all three categories. Specifically, comparing the state-of-the-art algorithm YOLOv5† with mAP50, our method improves the accuracy of detecting people, bikes, and cars by 3.6% mAP, 1.3% mAP, and 0.1% mAP, respectively. These results further confirm the effectiveness of our proposed method.

2) *Performance on HOD-1 Dataset*: We conducted a series of comparative experiments using the HOD-1 dataset [18] to assess the efficacy of our proposed methodology rigorously. We compared four other state-of-the-art methods, specifically FCOS [32], double-head R-CNN, FoveaBox, and HOD-1. A summary of the results can be found in Table IV. Notably, our proposed method surpasses the current leading technique (HOD-1) by achieving a 3.1% mAP improvement in mAP. It is essential to mention that the input data size for our method is merely one-sixteenth of that of HOD-1. Nevertheless, our method still attains a higher mAP than the modified algorithm.

TABLE V

ABLATION STUDY OF DIFFERENT INPUTS IN SPECTRAL AND SPATIAL AGGREGATED INFORMATION ON HOD3K DATASET. THE BASELINE IS YOLOV5. SA IS THE IMAGE OF SPECTRAL AGGREGATED INFORMATION, AND SE IS THE IMAGE OF SPATIAL AGGREGATED INFORMATION. G INDICATES GENERATION

Detectors	Input	Bands	people	bike	car	mAP50	mAP
Baseline	SA w/o G	3	3.69	71.4	66.0	47.0	34.7
	SE	3	75.0	67.8	90.8	77.9	45.2
	SA	3	79.3	94.0	91.2	88.1	54.4
S2ADet	SA w/o G + SA w/o G	6	2.01	76.2	55.7	44.6	40.4
	SA + SA	6	83.3	91.7	90.1	88.3	57.2
	SA + SE	6	87.2	97.7	95.3	93.4	59.8

This result underscores the effectiveness of our meticulously designed HID module tailored explicitly for HSIs.

Furthermore, our proposed method, S2ADet, achieves good results in each category, particularly on photo screen, pen screen, and pen real, with performance improvements of 5.3% mAP, 18.2% mAP, and 14.2% mAP, respectively. These comprehensive experiments on two datasets demonstrate the robustness and effectiveness of our approach.

D. Ablation Studies

1) *Effectiveness of Different Input*: We performed a comprehensive ablation study on S2ADet to assess the impact of various input images on detection performance, as presented in Table V. The YOLOv5 single-stream model served as the baseline. Before input, we obtained three images by decoupling hyperspectral information: SE information, pre-generation SA information, and postgeneration SA information.

To evaluate the efficacy of decoupling, we fed the three aggregated images into the baseline model as input. The results indicate that the postgeneration spatial aggregation image produced the best outcomes, followed by the SE information. Notably, the SA information demonstrated a 41.1% improvement in mAP50 after generation, surpassing the SE information. The result suggests that the generation process significantly impacts the processing of spatial aggregation information. Furthermore, to validate the complementarity of spectral and spatial aggregated information, we employed different combinations of aggregated information as input to S2ADet. The results demonstrate that the combination of spectral and spatial information yielded the best performance, with a 2.6% mAP advantage over S2Det, which exclusively uses SA information as input. These findings further confirm the effectiveness of our generated spectral and SA information.

2) *Effectiveness of Hyperspectral Information Decoupling*: The objective of the HID module is to perform decoupling-based aggregation of spectral and spatial information in the HSI. To demonstrate the effectiveness of the HID module in S2ADet, we present a breakdown of the benefits of each internal component in Table VI.

The results demonstrate that the standalone HID module surpasses the baseline performance by a margin of 1.9% mAP. Furthermore, the synergistic combination of the HID and SSA modules contributes to a substantial improvement of 4.9% mAP in the S2ADet performance. This indicates that when employed concurrently, the HID and SSA modules

TABLE VI

ABLATION STUDY OF THE HID MODULE ON HOD3K DATASET

Detectors	Input	Bands	HID	SSA	mAP
Baseline	SA	3	—	—	54.4
Baseline + HID	SA + SE	6	✓	—	56.3
Baseline + SSA S2ADet	SA	3	—	✓	54.9
	SA + SE	6	✓	✓	59.8

TABLE VII

ABLATION STUDY OF THE SSA MODULE IN ON HOD3K DATASET

Detectors	Input	Bands	SSA	SAM	mAP
Baseline	SA	3	—	—	54.4
S2ADet	SA + SE	6	—	—	56.3
	SA + SE	6	—	✓	57.1
	SA + SE	6	✓	—	58.9
	SA + SE	6	✓	✓	59.8

exhibit a complementary effect, augmenting the detector's overall efficacy. Our comprehensive experimental evaluation reveals that each constituent of the two modules enhances the HOD3K dataset performance.

3) *Effectiveness of Spectral-Spatial Aggregation Module*: The objective of the SSA module in S2ADet is to aggregate spectral and spatial information in the HSI. To assess the effectiveness of the SSA module, we present an analysis of the benefits of each internal component in Table VII.

The results indicate that the SSA module alone outperforms SAM by 1.8% mAP. Moreover, the SSA module without SAM achieves a 2.6% mAP improvement, indicating that detection performance can be enhanced by utilizing complementary information from spectral and spatial data. By employing SSA, S2ADet can achieve a 3.5% mAP performance improvement. Hence, the SSA and SAM modules can complement each other to enhance detection performance further. Our combined experiments demonstrate that the benefits of each component of the two combinations consistently improve the detection of HOD3K.

E. Qualitative Analysis

We conducted a thorough qualitative evaluation of the S2ADet algorithm on the HOD3K dataset, comparing its performance with that of the baseline model and S2ADet. We selected various scenarios to provide a comprehensive analysis, as shown in Fig. 5. The first column displays



Fig. 5. Qualitative analysis of S2ADet on HOD3K. The first column in (a) and (b) shows the baseline performance, and the second column shows the performance of S2ADet. (a) Baseline model treats some redundant background information as objects. (b) S2ADet can mitigate the omission problem of the baseline model. For the analysis, we transformed the HSI into pseudo-color images for display.



Fig. 6. Visualize some object detection results. The categories of people, bikes, and cars are represented by blue, yellow, and red boxes, respectively. We transformed the HSIs into pseudo-color images for display.

the results of the baseline model, while the second column presents the performance of S2ADet.

Fig. 5(a) demonstrates that S2ADet can detect objects even in the presence of occlusion by utilizing contextual information. In contrast, the baseline model struggles to identify the objects due to occlusion. In addition, S2ADet effectively learns to differentiate between objects possessing similar features that could be easily mistaken for one another by extracting and combining spectral and spatially aggregated data, resulting in the precise identification of each object within the HSI.

Moreover, Fig. 5(b) shows that S2ADet accurately distinguishes between object and background categories based on the spectral aggregated information of the objects, mitigating the issue of small object misclassification that the baseline model encounters. The results demonstrate the effectiveness of the S2ADet algorithm in detecting objects in challenging natural scene environments.

The results of our qualitative evaluation indicate that the S2ADet algorithm outperforms the baseline model in detecting objects in natural scenes. By utilizing both spectral and spatial aggregated information and contextual information, S2ADet effectively addresses the limitations of the baseline model, resulting in improved object detection accuracy.

F. Discussion and Visualization

To further demonstrate the effectiveness of the S2ADet algorithm, we present additional detection results on the HOD3K dataset in Fig. 6. The detection results showcase the algorithm's capability to accurately identify and localize objects in various natural scene environments, such as urban roads and campuses.

The high accuracy of S2ADet is evident from the clear and precise bounding boxes that accurately encompass each object. These results substantiate the efficacy of the proposed approach in hyperspectral and provide visual evidence of the algorithm's effectiveness in detecting objects in challenging natural scene environments. The visualization results demonstrate the superior performance of S2ADet over the baseline model, reinforcing the importance of considering spectral and spatial aggregated data and contextual information for object detection in the HSI. Overall, the promising performance of S2ADet on the HOD3K dataset highlights its potential to advance the object detection field in the HSI and opens up new avenues for future research.

Furthermore, we showed the classification confusion matrix for both datasets. As shown in Fig. 7(a), on the HOD-3K dataset, the pen-screen category tends to be misclassified as a background category due to the small target size of people, resulting in a classification accuracy of only 0.86. Conversely, the pen-screen category on the HOD-1 dataset exhibits an accuracy of merely 0.31, as shown in Fig. 7(b), with the majority being classified into the background category. Consequently, the algorithm warrants further improvement in the realm of fine-grained classification.

G. Limitations

Although the proposed S2ADet has made significant advances in hyperspectral object detection, addressing

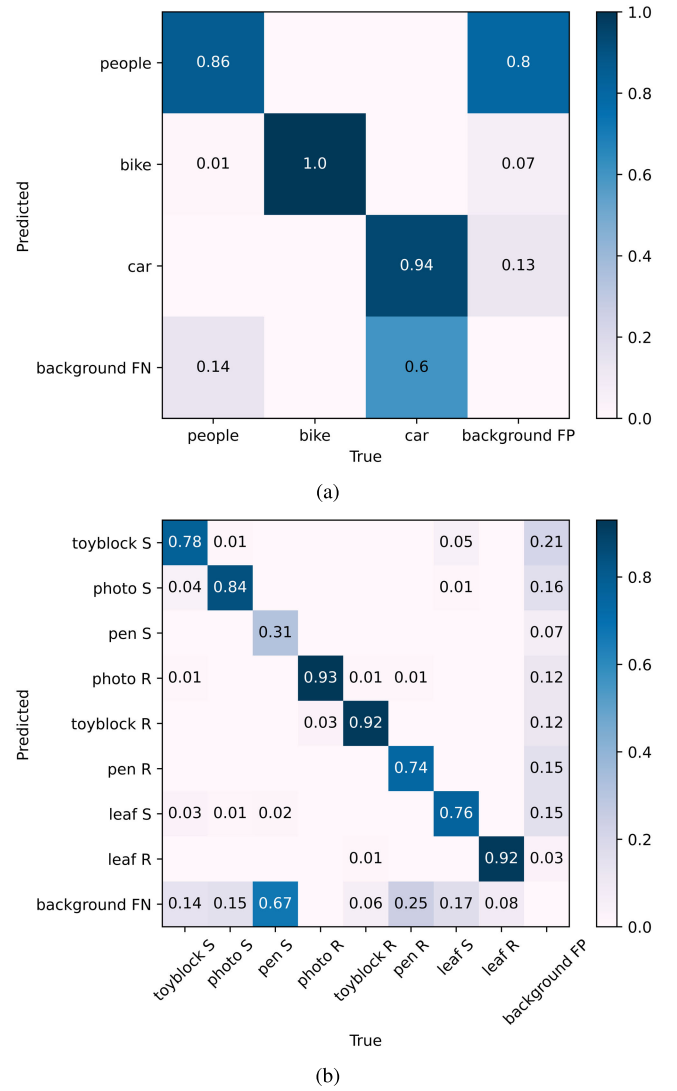


Fig. 7. Illustration of the classification confusion matrix. (a) HOD3K dataset. (b) HOD-1 dataset.

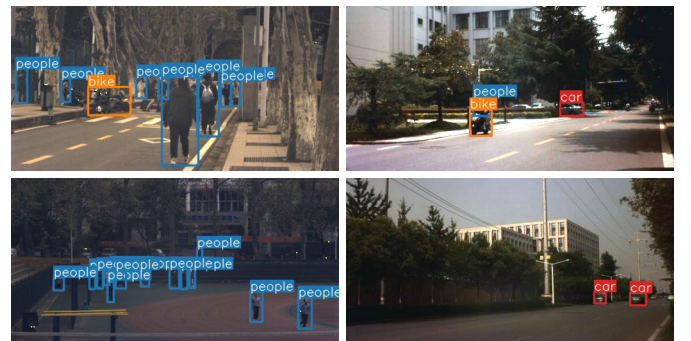


Fig. 8. Visualize some shortcoming detection results.

specific challenges remains crucial for further performance enhancement. Fig. 8 shows representative failure instances from the HOD-3K dataset, where prediction errors and missed detections by S2ADet are apparent. Notably, S2ADet is challenging to predict overlapping target regions and manage small objects.

Nevertheless, the S2ADet algorithm achieved a classification accuracy exceeding 0.9 for most categories.

The advancements delineated in Sections III and IV attest to the proposed S2ANet's proficiency in effectively tackling the most exigent scenarios, surpassing state-of-the-art methods in hyperspectral object detection tasks.

VI. CONCLUSION

In this article, we propose a novel object detector S2ADet for the HSI. The proposed framework reduces hyperspectral redundancy and aggregates spectral and spatial information utilizing an HID module. A two-stream feature extraction network is then used to extract spectral and spatial features, and an SSA module is embedded in the network to mine the complementary information of spectral and spatial features using global sensory attention. Comprehensive experimental analysis verifies the effectiveness of the proposed framework and its internal modules. Our approach achieves state-of-the-art performance on two hyperspectral object detection datasets compared to other methods. The comprehensiveness of our proposed datasets and the robust applicability of our method allow our work to contribute significantly to the development of hyperspectral object detection. Moreover, we present a large-scale object detection dataset of 3242 HSIs from multiple scenes. This dataset addresses the limitations of a single scene and small volume data in existing hyperspectral object detection datasets, thus facilitating the development of object detection. The HOD3K dataset is expected to advance the development of reliable and accurate hyperspectral detection systems.

ACKNOWLEDGMENT

The authors gratefully acknowledge the support of NVIDIA Corporation with the donation of the Titan V GPU used for this research.

REFERENCES

- [1] G.-S. Xia et al., "DOTA: A large-scale dataset for object detection in aerial images," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit.*, Jun. 2018, pp. 3974–3983.
- [2] Y. Zhao, Y. Zhang, Z. Gong, and H. Zhu, "Scene representation in bird's-eye view from surrounding cameras with transformers," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. Workshops (CVPRW)*, Jun. 2022, pp. 4510–4518.
- [3] M. Zhang et al., "Dynamic context-sensitive filtering network for video salient object detection," in *Proc. IEEE/CVF Int. Conf. Comput. Vis. (ICCV)*, Oct. 2021, pp. 1533–1543.
- [4] Z.-Q. Zhao, P. Zheng, S.-T. Xu, and X. Wu, "Object detection with deep learning: A review," *IEEE Trans. Neural Netw. Learn. Syst.*, vol. 30, no. 11, pp. 3212–3232, Nov. 2019.
- [5] Y. Cai et al., "Mask-guided spectral-wise transformer for efficient hyperspectral image reconstruction," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2022, pp. 17481–17490.
- [6] S. Zhang, L. Wang, L. Zhang, and H. Huang, "Learning tensor low-rank prior for hyperspectral image reconstruction," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2021, pp. 12001–12010.
- [7] X. Miao, X. Yuan, Y. Pu, and V. Athitsos, "λ-net: Reconstruct hyperspectral images from a snapshot measurement," in *Proc. IEEE/CVF Int. Conf. Comput. Vis. (ICCV)*, Oct. 2019, pp. 4059–4069.
- [8] L. Mou, X. Lu, X. Li, and X. X. Zhu, "Nonlocal graph convolutional networks for hyperspectral image classification," *IEEE Trans. Geosci. Remote Sens.*, vol. 58, no. 12, pp. 8246–8257, Dec. 2020.
- [9] S. Hou, H. Shi, X. Cao, X. Zhang, and L. Jiao, "Hyperspectral imagery classification based on contrastive learning," *IEEE Trans. Geosci. Remote Sens.*, vol. 60, 2022, Art. no. 5521213.
- [10] D. Hong et al., "SpectralFormer: Rethinking hyperspectral image classification with transformers," *IEEE Trans. Geosci. Remote Sens.*, vol. 60, 2022, Art. no. 5518615.
- [11] X. Rui, X. Cao, Q. Xie, Z. Yue, Q. Zhao, and D. Meng, "Learning an explicit weighting scheme for adapting complex HSI noise," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2021, pp. 6735–6744.
- [12] C.-I. Chang, "An effective evaluation tool for hyperspectral target detection: 3D receiver operating characteristic curve analysis," *IEEE Trans. Geosci. Remote Sens.*, vol. 59, no. 6, pp. 5131–5153, Jun. 2021.
- [13] Y. Dong, W. Shi, B. Du, X. Hu, and L. Zhang, "Asymmetric weighted logistic metric learning for hyperspectral target detection," *IEEE Trans. Cybern.*, vol. 52, no. 10, pp. 11093–11106, Oct. 2022.
- [14] X. Shang et al., "Target-constrained interference-minimized band selection for hyperspectral target detection," *IEEE Trans. Geosci. Remote Sens.*, vol. 59, no. 7, pp. 6044–6064, Jul. 2021.
- [15] C.-I. Chang, "Hyperspectral anomaly detection: A dual theory of hyperspectral target detection," *IEEE Trans. Geosci. Remote Sens.*, vol. 60, 2022, Art. no. 5511720.
- [16] X. Sun, H. Zhang, F. Xu, Y. Zhu, and X. Fu, "Constrained-target band selection with subspace partition for hyperspectral target detection," *IEEE J. Sel. Topics Appl. Earth Observ. Remote Sens.*, vol. 14, pp. 9147–9161, 2021.
- [17] Y. Liu, G. Gao, and Y. Gu, "Tensor matched subspace detector for hyperspectral target detection," *IEEE Trans. Geosci. Remote Sens.*, vol. 55, no. 4, pp. 1967–1974, Apr. 2017.
- [18] L. Yan, M. Zhao, X. Wang, Y. Zhang, and J. Chen, "Object detection in hyperspectral images," *IEEE Signal Process. Lett.*, vol. 28, pp. 508–512, 2021.
- [19] A. L. Neuenschwander, M. M. Crawford, and M. J. Provan, "Mapping of coastal wetlands via hyperspectral aviris data," in *Proc. IEEE Int. Geosci. Remote Sensing. Symp.*, vol. 1, Jul. 1998, pp. 189–191.
- [20] R. G. Resmini, M. E. Kappas, W. S. Aldrich, J. C. Harsanyi, and M. Anderson, "Mineral mapping with HYperspectral digital imagery collection experiment (HYDICE) sensor data at Cuprite, Nevada, U.S.A.," *Int. J. Remote Sens.*, vol. 18, no. 7, pp. 1553–1570, May 1997.
- [21] P. Sun et al., "Scalability in perception for autonomous driving: Waymo open dataset," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2020, pp. 2446–2454.
- [22] V. Zavrtanik, M. Kristan, and D. Skocaj, "DRAEM—A discriminatively trained reconstruction embedding for surface anomaly detection," in *Proc. IEEE/CVF Int. Conf. Comput. Vis. (ICCV)*, Oct. 2021, pp. 8330–8339.
- [23] R. Girshick, "Fast R-CNN," in *Proc. IEEE Int. Conf. Comput. Vis. (ICCV)*, Dec. 2015, pp. 1440–1448.
- [24] K. He, G. Gkioxari, P. Dollár, and R. Girshick, "Mask R-CNN," in *Proc. IEEE Int. Conf. Comput. Vis. (ICCV)*, Oct. 2017, pp. 2961–2969.
- [25] Z. Zhang, X. Lu, G. Cao, Y. Yang, L. Jiao, and F. Liu, "ViT-YOLO: Transformer-based YOLO for object detection," in *Proc. IEEE/CVF Int. Conf. Comput. Vis. Workshops (ICCVW)*, Oct. 2021, pp. 2799–2808.
- [26] W. Liu et al., "SSD: Single shot multibox detector," in *Computer Vision—ECCV. Amsterdam, The Netherlands: Springer*, 2016, pp. 21–37.
- [27] R. Girshick, J. Donahue, T. Darrell, and J. Malik, "Rich feature hierarchies for accurate object detection and semantic segmentation," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit.*, Jun. 2014, pp. 580–587.
- [28] S. Ren, K. He, R. Girshick, and J. Sun, "Faster R-CNN: Towards real-time object detection with region proposal networks," in *Proc. Adv. Neural Inf. Process. Syst.*, vol. 28, 2015, pp. 1–9.
- [29] L. Liu et al., "Deep learning for generic object detection: A survey," *Int. J. Comput. Vis.*, vol. 128, no. 2, pp. 261–318, Feb. 2020.
- [30] J. Redmon and A. Farhadi, "YOLO9000: Better, faster, stronger," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jul. 2017, pp. 6517–6525.
- [31] C. Feng, Y. Zhong, Y. Gao, M. R. Scott, and W. Huang, "TOOD: Task-aligned one-stage object detection," in *Proc. IEEE/CVF Int. Conf. Comput. Vis. (ICCV)*, Oct. 2021, pp. 3490–3499.
- [32] Z. Tian, C. Shen, H. Chen, and T. He, "FCOS: Fully convolutional one-stage object detection," in *Proc. IEEE/CVF Int. Conf. Comput. Vis. (ICCV)*, Oct. 2019, pp. 9626–9635.
- [33] N. Carion, F. Massa, G. Synnaeve, N. Usunier, A. Kirillov, and S. Zagoruyko, "End-to-end object detection with transformers," in *Computer Vision—ECCV. Glasgow, U.K.: Springer*, 2020, pp. 213–229.
- [34] R. Hang, Z. Li, P. Ghamisi, D. Hong, G. Xia, and Q. Liu, "Classification of hyperspectral and LiDAR data using coupled CNNs," *IEEE Trans. Geosci. Remote Sens.*, vol. 58, no. 7, pp. 4939–4950, Jul. 2020.
- [35] J. Bai et al., "Class incremental learning with few-shots based on linear programming for hyperspectral image classification," *IEEE Trans. Cybern.*, vol. 52, no. 6, pp. 5474–5485, Jun. 2022.

- [36] S. Liu, Q. Shi, and L. Zhang, "Few-shot hyperspectral image classification with unknown classes using multitask deep learning," *IEEE Trans. Geosci. Remote Sens.*, vol. 59, no. 6, pp. 5085–5102, Jun. 2021.
- [37] D. Zhu, B. Du, and L. Zhang, "Binary-class collaborative representation for target detection in hyperspectral images," *IEEE Geosci. Remote Sens. Lett.*, vol. 16, no. 7, pp. 1100–1104, Jul. 2019.
- [38] A. Sellami and S. Tabbone, "Deep neural networks-based relevant latent representation learning for hyperspectral image classification," *Pattern Recognit.*, vol. 121, Jan. 2022, Art. no. 108224.
- [39] L. Wang, C. Sun, Y. Fu, M. H. Kim, and H. Huang, "Hyperspectral image reconstruction using a deep spatial-spectral prior," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2019, pp. 8024–8033.
- [40] Z. Li et al., "Lightweight remote sensing change detection with progressive feature aggregation and supervised attention," *IEEE Trans. Geosci. Remote Sens.*, vol. 61, 2023, Art. no. 5602812.
- [41] Q. Li, F. K. K. Wong, and T. Fung, "Mapping multi-layered mangroves from multispectral, hyperspectral, and LiDAR data," *Remote Sens. Environ.*, vol. 258, Jun. 2021, Art. no. 112403.
- [42] N. Farmonov et al., "Crop type classification by DESIS hyperspectral imagery and machine learning algorithms," *IEEE J. Sel. Topics Appl. Earth Observ. Remote Sens.*, vol. 16, pp. 1576–1588, 2023.
- [43] Z. Liu et al., "An anchor-free Siamese target tracking network for hyperspectral video," in *Proc. 11th Workshop Hyperspectral Imag. Signal Process., Evol. Remote Sens. (WHISPERS)*, Mar. 2021, pp. 1–5.
- [44] A. Koz, "Ground-based hyperspectral image surveillance systems for explosive detection: Part I—State of the art and challenges," *IEEE J. Sel. Topics Appl. Earth Observ. Remote Sens.*, vol. 12, no. 12, pp. 4746–4753, Dec. 2019.
- [45] L. Fang, Y. Jiang, Y. Yan, J. Yue, and Y. Deng, "Hyperspectral image instance segmentation using spectral-spatial feature pyramid network," *IEEE Trans. Geosci. Remote Sens.*, vol. 61, 2023, Art. no. 5502613.
- [46] A. Vali, S. Comai, and M. Matteucci, "Deep learning for land use and land cover classification based on hyperspectral and multispectral Earth observation data: A review," *Remote Sens.*, vol. 12, no. 15, p. 2495, Aug. 2020.
- [47] D. Hong, J. Chanussot, N. Yokoya, J. Kang, and X. X. Zhu, "Learning-shared cross-modality representation using multispectral-LiDAR and hyperspectral data," *IEEE Geosci. Remote Sens. Lett.*, vol. 17, no. 8, pp. 1470–1474, Aug. 2020.
- [48] L. Fang, Y. Yan, J. Yue, and Y. Deng, "Toward the vectorization of hyperspectral imagery," *IEEE Trans. Geosci. Remote Sens.*, vol. 61, 2023, Art. no. 5518214.
- [49] L. Wu, L. Fang, X. He, M. He, J. Ma, and Z. Zhong, "Querying labeled for unlabeled: Cross-image semantic consistency guided semi-supervised semantic segmentation," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 45, no. 7, pp. 8827–8844, Jul. 2022.
- [50] S. Li, W. Song, L. Fang, Y. Chen, P. Ghamisi, and J. A. Benediktsson, "Deep learning for hyperspectral image classification: An overview," *IEEE Trans. Geosci. Remote Sens.*, vol. 57, no. 9, pp. 6690–6709, Sep. 2019.
- [51] Q. Wang, F. Zhang, and X. Li, "Hyperspectral band selection via optimal neighborhood reconstruction," *IEEE Trans. Geosci. Remote Sens.*, vol. 58, no. 12, pp. 8465–8476, Dec. 2020.
- [52] H. Chen, F. Miao, Y. Chen, Y. Xiong, and T. Chen, "A hyperspectral image classification method using multifeature vectors and optimized KELM," *IEEE J. Sel. Topics Appl. Earth Observ. Remote Sens.*, vol. 14, pp. 2781–2795, 2021.
- [53] C.-I. Chang, H. Cao, and M. Song, "Orthogonal subspace projection target detector for hyperspectral anomaly detection," *IEEE J. Sel. Topics Appl. Earth Observ. Remote Sens.*, vol. 14, pp. 4915–4932, 2021.
- [54] S. Yu, S. Jia, and C. Xu, "Convolutional neural networks for hyperspectral image classification," *Neurocomputing*, vol. 219, pp. 88–98, Jan. 2017.
- [55] F. Xiong, J. Zhou, and Y. Qian, "Material based object tracking in hyperspectral videos," *IEEE Trans. Image Process.*, vol. 29, pp. 3719–3733, 2020.
- [56] A. Torralba, B. C. Russell, and J. Yuen, "LabelMe: Online image annotation and applications," *Proc. IEEE*, vol. 98, no. 8, pp. 1467–1484, Aug. 2010.
- [57] T.-Y. Lin, P. Dollár, R. Girshick, K. He, B. Hariharan, and S. Belongie, "Feature pyramid networks for object detection," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jul. 2017, pp. 2117–2125.
- [58] H. Abdi and L. J. Williams, "Principal component analysis," *WIREs Comput. Statistic*, vol. 2, no. 4, pp. 433–459, Jul./Aug. 2010.
- [59] J. Guo et al., "CMT: Convolutional neural networks meet vision transformers," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2022, pp. 12175–12185.
- [60] S. Woo, J. Park, J.-Y. Lee, and I. S. Kweon, "CBAM: Convolutional block attention module," in *Proc. Eur. Conf. Comput. Vis.*, 2018, pp. 3–19.
- [61] J. Pang, K. Chen, J. Shi, H. Feng, W. Ouyang, and D. Lin, "Libra R-CNN: Towards balanced learning for object detection," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2019, pp. 821–830.
- [62] Q. Chen, Y. Wang, T. Yang, X. Zhang, J. Cheng, and J. Sun, "You only look one-level feature," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2021, pp. 13039–13048.
- [63] X. Zhu, W. Su, L. Lu, B. Li, X. Wang, and J. Dai, "Deformable DETR: Deformable transformers for end-to-end object detection," 2020, *arXiv:2010.04159*.
- [64] T.-Y. Lin, P. Goyal, R. Girshick, K. He, and P. Dollár, "Focal loss for dense object detection," in *Proc. IEEE Int. Conf. Comput. Vis. (ICCV)*, Oct. 2017, pp. 2980–2988.
- [65] Y. Wu et al., "Rethinking classification and localization for object detection," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2020, pp. 10186–10195.
- [66] T. Kong, F. Sun, H. Liu, Y. Jiang, L. Li, and J. Shi, "FoveaBox: Beyond anchor-based object detection," *IEEE Trans. Image Process.*, vol. 29, pp. 7389–7398, 2020.



Xiao He received the B.E. degree from the China University of Geosciences, Wuhan, China, in 2022.

He is currently working on the M.S. degree. His research interests include multimodal and object detection.



Chang Tang (Senior Member, IEEE) received the Ph.D. degree from Tianjin University, Tianjin, China, in 2016.

He joined the AMRL Laboratory, University of Wollongong, Wollongong, NSW, Australia, from September 2014 and September 2015. He is currently a Full Professor with the School of Computer Science, China University of Geosciences, Wuhan, China. He has published 80+ peer-reviewed articles, including those in highly regarded journals and conferences, such as IEEE TRANSACTIONS ON PATTERN ANALYSIS AND MACHINE INTELLIGENCE, IEEE TRANSACTIONS ON MULTIMEDIA, IEEE TRANSACTIONS ON KNOWLEDGE AND DATA ENGINEERING, IEEE TRANSACTIONS ON GEOSCIENCE AND REMOTE SENSING, IEEE TRANSACTIONS ON HUMAN-MACHINE SYSTEMS, IEEE International Conference on Computer Vision (ICCV), IEEE Conference on Computer Vision and Pattern Recognition (CVPR), International Joint Conference on Artificial Intelligence (IJCAI), Association for the Advancement of Artificial Intelligence (AAAI), and ACM International Conference on Multimedia (ACM MM). His research interests include machine learning and computer vision.

Dr. Tang won the Best Paper Award from the 5th Asian Conference on Artificial Intelligence Technology. He regularly serves on the Technical Program Committees or as Area Chair of some top conferences, such as Conference and Workshop on Neural Information Processing Systems (NIPS), International Conference on Machine Learning (ICML), CVPR, ICCV, European Conference on Computer Vision (ECCV), IJCAI, IEEE International Conference on Multimedia and Expo (ICME), and AAAI.



Xinwang Liu (Senior Member, IEEE) received the Ph.D. degree from the National University of Defense Technology (NUDT), Changsha, China, in 2013.

He is currently an Assistant Researcher with the School of Computer Science, NUDT. He has published 60+ peer-reviewed articles, including those in highly regarded journals and conferences, such as IEEE TRANSACTIONS ON PATTERN ANALYSIS AND MACHINE INTELLIGENCE, IEEE TRANSACTIONS ON IMAGE PROCESSING, IEEE TRANSACTIONS ON NEURAL NETWORKS AND LEARNING SYSTEMS, IEEE International Conference on Computer Vision (ICCV), Association for the Advancement of Artificial Intelligence (AAAI), and International Joint Conference on Artificial Intelligence (IJCAI). His research interests include kernel learning and unsupervised feature learning.

Dr. Liu regularly serves on the Technical Program Committees of top conferences, such as Conference and Workshop on Neural Information Processing Systems (NIPS), International Conference on Machine Learning (ICML), IEEE Conference on Computer Vision and Pattern Recognition (CVPR), ICCV, IJCAI, and AAAI.



Wei Zhang received the B.E. degree from Zhejiang University, Hangzhou, China, in 2004, the M.S. degree from Liaoning University, Shenyang, China, in 2008, and the Ph.D. degree from the Shandong University of Science and Technology, Qingdao, China, in 2018.

He is currently an Associate Professor with the Shandong Computer Science Center (National Supercomputing Center in Jinan), Qilu University of Technology (Shandong Academy of Sciences), Jinan, China. His research interests include future-generation network architectures, edge computing, and edge intelligence.



Kun Sun (Member, IEEE) received the Ph.D. degree from the School of Artificial Intelligence and Automation, Huazhong University of Science and Technology (HUST), Wuhan, China, in 2017.

He is currently an Associate Professor with the School of Computer Science, China University of Geosciences (CUG), Wuhan. His research focuses on 3-D-related computer vision algorithms, such as multi-view image matching, large-scale structure from motion (SfM), and 3-D point cloud processing.



Jiangfeng Xu received the B.E. degree in mechanical design, manufacturing, and automation from the Huazhong University of Science and Technology, Wuhan, China, in 2009.

He graduated from a large state-owned enterprise and currently works at Hexagon AB, Qingdao, China. He is responsible for the research and development and management of the company's visual solution product solution integration project. In response to customer requirements, he collaborated with a team to provide customers with a variety of on-site visual inspection solutions, which have been widely recognized in the market.