

# Canadian Bioinformatics Workshops

[www.bioinformatics.ca](http://www.bioinformatics.ca)  
[bioinformaticsdotca.github.io](https://bioinformaticsdotca.github.io)

This page is available in the following languages:

Afrikaans Ӣunrapoai Català Dansk Deutsch Eλλnvwά English English (CA) English (GB) English (US) Esperanto  
 Castellano Castellano (AR) Español (CL) Castellano (CO) Español (Ecuador) Castellano (MX) Castellano (PE)  
 Euskara Suomiεki français français (CA) Galego ગુજરાતi hrvatski Magyar Italiano 日本語 한국어 Macedonian Melayu  
 Nederlands Norsk Sesotho sa Leboa polski Português română slovenski jezik српски (latinica) Sotho svenska  
 中文 華語 (台灣) isiZulu



## Attribution-Share Alike 2.5 Canada

### You are free:



**to Share** — to copy, distribute and transmit the work



**to Remix** — to adapt the work



### Under the following conditions:



**Attribution.** You must attribute the work in the manner specified by the author or licensor (but not in any way that suggests that they endorse you or your use of the work).



**Share Alike.** If you alter, transform, or build upon this work, you may distribute the resulting work only under the same or similar licence to this one.

- For any reuse or distribution, you must make clear to others the licence terms of this work.
- Any of the above conditions can be waived if you get permission from the copyright holder.
- The author's moral rights are retained in this licence.


[Disclaimer](#)

Your fair dealing and other rights are in no way affected by the above.  
 This is a human-readable summary of the Legal Code (the full licence) available in the following languages:  
[English](#) [French](#)

[Learn how to distribute your work using this licence](#)


# RNA-Seq Module 2: Alignment vs Assembly vs Pseudoalignment

Malachi Griffith, Obi Griffith, Isabel Risch, Vida Talebian  
RNA-seq Analysis 2024. June 17-19, 2024

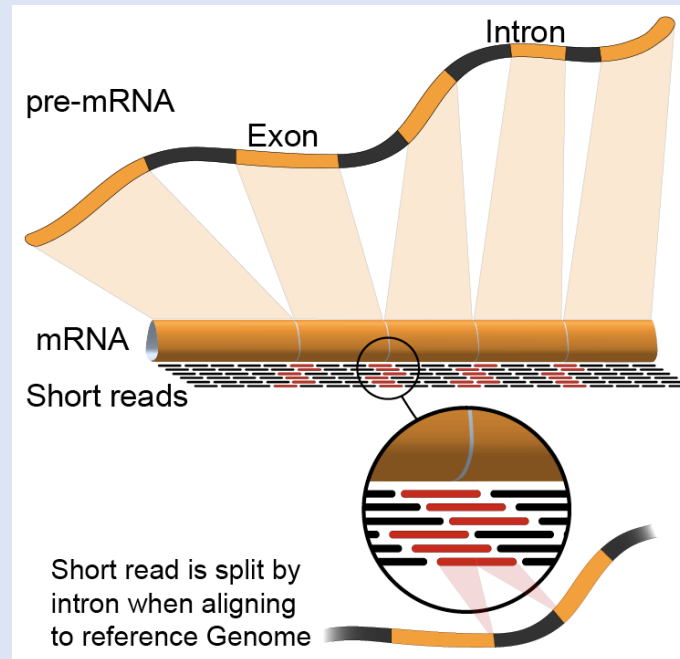

# Alignment


- Uses a reference genome/transcriptome to map reads
- Capable of some novel transcript inference
- Relatively fast runtime
- Tools: HISAT2, STAR, GSNAP

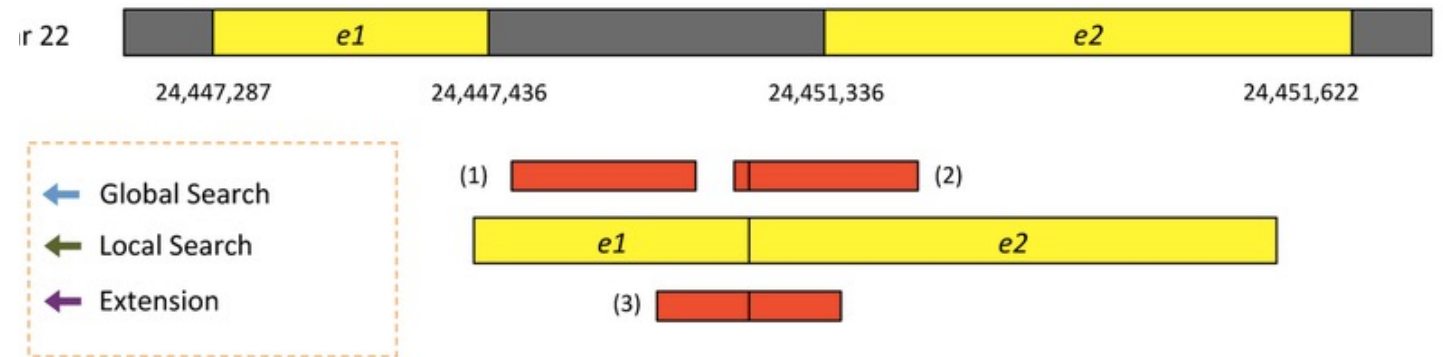

Kim et al. 2015. Nat Methods 12:357–360

# Assembly


- Infer transcript structure directly from the data
- Useful when you do not have a reference sequence
- Other uses – highly rearranged genomes (some cancers)
- Computationally expensive
- Tools: Trinity, Velvet, SPAdes

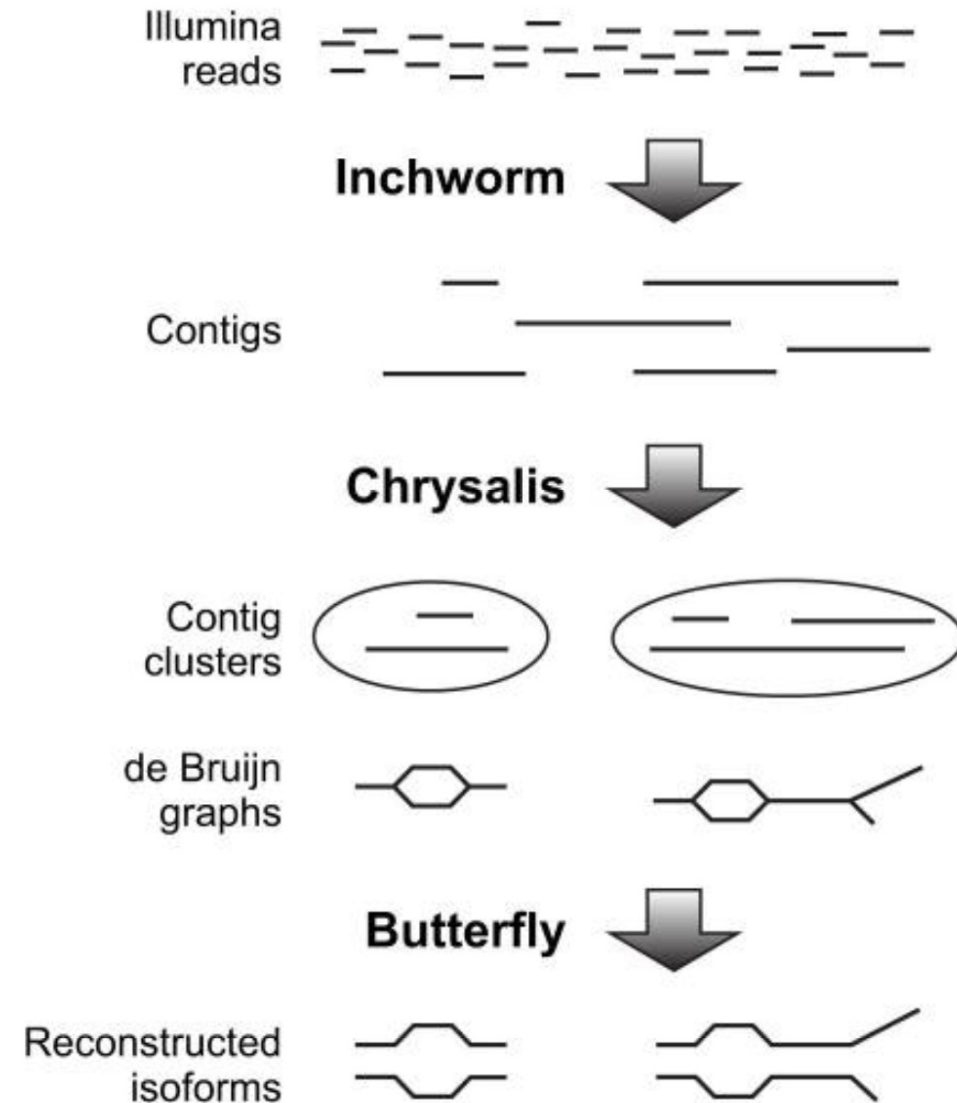

Haas, et al (2013) doi: 10.1038/nprot.2013.084

# Pseudoalignment

- Does not determine where in the genome a read lies, only which transcripts it is compatible with
- Very fast!
- Does not produce a bam by default (though pseudo-bams can be created), not useful for variant detection.
- Tools: Kallisto, Sailfish

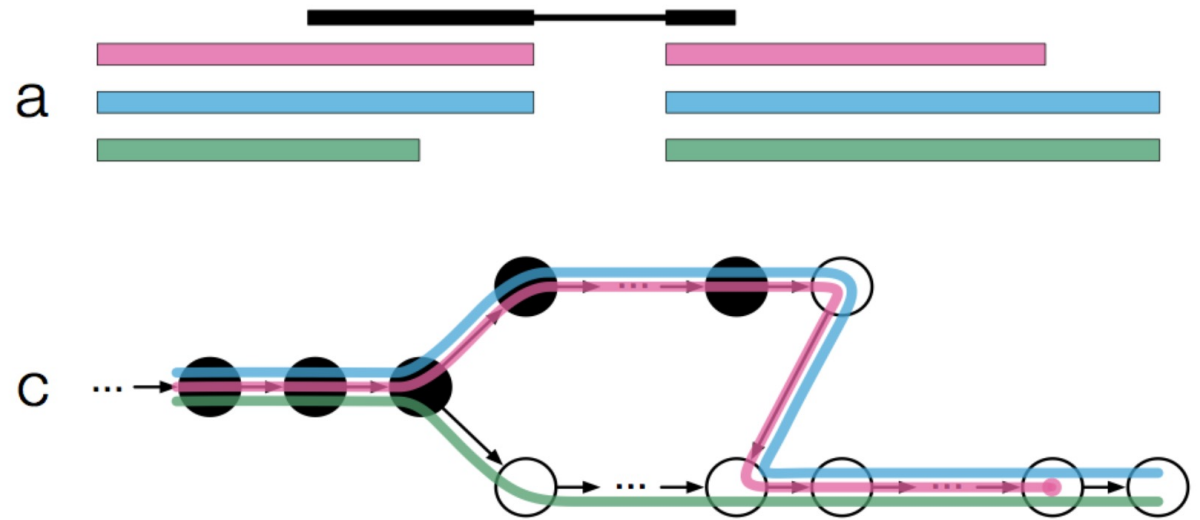

Bray, 2016 doi:10.1038/nbt.3519

<https://tinyheero.github.io/2015/09/02/pseudoalignments-kallisto.html>

# We are on a Coffee Break & Networking Session

Workshop Sponsors:



Canadian Centre for  
Computational  
Genomics



HPC4Health



GenomeCanada