



bioinformatics.ca
bioinformaticsdotca.github.io



CC BY-SA 4.0 DEED

Attribution-ShareAlike 4.0 International

Canonical URL : <https://creativecommons.org/licenses/by-sa/4.0/>

[See the legal code](#)

You are free to:

Share — copy and redistribute the material in any medium or format for any purpose, even commercially.

Adapt — remix, transform, and build upon the material for any purpose, even commercially.

The licensor cannot revoke these freedoms as long as you follow the license terms.

Under the following terms:

 **Attribution** — You must give [appropriate credit](#), provide a link to the license, and [indicate if changes were made](#). You may do so in any reasonable manner, but not in any way that suggests the licensor endorses you or your use.

 **ShareAlike** — If you remix, transform, or build upon the material, you must distribute your contributions under the [same license](#) as the original.

No additional restrictions — You may not apply legal terms or [technological measures](#) that legally restrict others from doing anything the license permits.

Notices:

You do not have to comply with the license for elements of the material in the public domain or where your use is permitted by an applicable [exception or limitation](#).

No warranties are given. The license may not give you all of the permissions necessary for your intended use. For example, other rights such as [publicity, privacy, or moral rights](#) may limit how you use the material.





Module 3: RNA Expression and Differential Expression

Malachi Griffith & Obi Griffith

RNA-seq Analysis


June 22-24, 2026

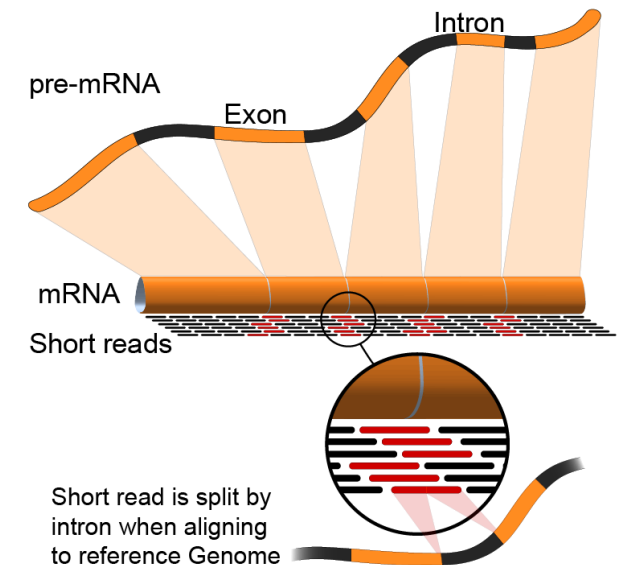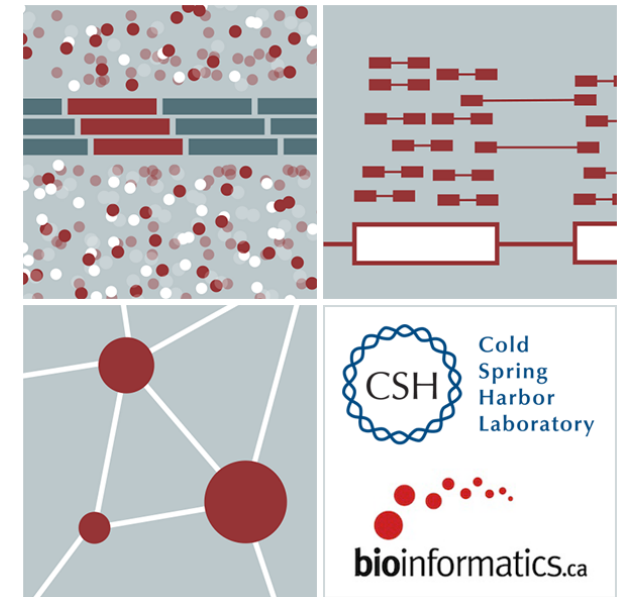



Learning objectives of module 3

- Expression estimation for known genes and transcripts
- FPKM/TPM expression estimates vs. raw counts
- Differential expression methods
- Downstream interpretation of expression and differential estimates

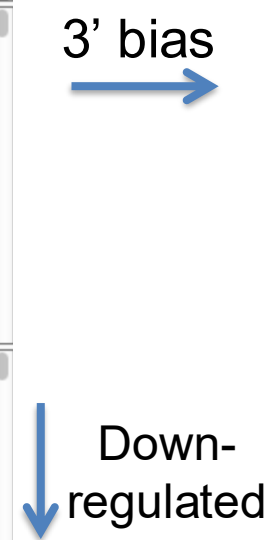

What is FPKM (RPKM)?



- RPKM: **Reads** Per Kilobase of transcript per Million mapped reads.
- FPKM: **Fragments** Per Kilobase of transcript per Million mapped reads.
- No essential difference - Just a terminology change to better describe paired-end reads!



What is FPKM?

- Why not just count reads in my RNAseq data? → **Fragments**
- The relative expression of a transcript is proportional to the number of cDNA fragments that originate from it. However:
 - # fragments is biased towards larger genes → **Per Kilobase of transcript**
 - # fragments is related to total library depth → **per Million mapped reads.**

What is FPKM?



- FPKM attempts to normalize for gene size and library depth
 - remember – RPKM is essentially the same!
- C = number of mappable fragments for a gene (transcript)
- N = total number of mappable fragments in the library
- L = number of base pairs in the gene (transcript)
 - $FPKM = (C / (N \times L)) \times 1,000 \times 1,000,000$
 - $FPKM = (1,000,000,000 \times C) / (N \times L)$
 - $FPKM = (C / (N / 1,000,000)) / (L/1000)$
- More reading:
 - <http://www.biostars.org/p/11378/>
 - <http://www.biostars.org/p/68126/>

How do FPKM and TPM differ?



- TPM: Transcript per Kilobase Million
- The difference is in the order of operations:

FPKM

- 1) Determine total fragment count, divide by 1,000,000 (per Million)
- 2) Divide each gene/transcript fragment count by #1 (Fragments Per Million)
- 3) Divide each FPM by length of each gene/transcript in kilobases (FPKM)

TPM

- 1) Divide each gene/transcript fragment count by length of the transcript in kilobases (Fragments Per Kilobase)
- 2) Sum all FPK values for the sample and divide by 1,000,000 (per Million)
- 3) Divide #1 by #2 (TPM)

- The sum of all TPMs in each sample is the same. Easier to compare across samples!
- <http://www.rna-seqblog.com/rpkm-fpkm-and-tpm-clearly-explained/>
- <https://www.ncbi.nlm.nih.gov/pubmed/22872506>


How does StringTie work?



Map reads to the genome


Infer isoforms:

- iteratively extract the heaviest path from a splice graph
- construct a flow network
- compute maximum flow to estimate abundance
- update the splice graph by removing reads that were assigned by the flow algorithm
- This process repeats until all reads have been assigned.

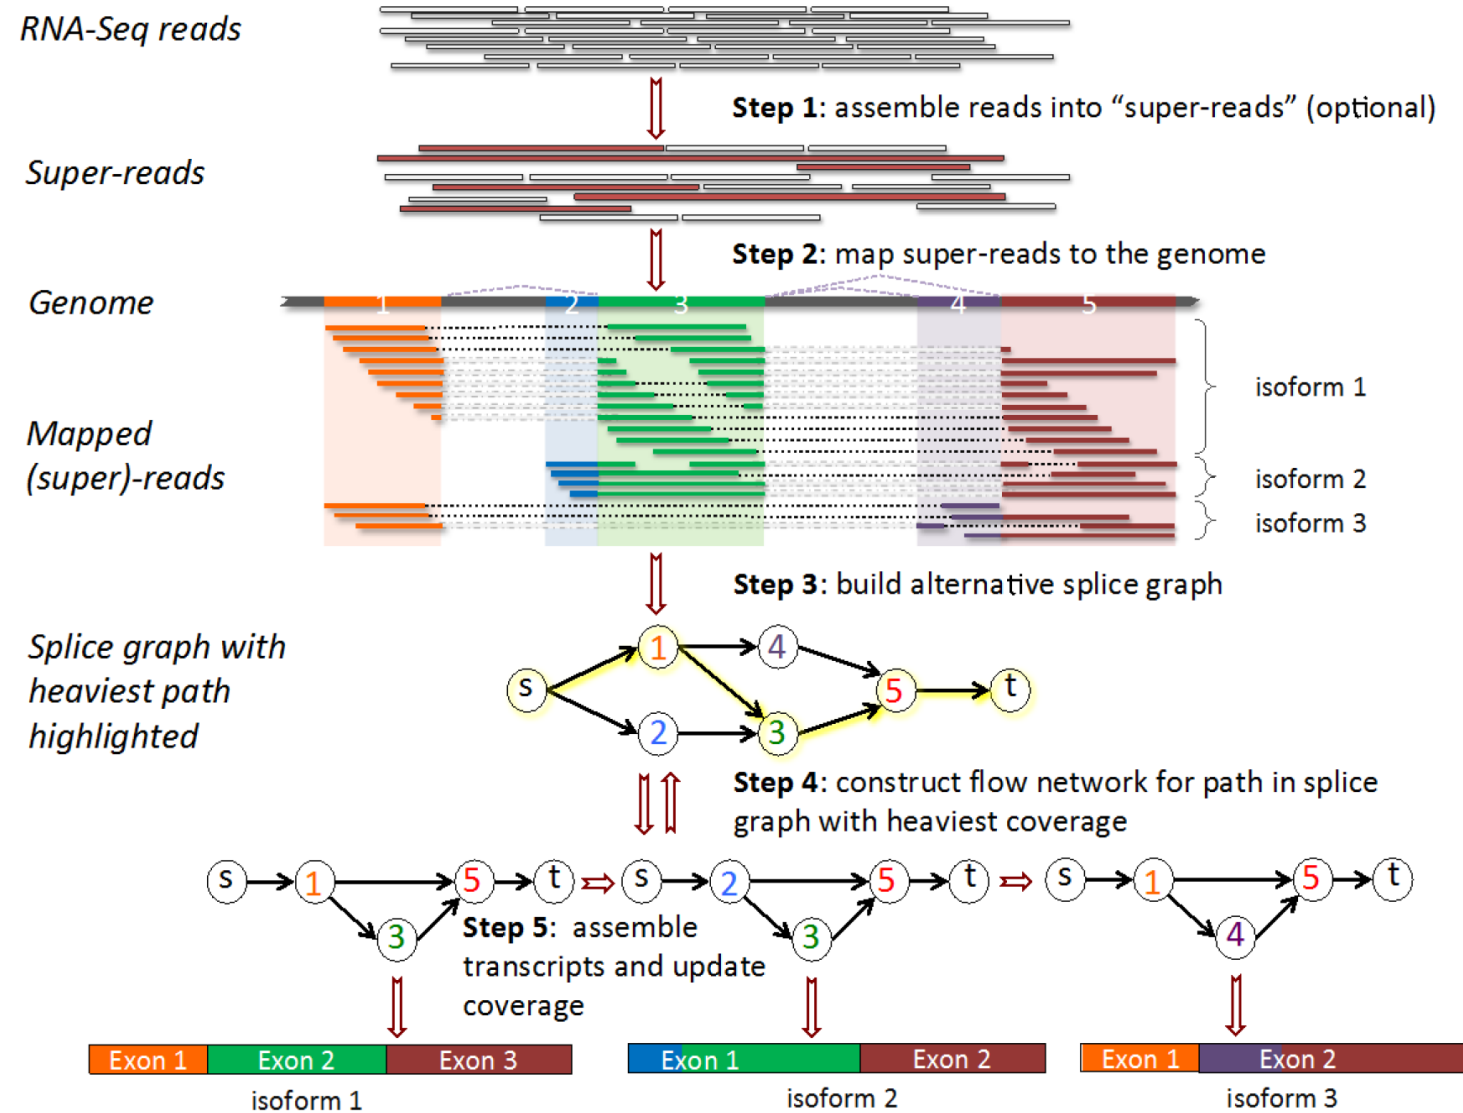

Pertea et al. Nature Biotechnology, 2015

From flow network for each transcript, maximum flow is used to assemble transcript and estimate abundance

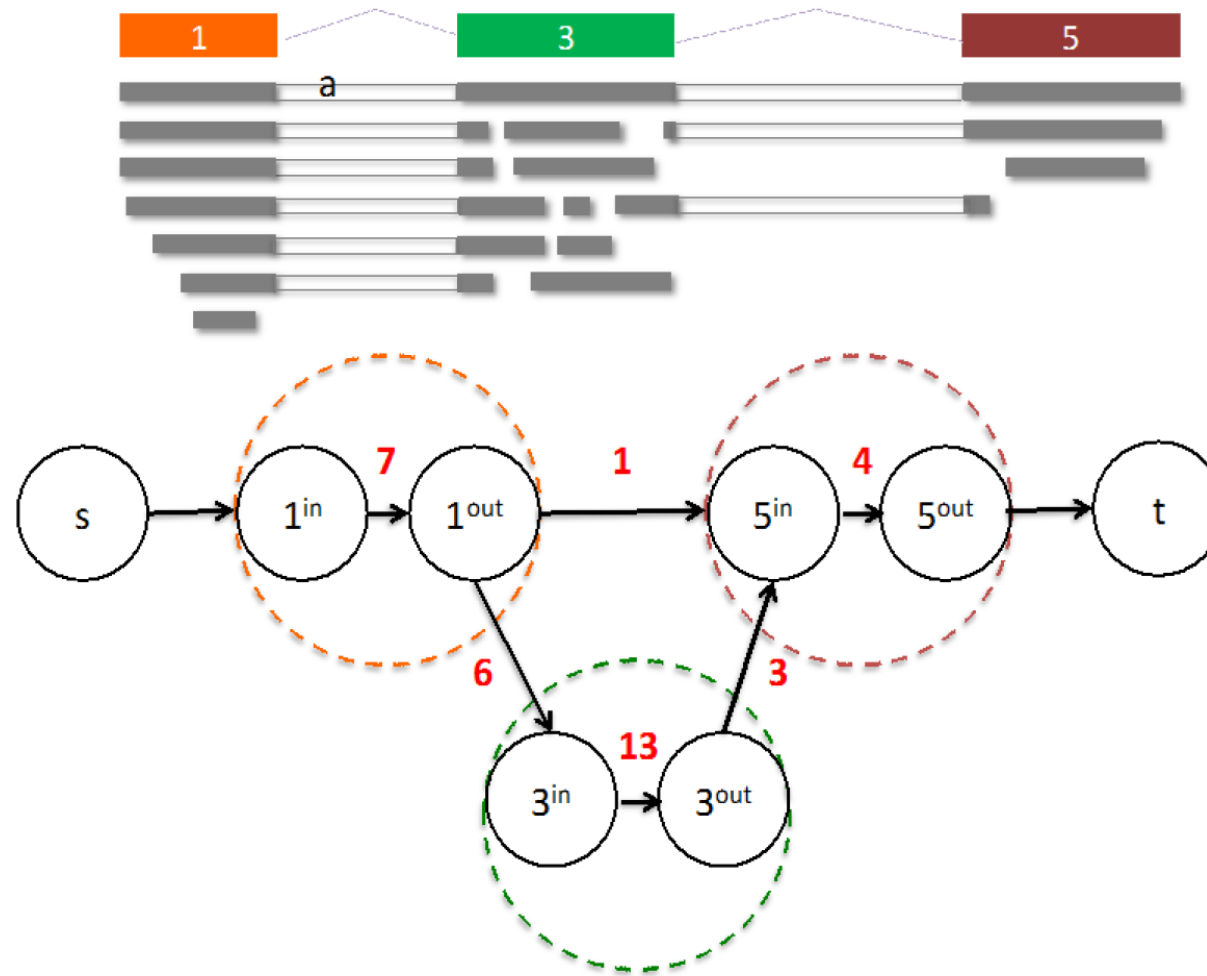

StringTie uses basic graph theory (splice graph), custom heuristics (heaviest path), more graph theory (flow network) and optimization theory (maximum flow). See StringTie paper for definitions and math.

Alternatives to FPKM



- Raw read counts for differential expression analysis
 - Assign reads/fragments to defined genes/transcripts, get “raw counts”
 - Transcript structures could still be defined by something like Stringtie

- HTSeq (htseq-count)

- <https://htseq.readthedocs.io/>

```
htseq-count --mode intersection-strict --stranded no --minqual 1 --type exon --idattr  
transcript_id accepted_hits.sam chr22.gff > transcript_read_counts_table.tsv
```

- Caveats of ‘transcript’ analysis by htseq-count:
 - Designed for genes - ambiguous reads from overlapping transcripts may not be handled!
 - <http://seqanswers.com/forums/showthread.php?t=18068>

HTSeq-count basically counts reads supporting a feature (exon, gene) by assessing overlapping coordinates



	union	intersection_strict	intersection_nonempty
	gene_A	gene_A	gene_A
	gene_A	no_feature	gene_A
	gene_A	no_feature	gene_A
	gene_A	gene_A	gene_A
	gene_A	gene_A	gene_A
	ambiguous	gene_A	gene_A
	ambiguous	ambiguous	ambiguous


Note, if gene_A and gene_B on opposite strands, sequence data is stranded, and correct HTSeq parameter set then this read may not be ambiguous

Whether a read is counted depends on the nature of overlap and “mode” selected

Differential Expression



- Tying gene expression back to genotype/phenotype
- What genes/transcripts are being expressed at higher/lower levels in different groups of samples?
 - Are these differences 'significant', accounting for variance/noise?
- Examples (used in course):
 - UHR cells vs HBR brain
 - Tumor vs Normal tissue
 - Wild-type vs gene KO cells

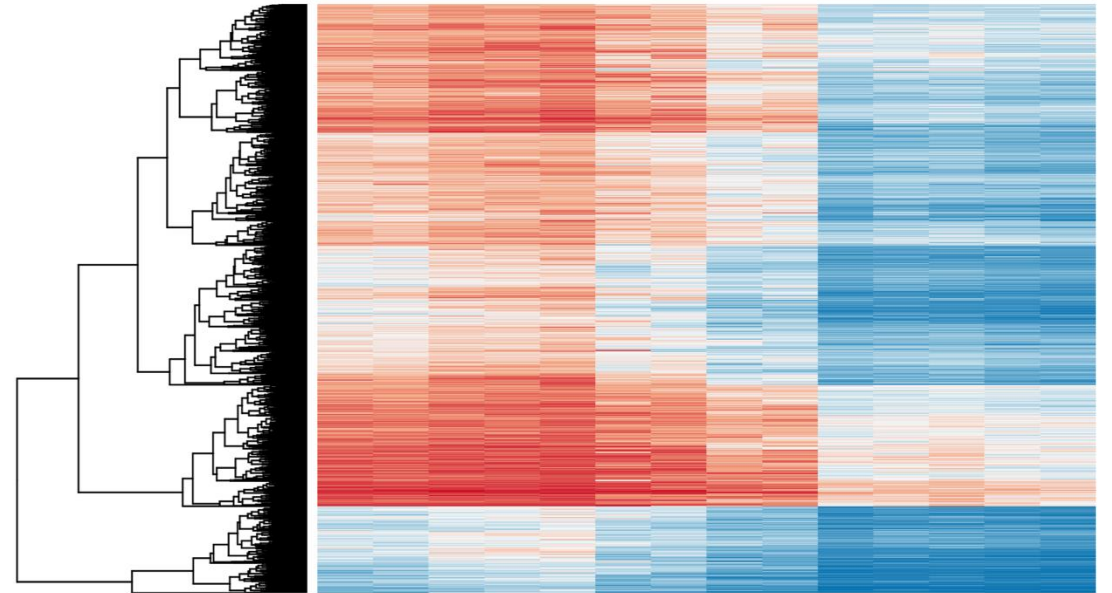

Differential Expression with Ballgown





Parametric F-test comparing nested linear models

- Two models are fit to each feature, using expression as the outcome
 - one including the covariate of interest (e.g., case/control status or time) and one not including that covariate.
- An F statistic and p-value are calculated using the fits of the two models.
 - A significant p-value means the model including the covariate of interest fits significantly better than the model without that covariate, indicating differential expression.
- We adjust for multiple testing by reporting q-values:
 - $q < 0.05$ the false discovery rate should be controlled at ~5%.

[Frazee et al. \(2014\)](#)

Ballgown for Visualization with R

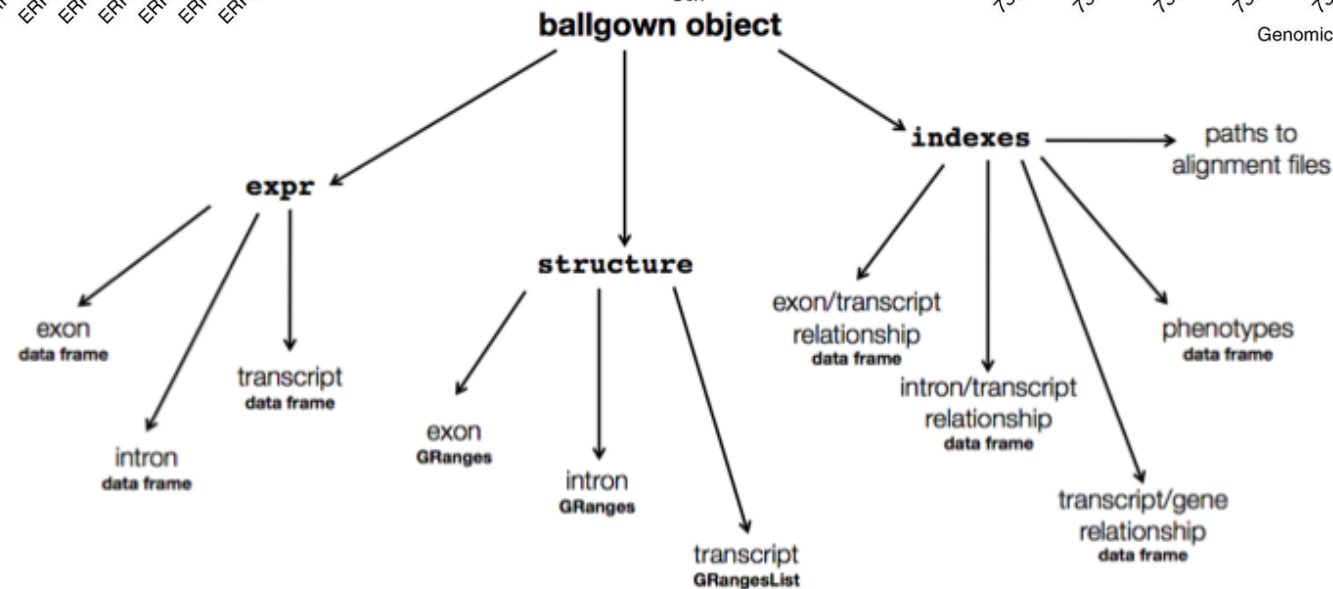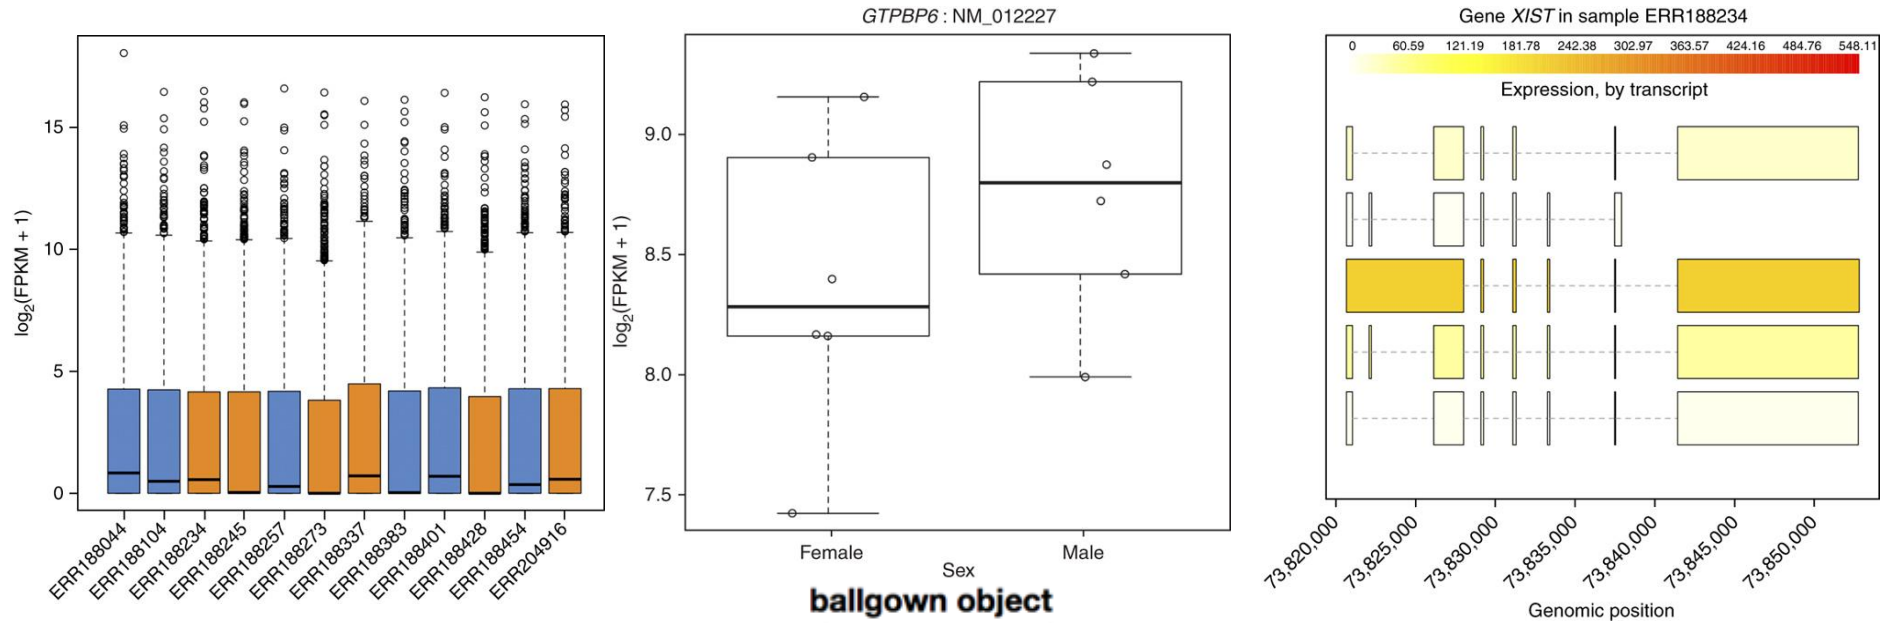

Alternative differential expression methods



- Raw count approaches
 - DESeq2 - <http://www-huber.embl.de/users/anders/DESeq/>
 - edgeR - <http://www.bioconductor.org/packages/release/bioc/html/edgeR.html>
 - Others...

'FPKM/TPM' expression estimates vs. 'raw' counts




- Which should I use?
 - Long running debate, but the general consensus:
- FPKM/TPM
 - When you want to leverage benefits of tuxedo suite
 - Isoform deconvolution
 - Good for visualization (e.g., heatmaps)
 - Calculating fold changes, etc.
- Counts
 - More robust statistical methods for differential expression
 - Accommodates more sophisticated experimental designs with appropriate statistical tests

Multiple approaches advisable



DE Method Comparison

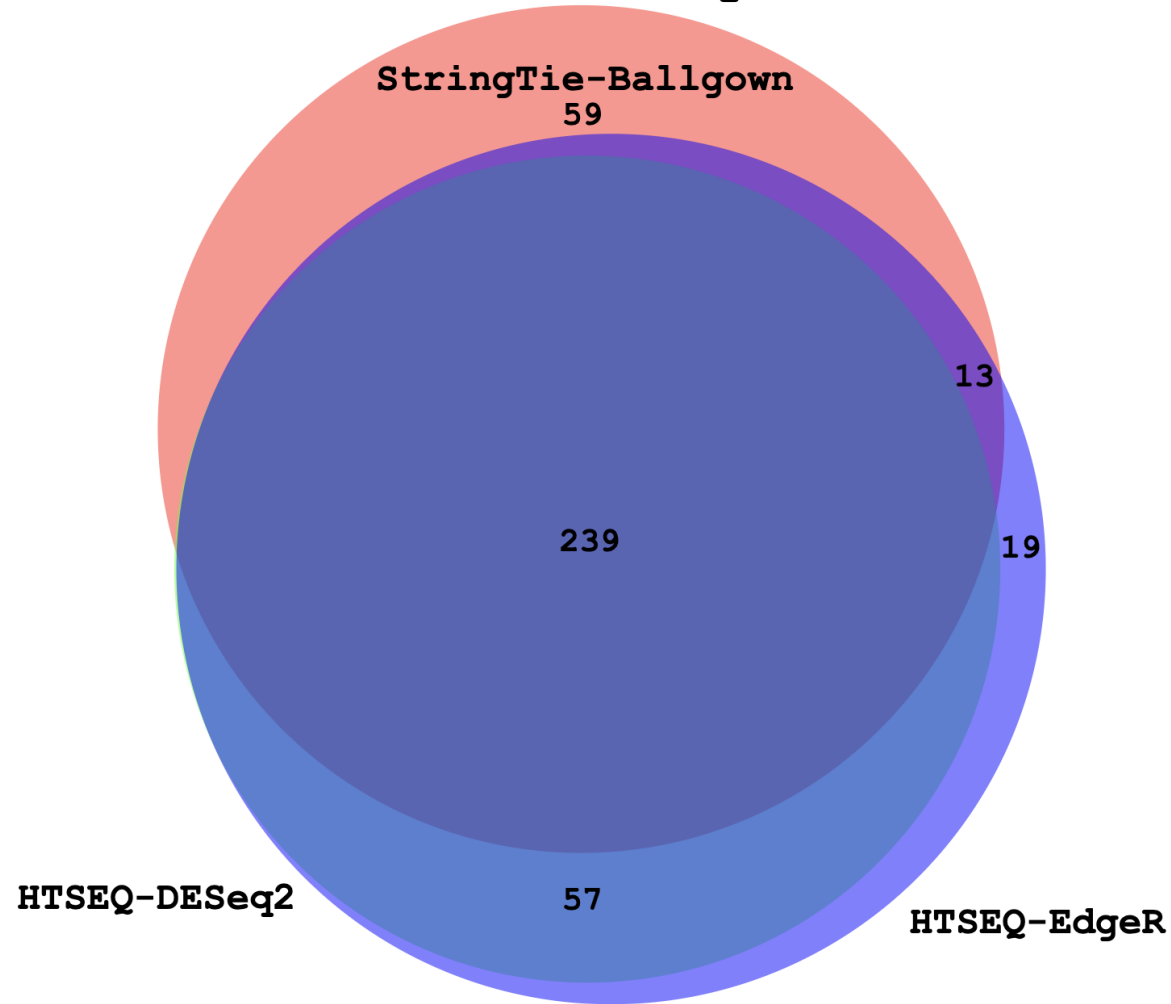

Lessons learned from microarray days



- Hansen et al. “Sequencing Technology Does Not Eliminate Biological Variability.” Nature Biotechnology 29, no. 7 (2011): 572–573.
- Power analysis for RNA-seq experiments
 - <http://scotty.genetics.utah.edu/>
- RNA-seq need for biological replicates
 - <http://www.biostars.org/p/1161/>
- RNA-seq study design
 - <http://www.biostars.org/p/68885/>



Multiple testing correction

- As more attributes are compared, differences due solely to chance become more likely!
- Well known from array studies
 - 10,000s genes/transcripts
 - 100,000s exons
- With RNA-seq, more of a problem than ever
 - All the complexity of the transcriptome gives huge numbers of potential features
 - Genes, transcripts, exons, junctions, retained introns, microRNAs, lncRNAs, etc
- Bioconductor multtest
 - <http://www.bioconductor.org/packages/release/bioc/html/multtest.html>


Downstream interpretation of expression analysis




- Topic for an entire course
- Expression estimates and differential expression lists from StringTie, Ballgown or other alternatives can be fed into many analysis pipelines
- See supplemental R tutorial for how to format expression data and start manipulating in R
- Clustering/Heatmaps
 - Provided by Ballgown
 - For more customized analysis various R packages exist:
 - hclust, heatmap.2, plotrix, ggplot2, etc.
- Classification
 - Weka is a good learning tool
- Pathway analysis
 - GSEA, IPA, Cytoscape, many R/BioConductor packages:
<http://www.bioconductor.org/help/search/index.html?q=pathway>

https://genviz.org/module-04-expression/0004/01/01/Expression_Profiling_and_Visualization/

HISAT2/StringTie/Ballgown RNA-seq Pipeline

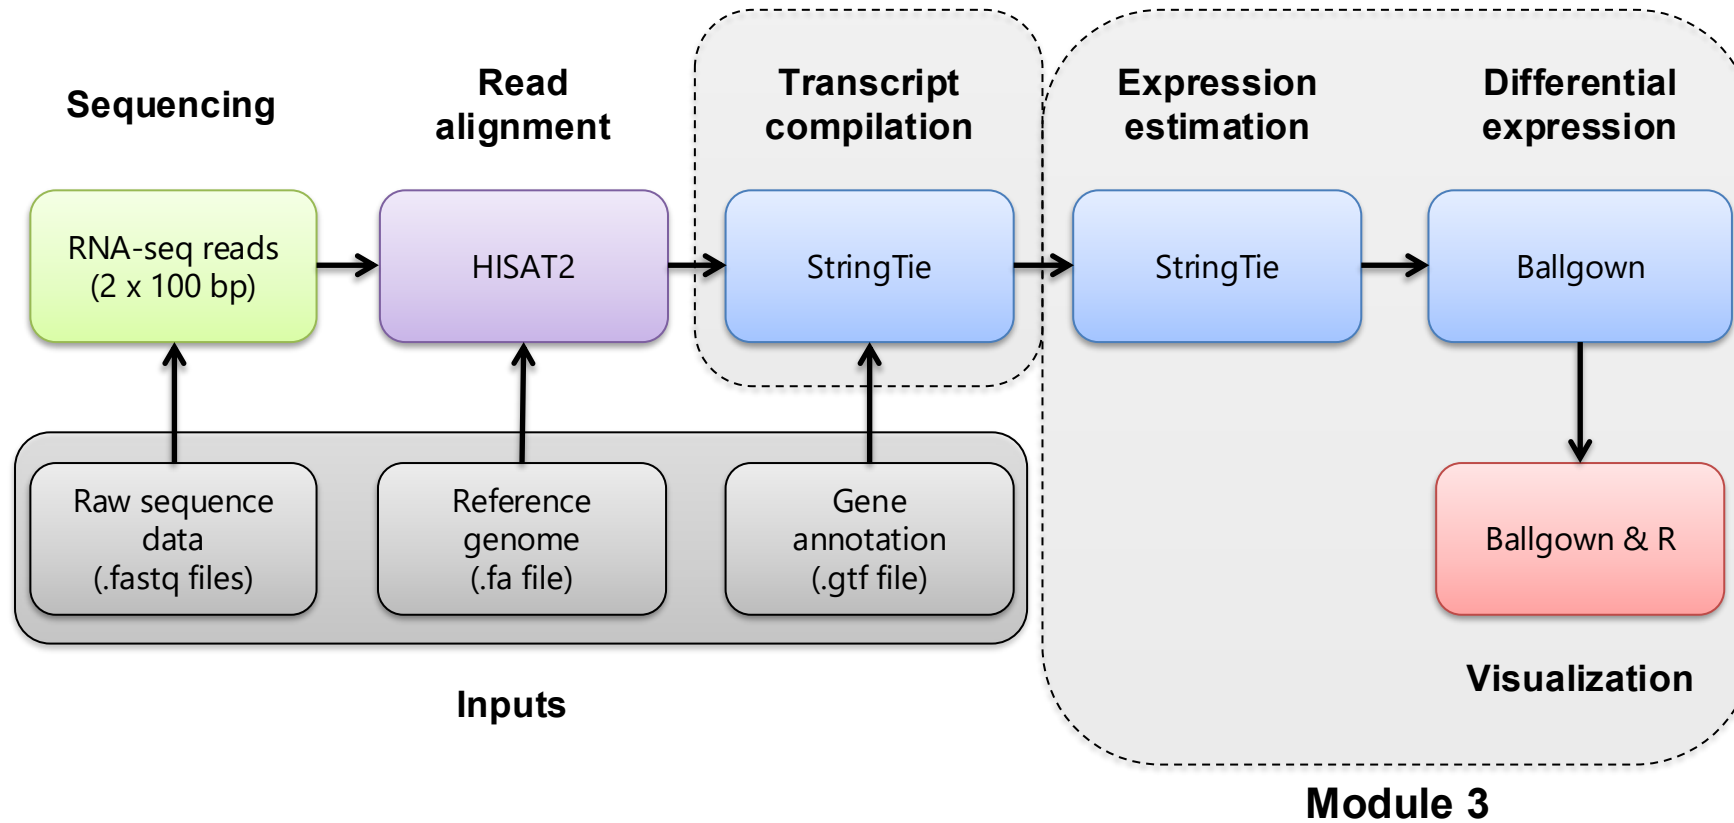

HISAT2/htseq/DESeq2 RNA-seq Pipeline

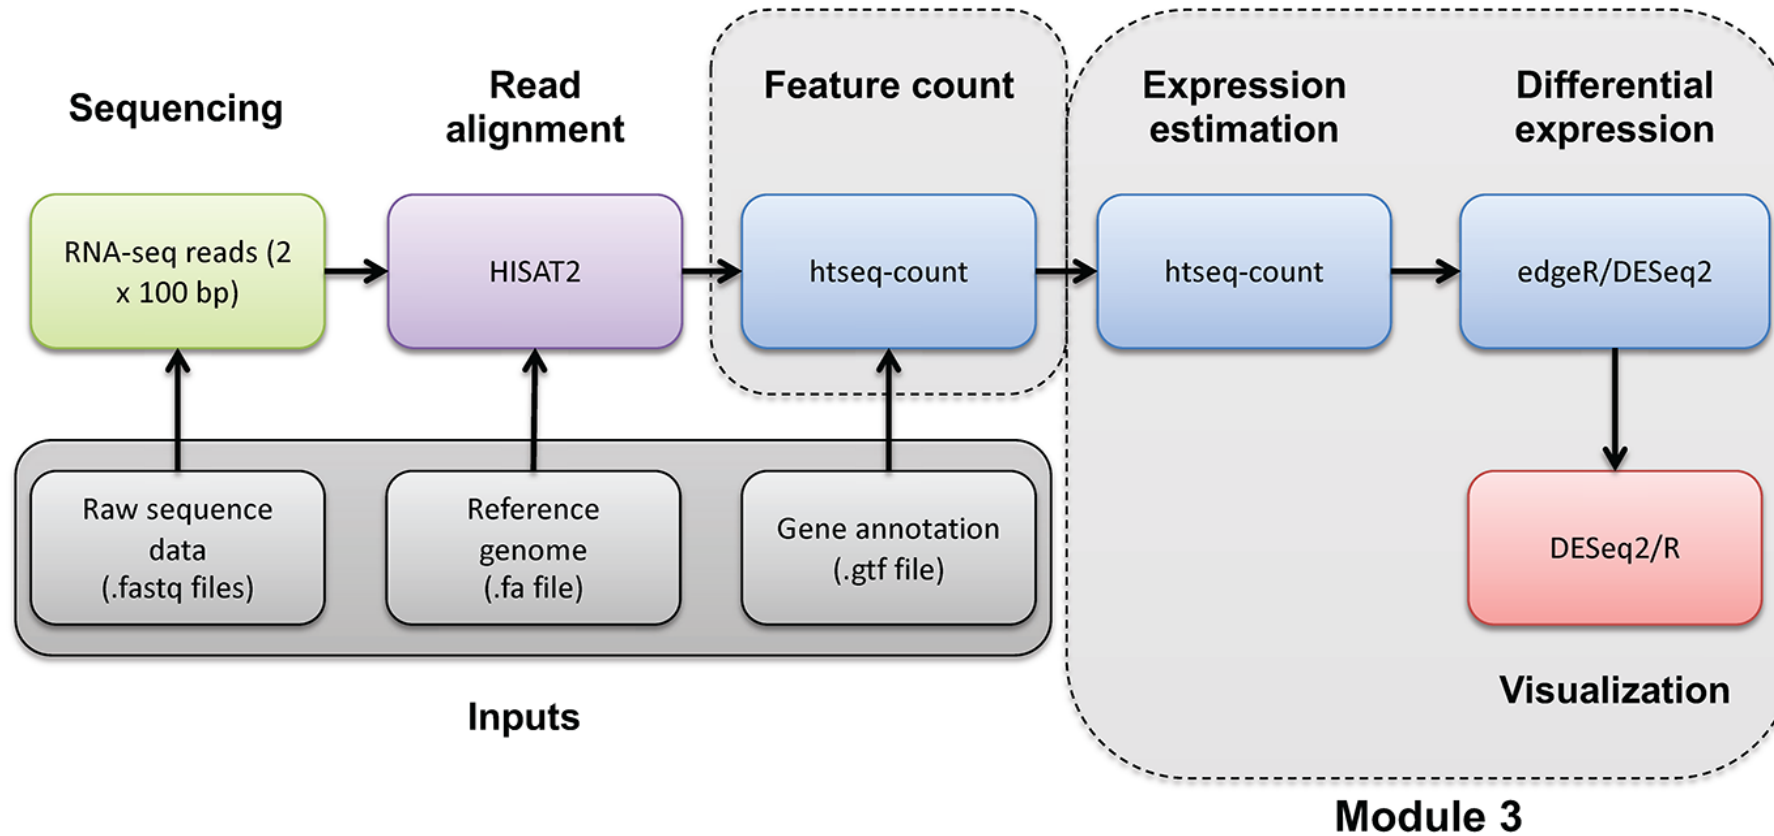



Coffee Break & Networking Session

Workshop Sponsors

