

QA Практика — Проект №3: API QA PROJECT

API для практики:

<https://reqres.in>

<https://restful-booker.herokuapp.com>

API Checklist (<https://reqres.in>)

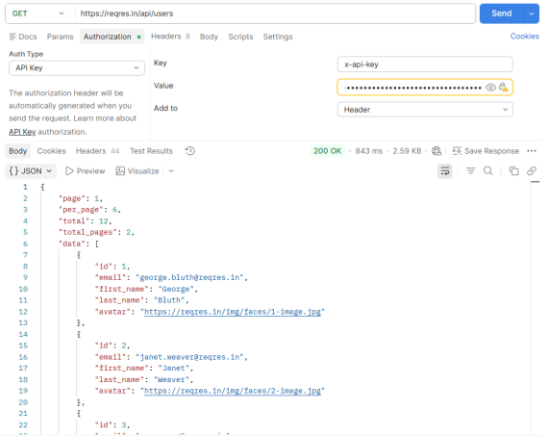
ID	Endpoint	Check Item	Priority	Status
API-001	/users	Проверить GET users	High	Passed
API-002	/users/6	Проверить GET single user	High	Passed
API-003	/users/999	Проверить response для несуществующего user	High	Passed
API-004	/users	Проверить создание пользователя	High	Passed
API-005	/users	Проверить POST с пустым body	High	Failed
API-006	/users	Проверить invalid JSON	Medium	Passed

API Checklist (<https://restful-booker.herokuapp.com>)

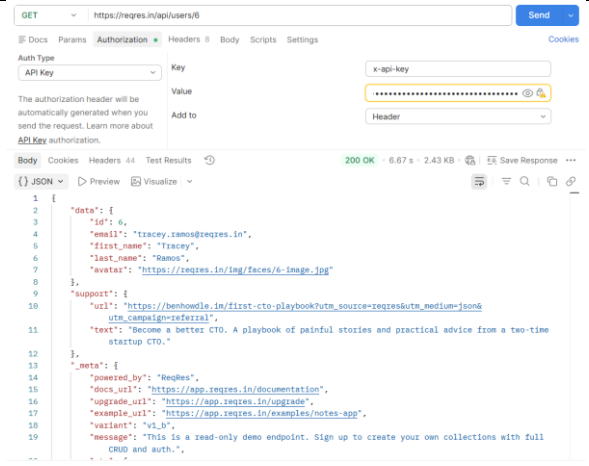
ID	Endpoint	Check Item	Priority	Status
API-001	/ booking	Проверить GET booking	High	Passed
API-002	/ booking /1	Проверить GET single booking	High	Passed
API-003	/ booking /12345	Проверить response для несуществующего booking	High	Passed
API-004	/ booking	Проверить создание booking	High	Passed

API-005	/ booking	Проверить POST с пустым body	High	Failed
API-006	/ booking	Проверить invalid JSON	Medium	Passed

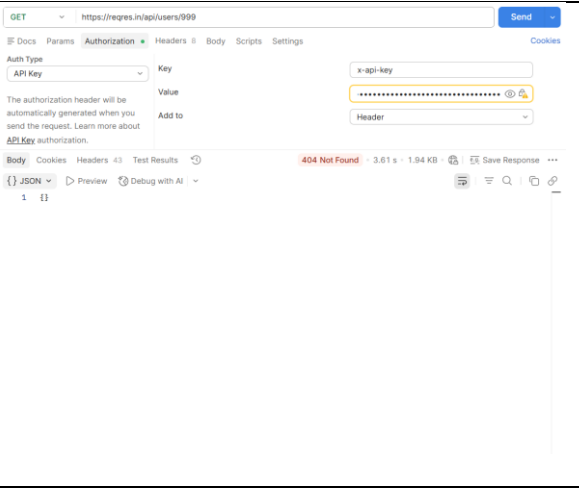
ТЕСТ-КЕЙСЫ <https://reqres.in>

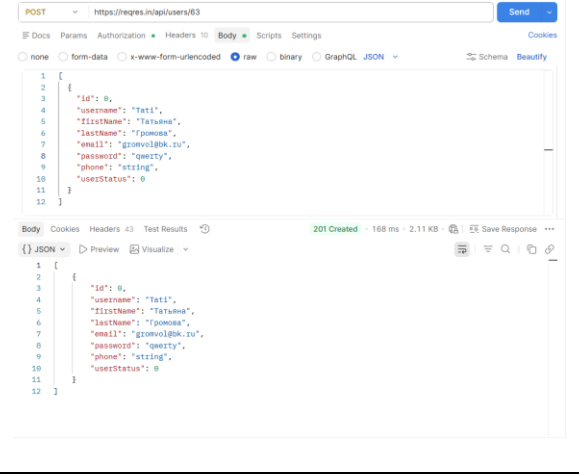
Test Case ID	Test1
Title	Проверка GET users (запрос информации о пользователях)
Preconditions	Postman открыт
Method	GET
Headers	x-api-key
URL	https://reqres.in/api/users
Steps	1. На Workspace создать New collection 2. Add request 3. Отправить GET/users
Expected Result	Status 200, JSON с пользователями
Attachments	 The screenshot shows the Postman interface for a GET request to <code>https://reqres.in/api/users</code>. The 'Authorization' tab is active, showing an 'API Key' header with the value 'x-api-key'. The 'Body' tab shows a JSON response with a status of 200 OK. The JSON data is as follows: <pre> 1 { 2 "page": 1, 3 "per_page": 4, 4 "total": 12, 5 "total_pages": 2, 6 "data": [7 { 8 "id": 1, 9 "email": "george.bluth@reqres.in", 10 "first_name": "George", 11 "last_name": "Bluth", 12 "avatar": "https://reqres.in/img/faces/1-image.jpg" 13 }, 14 { 15 "id": 2, 16 "email": "janet.weaver@reqres.in", 17 "first_name": "Janet", 18 "last_name": "Weaver", 19 "avatar": "https://reqres.in/img/faces/2-image.jpg" 20 }, 21 { 22 "id": 3, </pre>

Test Case ID	Test2
Title	Проверка GET single user (запрос информации об одиночном пользователе)

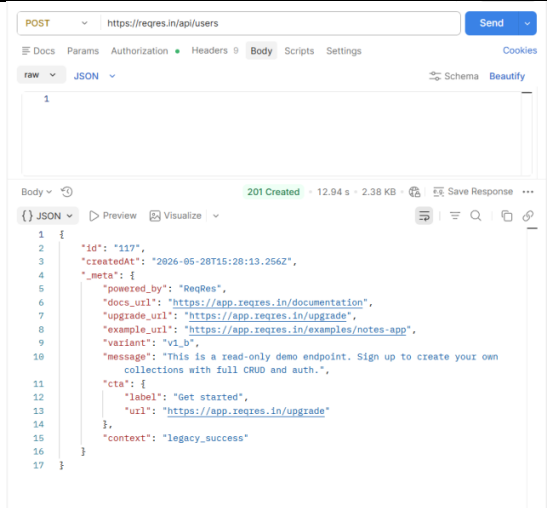
Preconditions	Postman открыт
Method	GET
Headers	x-api-key
URL	https://reqres.in/api/users/6
Steps	1. Add request 2. Отправить GET/users/6
Expected Result	Status 200, JSON с пользователем
Attachments	 The screenshot shows the Postman interface with the following details: Request: GET https://reqres.in/api/users/6 Authorization: API Key (x-api-key) Response: 200 OK, 6.67 s, 2.43 KB JSON Body: <pre> 1 { 2 "data": { 3 "id": 6, 4 "email": "tracey.samu@reqres.in", 5 "first_name": "Tracey", 6 "last_name": "Samos", 7 "avatar": "https://reqres.in/img/faces/6-image.jpg" 8 }, 9 "support": { 10 "url": "https://benhowdle.in/first-cto-playbook?utm_source=reqres&utm_medium=json&utm_campaign=referral", 11 "text": "Become a better CTO. A playbook of painful stories and practical advice from a two-time startup CTO." 12 }, 13 "_meta": { 14 "powered_by": "ReqRes", 15 "docs_url": "https://app.reqres.in/documentation", 16 "upgrade_url": "https://app.reqres.in/upgrade", 17 "example_url": "https://app.reqres.in/examples/notes-app", 18 "version": "v1.0", 19 "message": "This is a read-only demo endpoint. Sign up to create your own collections with full CRUD and auth." 20 } 21 }</pre>

Test Case ID	Test3
Title	Проверка response для несуществующего user
Preconditions	Postman открыт
Method	GET
Headers	x-api-key
URL	https://reqres.in/api/users/999
Steps	1. Add request 2. Отправить GET/users/999
Expected Result	Status 404 Not Found

Attachments	
-------------	---

Test Case ID	Test4
Title	Проверка создания пользователя
Preconditions	Postman открыт
Method	POST
Headers	x-api-key
URL	https://reqres.in/api/users
Steps	1. Add request 2. Add body 3. Отправить POST/users
Expected Result	Status 201 Created
Attachments	

Test Case ID	Test5
--------------	-------

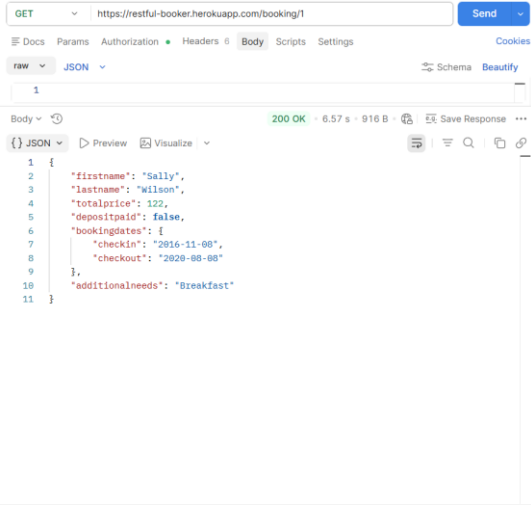
Title	Проверка POST с пустым body
Preconditions	Postman открыт
Method	POST
Headers	x-api-key
URL	https://reqres.in/api/users
Steps	1. Add request 2. Add empty body 3. Отправить POST/users
Expected Result	Status 400 Bad Request
Attachments	 The screenshot shows a Postman interface with a POST request to https://reqres.in/api/users. The response is a 201 Created status with a JSON body. The JSON body contains the following fields: id (1), createdAt (2026-05-20T15:20:13.256Z), meta (powered_by: ReqRes, docs_url: https://app.reqres.in/documentation, upgrade_url: https://app.reqres.in/upgrade, example_url: https://app.reqres.in/examples/notes-app, variant: v1.0, message: This is a read-only demo endpoint. Sign up to create your own collections with full CRUD and auth., cta: { label: Get started, url: https://app.reqres.in/upgrade }, context: legacy_success).

Test Case ID	Test6
Title	Проверить invalid JSON
Preconditions	Postman открыт
Method	POST
Headers	x-api-key
URL	https://reqres.in/api/users
Steps	1. Add request 2. Добавить invalid JSON 3. Отправить POST/users
Expected Result	Status 400 Bad Request

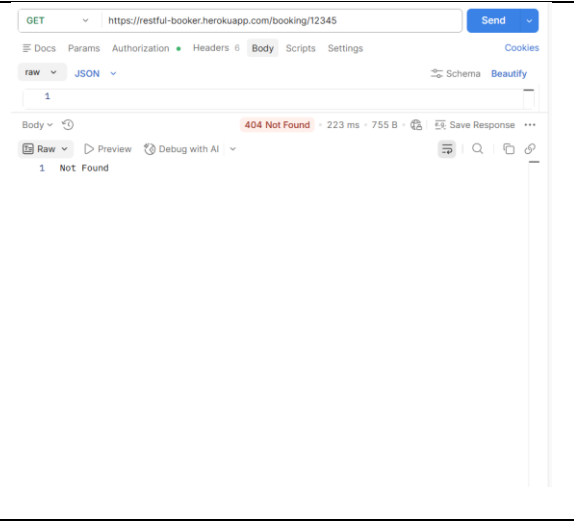
Attachments	
-------------	--

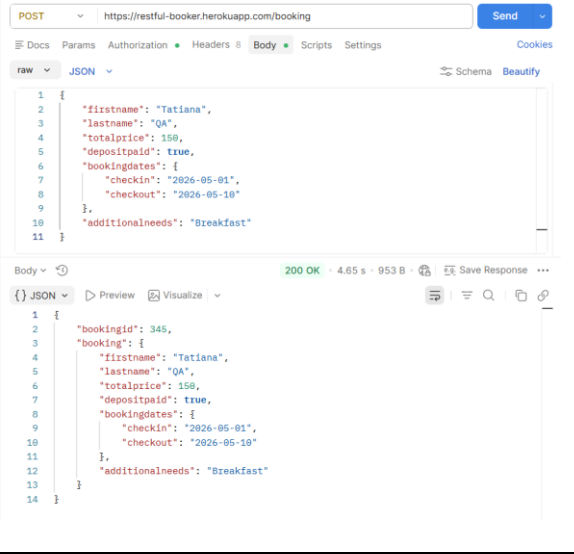
<https://restful-booker.herokuapp.com>

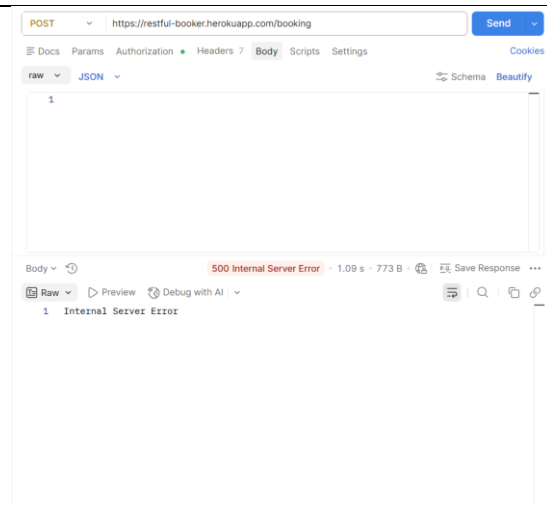
Test Case ID	Test1
Title	Проверка получения списка booking
Preconditions	Postman открыт
Method	GET
URL	https://restful-booker.herokuapp.com/booking
Steps	1. На Workspace создать New collection 2. Add request 3. Отправить GET/ booking
Expected Result	Status 200 OK
Attachments	

Test Case ID	Test2
Title	Проверка получения booking по ID
Preconditions	Postman открыт
Method	GET
URL	https://restful-booker.herokuapp.com/booking/1
Steps	1. Add request 2. Отправить GET/ booking/1
Expected Result	Status 200 OK
Attachments	 <pre> 1 { 2 "firstname": "Sally", 3 "lastname": "Wilson", 4 "totalprice": 122, 5 "depositpaid": false, 6 "bookingdates": { 7 "checkin": "2016-11-08", 8 "checkout": "2020-08-08" 9 }, 10 "additionalneeds": "Breakfast" 11 } </pre>

Test Case ID	Test3
Title	Проверка response для несуществующего booking
Preconditions	Postman открыт
Method	GET
URL	https://restful-booker.herokuapp.com/booking/12345
Steps	1. Add request 2. Отправить GET/ booking/12345
Expected Result	Status 404 Not Found

Attachments	 The screenshot shows a Postman interface with a GET request to <code>https://restful-booker.herokuapp.com/booking/12345</code>. The response is a <code>404 Not Found</code> status with a response time of 223 ms and a body size of 755 B. The response body is empty.
-------------	---

Test Case ID	Test4
Title	Проверка создания booking
Preconditions	Postman открыт
Method	POST
URL	https://restful-booker.herokuapp.com/booking
Steps	1. Add request 2. Add body 3. Отправить POST / booking
Expected Result	Status 200 OK
Attachments	 The screenshot shows a Postman interface with a POST request to <code>https://restful-booker.herokuapp.com/booking</code>. The request body is a JSON object: <code>{ "firstname": "Tatiana", "lastname": "QA", "totalprice": 150, "depositpaid": true, "bookingdates": { "checkin": "2026-05-01", "checkout": "2026-05-10" }, "additionalneeds": "Breakfast" }</code>. The response is a <code>200 OK</code> status with a response time of 4.65 s and a body size of 953 B. The response body is a JSON object: <code>{ "bookingId": 345, "booking": { "firstname": "Tatiana", "lastname": "QA", "totalprice": 150, "depositpaid": true, "bookingdates": { "checkin": "2026-05-01", "checkout": "2026-05-10" }, "additionalneeds": "Breakfast" } }</code>

Test Case ID	Test5
Title	Проверка POST с пустым body
Preconditions	Postman открыт
Method	POST
URL	https://restful-booker.herokuapp.com/booking
Steps	1. Add request 2. Add empty body 3. Отправить POST / booking
Expected Result	Status 400 Bad Request
Attachments	 The screenshot shows the Postman interface for a POST request to the URL 'https://restful-booker.herokuapp.com/booking'. The 'Body' tab is selected, and the body is empty. The response status is '500 Internal Server Error' with a response time of 1.09 s and a size of 773 B. The response body is also empty.

Test Case ID	Test6
Title	Проверить invalid JSON
Preconditions	Postman открыт
Method	POST
URL	https://restful-booker.herokuapp.com/booking
Steps	1. Добавить запрос (Add request) 2. Добавить invalid JSON 3. Отправить POST/ booking
Expected Result	Status 400 Bad Request

Attachments

POST

https://restful-booker.herokuapp.com/booking

Send

Docs Params Authorization Headers 8 Body Scripts Settings Cookies

raw JSON Schema Beautify

1 {

2 "firstname": "Tatiana",

3 "lastname": "QA",

4 "totalprice": 150,

5 "depositpaid": true,

6 "bookingdates": {

7 "checkin": "2026-05-01",

8 "checkout": "2026-05-10"

9 },

10 "additionalneeds": "Breakfast",

11 }

Body

400 Bad Request · 5.47 s · 752 B

Save Response

Raw Preview Debug with AI

1 Bad Request

Bug Report

Bug ID

BUG-001

Название

POST /api/users создает пользователя с пустым body вместо возврата ошибки валидации

Проект

ReqRes API Testing

Окружение

- API: <https://reqres.in>
- Инструмент: Postman
- Метод: POST
- Endpoint: /api/users

Severity

Medium

Priority

Medium

Preconditions

- Postman открыт
- API key добавлен в Headers

Шаги воспроизведения

1. Открыть Postman
2. Создать POST запрос
3. Указать URL:
<https://reqres.in/api/users>
4. Добавить Header:
x-api-key: <API_KEY>
5. Оставить Body пустым
6. Нажать Send

Ожидаемый результат

Сервер должен вернуть:

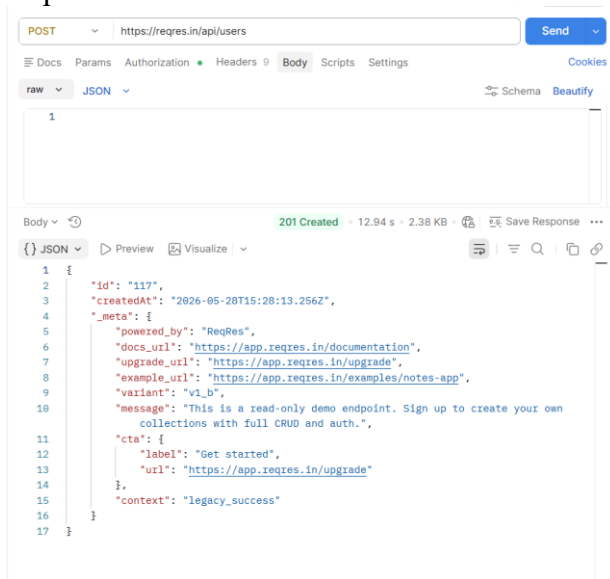
- Status 400 Bad Request
- Сообщение об ошибке валидации
- Пользователь не должен быть создан

Фактический результат

Сервер возвращает успешный ответ и создает пользователя несмотря на пустой request body.

Вложение

Скриншот ответа из Postman



Bug Report

Bug ID

BUG-002

Название

POST /booking возвращает 500 Internal Server Error при пустом request body вместо ошибки валидации

Проект

Restful Booker API Testing

Окружение

- API: <https://restful-booker.herokuapp.com>
- Инструмент: Postman
- Метод: POST
- Endpoint: /booking

Severity

High

Priority

Medium

Preconditions

Postman открыт

Шаги воспроизведения

1. Открыть Postman
2. Создать POST запрос
3. Указать URL:
<https://restful-booker.herokuapp.com/booking>
4. Оставить Body пустым
5. Нажать Send

Ожидаемый результат

Сервер должен вернуть:

- Status 400 Bad Request
- Сообщение об ошибке валидации
- Booking не должен быть создан

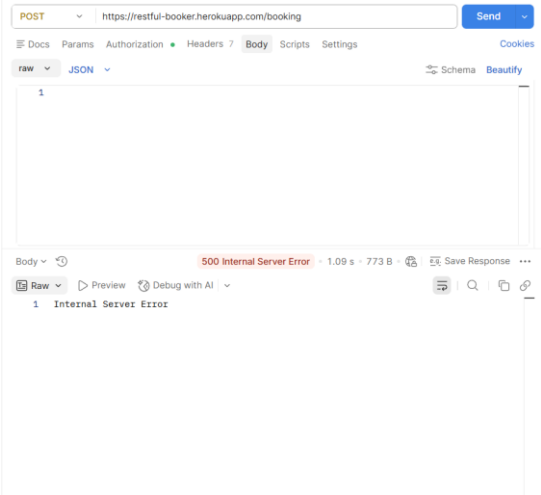
Фактический результат

Сервер возвращает:

- Status 500 Internal Server Error
- Backend не обрабатывает пустой request body корректно.

Вложение

Скриншот ответа из Postman



API Test Report

Проект

API QA Testing Practice Project

Тестируемые API

1. <https://reqres.in>
2. <https://restful-booker.herokuapp.com>

Инструменты

- Postman
- Swagger/OpenAPI
- JSON
- REST API

Цель тестирования

Проверка корректности работы REST API:

- GET requests
- POST requests
- Validation
- Error handling
- Negative testing
- Response codes

Объем тестирования

ReqRes API

Проверены:

- Получение списка пользователей
- Получение пользователя по ID
- Проверка несуществующего пользователя
- Создание пользователя
- POST запрос с пустым body
- Invalid JSON

Restful Booker API

Проверены:

- Получение списка booking
- Получение booking по ID
- Проверка несуществующего booking
- Создание booking
- POST запрос с пустым body
- Invalid JSON

Выполненные тесты

API	Количество тестов
ReqRes	6
Restful Booker	6
Всего	12

Результаты тестирования

Статус Количество

Passed 10

Failed 2

Найденные дефекты

BUG-001

POST /api/users создает пользователя с пустым body вместо возврата validation error.

Severity: Medium

BUG-002

POST /booking возвращает 500 Internal Server Error при пустом body вместо validation error.

Severity: High

Основные проверки

В ходе тестирования были проверены:

- Status Codes
- JSON response
- Response body
- Negative scenarios
- Invalid JSON handling
- Empty body validation
- Not Found responses (404)

Вывод

API testing выполнено частично успешно. Обнаружены 2 дефекта.

В ходе тестирования были обнаружены проблемы обработки некорректных запросов:

- отсутствие корректной validation при пустом body;

- некорректная обработка server-side ошибок.

Проект позволил отработать:

- работу с REST API;
- тестирование через Postman;
- составление test cases;
- negative testing;
- оформление bug reports;
- анализ response codes и response body.