

Pull Request



改一些档案

```
diff --git a/README.md b/README.md
index 7db80e4..4031b47 100644
--- a/README.md
+++ b/README.md
@@ -1,24 +1,3 @@
 # README
-This README would normally document whatever steps are necessary to get the
 application up and running.
-Things you may want to cover:
-* Ruby version
-* Configuration
  Database creation
 * Database initialization
-* How to run the test suite
 * Services (job queues, cache servers, search engines, etc.)
 * Deployment instructions
+This is My first week assignment
```



然后做一些 commit

```
    xdite@xditedeMacBook-Pro: ~/projects/job-

→ job-listing git:(version-1) X git status
On branch version-1
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
 (use "git checkout -- <file>..." to discard changes in working directory)
       modified: README.md
no changes added to commit (use "git add" and/or "git commit -a")
→ job-listing git:(version-1) x git add .
→ job-listing git:(version-1) x git commit -m "first-week"
[version-1 eda799a] first-week
1 file changed, 1 insertion(+), 22 deletions(-)
→ job-listing git:(version-1) git push origin version-1
Counting objects: 3, done.
Delta compression using up to 8 threads.
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 296 bytes | 0 bytes/s, done.
Total 3 (delta 1), reused 0 (delta 0)
To git@github.com:xdite/job-listing.git
* [new branch] version-1 -> version-1
```




git push origin version-1

```
    xdite@xditedeMacBook-Pro: ~/projects/job-listing (zsh)

→ job-listing git:(version-1) x git status
On branch version-1
Changes not staged for commit:
 (use "git add <file>..." to update what will be committed)
  (use "git checkout -- <file>..." to discard changes in working directory)
       modified: README.md
no changes added to commit (use "git add" and/or "git commit -a")
→ job-listing git:(version-1) x git add .
→ job-listing git:(version-1) X git commit -m "first-week"
[version-1 eda799a] first-week
1 file changed, 1 insertion(+), 22 deletions(-)
→ job-listing git:(version-1) git push origin version-1
Counting objects: 3, done.
Delta compression using up to 8 threads.
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 296 bytes | 0 bytes/s, done.
Total 3 (delta 1), reused 0 (delta 0)
To git@github.com:xdite/job-listing.git
                   version-1 -> version-1
 * [new branch]
→ job-listing git:(version-1)
```




开启你的 github 页面

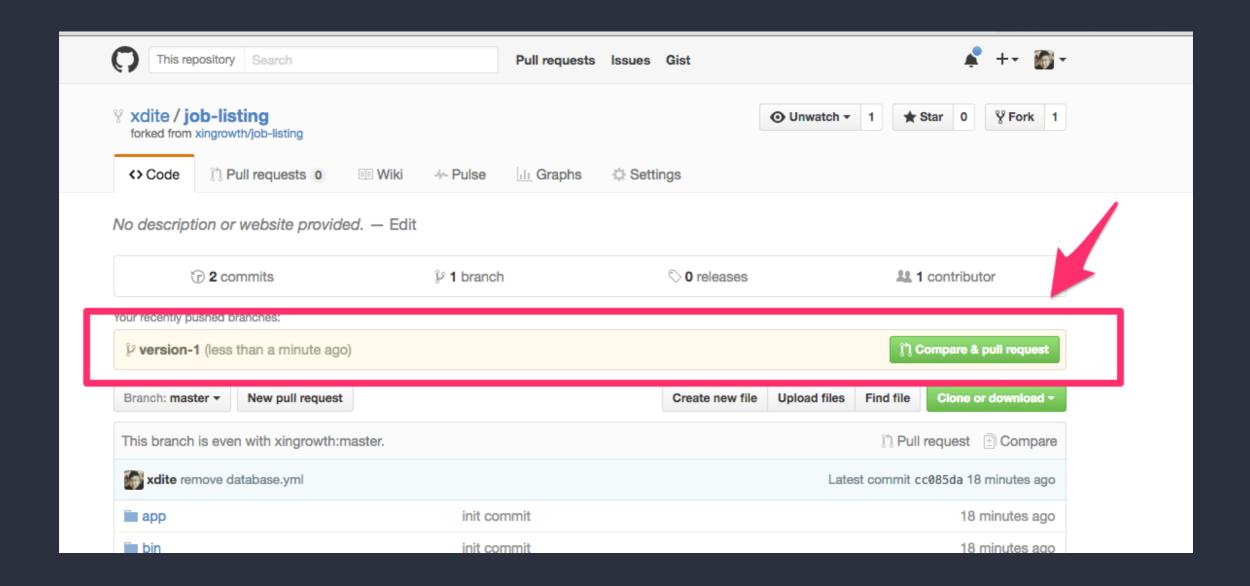



Open your first pull-request

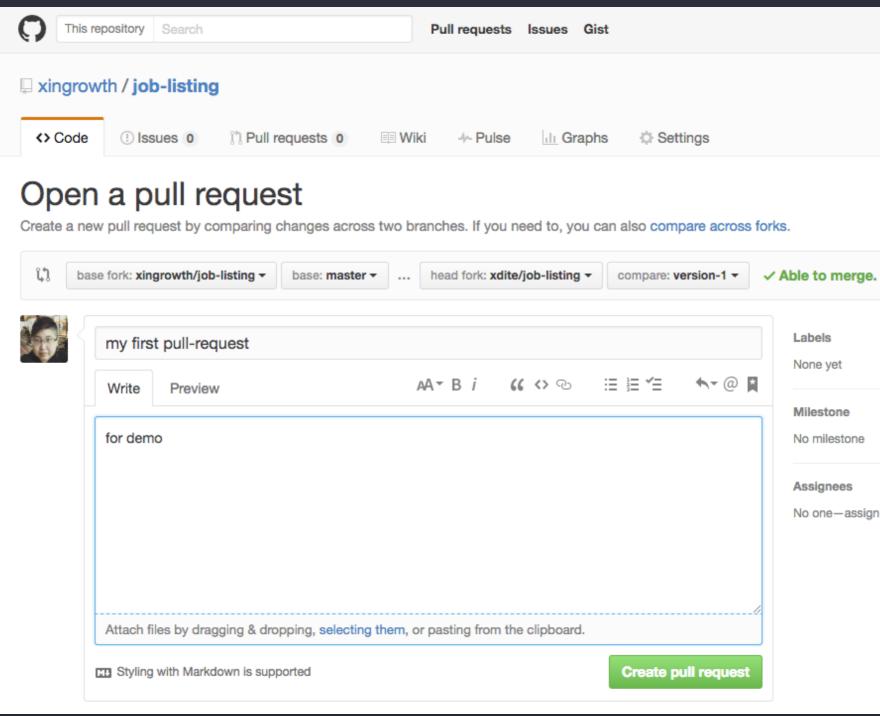



Send!

