

Petstore API Reference

Base URL: `https://petstore.swagger.io/v2` **Resource:** `/pet` | **Version:** 1.0 | **Spec:** Petstore 2.0 **Content-Type:** `application/json` **Authentication:** Optional `api_key` header (required for DELETE)

Contents

- [Petstore API Reference](#)
 - [Overview](#)
 - [API Methods](#)
 - [GET /pet/{petId}](#)
 - [POST /pet](#)
 - [PUT /pet](#)
 - [DELETE /pet/{petId}](#)
 - [HTTP Status Code Reference](#)

Overview

This document provides a complete API reference for the Petstore REST API (v2). It covers all four CRUD operations on the `/pet` resource: **GET**, **POST**, **PUT**, and **DELETE**. Each section includes the endpoint URL, request parameters, request body examples, response parameters, response body examples, and error codes.

Property	Value
Base URL	<code>https://petstore.swagger.io/v2</code>
Content-Type	<code>application/json</code>
Authentication	Optional <code>api_key</code> header (required for DELETE)

Endpoint Summary

Method	Endpoint	Description
GET	/pet/{petId}	Retrieve details of a specific pet by its ID.
POST	/pet	Add a new pet to the pet store.
PUT	/pet	Update the details of an existing pet.
DELETE	/pet/{petId}	Permanently remove a pet record from the store.

API Methods

GET /pet/{petId}

GET

/pet/{petId}

— Retrieve a single pet by its unique identifier

Introduction

This endpoint retrieves information about a single pet in the pet store, identified by its unique `petId`.

Request Details

Property	Value
Method	GET
Base URL	https://petstore.swagger.io/v2
Endpoint	/pet/{petId}

Request URL

```
https://petstore.swagger.io/v2/pet/{petId}
```

Example URL

```
https://petstore.swagger.io/v2/pet/9966
```

Request Parameters

Parameter	Required / Optional	Data Type	Example Value	Description
<code>petId</code>	Required	Int64	<code>9966</code>	The unique numeric identifier of the pet to retrieve.

Response Parameters

Parameter	Child Parameter	Data Type	Example Value	Description
<code>id</code>	—	Int64	<code>9966</code>	Unique identifier assigned to the pet.
<code>category</code>	<code>id</code>	Int64	<code>1</code>	Unique identifier of the pet category.
	<code>name</code>	String	<code>cats</code>	Name of the pet category.
<code>name</code>	—	String	<code>sher.cats</code>	Name of the pet.
<code>photoUrls</code>	—	String	—	URL of the pet's photo.
<code>tags</code>	<code>id</code>	Int64	—	Unique identifier of the tag assigned to the pet.
	<code>name</code>	String	—	Name of the tag assigned to the pet.
<code>status</code>	—	String	<code>available</code> / <code>pending</code> / <code>sold</code>	Availability status of the pet in the store.

Example Response


```
{
  "id": 9966,
  "category": {
    "id": 1,
    "name": "cats"
  },
  "name": "sher.cats",
  "photoUrls": [
    "string"
  ],
  "tags": [
    {
      "id": 0,
      "name": "string"
    }
  ],
  "status": "available"
}
```

Error Responses

HTTP Status	Description	Common Cause
400 Bad Request	Invalid ID supplied.	The <code>petId</code> value is not a valid integer.
404 Not Found	Pet not found.	No pet exists with the specified <code>petId</code> .

Postman Screenshot

The screenshot below shows the Postman test result for `GET /pet/9966`. **HTTP 200 OK** confirms the request was successful and the pet record was returned.

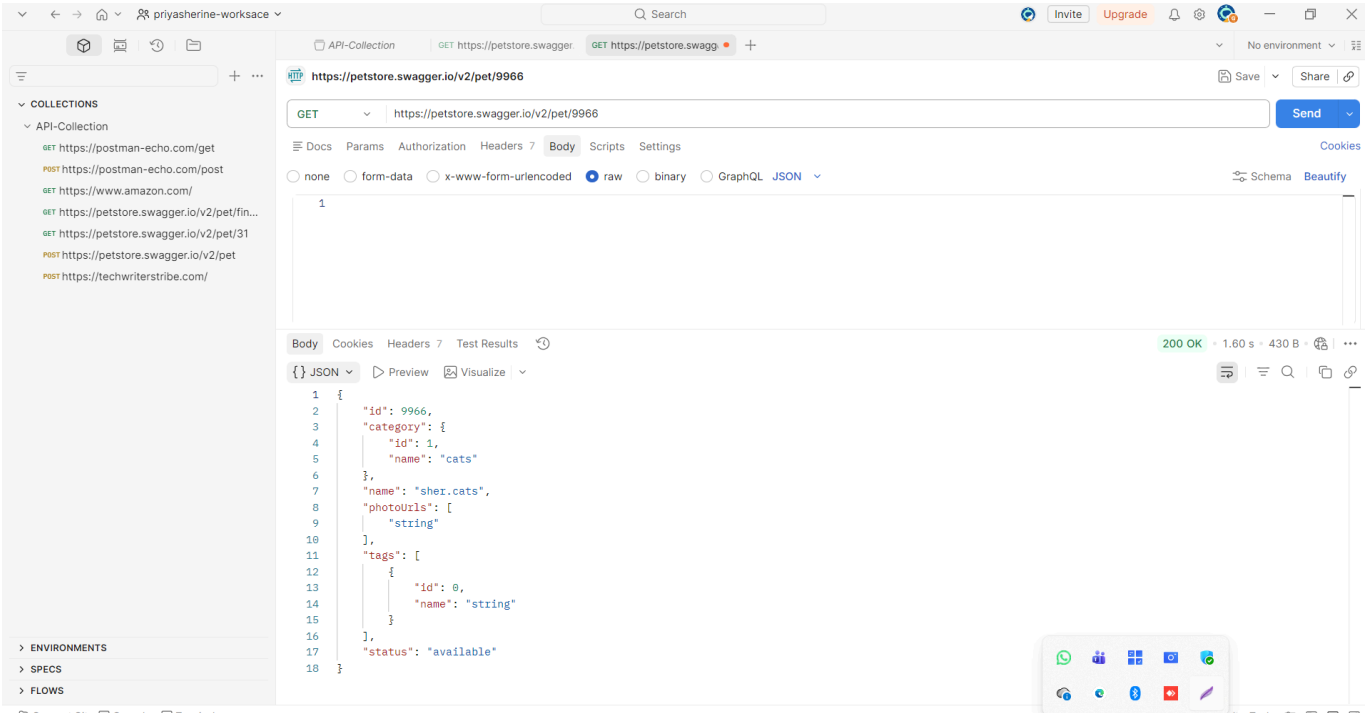

POST /pet

POST

/pet

— Add a new pet to the pet store

Introduction

This endpoint adds a new pet to the pet store. The request body contains the pet details in JSON format. The server returns the created pet object with a confirmed status.

Request Details

Property	Value
Method	POST
Base URL	https://petstore.swagger.io/v2
Endpoint	/pet
Content-Type	application/json

Request URL

```
https://petstore.swagger.io/v2/pet
```

Example URL

```
https://petstore.swagger.io/v2/pet
```

Request Parameters

Send all parameters in the request body as a JSON object. The `name` and `photoUrls` fields are **required**.

Parameter	Required / Optional	Data Type	Example Value	Description
<code>id</code>	Optional	Int64	<code>9966</code>	Unique identifier of the pet. The server assigns this value.
<code>category</code>	Optional	Object	—	Category object containing the pet species details.
<code>id</code>	Optional	Int64	<code>1</code>	Unique identifier of the pet category.
<code>name</code>	Optional	String	<code>cats</code>	Name of the pet category.
<code>name</code>	Required	String	<code>sher.cats</code>	Name of the pet.
<code>photoUrls</code>	Required	Array	<code>string</code>	List of URLs pointing to photos of the pet.
<code>tags</code>	Optional	Array	—	List of tag objects assigned to the pet.
<code>id</code>	Optional	Int64	<code>0</code>	Unique identifier of the tag.
<code>name</code>	Optional	String	<code>string</code>	Name of the tag.
<code>status</code>	Optional	String	<code>available</code>	Availability status of the pet. Allowed values: <code>available</code> /

Parameter	Required / Optional	Data Type	Example Value	Description
				pending / sold.

Request Body Example

```
{
  "id": 9966,
  "category": {
    "id": 1,
    "name": "cats"
  },
  "name": "sher.cats",
  "photoUrls": [
    "string"
  ],
  "tags": [
    {
      "id": 0,
      "name": "string"
    }
  ],
  "status": "available"
}
```

Response Parameters

Parameter	Child Parameter	Data Type	Example Value	Description
id	—	Int64	9966	Unique identifier assigned to the pet.
category	id	Int64	1	Unique identifier of the pet category.
	name	String	cats	Name of the pet category.
name	—	String	sher.cats	Name of the pet.
photoUrls	—	Array	string	URL of the pet's photo.
tags	id	Int64	0	Unique identifier of the tag assigned to the pet.

Parameter	Child Parameter	Data Type	Example Value	Description
	name	String	string	Name of the tag assigned to the pet.
status	—	String	available	Availability status of the pet in the store.

Example Response


```
{
  "id": 9966,
  "category": {
    "id": 1,
    "name": "cats"
  },
  "name": "sher.cats",
  "photoUrls": [
    "string"
  ],
  "tags": [
    {
      "id": 0,
      "name": "string"
    }
  ],
  "status": "available"
}
```

Error Responses

HTTP Status	Description	Common Cause
405 Method Not Allowed	Invalid input.	The request body is missing or contains invalid fields.
400 Bad Request	Invalid ID supplied.	The <code>id</code> value is not a valid integer.
404 Not Found	Pet not found.	No pet exists with the specified <code>petId</code> .

Postman Screenshot

The screenshot below shows the Postman test result for `POST /pet`. **HTTP 200 OK** confirms the request is successful and the pet record is created.

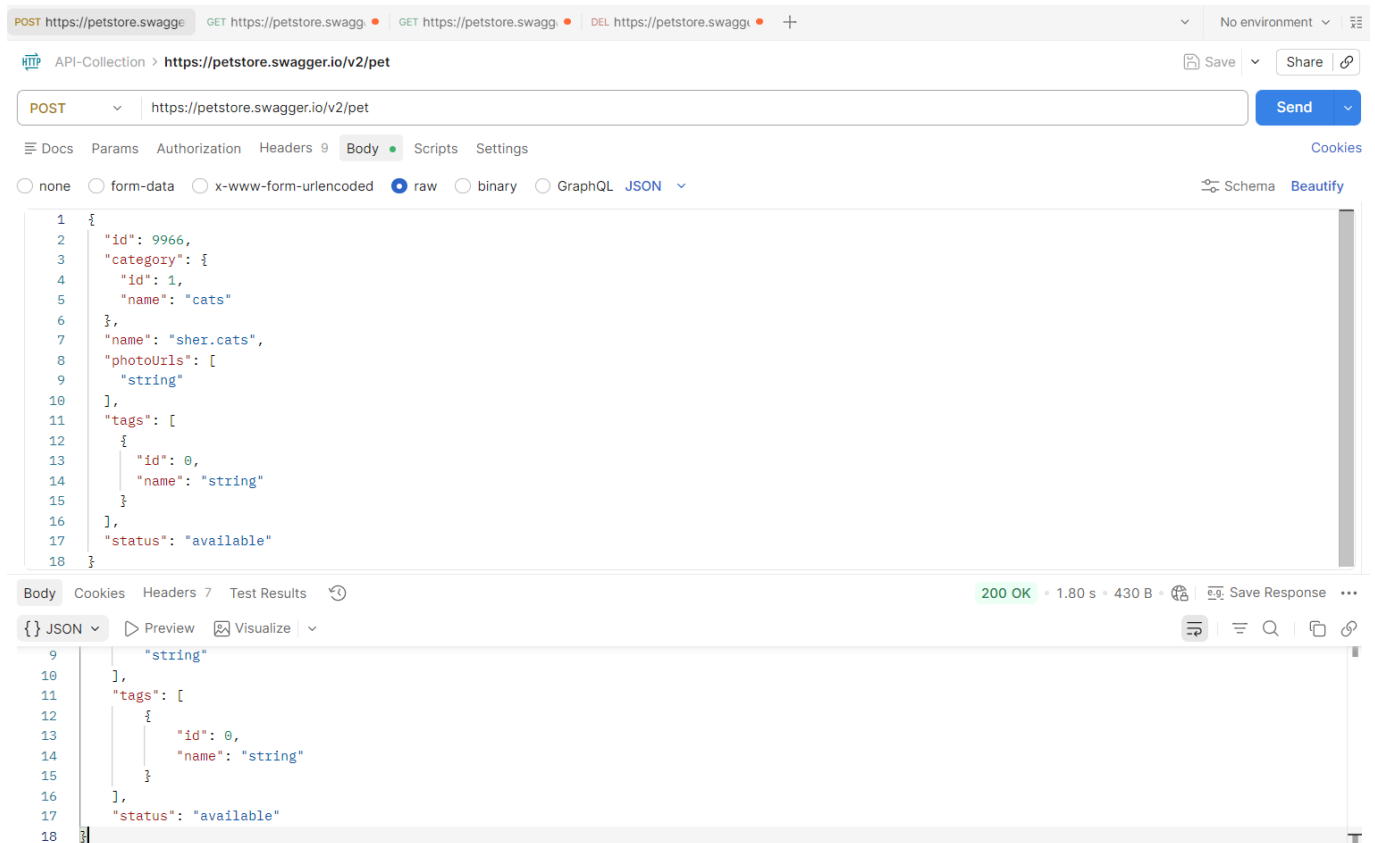

PUT /pet

PUT `/pet` — Update an existing pet

Introduction

This endpoint updates an existing pet in the pet store. The request body contains the updated pet details in JSON format. The server returns the updated pet object with a confirmed status.

Request Details

Property	Value
Method	PUT
Base URL	https://petstore.swagger.io/v2
Endpoint	/pet
Content-Type	application/json

Request URL

```
https://petstore.swagger.io/v2/pet
```

Example URL

```
https://petstore.swagger.io/v2/pet
```

Request Parameters

Send all parameters in the request body as a JSON object. The `name` and `photoUrls` fields are **required**.

Parameter	Required / Optional	Data Type	Example Value	Description
<code>id</code>	Optional	Int64	9966	Unique identifier of the pet. The server assigns this value.
<code>category</code>	Optional	Object	—	Category object containing the pet species details.
<code>id</code>	Optional	Int64	1	Unique identifier of the pet category.
<code>name</code>	Optional	String	string	Name of the pet category.
<code>name</code>	Required	String	doggie	Name of the pet.

Parameter	Required / Optional	Data Type	Example Value	Description
<code>photoUrls</code>	Required	Array	<code>string</code>	List of URLs pointing to photos of the pet.
<code>tags</code>	Optional	Array	—	List of tag objects assigned to the pet.
<code>id</code>	Optional	Int64	<code>0</code>	Unique identifier of the tag.
<code>name</code>	Optional	String	<code>string</code>	Name of the tag.
<code>status</code>	Optional	String	<code>available</code>	Availability status of the pet. Allowed values: <code>available</code> / <code>pending</code> / <code>sold</code> .

Request Body Example

```
{
  "id": 9966,
  "category": {
    "id": 1,
    "name": "string"
  },
  "name": "doggie",
  "photoUrls": [
    "string"
  ],
  "tags": [
    {
      "id": 0,
      "name": "string"
    }
  ],
  "status": "available"
}
```

Response Parameters

Parameter	Child Parameter	Data Type	Description
<code>id</code>	—	Int64	Unique identifier assigned to the pet.

Parameter	Child Parameter	Data Type	Description
category	id	Int64	Unique identifier of the pet category.
	name	String	Name of the pet category.
name	—	String	Name of the pet.
photoUrls	—	Array	URL of the pet's photo.
tags	id	Int64	Unique identifier of the tag assigned to the pet.
	name	String	Name of the tag assigned to the pet.
status	—	String	Availability status of the pet in the store.

Example Response

```
{
  "id": 9966,
  "category": {
    "id": 1,
    "name": "string"
  },
  "name": "doggie",
  "photoUrls": [
    "string"
  ],
  "tags": [
    {
      "id": 0,
      "name": "string"
    }
  ],
  "status": "available"
}
```


Error Responses

HTTP Status	Description	Common Cause
400 Bad Request	Invalid ID supplied.	The <code>id</code> value is not a valid integer.

HTTP Status	Description	Common Cause
404 Not Found	Pet not found.	No pet exists with the specified <code>petId</code> .
405 Method Not Allowed	Validation exception.	The request body is missing or contains invalid fields.

Postman Screenshot

The screenshot below shows the Postman test result for `PUT /pet`. **HTTP 200 OK** confirms the request is successful and the pet record is updated.

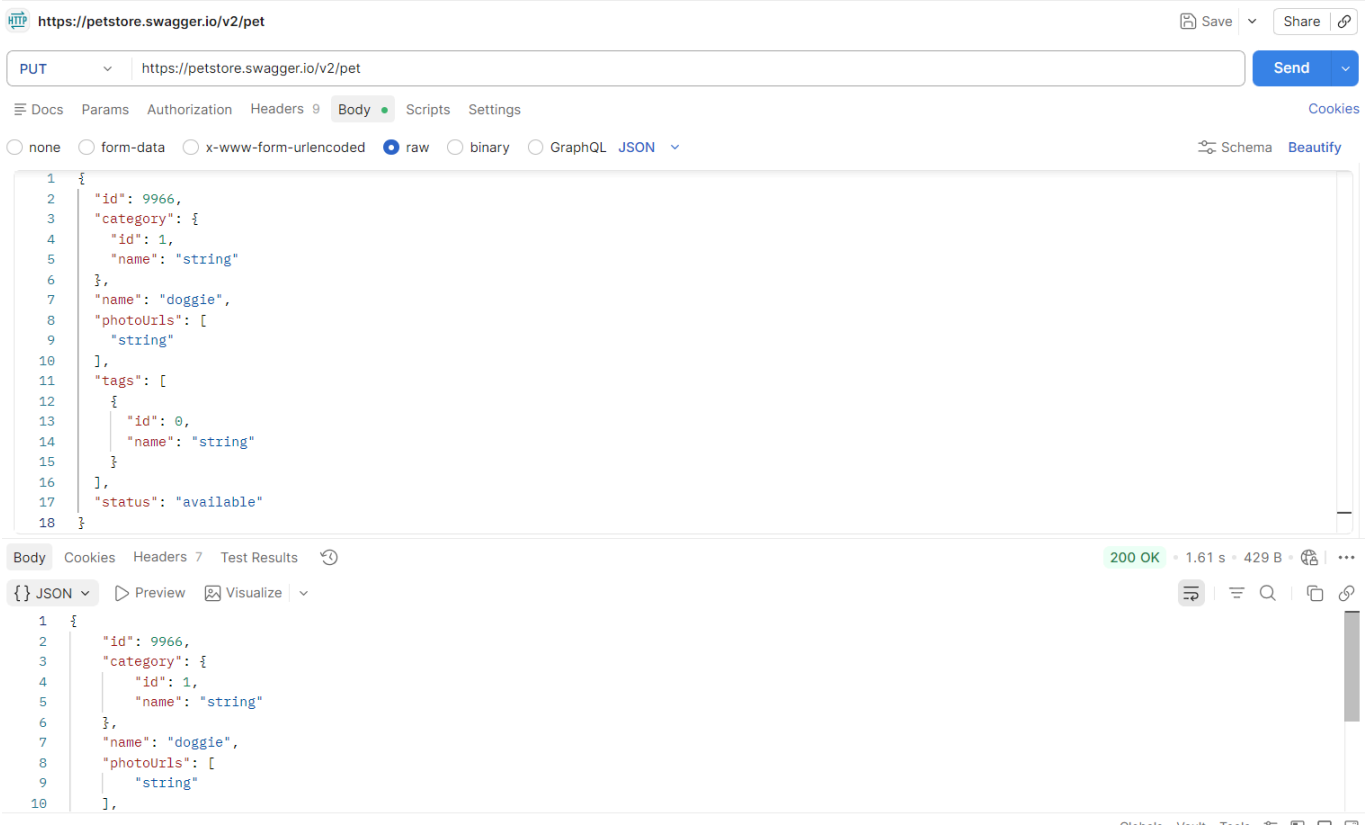

DELETE /pet/{petId}

DELETE `/pet/{petId}` — Permanently remove a pet from the store

Introduction

This endpoint permanently deletes a pet record from the pet store, identified by its unique `petId`. **This operation is irreversible.**

Request Details

Property	Value
Method	DELETE
Base URL	https://petstore.swagger.io/v2
Endpoint	/pet/{petId}

Request URL

```
https://petstore.swagger.io/v2/pet/{petId}
```

Example URL

```
https://petstore.swagger.io/v2/pet/9966
```

Request Parameters

Parameter	Required / Optional	Data Type	Example Value	Description
<code>petId</code>	Required	Int64	9966	The unique numeric identifier of the pet to delete.
<code>api_key</code>	Optional	String	—	API key passed in the request header for authentication.

Response Parameters

Parameter	Child Parameter	Data Type	Example Value	Description
<code>code</code>	—	Int64	<code>200</code>	HTTP status code returned by the server.
<code>type</code>	—	String	<code>unknown</code>	Response type returned by the server.
<code>message</code>	—	String	<code>9966</code>	The <code>petId</code> of the deleted pet record.

Example Response


```
{
  "code": 200,
  "type": "unknown",
  "message": "9966"
}
```

Error Responses

HTTP Status	Description	Common Cause
<code>400 Bad Request</code>	Invalid ID supplied.	The <code>petId</code> value is not a valid integer.
<code>404 Not Found</code>	Pet not found.	No pet exists with the specified <code>petId</code> .

Postman Screenshot

The screenshot below shows the Postman test result for `DELETE /pet/9966`. **HTTP 200 OK** confirms the request was successful and the pet record was deleted.

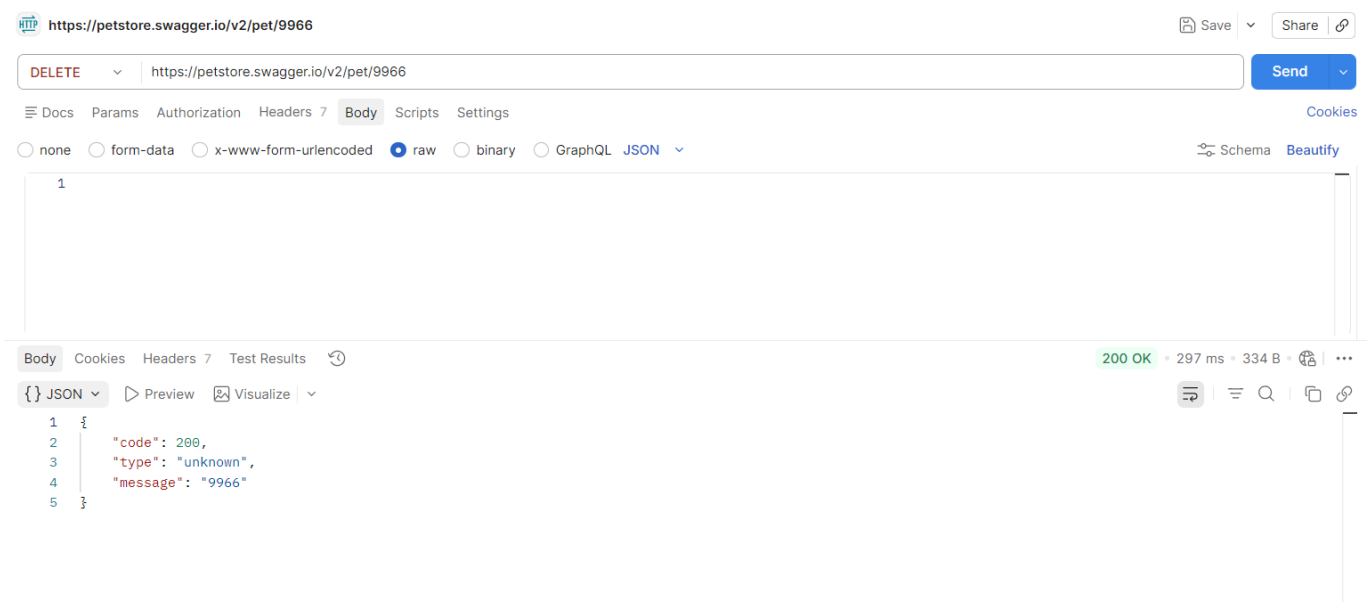

HTTP Status Code Reference

The following HTTP status codes may be returned by any endpoint in this API.

HTTP Status Code	Status Text	Applies To	Description
200	OK	GET · POST · PUT · DELETE	The request succeeds. The response body contains the result.
400	Bad Request	GET · PUT · DELETE	The request contains an invalid <code>petId</code> . Supply a valid integer.
404	Not Found	GET · PUT · DELETE	No pet record exists for the given <code>petId</code> . Verify the ID and retry.
405	Method Not Allowed	POST · PUT	The request body is missing or contains invalid fields.