


WEEK 01 · REFERENCE

THE HTML CATALOGUE

The companion to the lecture, and the one you keep open. Eleven slides you will still be using in week 6, when the project needs a table or a form and you want the anatomy in front of you rather than in your memory.

YOSSI ARVIV · FRONT-END WEB DEVELOPMENT · RUPPIN

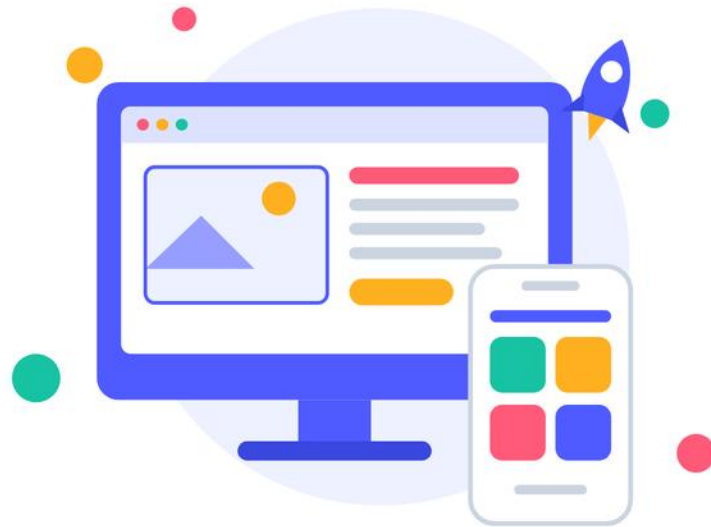

Four of these topics — lists, anchors, void elements and the tag map — are taught in the lecture as well. That is deliberate: this deck is the copy you keep.

THE WHOLE VOCABULARY, ON ONE PAGE

DOCUMENT

html · head · body · title · meta ·
link · script · style

LISTS

ul · ol · li · dl · dt · dd

FORMS

form · fieldset · legend · label ·
input · textarea · select ·
option · button

SECTIONING

header · nav · main · section ·
article · aside · footer · h1–h6

LINKS AND MEDIA

a · img · picture · source ·
figure · figcaption · video ·
audio · svg · iframe

INTERACTIVE

details · summary · dialog ·
progress · meter

TEXT

p · strong · em · b · i · small ·
mark · time · code · pre ·
blockquote · abbr

TABLES

table · caption · thead · tbody ·
tfoot · tr · th · td

MEANINGLESS ON PURPOSE

div · span — and that is the entire point of
them.

About 110 elements exist. These are the ones this course uses. Every one of them is on MDN, one search away — the value of this page is knowing what to search for.

AN ELEMENT, NAMED

```
1 <a href="/pricing" class="btn">View pricing</a>
2 <!-- ^tag ^attribute      ^content ^closing -->
3 
```

- tag** the name — what this thing IS
- attribute** `name="value"` — extra information about it
- content** what sits between the tags
- void** elements with no content and no closing tag

VOID ELEMENTS — NO CONTENT, NO CLOSING TAG

```
  
<br>      <!-- a line break that is part of the content -->  
<hr>      <!-- a thematic break between sections -->  
<input type="email" id="email" name="email">  
<meta charset="utf-8">  
<link rel="stylesheet" href="style.css">
```

There is nothing to put inside them, so there is nothing to close.

`<img></img>` is not a thing.

LISTS — THREE KINDS, AND THEY NEST

```
1 <ul>      <!-- order does not matter -->
2   <li>Milk</li>
3   <li>Bread</li>
4 </ul>
5
6 <ol>      <!-- order IS the meaning -->
7   <li>Install Node</li>
8   <li>Then clone</li>
9 </ol>
10
11 <dl>      <!-- term and description -->
12   <dt>DNS</dt>
13   <dd>A name becomes an address</dd>
14 </dl>
```

NEVER

Do not number an `<ol>` by hand — you get 1. 1. 1. the moment you reorder. And never fake a list with `<br>`.

ONLY LI

The only legal direct child of `ul / ol` is `li`. Put anything else inside an `li`.

ID AND CLASS

ID — ONE, UNIQUE

Appears **once** per document. Targets an anchor (`#contact`), links a `label` to its field, and is what `getElementById` looks for.

CLASS — MANY, REUSABLE

As many elements as you like, and an element can carry several. This is what CSS hangs on from week 2 onwards.

```
1 <section id="contact" class="panel panel--wide">...</section>
2
3 <a href="#contact">Jump to contact</a>
```


NESTING AND INDENTATION

UNREADABLE

```
<main><section><h2>About</h2>  
<p>Text</p></section></main>
```

TWO SPACES PER LEVEL

```
<main>  
  <section>  
    <h2>About</h2>  
    <p>Text</p>  
  </section>  
</main>
```

Both render identically. One of them you can still edit in week 12. Prettier does this on save — it is already configured in the folder you were given.

ANCHORS — EVERY KIND OF LINK

```
1 <a href="about.html">Another page in this folder</a>
2 <a href="../index.html">Up one folder</a>
3 <a href="#contact">A section of this page</a>
4 <a href="mailto:me@ruppin.ac.il">Open a mail client</a>
5 <a href="https://mdn.io" target="_blank" rel="noopener noreferrer">A new tab</a>
```

THE ONE RULE

The link text must make sense read on its own. A screen-reader user can ask for a list of every link on the page — ten of them saying “Click here” is a list of nothing.

TABLES — THE FULL ANATOMY

```
1 <table>
2   <caption>Opening hours</caption>
3   <thead>
4     <tr>
5       <th scope="col">Day</th>
6       <th scope="col">Hours</th>
7     </tr>
8   </thead>
9   <tbody>
10    <tr>
11      <th scope="row">Sunday</th>
12      <td>08:00–16:00</td>
13    </tr>
14  </tbody>
15 </table>
```

scope is the whole point: it tells a screen reader which header owns which cell. A table without it is a grid of unlabelled numbers.

FORMS — THE INPUT TYPES WORTH KNOWING

text	anything short
email	validates the shape, and changes the phone keyboard
tel	numeric keypad on mobile
number	with <code>min</code> , <code>max</code> , <code>step</code>
date	a real date picker, free
password	masked — masked, not secure
checkbox	many independent yes/no
radio	one of several — same <code>name</code>
file	upload
textarea	multi-line; not an input
select	a list of <code>option</code> s

Create Account

Full name

Email

Newsletter topics

☐ Tech

☐ Deals

Plan

☒ Basic

☐ Pro

Country

About you

Every field here has a real label. That is the assignment.

THE SEMANTIC ELEMENTS, ALL OF THEM

PAGE REGIONS

header nav main footer
aside

CONTENT

section article figure
figcaption time blockquote

TEXT MEANING

strong em abbr code mark
small

This content should be meaningful on its own, even if separated from the rest of the webpage.

WHERE TO LOOK THINGS UP

MDN

`developer.mozilla.org` — the reference. Search “mdn <tag>” and you land on the right page.

THE VALIDATOR

`validator.w3.org`, or the checks already in your repo.

NOT A RANDOM BLOG

Half of them are ten years old and still teaching `<center>`.