

S

M

D

G

Vibeathon HowTo

What? Why? How? Where? When?

SMDG#80 Shanghai, September 7–11, 2026



Agenda



1. First steps with DeepSeek harness
2. Agentic AI examples
3. Advanced track: software development in web browser
4. How to set up DeepSeek in my company?



First steps with DeepSeek harness

Access



Team	DeepSeek URL	Username	Password
1	https://team1.hack.gsb.n.trade	team1	vibecoding-in-shanghai
2	https://team2.hack.gsb.n.trade	team2	
3	https://team3.hack.gsb.n.trade	team3	
4	https://team4.hack.gsb.n.trade	team4	
5	https://team5.hack.gsb.n.trade	team5	

workspace ▾ Standard mode ▾

Describe what you want to build

+ Full access ▾

deepseek-v4-pro-0813 ▾



Data: ask for it and explore brief.md



Prompt: Tell me what you see in data folder?

`/workspace/data` is a 652 KB, 34-file container-shipping dataset organised as five "track" folders — each one a themed briefing (`brief.md`) plus synthetic but schema-realistic data. It looks like hackathon/exercise material for maritime-data tooling (SMDG / UN-CEFACT flavour).

Track 1 — Vessel Schedule (`Track 1 – Vessel Schedule/`)

Ship-planning data: 5 CSVs + brief.

- `services.csv` (3) → `vessels.csv` (8, with IMO/capacity) → `sailings.csv` (48) → `port_calls.csv` (180, rotation legs with `estimated_arrival`, `port` as UN/LOCODE e.g. `CNSH`) → `bookings.csv` (459, with `teu`, `roll_window`, `rolled_flag`)
- Brief covers schedule reliability, voyage construction, slot allocation, rolled cargo.

Static files access



Navigate to /files/ (note the slash at the end), e.g.

<https://teamN.hack.gsbn.trade/files/>

1 directory 1 file 169 B total		List Grid	
NAME	Search	SIZE	MODIFIED
data/		—	9/1/2026, 11:36:19 PM
shanghai-facts.txt		169 B	9/4/2026, 12:39:38 AM

Agentic AI examples

Examples



1. Local file + search
2. human in the loop & rendering, ask questions about the prompt
3. Agentic setup: negotiation example

Example 1: local file + search



<https://teamN.hack.gsb.nyu.edu/files/shanghai-facts.txt>

1. Shanghai Tower is the tallest building in Shanghai and in China, at 468 meters.
2. Shanghai has more subway stations than any other city's metro system in the world.

Prompt

Read shanghai-facts.txt in the workspace and check each claim against the web. For each one, say whether it's accurate, and if not, give the correction with a source.

Example 1: result



Into the Unknown Preview

 workspace  Standard mode

Read shanghai-facts.txt in the workspace and check each claim against the web. For each one, say whether it's accurate, and if not, give the correction with a source.

  Full access qwen3.8-flash 

Summary

#	Claim	Verdict	Correction
1	Shanghai Tower tallest in China, 468 m	 Height wrong	It's 632 m ; 468 m is the Oriental Pearl Tower
2	Shanghai metro has most stations in the world	 Outdated	Beijing has the most (539 vs. Shanghai's 523, as of Dec 27, 2025)

S M D G

[Session log](#) 

ASSISTANT Now let me verify both claims against the web.

ASSISTANT The initial results are mixed. Let me dig deeper on both claims with more targeted searches.

ASSISTANT Let me pull the authoritative numbers directly from Wikipedia and the official Shanghai government page.

ASSISTANT curl is not available. Let me try wget or python's urllib.

```
TOOL bash {"command": "python3 - <<'E0F'\nimport urllib.request, json\n- [stderr] bash: line 1: python3: command not found [exit code: 127]
```

ASSISTANT no Python3, no curl either. Let me check which tools exist: node? wget?

```
TOOL bash {"command":"which node wget busybox perl python 2>/dev/null;_ - /usr/local/bin/node /usr/bin/perl v22.23.2
```

ASSISTANT Node v22 is available. I'll fetch the Wikipedia REST summary with node. For the number of stations, I might also want the infobox data from "Shanghai Metro" and "Beijing Subway" — the summary extract might contain the number of stations. Let's first fetch the summary, and if needed, grab the full wikitext/HTML for the infobox stats.

```
TOOL bash {"command":"node - <<'EOF'\nconst titles = ["Shanghai_Tower", - - - Shanghai_Tower - - - ERROR: Unexpected token '<', '<!DOCTYPE "... is not valid JSON - - - Oriental_Pearl_Tower - - - ERROR: Unexpected token '<', '<!DOCTYPE "... is not valid JSON - - - Shanghai_Metro - - - ERROR: Unexpected token -
```

ASSISTANT The REST API returned HTML (probably a redirect to the en.wikipedia.org REST endpoint got blocked, or the mobile domain is needed). I'll try the action API instead: <https://en.wikipedia.org/w/api.php?action=query&prop=extracts&extinfo&explain&format=json&titles=...> Or the page content might be returned via a redirect. Let me check what the response actually is — cou...

```
TOOL bash ("command":"node -e '<EOF>\n(async () => {\n const url = \"ht_ - status 403 NOT JSON, first 500 chars: <DOCTYPE html> <html lang=\\\"en\\\" <meta charset=\\\"utf-8\\\" <title>Wikimedia Error</title> <style> * { margin: 0; padding: 0; } body { background: #fff; font: 15px/1.6 sans-serif; color: #333.
```

ASSISTANT Wikipedia is blocking this UA / direct fetch (403). Wikimedia requires a descriptive UA that includes contact info. Maybe it's blocking cloud IPs. Let me try with a different UA, or use the DBpedia summary as an alternative. Or use the mobile URL. Or use a Wikipedia mirror like [wikiwand](#) via search snippets. Or use curl via a proxy? Let me try a browser-like User-Agent and Acce...

ASSISTANT Wikipedia blocks direct requests from this network. Let me try other authoritative sources and more targeted searches.

ASSISTANT Confirmed on the official Shanghai municipal government page: Shanghai Tower: 632 meters, tallest building in China, 3rd tallest in the world. (Claim 1's "468 meters" is wrong. 468 meters is the Oriental Pearl Tower.) Claim 1's assertion "tallest in Shanghai and China" — the building identity is correct, but the height figure is wrong. Note: Is Shanghai Tower still the tallest in Ch...

```
TOOL bash {"command": "node - <<'EOF'\n(async () => {\n  const h = {"Use_ - Shanghai Metro -> status 403 len 5485 Beijing Subway -> status 403 len 5485 NYC Subway -> status 403 len 5485 Seoul -> status 403 len 5485
```

Assistant Wikiwand is also blocked. Options: DBpedia summary (old but has station numbers); or use web_search with a more targeted query. Or try Wikipedia via another route: e.g., the Wikipedia API might block IPs from this host, but it might also be possible via "smart wikis" or via the Wikipedia REST via the "simple" version... Probably the entire Wikimedia domain is blocked by IP. T...

ASSISTANT The snippets don't directly state the numbers. Let's try fetching some of these pages: <https://realit.onliner.by/2025-09-20/top-metropolitenov-mira> — A ranking of the world's largest metro systems with station counts and route lengths (probably as of mid-2025). <http://bj.people.com.cn/2025/12/14/14540-41418249.html> — Beijing: total operating distance to exceed 900 km...

TOOL `bash {"command": "node -e 'EOF'\n(async) () => {\n const h = {\n Use_ https://realt.onliner.by/2025/09/20/top-metropolitenov-mira -> 200 - Самое большое метро в мире - рейтинг по числу станций 18+ Недвижимость Главная страница Каталог 60 000+ скидок здесь! Новости - Люди Авто Спорт Технологии ...`

ASSISTANT Now I have important numbers lined up: Beijing (official, People's Daily Online, November 21, 2025, from a press conference on November 20, 2025): 29 operating lines, 524 stations (of which 100 are transfer stations), operating distance 879 km. By the end of 2025: distance over 900 km (per the same article, 909 km at the end of the "14th Five-Year Plan"). Onliner (Septem...

Tool web_search ("queries":["上海地铁 车站总数 518 世界最大 运营里程", "北京- Sources: 市交通委向申通集团开展轨道交通设施设备运营维护座谈交流 "十四五"时期交通建设重点显著 轨道交通运营总里程居全国第一 北京"八通两线"枢纽格局成型 北京要建"首都之窗" 北京市人民政府门户网站 - 我在听, 请说话 (10s) 上海906, 北京909! 事关地铁出行, 京沪两大城市接洽..."])

TOOL `bash {"command":"node -c 'EOF'\n(async) => {\n const h = ("Use- https://cbgc.scol.com.cn/news/7112475 -> 200 len=84485 勿公开转发。 事关地铁出行 京沪两城连发两布好消息：都有新线开通 地铁总里程本周双双破900 ... 上海 18号线二期本周六开通运营 地铁总里程首次突破900大关 12月27日（周六）首趟车起，18号线二期工程将开通试`

ASSISTANT Now I have a very clear overall picture of the late-December 2025 situation: December 27, 2025 (both cities opened new lines on the same day): Shanghai: Line 18 Phase 2 opened, 5 new stations → 21 lines, 906 km, 523 stations [per CCTV News via bjd]. Beijing: On December 27, 2025, three new line sections opened (Line 17 middle section, Line 18 [Beijing's own Line 18: Ma...

TOOL web_search ("queries":["北京地铁 12月27日 新线开通 车站 909公里 2025"], Sources: ["三城地铁新线开通首日 市民周末早平高峰体验 "新线开通 我开心了!"] - 我在听, 请说话(10s) خطأ 30 جمل بذلك إجمالي عدد الخطوات العاملة إلى 30 خطأ! - الفتحاح 3 خطوات جديدة: المصادر الاتفاق بيكون، لجمال بذلك إجمالي عدد الخطوات العاملة إلى 30 خطأ! - الفتحاح 3 خطوات جديدة: المصادر الاتفاق بيكون، لجمال بذلك إجمالي عدد الخطوات العاملة إلى 30 خطأ!

ASSISTANT Let's retrieve the Xinhua article about the Beijing opening on December 27, and the Beijing Daily article "Three new subway lines open today" — I'm hoping to see the total number of stations listed after the opening. The Arabic version states "30 lines in total." Let's grab these two Chinese articles.

TOOL `bash {"command":"node -e '<<EOF'\n(async () => {\n const h = \"Use. http://www.xinhuanet.com.cn/politics/20251227/8a8a565dc3d43d48ae85d4cd05267ed9288/c.html -> 200 中段线 (工人体育场—十里河)、18号线 (马连洼—大屯东)、6号线南延 (潞城—潞阳) 等3段 | 城市轨道交通新线开通, 至此, 北京城市轨道交通运营总里程达909公里。 3.`

ASSISTANT I read both claims in shanghai-facts.txt and checked them against current sources (including the official Shanghai municipal government site and Chinese state media reports from the December 2025 line openings). Here's the verdict: Claim 1 - ✗ Inaccurate (wrong height) "Shanghai Tower is the tallest building in Shanghai and in China, at 468 meters." Correct: Shanghai To...

Example 2: human in the loop & rendering



> I'm attending SMDG #80 meeting in Shanghai. Give me food recommendation near the venue. **Clarify my preferences** before making any recommendation.


> **Render** suggestions on the map and show it to me.

 **Your venue: Ocean Hotel Shanghai (上海远洋宾馆), 1171 Dongdaming Rd, Hongkou**

Per the [SMDG80 official page](#), the conference hotel and venue are the same building (7–11 Sept 2026, in partnership with COSCO). It sits in the North Bund port quarter by Tilanqiao Metro (Line 12) — not a premium-dining district. **The truth about your constraints:** within a 15-min walk there is no ¥800+ pure-shanghainese (本帮菜) venue; the good stuff clusters ~2 km west where Suzhou Creek meets the Huangpu. So my picks are ranked accordingly — one strictly-walkable, two worth a 6-min cab.

 **If you'll allow a 5–8 min taxi (~2 km): 新大陆·中国厨房 (Xin Dalu Chinese Kitchen) @ Hyatt on the Bund**

- **Why:** the best authentic Shanghai/Jiangnan cooking within reach — 4.7/5 on [Ctrip](#), [453 reviews](#). The [Shangri-La Tatler dining guide](#) describes it as "essentially classic Jiangnan flavor": jasmine-smoked

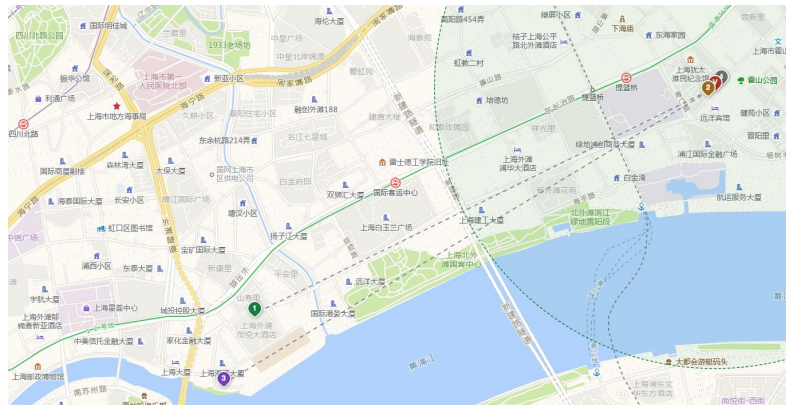

Example 3: “sell me this pen”



Context: Jordan Belfort in “The Wolf of Wall Street” pulls out a pen and challenges his team to sell it to him.

Set up “buyer” and “seller” agents and let them negotiate the prices of a 1\$ pen.



Source: “The Wolf of Wall Street”

Example 3: “sell me this pen”



Prompt:

A pen costs me \$1 to make. Spawn two subagents: a **seller**, who has to move this exact pen and is coached in the fast-talking, always-be-closing style of the "sell me this pen" scene from Wolf of Wall Street — creates urgency, reframes objections, sells the pen as a solution before naming a price; and a **buyer**, who has \$20 in their pocket, no actual need for a pen, and will only pay for something they're genuinely convinced is worth it.

Relay their negotiation back and forth yourself, offer by offer — don't let them just each state a position once. Give it up to 8 rounds. Stop early if they agree on a price, or if either side genuinely walks away (buyer refuses to continue, or seller won't go below a price the buyer will pay). At the end, report: the full back-and-forth, the final outcome (a deal price — which could land above or below the \$1 cost — or no sale), and why that outcome happened rather than some other price.

6 turns · 32 steps | LLM 5m27s · Tool call 0.2s | TTFT avg 1.4s · 70 tok/s

Example 3: outcome & explanation



Outcome

Deal price	**6 * *—6 × the 1 cost, \$5 profit
Path	ask 20 → 12 → 8 → takes 6 · bid 3 → 5 → \$6 → sold
Rounds used	4 of 8

Why \$6 and not some other price

- **Why the buyer paid anything at all:** every real concession came from an *identity cut*, never a logic cut. Round 1's money argument moved him 0. *The status re frame (bank pen = "you look like a free customer") and the glovebox confession moved him 3 → 5 → 6.* He wasn't buying ink; the seller made not-buying an admission of the thing he'd just confessed — the guy who watches contracts die. Walking away after "that cost me" would've cost him more than \$6.
- **Why 6 rather than 8/12/20:** the seller's floor wasn't cost — at 1 *sunk*, *the pen was worth 0* in his drawer — it was rhetoric. He'd told the buyer "one unsigned contract is a hundred times twelve," so grinding out the last \$2 would've broken his own frame (he'd become the haggler over two bucks). "I don't do halves twice" had already spent his mid-deal floors; the only credible step left was the close.
- **Why not 3/5:** the buyer's toughness was always a bluff — each round he volunteered *new evidence* for the seller's case (the versions line, the glovebox story, "eight is under the line where I'd feel it"). The seller priced against that trail of concessions, not the stated bids, and stopped exactly at the buyer's last honest number.
- **Net:** a textbook split — seller conceded ~70% off his anchor and still cleared 6× cost; buyer paid 30% of it and still got the pen. Each walked away able to tell himself he won, which is exactly what a \$6 pen is worth.

Example 4 (bonus): “dollar auction”



Simulate the classic "[dollar auction](#)" game with three student subagents bidding on a real \$10 note. Auction rules, tell all three agents these exactly:

Bidding starts at \$1, minimum increment \$1, ascending open-outcry — each round every agent still in the game may raise or pass.

When bidding ends: **the highest bidder pays what they bid and receives the \$10. The second-highest bidder also pays what they bid — but receives nothing.** Everyone else pays nothing and receives nothing.

Each agent's goal is to maximize its own net value (money received minus money paid), not to "win" for its own sake.

Run it as rounds: each round, tell all three agents the current highest and second-highest bids and who holds them, then collect each agent's decision (raise by some amount, or drop out — once dropped, an agent can't re-enter). Run at least 10 rounds. Stop earlier only if the auction genuinely resolves — no eligible bidder is willing to raise for two consecutive rounds, or only one bidder remains.

At the end, report: the full round-by-round bid history, the final outcome (winner's payment, second-place payment, every agent's net payoff), and whether the group fell into the classic trap of the combined payments exceeding the \$10 note — and if so, at what round that became mathematically unavoidable for the agent in second place.

9 turns · 18 steps | LLM 8m12s · Tool call 0.3s | TTFT avg 1.5s · 62 tok/s

Example 4 (bonus): “dollar auction”



Final outcome (Rule 2 applied)


Bidder	Position	Pays	Receives	Net
Alice	Highest bid \$3	\$3	\$10 note	+\$7
Bob	Second-highest bid \$2 (binding after drop)	\$2	nothing	-\$2
Carol	No bid on record	\$0	—	\$0

Did they fall into the classic trap?

No. Combined payments were $3+2=5 \leq 10$ — the trap requires the pair to reach $6/5$ or higher (combined ≥ 11). *The class “lost” 5 of value on a \$10 transfer but escaped the ruinous spiral.*

Agent presets

Feel free to use your own agents or select one of the presets for each track

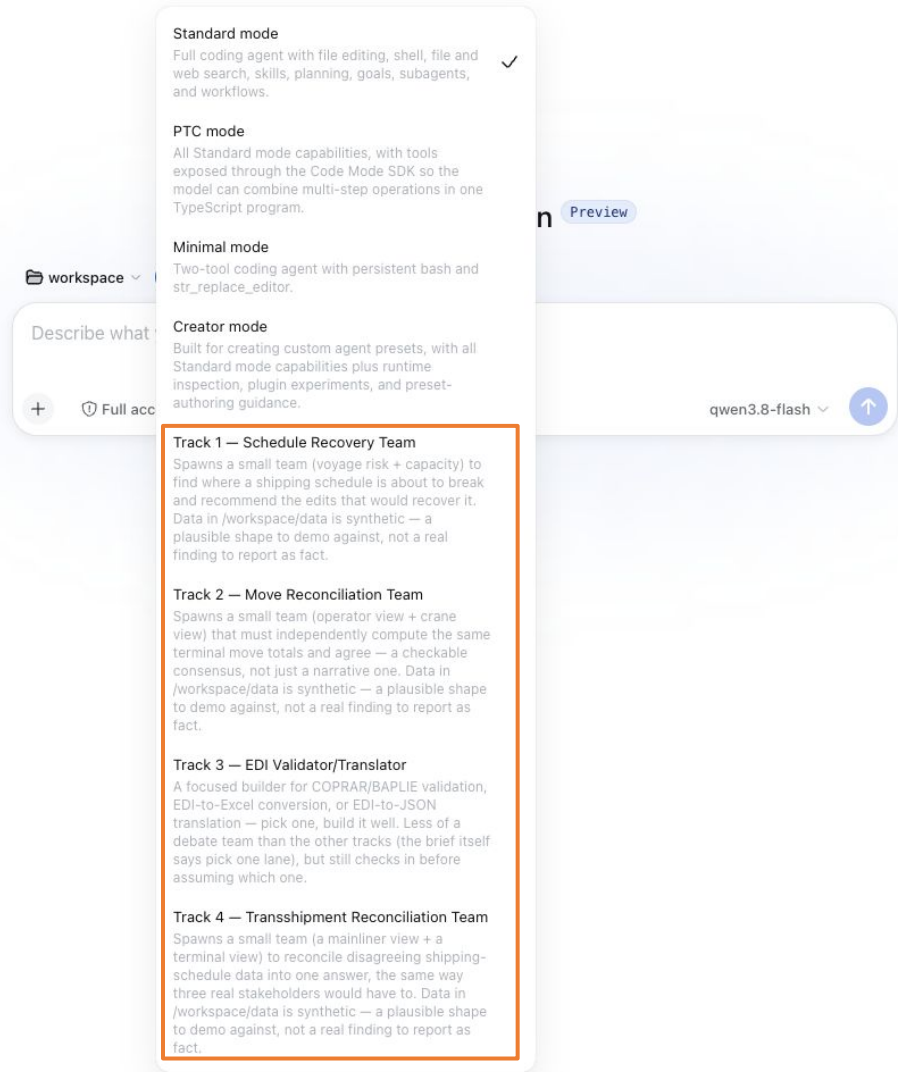


Advanced track: software
development in web browser

Access




Team	Bolt.diy URL	Username	Password
1	https://build1.hack.gsbn.trade	team1	vibecoding-in-shanghai
2	https://build2.hack.gsbn.trade	team2	
3	https://build3.hack.gsbn.trade	team3	
4	https://build4.hack.gsbn.trade	team4	
5	https://build5.hack.gsbn.trade	team5	

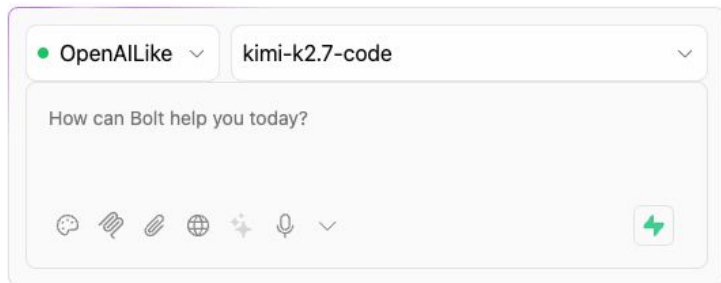

Only use it if you explored DeepSeek harness. Bolt requires more tokens and some Node.js experience. The build takes longer than a static DeepSeek website.

How to set up DeepSeek
in my company?

Architecture

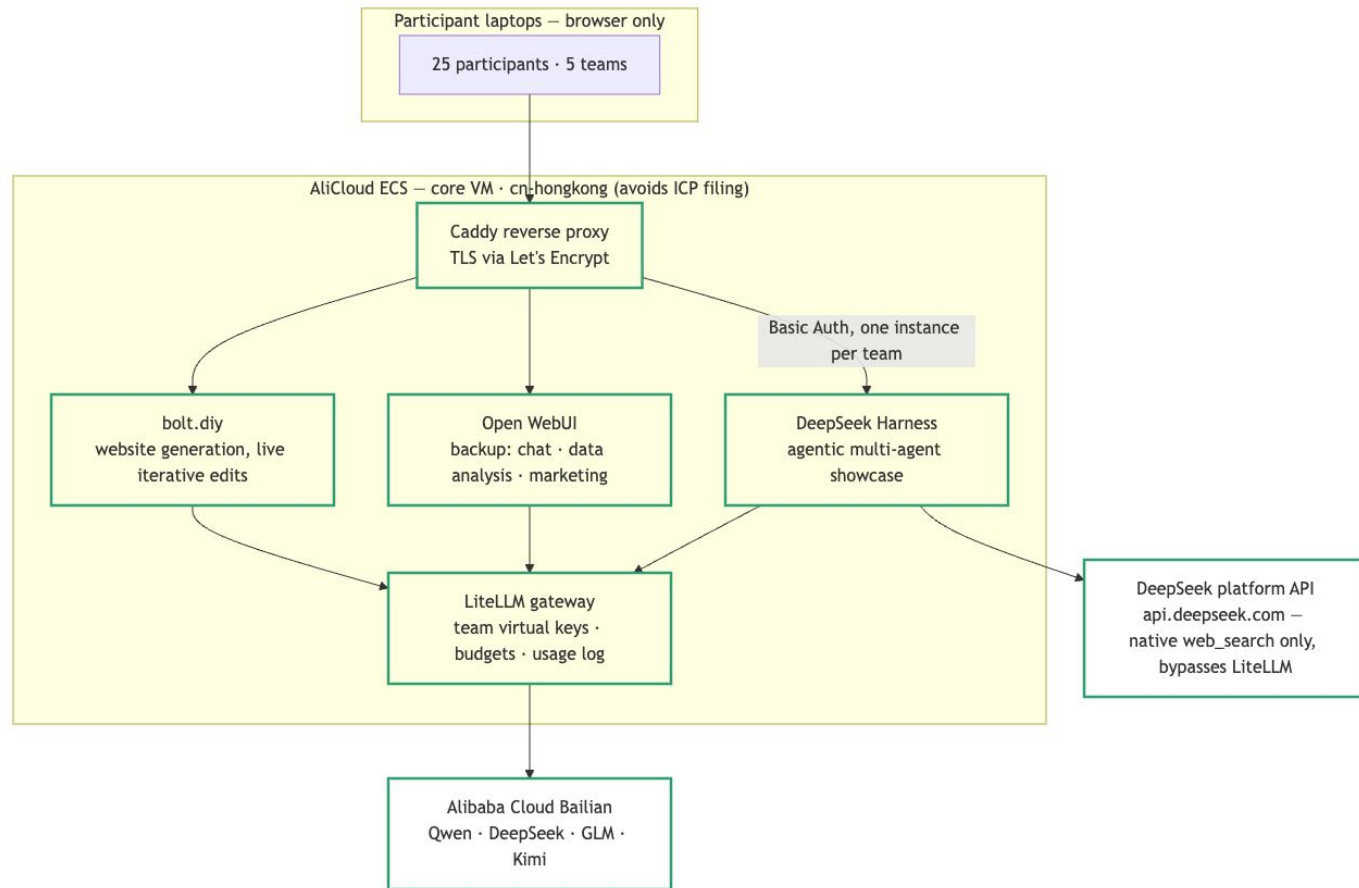

Token provider:
Alibaba Cloud

Token key
management,
minting, budgets:
LiteLLM

Apps:
DeepSeek/Bolt.diy

Reverse Proxy:
Caddy

Architecture notes



- Ask us for infra repository access & Terraform configs. It could be deployed to major cloud providers.
- DeepSeek container was built from scratch to support custom models.
- Need to keep track of models MaxContext and Token throughput (TPM).
- The harness could be in the cloud or installed locally as a desktop app.



Thank You

SMDG e.V.

Registered at Amtsgericht Pinneberg, Reg.-ID VR 2142 PI

Board members: Ann-Christin Fröhmcke (co-chair), Sönke Witt (co-chair), Heiko Meyer (treasurer), Thor Baunsgaard, Jasmin Drönnner, Alex Hartnoll, Y.S. Hwang,
Mark Lim, Shin Shin Lung, Francisco Javier Moral Santiago, Jost Müller, Robèrt Roestenburg, Michael Schröder, Julien Vangeon

<https://smdg.org>