

Introduction to Programming with Scientific Applications



Course evaluation
*"Den første forelæsning var meget
skræmmende og overvældende"*

Course description – kursuskatalog.au.dk/en/course/111388/

Introduction to Programming with Scientific Applications

Description of qualifications

After the course the participants will have knowledge of principles and techniques for systematic **construction of programs**.

At the end of the course, the participants will be able to:

- apply constructions of a common programming language,
- develop **well-structured** programs and perform **testing** and **debugging** of these,
- explain fundamental programming concepts and basic algorithmic techniques,
- apply standard **tools for scientific applications**,
- use the documentation for a programming language and available software packages.

Contents

The course gives an introduction to programming with scientific applications.

Programming concepts and techniques are introduced using the **Python** programming language.

The programming concepts are **illustrated in other programming languages**. The following content is included.

Basic programming constructs: Data types, operators, variables, flow of control, conditionals, loops, functions, recursion, scope, exceptions. *Object orientation:* Abstract data types, classes, inheritance, encapsulation. *Basic algorithmic techniques:* Sorting, binary search, dynamic programming. *Systematic development of programs:* Testing and debugging. File-based input/output, numerical analysis, functional programming. Scientific computing using standard packages for Python.

ECTS 10

Hours - weeks - periods

Lectures 2 x 2 hours/week

TA sessions 1 x 3 hours/week

Study café 3 x 1 hour/week

Language of instruction

Danish

Instructor

Gerth Stølting Brodal

Academic prerequisites

(Some) Linear algebra

Exam

5 hour programming

Aid: Computer and Internet, headphones, 7-point grading scale

Prerequisites for examination participation

Submission and approval of 10 mandatory assignments and submission of **1 implementation project**

Notes

Grade reflects an overall assessment of implementation project and written examination. Project counts 20% and written exam counts 80%

Lecturer

Name	Gerth Stølting Brodal
Research	Algorithms and Data Structures (Computer Science)
Teaching	
2018 -	BSc course on Introduction to Programming with Scientific Applications
2003 -	BSc course on Introduction to Algorithms and Data Structures
1999 - 17	MSc courses on Computational Geometry, Algorithm Engineering, Advanced Data Structures, External Memory Algorithms and Data Structures
Python	Advanced Beginner

Question – Primary Education?

- a) Mathematics
- b) Mathematics-Economics
- c) Data Science
- d) Chemistry
- e) Physics
- f) Other Science-Technology
- g) Other

Question – Programming languages you know?

+750 listed on en.wikipedia.org/wiki/List_of_programming_languages

Question – Programming experience?

For the programming language you know best (if any) please state your proficiency level within the language.

- a) None
- b) Fundamental awareness (basic knowledge)
- c) Novice (limited experience)
- d) Intermediate (practical application)
- e) Advanced (applied theory)
- f) Expert (recognized authority)

Some course practicalities

Primary lecture material = slides




	Monday	Tuesday	Wednesday	Thursday	Friday
8:15-9:00					
9:15-10:00	Lecture	KE Mix			
10:15-11:00					
11:15-12:00	Studiecafé		MØ1		
12:15-13:00					
13:15-14:00					
14:15-15:00	DV MØ2	MA2	Lecture		
15:15-16:00					
16:15-17:00		Studiecafé	Studiecafé		
17:15-18:00					

Week	Monday	Tuesday	Wednesday	Thursday	Friday
5	- / F1	no TA clas:	- / F2		TØ1
6	TØ1 / F3	TØ1	TØ1 / F4	TØ1	TØ2
7	TØ2 / F5	TØ2	TØ2 / F6	TØ2	TØ3
8	TØ3 / F7	TØ3	TØ3 / F8	TØ3	TØ4
9	TØ4 / F9	TØ4	TØ4 / F10	TØ4	TØ5
10	TØ5 / F11	TØ5	TØ5 / F12	TØ5	TØ6
11	TØ6 / F13	TØ6	TØ6 / F14	TØ6	TØ7
12	TØ7 / F15	TØ7	TØ7 / F16	TØ7	TØ8
13	TØ8 / F17	TØ8	TØ8 / F18	TØ8	TØ9
14				Easter break	
15			-	- / F21	TØ9
16	TØ9 / F19	TØ9	TØ9 / F20	TØ10	TØ11
17	TØ10 / F22	TØ10	TØ10 / F23	TØ11	Kapselfjads?
18	TØ11 / F24	TØ11	TØ11 / F25	TØ12	Prayer Day
19	TØ12 / F26	TØ12	TØ12 / -	TØ13	TØ12
20	TØ13 / F27	TØ13	TØ13 / -		Ascension Day



Course page on Brightspace and GitHub

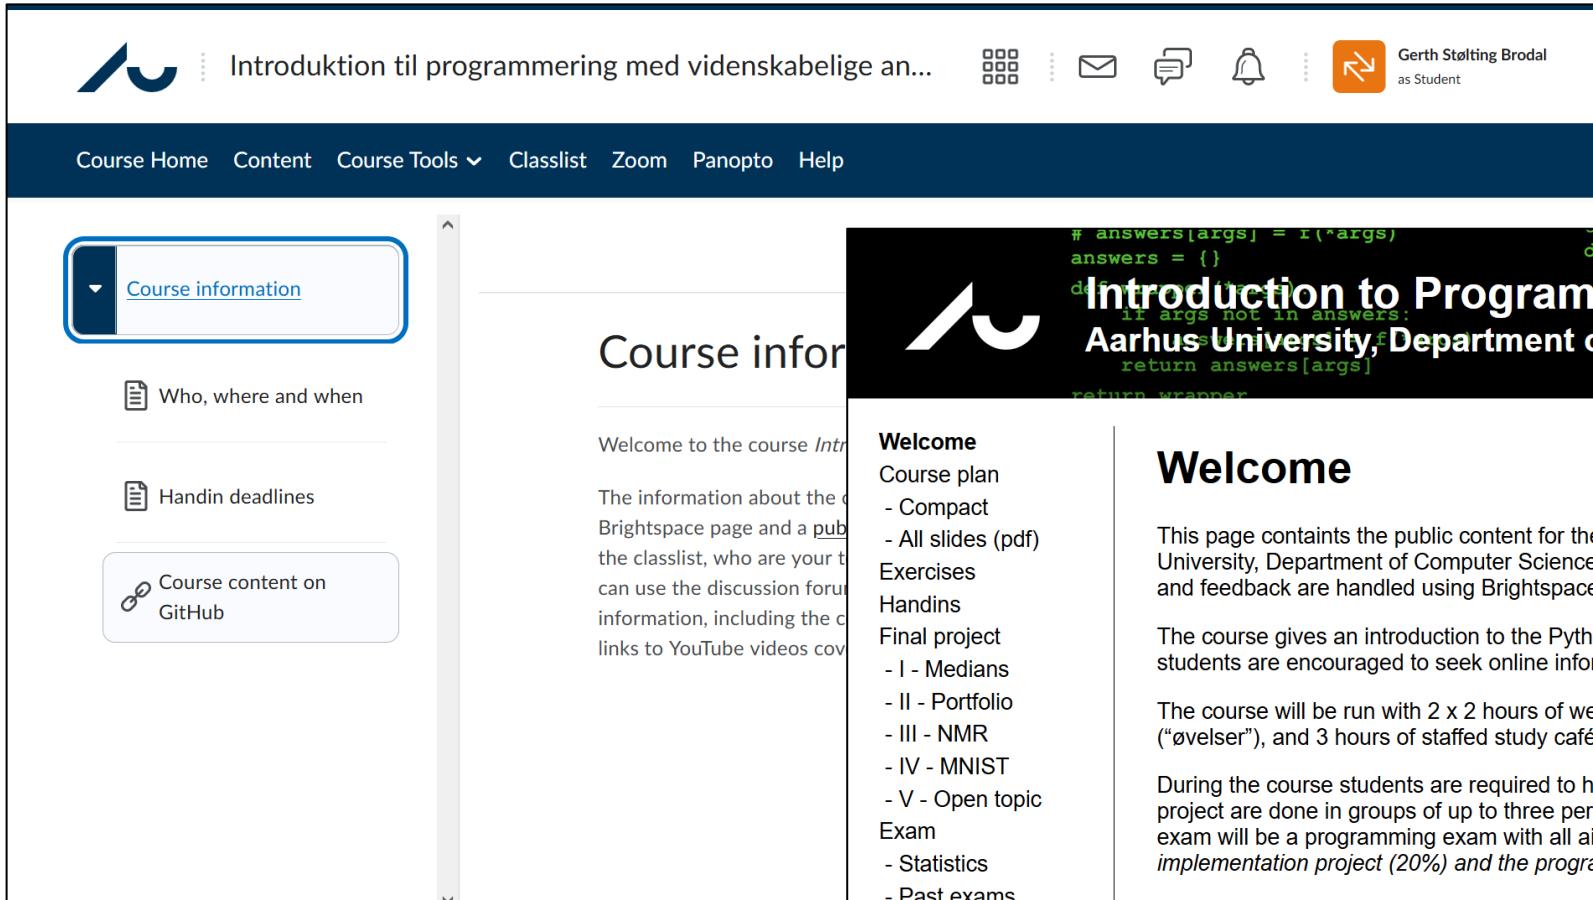

The screenshot shows a Brightspace course page for "Introduktion til programmering med videnskabelige an...". The page includes a navigation bar with links to Course Home, Content, Course Tools, Classlist, Zoom, Panopto, and Help. A sidebar on the left contains links for Course information, Who, where and when, Handin deadlines, and Course content on GitHub. The main content area features a "Course information" section with a welcome message and a sidebar with a navigation menu. On the right, there is a GitHub integration showing a repository for "gsbrodal.github.io/ipsa" with code snippets and a preview of the course's GitHub page.

Introduktion til programmering med videnskabelige an...

Course Home Content Course Tools Classlist Zoom Panopto Help

Course information

Who, where and when

Handin deadlines

Course content on GitHub

Course information

Welcome to the course *Introduction to Programming with Scientific Applications* offered by Aarhus University, Department of Computer Science. The lecturer is Gerth Stølting Brodal. Class lists, discussions, student handins and feedback are handled using Brightspace at brightspace.au.dk.

This page contains the public content for the course *Introduction to Programming with Scientific Applications* offered by Aarhus University, Department of Computer Science. The lecturer is Gerth Stølting Brodal. Class lists, discussions, student handins and feedback are handled using Brightspace at brightspace.au.dk.

The course gives an introduction to the Python 3 programming language and applications using Python. Throughout the course students are encouraged to seek online information in e.g. the Python language specification.

The course will be run with 2 x 2 hours of weekly lectures (alternatively recorded lectures on YouTube), 3 hours of TA classes ("øvelser"), and 3 hours of staffed study café.

During the course students are required to hand in 10 weekly handins and one larger implementation project. Handins and the project are done in groups of up to three persons. Approval of the weekly handins is a prerequisite to attend the exam. The final exam will be a programming exam with all aids, incl. internet, and the *final grade will be based on an overall evaluation of the implementation project (20%) and the programming exam (80%)*.

Welcome

Course content

The course gives an introduction to programming with scientific applications. Programming concepts and techniques are introduced using the Python programming language. The programming concepts are illustrated in other programming languages. The following content is included.

- Basic programming constructs: Data types, operators, variables, flow of control, conditionals, loops, functions, recursion, scope, exceptions.

gsbrodal.github.io/ipsa

```
# answers[args] = r(*args)
answers = {}
def binomial(n, k):
    if 0 < k < n:
        return answers[k]
    if args not in answers:
        if k == 0:
            return 1
        else:
            return binomial(n-1, k-1) + binomial(n-1, k)
    return answers[k]
```

Aarhus University, Department of Computer Science

Course plan

- Compact
- All slides (pdf)

Exercises

Handins

Final project

- I - Medians
- II - Portfolio
- III - NMR
- IV - MNIST
- V - Open topic

Exam

- Statistics
- Past exams

Plagiarism

Workload


Literature

Python installation

- Windows 10
- Mac & Linux


Python resources

Course text book – optional

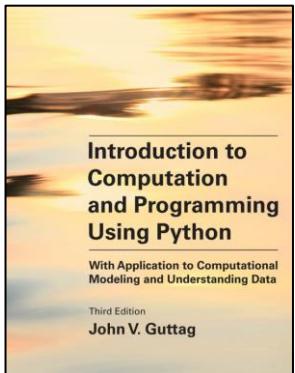

John V. Guttag: **Introduction to Computation and Programming Using Python, Third Edition With Application to Computational Modeling and Understanding Data.** Third Edition. 664 pages. MIT Press, 2021.

- *[Guttag, 2nd Ed., page 8] "The reader should be forewarned that this book is by no means a comprehensive introduction to Python". 3rd Ed. added about 80 pages on introduction to Python.*
- *Covers all basic features of Python enabling you to deal with data in Chapters 1-10 (212 pages) - remaining chapters are applications*
- *Other resources: Google, stackoverflow, Python.org, YouTube, ...*



Comparison to a standard text book on the *programming language* Python by Cay Horstmann and Rance Necaise:

Topic **recursion** is covered by Guttag on page 123 (2nd edition on page 50), Horstmann and Necaise do it on page 611


Some other books on Python




O'Reilly, 2013
1684 pages




Wiley, 2016
752 pages

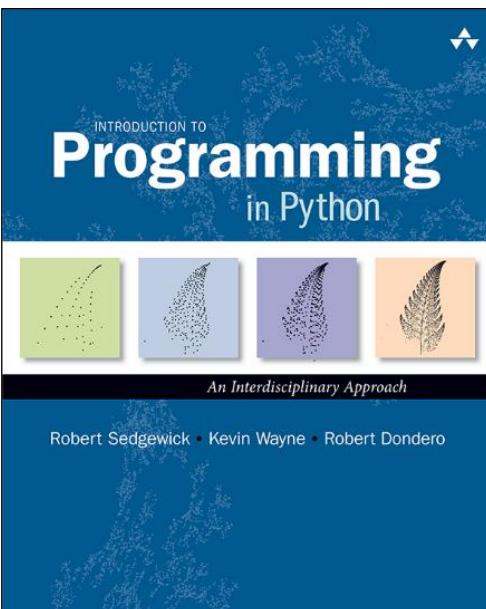

Addison-Wesley, 2015
794 pages

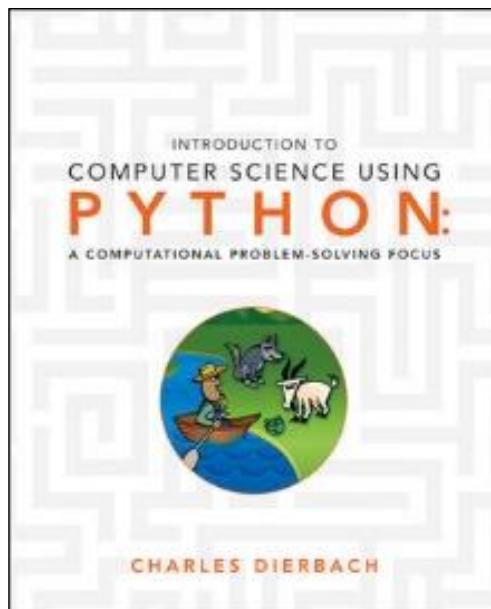

Wiley, 2013
580 pages

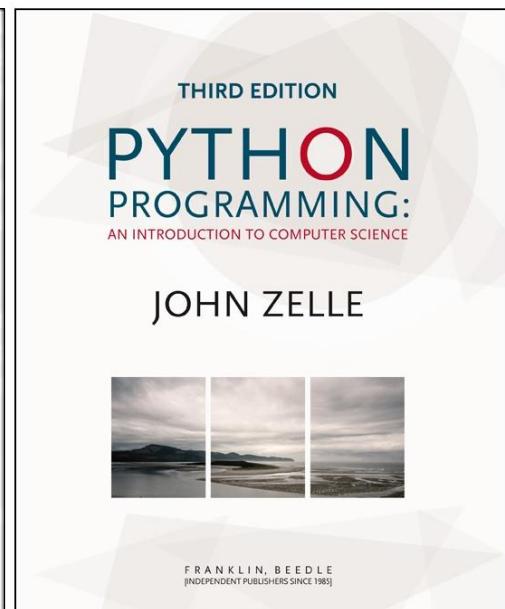

Franklin & Beedle, 2016
552 pages

... numerous online introduction texts/courses/videos on Python

Two Python programs

A Python program

Python shell

```
> x = 7
> print(x * x)
| 49
```

Memory



- 7 is an *integer literal* – in Python denoted an “int”
- x is the name of a *variable* that can hold some value
- = is assigning a value to a variable
- * denotes multiplication
- print is the name of a built-in *function*,
here we call print to print the result of 7*7
- A program consists of a sequence of *statements*, executed sequentially


Question – What is the result of this program?

Python shell

```
> x = 3
> y = 5
> x = 2
> print(x * y)
```

x assigned new value


Memory

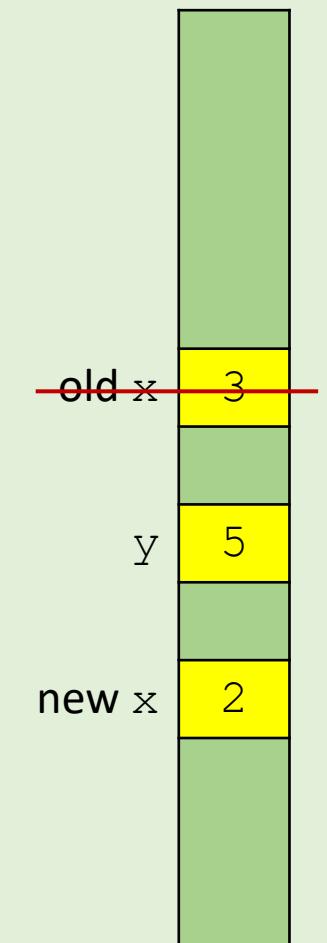

- 😊 a) 10
b) 15
c) 25
d) [15, 10]
e) Error
f) Don't know

Another Python program using lists

```
Python shell  
> a = [13, 27, 7, 42]  
> print(a)  
| [13, 27, 7, 42]  
> print(a[2])  
| 7
```

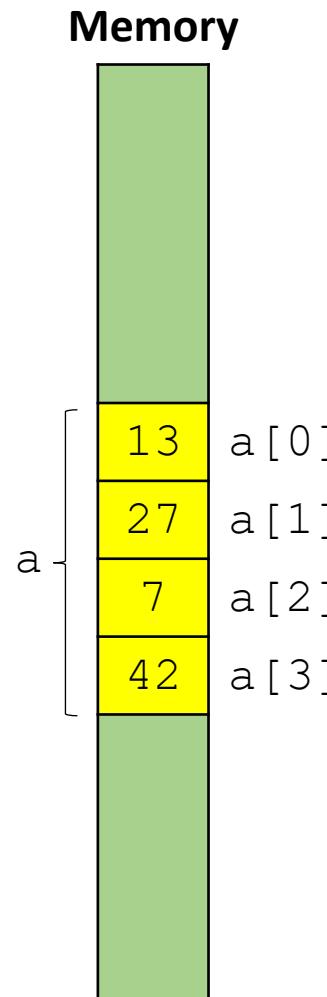

- `[13, 27, 7, 42]` is a *list* containing four integers
- `a[2]` refers to the entry in the list with *index 2*
(the first element has index 0, i.e. `a[2]` is the 3rd element of the list)
- Note that `print` also can print a list


Question – What is the result of this program?

Python shell

```
> a = [3, 5, 7]
> print(a[1] + a[2])
```

- a) 8
- b) 10
- c) 12
- d) 15
- e) Don't know

Memory

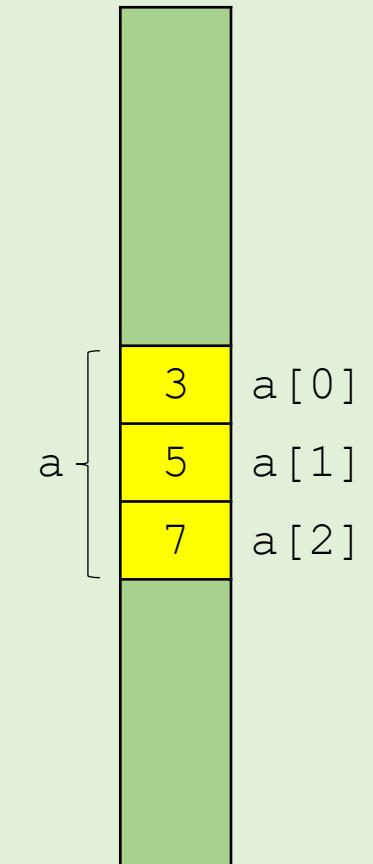

Why Python ?



the next slides will be technical

TIOBE Index January 2023

Jan 2023	Jan 2022	Change	Programming Language	Ratings	Change
1	1		 Python	16.36%	+2.78%
2	2		 C	16.26%	+3.82%
3	4		 C++	12.91%	+4.62%
4	3		 Java	12.21%	+1.55%
5	5		 C#	5.73%	+0.05%
6	6		 Visual Basic	4.64%	-0.10%
7	7		 JavaScript	2.87%	+0.78%
8	9		 SQL	2.50%	+0.70%
9	8		 Assembly language	1.60%	-0.25%
10	11		 PHP	1.39%	-0.00%

Since
November
2021
Python #1


The TIOBE Programming Community index is an indicator of the *popularity of programming languages*. The index is updated once a month. The ratings are based on the number of skilled engineers world-wide, courses and third party vendors. Popular search engines such as Google, Bing, Yahoo!, Wikipedia, Amazon, YouTube and Baidu are used to calculate the ratings. It is important to note that the TIOBE index is not about the *best* programming language or the language in which *most lines of code* have been written.

www.tiobe.com

Popularity of programming languages

TIOBE Programming Community Index

Source: www.tiobe.com

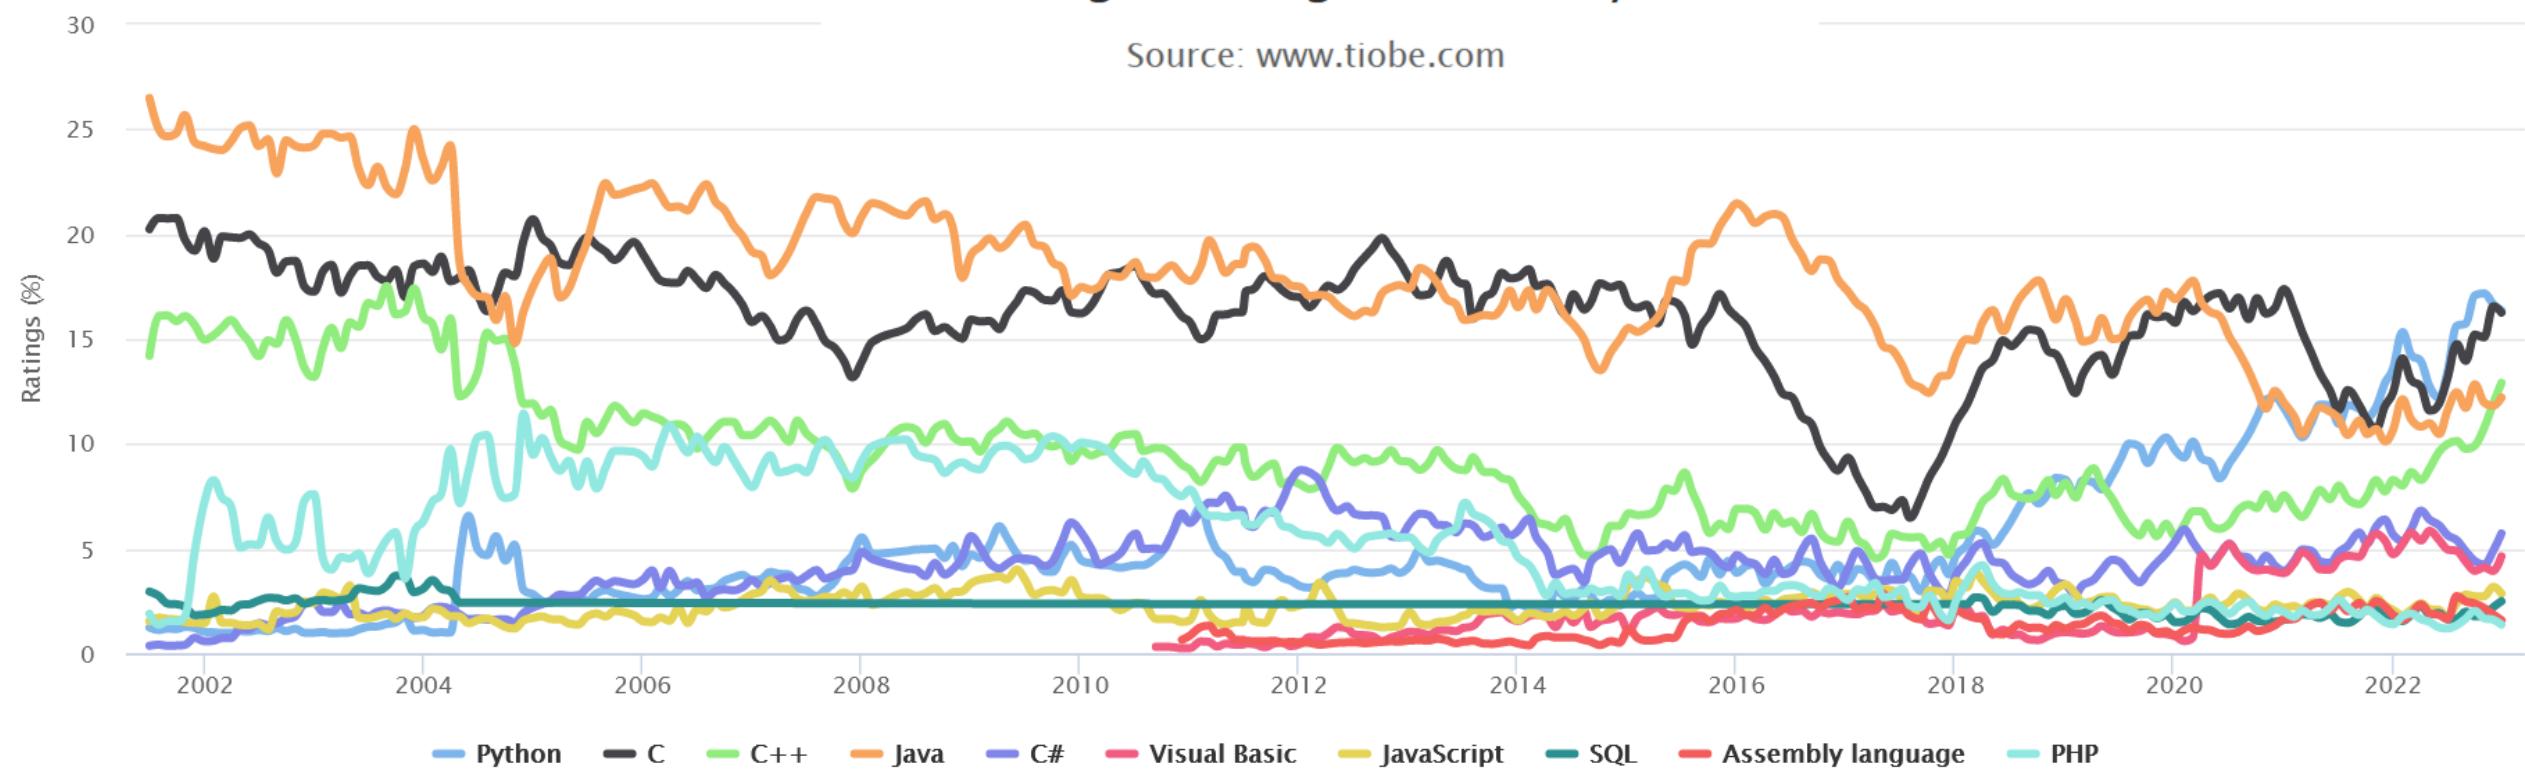

“Hello World”

- In Java, C, C++ a lot of “{”, “}” and “;” are needed
- Java tends to have a lot of “public...” details that need to be spelled out
- Python is concise

Java

```
public class HelloWorld {  
    public static void main( String[] args ) {  
        System.out.println( "Hello World!" );  
        System.exit( 0 );  
    }  
}
```

C

```
#include <stdio.h>  
  
int main(int argc, char **argv) {  
    printf("Hello World");  
    return 0;  
}
```

C++

```
#include <iostream>  
using namespace std;  
  
int main(int argc, char** argv) {  
    cout << "Hello, World!";  
    return 0;  
}
```

Python 2

```
print "Hello world"
```

Python 3

```
print("Hello world")
```

Why Python ?

- Short concise code


(C developed by Dennis Ritchie 1969-73)

C index out of bounds

Debugging is the process of finding and resolving defects or problems within a computer program that prevent correct operation of computer software or a system.

en.wikipedia.org/wiki/Debugging

Memory

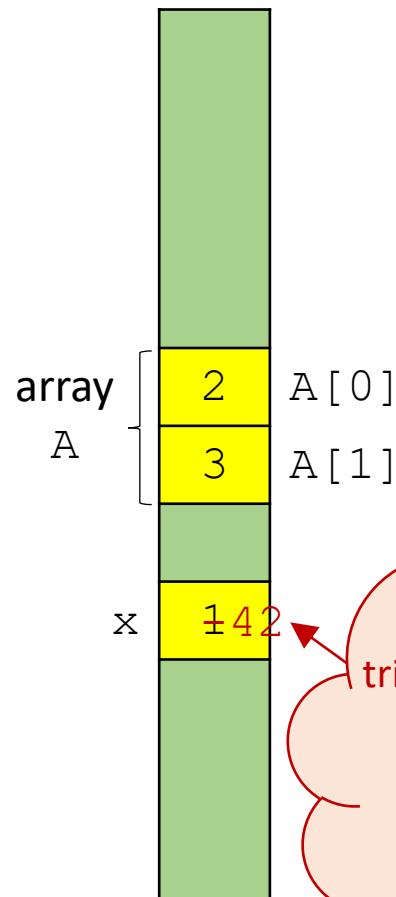

"A" only has size 2, but tries to update the 4th entry.
No warning is giving.
Something unexpected is overridden in memory.
Have fun debugging!

indexing.c


```
#include <stdio.h>
int main() {
    int x = 1;
    int A[2] = {2, 3}; // A[0] = 2, A[1] = 3
    printf("x = %d, A = {%d, %d}\n", x, A[0], A[1]);
    A[3] = 42; // index A[3] out of bounds
    printf("x = %d, A = {%d, %d}\n", x, A[0], A[1]);
    return 0;
}
```

Output

```
$ gcc indexing.c
$ ./a.exe
x = 1, A = {2, 3}
x = 42, A = {2, 3}
```

Skipping checking for invalid indexing makes programs faster,
but also requires disciplined programming

... and C++ index out of bounds

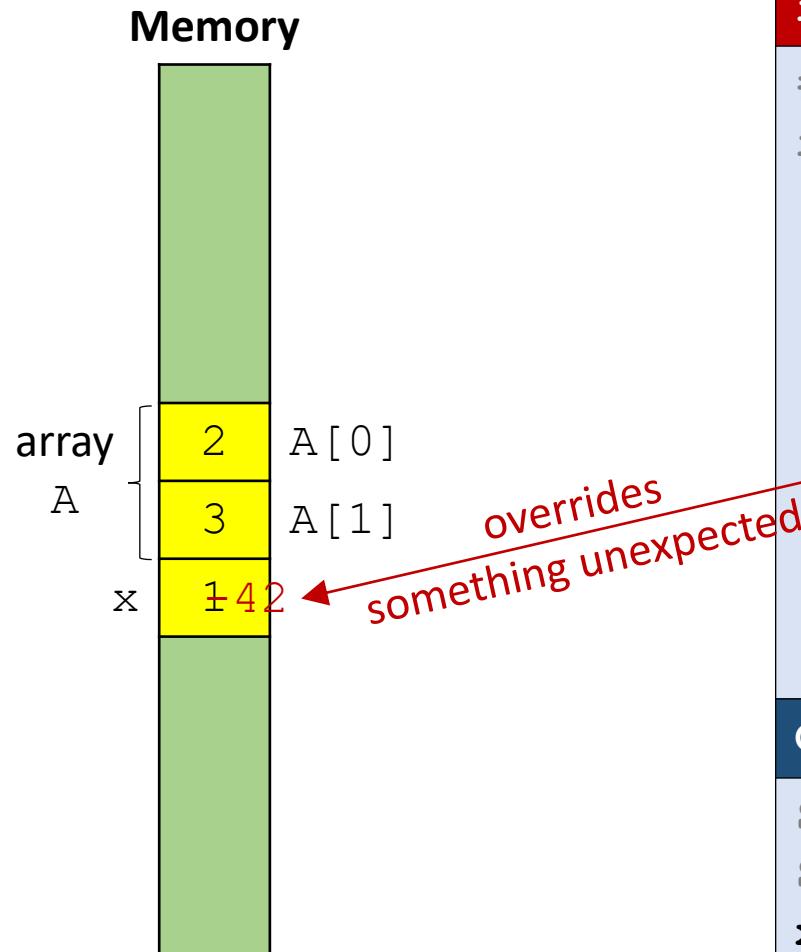


indexing.cpp

```
#include <iostream>
int main() {
    int x = 1;
    int A[2] = {2, 3}; // A[0] = 2, A[1] = 3
    std::cout << "x = " << x << ", A = {" 
                  << A[0] << ", " << A[1] << "}" << std::endl;
    A[2] = 42; // index A[2] out of bounds
    std::cout << "x = " << x << ", A = {" 
                  << A[0] << ", " << A[1] << "}" << std::endl;
    return 0;
}
```

Output

```
$ g++ indexing.cpp
$ ./a.exe
x = 1, A = {2, 3}
x = 42, A = {2, 3}
```

... and C++ vector index out of bounds

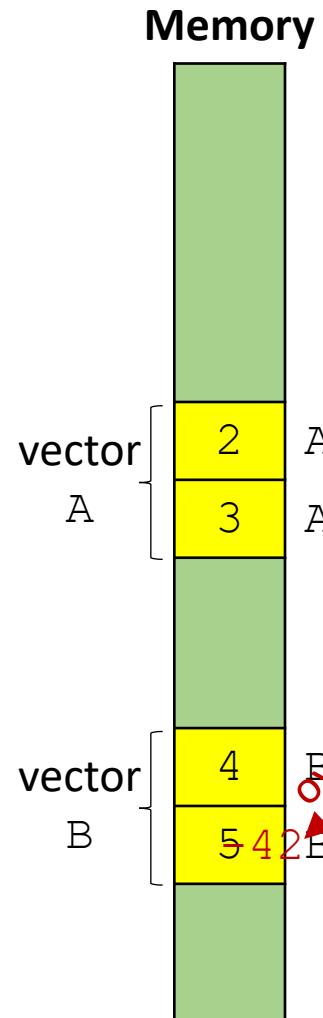

indexing.cpp

```
#include <iostream>
#include <vector>


int main() {
    std::vector<int> A = {2, 3}; // A[0] = 2, A[1] = 3
    std::vector<int> B = {4, 5}; // B[0] = 4, B[1] = 5
    std::cout << "A={" << A[0] << ", " << A[1] << "}, ";
    std::cout << "B={" << B[0] << ", " << B[1] << "}" << std::endl;
    A[9]=42; // index A[9] out of bounds
    std::cout << "A={" << A[0] << ", " << A[1] << "}, ";
    std::cout << "B={" << B[0] << ", " << B[1] << "}" << std::endl;
    return 0;
}
```

Output

```
$ g++ -std=c++11 indexing-vector.cpp
$ ./a.exe
A={2, 3}, B={4, 5}
A={2, 3}, B={4, 42}
```

... and Java index out of bounds exception

Memory

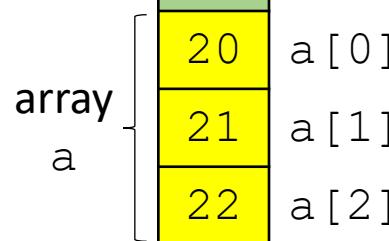

indexing.java

```
class IndexingTest{
    public static void main(String args[]) {
        int a[] = {20, 21, 22};
        a[5] = 42; // index a[5] out of bounds
    }
}
```

Output

```
$ javac indexing.java
$ java IndexingTest
Exception in thread "main"
java.lang.ArrayIndexOutOfBoundsException: 5
        at IndexingTest.main(indexing.java:5)
```

Java provides error message when running the program

... and Python index out of bounds exception

Memory



indexing.py	
a = [20, 21, 22]	
a[5] = 42 # index a[5] out of bounds	
Output	
\$ python indexing.py	
Traceback (most recent call last):	
File "indexing.py", line 3, in <module>	
a[5] = 42	
IndexError: list assignment index out of range	

Python provides error message when running the program

Why Python ?

- Short concise code
- **Index out-of-range exceptions**

C++ different ways to print a vector

vector-iterator.cpp

```
#include <iostream>
#include <vector>
int main() {
    // Vector is part of STL (Standard Template Library)
    std::vector<int> A = {20, 23, 26};
    // "C" indexing - since C++98
    for (int i = 0; i < A.size(); i++)
        std::cout << A[i] << std::endl;
    // iterator - since C++98
    for (std::vector<int>::iterator it = A.begin(); it != A.end(); ++it)
        std::cout << *it << std::endl;
    // "auto" iterator - since C++11
    for (auto it = A.begin(); it != A.end(); ++it)
        std::cout << *it << std::endl;
    // Range-based for-loop - since C++11
    for (auto e : A)
        std::cout << e << std::endl;
}
```

elegant

Java - different ways to print a vector

vector-iterator.java

```
import java.util.Vector;
import java.util.Iterator;

class IteratorTest{
    public static void main(String[] args) {
        Vector<Integer> a = new Vector<Integer>();
        a.add(7);
        a.add(42);
        // "C" for-loop & get method
        for (int i = 0; i < a.size(); i++)
            System.out.println(a.get(i));
        // iterator
        for (Iterator it = a.iterator(); it.hasNext(); )
            System.out.println(it.next());
        // for-each loop - since Java 5
        for (Integer e : a)
            System.out.println(e);
    }
}
```

elegant

The Python way to print a list

print-list.py

```
a = [20, 23, 26]

for e in a:
    print(e)
```

Output

```
$ python print-list.py
20
23
26
```

Why Python ?

- Short concise code
- Index out of range exceptions
- **Elegant for-each loop**

```
$ g++ -std=c++11 print-vector.cpp
cpp-error-message.cpp: In function 'int main()':
cpp-error-message.cpp:7:13: error: no match for 'operator<<' (operand types are 'std::ostream {aka std::basic_ostream<char>}' and 'std::vector<int>')
    std::cout << A << std::endl;
                                         ^
In file included from /usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/iostream:39:0,
                 from cpp-error-message.cpp:1:
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:628:5: note: candidate: std::basic_ostream<_CharT, _Traits>& std::operator<<(std::basic_ostream<_CharT, _Traits>&, const _Tp&) [with _CharT = char; _Traits = std::char_traits<char>; _Tp = std::vector<int>] <near match>
        operator<<(basic_ostream<_CharT, _Traits>&, _os, const _Tp& __x)
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:628:5: note:   conversion of argument 1 would be ill-formed:
cpp-error-message.cpp:7:16: error: cannot bind 'std::ostream {aka std::basic_ostream<char>}' lvalue to 'std::basic_ostream<char>&'
    std::cout << A << std::endl;
                                         ^
In file included from /usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ios:39:0,
                 from cpp-error-message.cpp:1:
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:108:7: note: candidate: std::basic_ostream<_CharT, _Traits>::operator<<(std::basic_ostream<_CharT, _Traits>::__ostream_type& (*_os_type)(std::basic_ostream<_CharT, _Traits>::__ostream_type&)) [with _CharT = char; _Traits = std::char_traits<char>]
        operator<<(_ostream_type& (*_pf) (_ostream_type&))
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:108:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::basic_ostream<char>::__ostream_type& (*)(std::basic_ostream<char>::__ostream_type&)' (aka std::basic_ostream<char>& (*)(std::basic_ostream<char>))
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:117:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type& std::basic_ostream<_CharT, _Traits>::operator<<(std::basic_ostream<_CharT, _Traits>::__ios_type& (*)(std::basic_ostream<_CharT, _Traits>::__ios_types)) [with _CharT = char; _Traits = std::char_traits<char>]
        _Traits>::__ostream_type = std::basic_ostream<char>; std::basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:117:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::basic_ostream<char>::__ios_type& (*)(std::basic_ostream<char>::__ios_type&)' (aka std::basic_ios<char>& (*)(std::basic_ios<char>))
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:127:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type& std::basic_ostream<_CharT, _Traits>::operator<<(std::ios_base& (*)(std::ios_base&)) [with _CharT = char; _Traits = std::char_traits<char>; std::basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>]
        operator<<(<ios_base> (*_pf) (ios_base&))
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:127:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::ios_base& (*)(std::ios_base&)'
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:166:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
        operator<<(long __n)
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:166:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::ios_base& (*)(std::ios_base&)'
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:170:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
        operator<<(<unsigned long __n)
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:170:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::ios_base& (*)(std::ios_base&)'
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:174:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
        operator<<(<bool __n)
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:174:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::ios_base& (*)(std::ios_base&)'
In file included from /usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:638:0,
                 from /usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/iostream:39,
                 from cpp-error-message.cpp:1:
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/bits/ostream.tcc:91:5: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
        basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/bits/ostream.tcc:91:5: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::basic_ostream<char>::__ostream_type'
In file included from /usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/iostream:39:0,
                 from cpp-error-message.cpp:1:
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:181:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
        operator<<(<unsigned short __n)
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:181:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::basic_ostream<char>::__ostream_type'
In file included from /usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:638:0,
                 from /usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/iostream:39,
                 from cpp-error-message.cpp:1:
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/bits/ostream.tcc:105:5: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
        basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/bits/ostream.tcc:105:5: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::basic_ostream<char>::__ostream_type'
In file included from /usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/iostream:39:0,
                 from cpp-error-message.cpp:1:
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:192:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
        operator<<(<unsigned int __n)
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:192:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::basic_ostream<char>::__ostream_type'
In file included from /usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/iostream:39:0,
                 from cpp-error-message.cpp:1:
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:192:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
        operator<<(<long long __n)
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:201:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::basic_ostream<char>::__ostream_type'
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:201:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type& std::basic_ostream<_CharT, _Traits>::operator<<(<long long __n)
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:201:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::basic_ostream<char>::__ostream_type'
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:205:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
        operator<<(<unsigned long long __n)
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:205:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::basic_ostream<char>::__ostream_type'
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:220:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
        operator<<(<double __f)
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:220:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::basic_ostream<char>::__ostream_type'
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:224:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type& std::basic_ostream<_CharT, _Traits>::operator<<(<float __f)
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:224:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::basic_ostream<char>::__ostream_type'
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:224:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
        operator<<(<long double __f)
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:232:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::basic_ostream<char>::__ostream_type'
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:245:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type& std::basic_ostream<_CharT, _Traits>::operator<<(<const void* __v)
                           ^
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:232:7: note:   no known conversion for argument 1 from 'std::vector<int>' to 'std::basic_ostream<char>::__ostream_type'
/usr/lib/gcc/x86_64-pc-cygwin/5.4.0/include/c++/ostream:245:7: note: candidate: std::basic_ostream<_CharT, _Traits>::__ostream_type = std::basic_ostream<char>
```

C++ how not to print a vector

print-vector.cpp

```
#include <iostream>
#include <vector>


int main() {
    std::vector<int> A = {2, 3};
    std::cout << A << std::endl;
    return 0;
}
```

C++ vectors cannot be printed directly –
mistake results in +200 lines of error messages

Why Python ?

- Short concise code
- Index out of range exceptions
- Elegant for-each loop
- **Python hopefully better error messages than C++**

Python and garbage collection

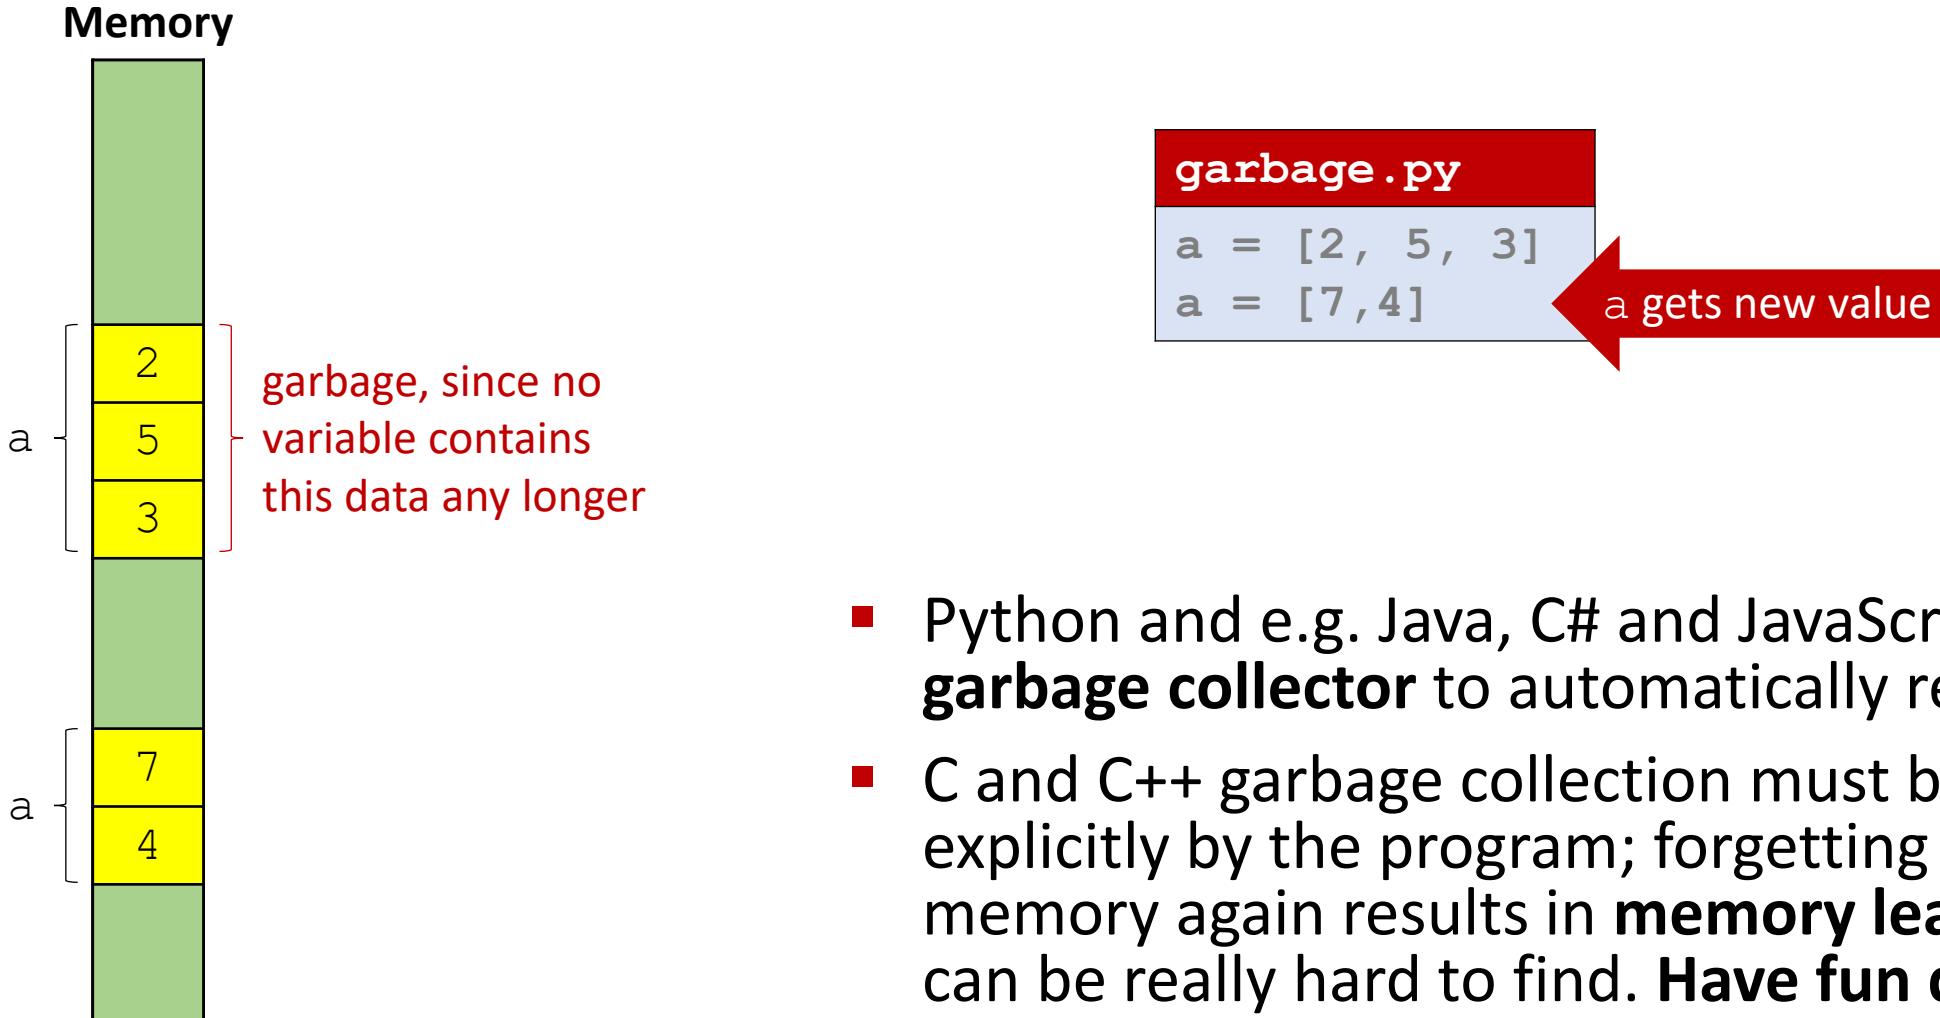


Why Python ?

- Short concise code
- Index out of range exceptions
- Elegant for-each loop
- Python hopefully better error messages than C++
- **Garbage collection is done automatically**

Python performance vs C, C++ and Java

Compute sum $1 + 2 + 3 + \dots + n = \frac{n^2}{2} + \frac{n}{2}$

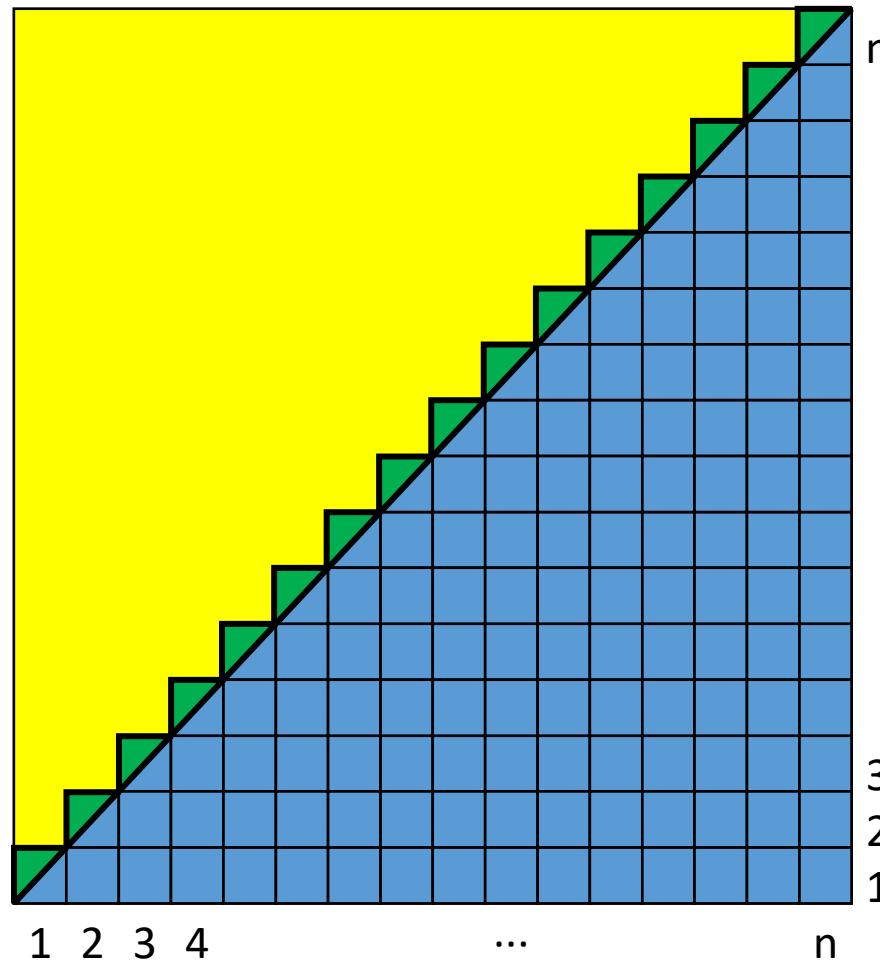

$$1 + 2 + \cdots + n$$

add.py

```
import sys

n = int(sys.argv[1])
sum = 0
for i in range(1, n + 1):
    sum += i
print("Sum = %d" % sum)
```

add.c

```
#include <stdio.h>
#include <stdlib.h>

int main(int argc, char *argv[]) {
    int n = atoi(argv[1]);
    int sum = 0;
    for (int i = 1; i <= n; i++)
        sum += i;
    printf("Sum = %d\n", sum);
}
```

add.cpp

```
#include <iostream>
#include <cstdlib>
using namespace std;

int main(int argc, char *argv[]) {
    int n = atoi(argv[1]);
    int sum = 0;
    for (int i = 1; i <= n; i++)
        sum += i;
    cout << "Sum = " << sum << endl;
}
```

add.java

```
class Add{
    public static void main(String args[]){
        int n = Integer.parseInt(args[0]);
        int sum = 0;
        for (int i = 1; i <= n; i++)
            sum += i;
        System.out.println("Sum = " + sum);
    }
}
```

Timing results

n	C (gcc 9.2)	C++, int (g++ 9.2)	C++, long (g++ 9.2)	Java (12.0)	CPython (3.8.1)	PyPy (7.3.0)	Python
10^7	0.001 sec*	0.001 sec*	0.003 sec	0.006 sec*	1.5 sec	0.27 sec	0.002 sec
10^9	0.10 sec**	0.10 sec**	0.30 sec	0.40 sec**	145 sec	27 sec	0.2 sec

Wrong output (overflow)

* -2004260032 instead of 50000005000000

** -243309312 instead of 5000000050000000

- since C, C++, and Java only uses 32 bits to represent integers (and 64 bits for "long" integers)



Bit position	6666666665555555444444443333333332222222211111111000000000 987654321098765432109876543210987654321098765432109876543210
bin(10**9)	11101110011010110010100000000
bin(50000005000000)	101101011100110001000100101101011010000000
bin(-2004260032+2**32)	100010001000100101101011010000000
bin(5000000050000000)	11011100001011010110011110010110010100000000
bin(-243309312+2**32)	1111000101111110110010100000000

Timing results


n	C (gcc 9.2)	C++, int (g++ 9.2)	C++, long (g++ 9.2)	Java (12.0)	Python (3.8.1)	PyPy (7.3.0)	Python Numba, int64
10^7	0.001 sec*	0.001 sec*	0.003 sec	0.006 sec*	1.5 sec	0.27 sec	0.002 sec
10^9	0.10 sec**	0.10 sec**	0.30 sec	0.40 sec**	145 sec	27 sec	0.2 sec

- Relative speed

C ≈ C++ > Java >> Python


- C, C++, Java need to care about integer overflows – select integer representation carefully with sufficient number of bits (8, 16, 32, 64, 128)
- Python natively works with arbitrary long integers (as memory on your machine allows). Also possible in Java using the class `java.math.BigInteger`
- Python programs can (sometimes) run faster using PyPy
- Number crunching in **Python** should be delegated to **specialized modules (e.g. Numpy, CPLEX, Numba)** – often written in C or C++ and requires selecting right integer representation

Interpreter vs Compiler

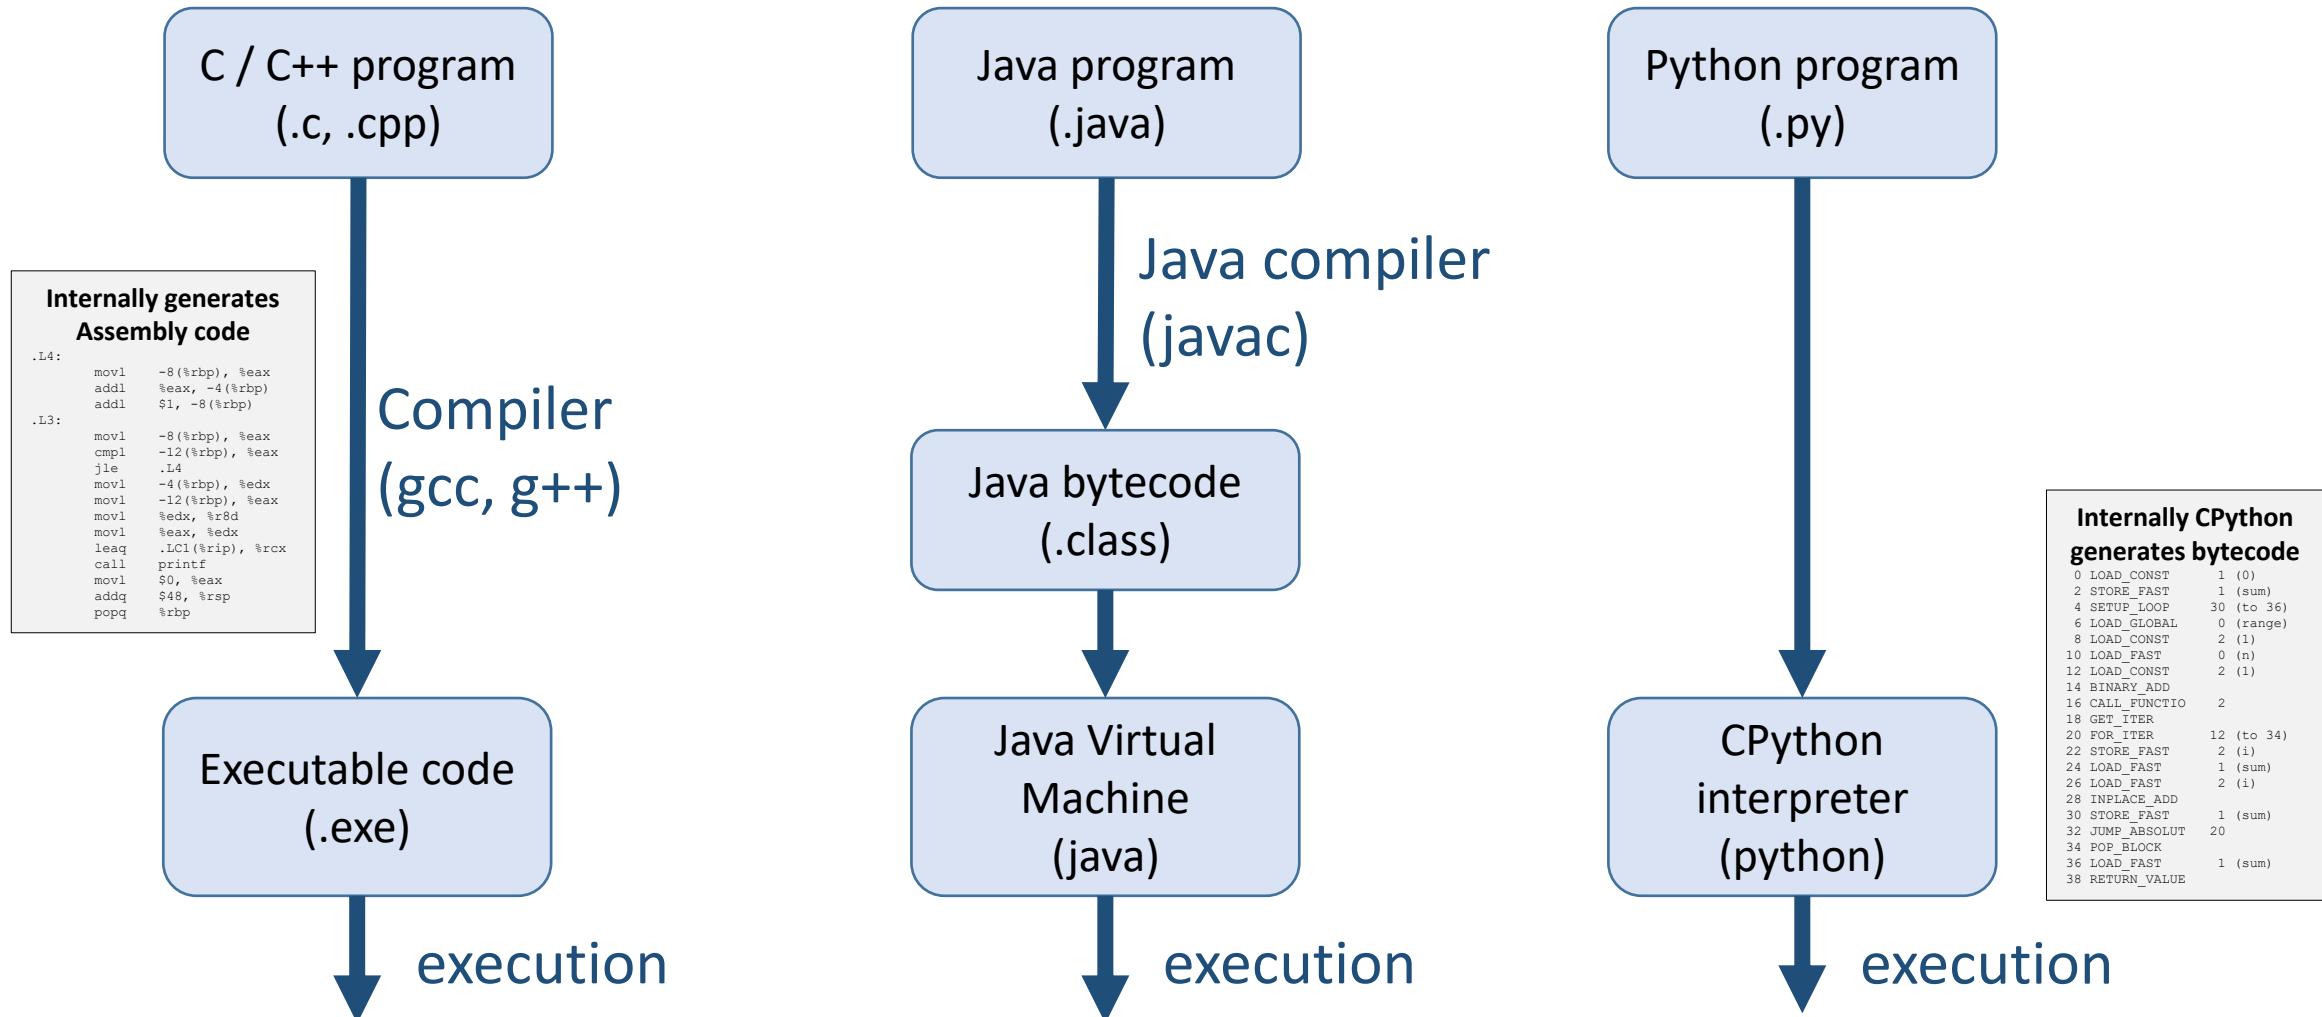


Why Python ?

- Short concise code
- Index out of range exceptions
- Elegant for-each loop
- Python hopefully better error messages than C++
- Garbage collection is done automatically
- **Exact integer arithmetic (no overflows)**
- **Can delegate number crunching to C, C++, ...**

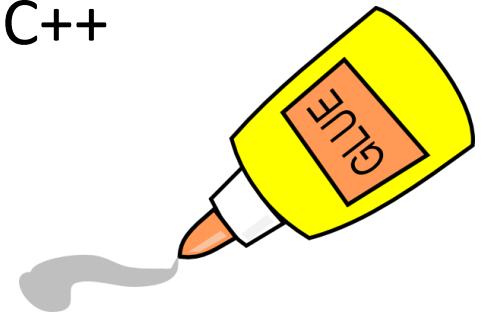

This course

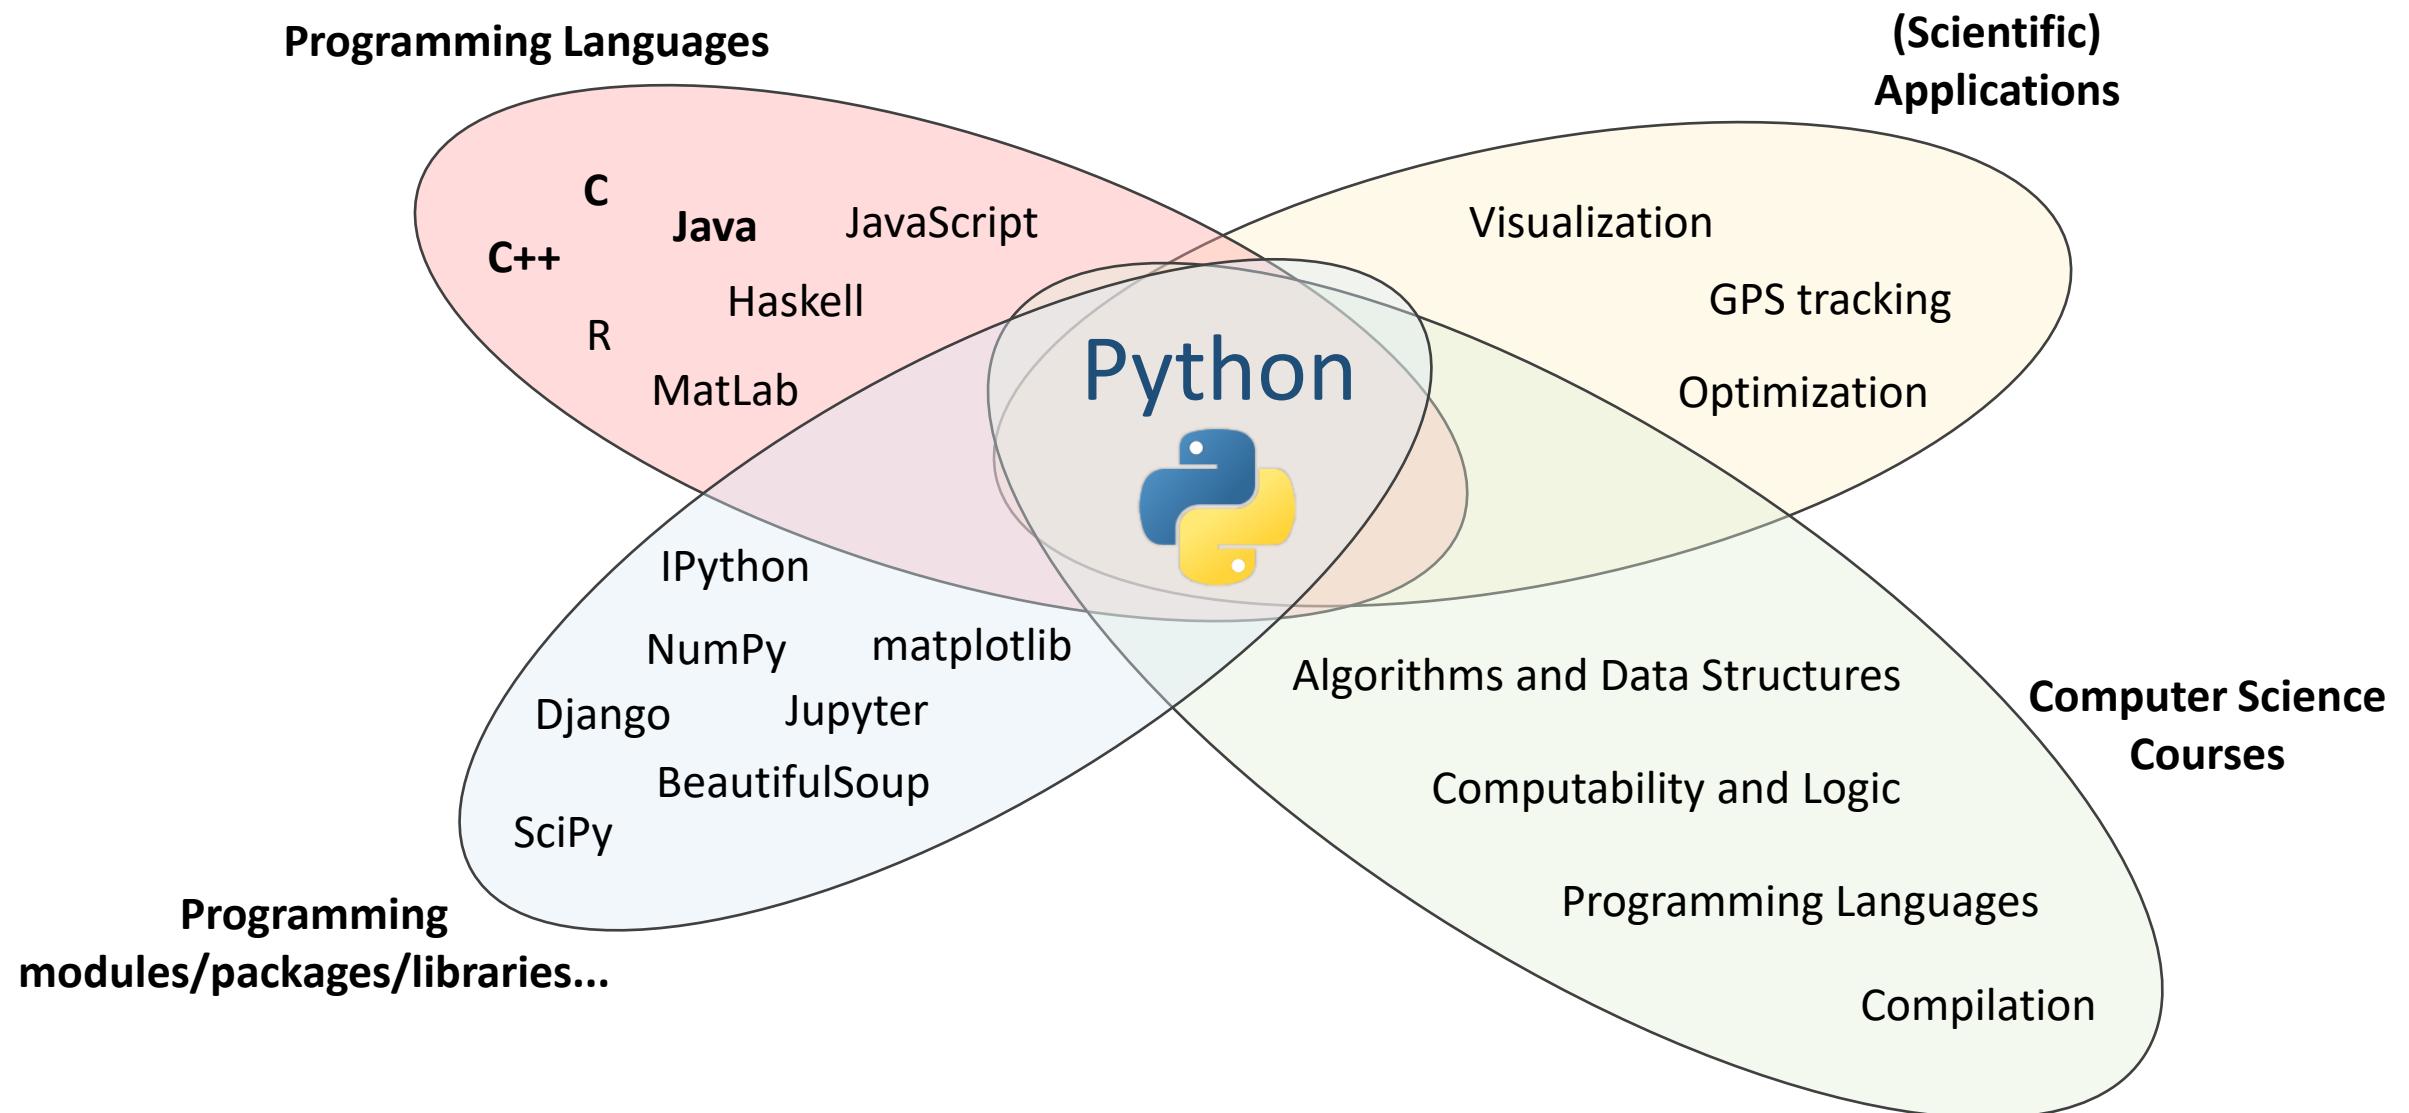

Course overview

Basic programming
Advanced / specific python
Libraries & applications

1. Introduction to Python	10. Functions as objects	19. Linear programming
2. Python basics / if	11. Object oriented programming	20. Generators, iterators, with
3. Basic operations	12. Class hierarchies	21. Modules and packages
4. Lists / while / for	13. Exceptions and files	22. Working with text
5. Tuples / comprehensions	14. Doc, testing, debugging	23. Relational data
6. Dictionaries and sets	15. Decorators	24. Clustering
7. Functions	16. Dynamic programming	25. Graphical user interfaces (GUI)
8. Recursion	17. Visualization and optimization	26. Java vs Python
9. Recursion and Iteration	18. Multi-dimensional data	27. Final lecture

10 handins
1 final project (last 1 month)

History of Python development

- Python created by Guido van Rossum in 1989, first release 0.9.0 1991
- Python 2 → Python 3 (clean up of Python 2 language)
 - Python 2 – version 2.0 released 2000, final version 2.7 released mid-2010
 - Python 3 – released 2008, current release 3.11.1
- Python 3 is *not* backward compatible, libraries incompatible

Python 2	Python 3
print 42	print(42)
int = C long (32 bits)	int = arbitrary number of digits (= named “long” in Python 2)
7/3 → 2 returns “int”	7/3 → 2.333... returns “float”
range() returns list (memory intensive)	range() returns iterator (memory efficient; xrange in Python 2)

Python.org

The screenshot shows the Python.org homepage with several red arrows highlighting different features:

- A red arrow points from the top right towards the search bar and the "Documentation" button.
- A red arrow points from the middle right towards the "Download Python and IDLE" button.
- A red arrow points from the bottom left towards the "Get Started" section.

Top Navigation Bar:

- Python
- PSF
- Docs
- PyPI
- Jobs
- Community

Header:

- python™ logo
- Donate button
- Search bar with placeholder "+400.000 Python packages"
- GO button
- Socialize link

Main Navigation Bar:

- About
- Downloads
- Documentation
- Community
- Success Stories
- News
- Events

Content Area:

- Code Snippet:**# For loop on a list
```>>> numbers = [2, 4, 6, 8]  
>>> product = 1  
>>> for number in numbers:  
... product = product \* number  
...  
>>> print('The product is:', product)  
The product is: 384
- All the Flow You'd Expect:** Python knows the usual control flow statements that other languages speak – `if`, `for`, `while` and `range` – with some of its own twists, of course. [More control flow tools in Python 3](#)
- Navigation:** 1 2 3 4 5

**Bottom Text:** Python is a programming language that lets you work quickly and integrate systems more effectively. [» Learn More](#)

**Footer Sections:**

- Get Started:** Whether you're new to programming or an experienced developer, it's easy to learn and use Python. [Start with our Beginner's Guide](#)
- Download:** Python source code and installers are available for download for all versions! Latest: [Python 3.11.1](#)
- Docs:** Documentation for Python's standard library, along with tutorials and guides, are available online. [docs.python.org](#)
- Jobs:** Looking for work or have a Python related position that you're trying to hire for? Our **relaunched community-run job board** is the place to go. [jobs.python.org](#)

# Installing Python

The image shows the Python website's download page and a Windows setup window.

**Python Website Download Page:**

- Header navigation: Python, PSF, Docs, PyPI, Jobs, Community.
- Logo and search bar.
- Main menu: About, **Downloads** (circled with red #1), Documentation, Community, Success Stories, News, Events.
- Sidebar: Download Python (highlighted), Looking for Python on macOS, Other, Want to help test images, License, Alternative Implementations.
- Content area:
  - Download for Windows** section (circled with red #2):
    - Python 3.11.1 (button highlighted).
    - Note: Note that Python 3.9+ cannot be used on Windows 7 or earlier.
    - Text: Not the OS you are looking for? Python can be used on many operating systems and environments.
    - Link: View the full list of downloads.
  - All releases, Source code, Windows, macOS, Other Platforms, License, Alternative Implementations links.


**Windows Setup Window:**

- Title: Python 3.11.1 (64-bit) Setup.
- Header: Install Python 3.11.1 (64-bit). Subtext: Select Install Now to install Python with default settings, or choose Customize to enable or disable features.
- Buttons:
  - Install Now** (circled with red #4): C:\Users\au121\AppData\Local\Programs\Python\Python311. Includes IDLE, pip and documentation. Creates shortcuts and file associations.
  - Customize installation: Choose location and features.
- Checkboxes:
  - Use admin privileges when installing py.exe
  - Add python.exe to PATH** (circled with red #3)
- Buttons: Cancel.

**IMPORTANT** (Large red arrow pointing to the "Add python.exe to PATH" checkbox in the Windows setup window.)

# Running the Python Interpreter from a terminal

- Open Command Prompt  
(Windows-key + cmd)
  - Type “python” + return
  - Start executing  
Python statements
- 
- To exit shell:  
Ctrl-Z + return or  
exit() + return

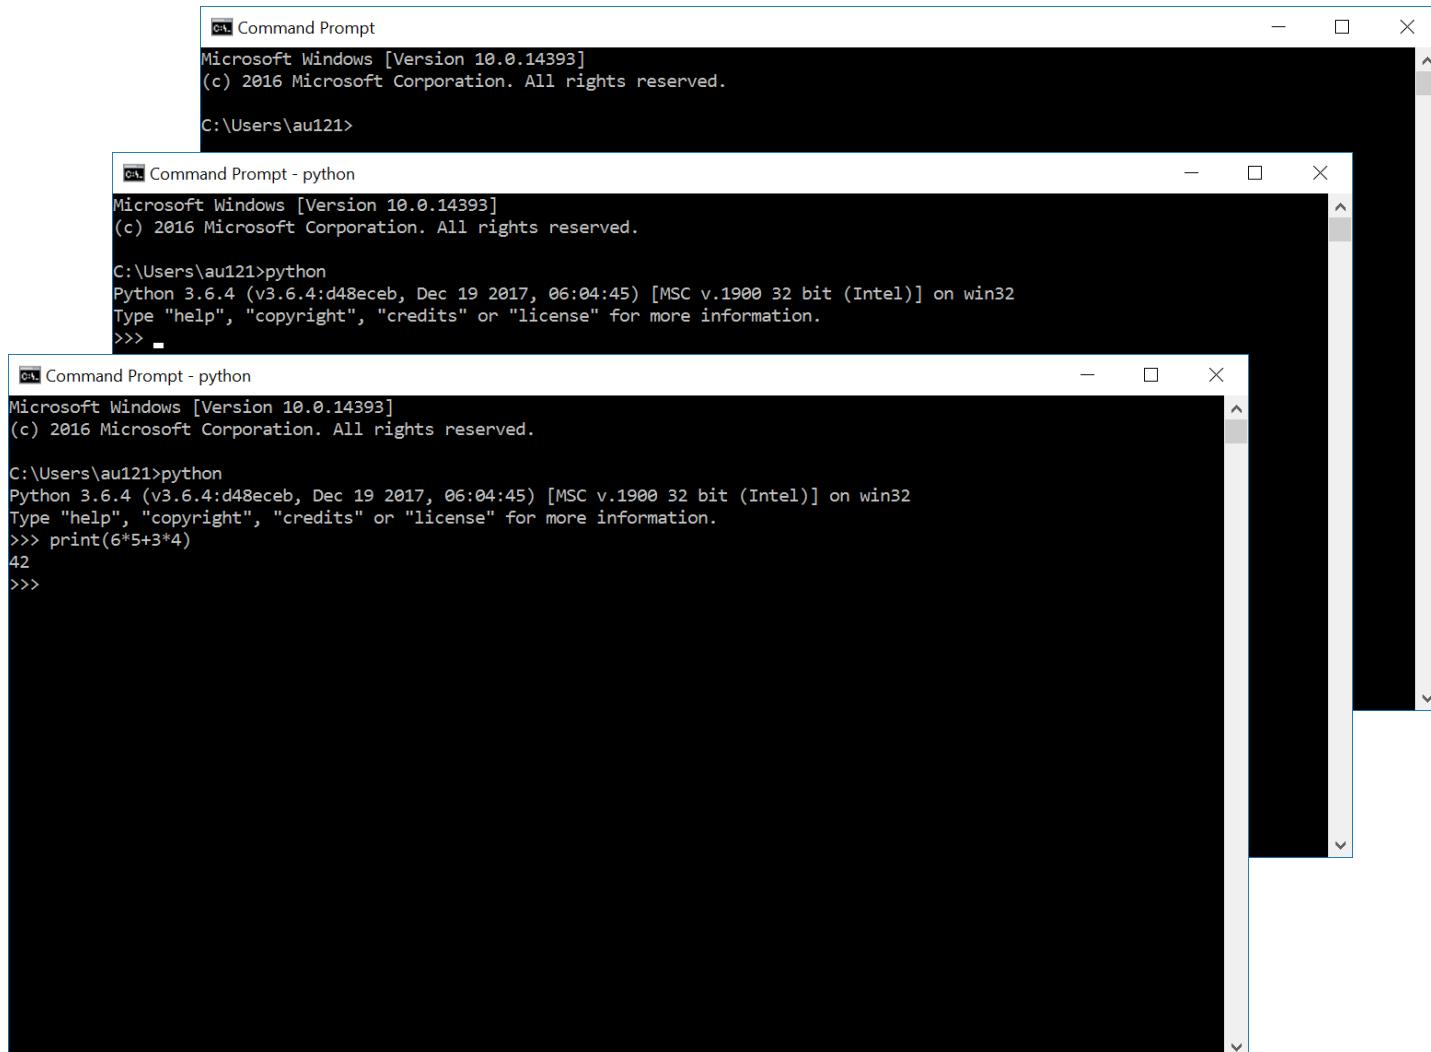

The image shows three separate windows of a Windows Command Prompt, each demonstrating a different step in running the Python interpreter.

- Top Window:** Shows the standard Windows Command Prompt environment. It displays the title "Command Prompt", the operating system version "Microsoft Windows [Version 10.0.14393]", and copyright information "(c) 2016 Microsoft Corporation. All rights reserved.". The command prompt itself shows "C:\Users\au121>".
- Middle Window:** Shows the Python interpreter running. The title is "Command Prompt - python". It displays the same Windows version and copyright info. The command prompt shows "C:\Users\au121>python". Below this, the Python interpreter's welcome message is shown: "Python 3.6.4 (v3.6.4:d48eceb, Dec 19 2017, 06:04:45) [MSC v.1900 32 bit (Intel)] on win32". It also includes the instruction "Type "help", "copyright", "credits" or "license" for more information." and the Python prompt "=>".
- Bottom Window:** Shows the continuation of the Python session. The title is "Command Prompt - python". It displays the same Windows version and copyright info. The command prompt shows "C:\Users\au121>python". Below this, the Python interpreter's welcome message is shown again. The user has typed the expression "print(6\*5+3\*4)" and pressed enter, resulting in the output "42" displayed at the prompt "=>".


# Installing IPython – A more powerful interactive Python shell

- Open Command Prompt
- Execute:

```
pip install ipython
```

- Start ipython

```
ipython
```

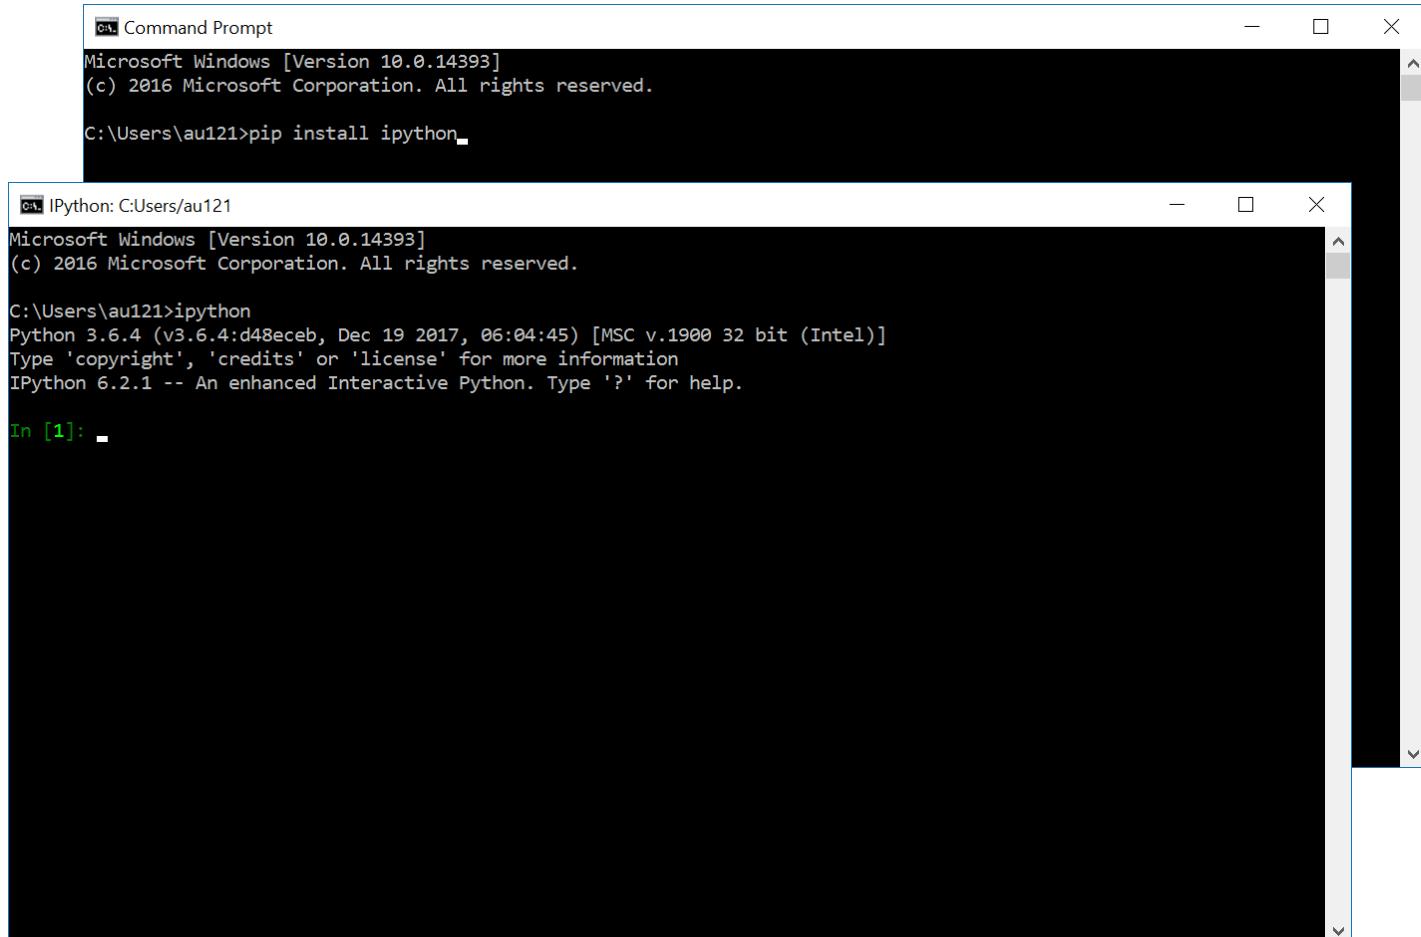

The image shows two windows side-by-side. The top window is a 'Command Prompt' window titled 'Command Prompt'. It displays the Windows version information and a command line prompt: 'C:\Users\au121>pip install ipython'. The bottom window is an 'IPython' window titled 'IPython: C:\Users\au121'. It also displays the Windows version information and a command line prompt: 'C:\Users\au121>ipython'. Below the prompt, it shows the Python version, build date, and license information, followed by the IPython version and help instructions.

```
Command Prompt
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\au121>pip install ipython

IPython: C:\Users\au121
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\au121>ipython
Python 3.6.4 (v3.6.4:d48eceb, Dec 19 2017, 06:04:45) [MSC v.1900 32 bit (Intel)]
Type 'copyright', 'credits' or 'license' for more information
IPython 6.2.1 -- An enhanced Interactive Python. Type '?' for help.

In [1]:
```

pip = the Python package manager

# Some other usefull packages

- Try installing some more Python packages:

pip install numpy

linear algebra support (N-dimensional arrays)

pip install scipy

numerical integration and optimization

pip install matplotlib

2D plotting library

pip install pylint

Python source code analyzer enforcing a coding standard


# Creating a Python program the very basic way



A screenshot of a Windows Notepad window titled "my-first-python-program.py - Notepad". The window contains the following Python code:

```
x = 3
y = 4
print(x * y)
```

The status bar at the bottom right shows "Ln 1, Col 1".

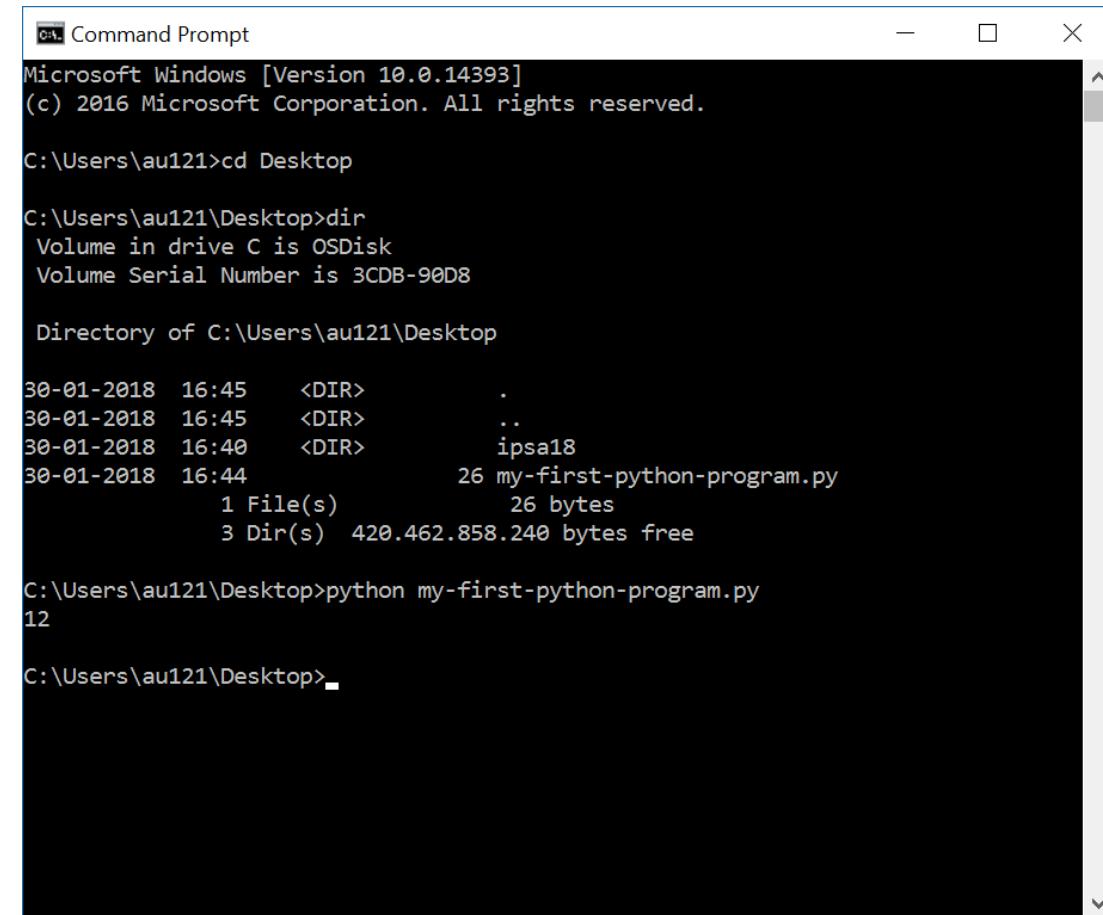

A screenshot of a Windows Command Prompt window titled "Command Prompt". The window shows the following terminal session:

```
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\au121>cd Desktop

C:\Users\au121\Desktop>dir
Volume in drive C is OSDisk
Volume Serial Number is 3CDB-90D8

Directory of C:\Users\au121\Desktop

30-01-2018 16:45 <DIR> .
30-01-2018 16:45 <DIR> ..
30-01-2018 16:40 <DIR> ipsa18
30-01-2018 16:44 26 my-first-python-program.py
 1 File(s) 26 bytes
 3 Dir(s) 420.462.858.240 bytes free

C:\Users\au121\Desktop>python my-first-python-program.py
12

C:\Users\au121\Desktop>
```

- Open Notepad (orTextEdit on Mac)
  - write a simple Python program
  - save it
- Open a command prompt
  - go to folder (using cd)
  - run the program using

python <program name>.py

# ... or open IDLE and run program with F5

enable  
line numbers  
under options



```
my-first-python-program.py - C:\Users\au121\Desktop\my-first-python-program.py (3.11.0)
File Edit Format Run Options Window Help
1 x = 3
2 y = 4
3 print(x *y)
4
Ln: 4 Col: 0
```

```
IDLE Shell 3.11.0
File Edit Shell Debug Options Window Help
Python 3.11.0 (main, Oct 24 2022, 18:26:48) [MSC v.1933 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license()" for more information.
>>>
===== RESTART: C:\Users\au121\Desktop\my-first-python-program.py =====
12
>>>
Ln: 6 Col: 0
```

- IDLE ships with Python from [python.org](https://www.python.org)
- Good beginner IDE (Integrated Development Environment)

# The Python Ecosystem

- **Interpreters/compiler**
  - CPython – reference C implementation from [python.org](http://python.org)
  - PyPy – written in RPython (a subset of Python) – faster than CPython
  - Jython – written in Java and compiles to Java bytecode, runs on the JVM
  - IronPython – written in C#, compiles to Microsoft's Common Language Runtime (CLR) bytecode
  - Cython – project translating Python-ish code to C
- **Shells (IPython, IDLE, Jupyter)**
- **Libraries/modules/packages**
  - [pypi.python.org/pypi](http://pypi.python.org/pypi) (PyPI - the Python Package Index, +400.000 packages)
- **IDEs (Integrated development environment)**
  - IDLE comes with Python ([docs.python.org/3/library/idle.html](http://docs.python.org/3/library/idle.html))
  - Anaconda w. Spyder, IPython ([www.anaconda.com/download](http://www.anaconda.com/download))
  - Canopy ([enthought.com/product/canopy](http://enthought.com/product/canopy))
  - Visual Studio Code ([code.visualstudio.com](http://code.visualstudio.com))
  - Python tools for Visual Studio ([github.com/Microsoft/PTVS](http://github.com/Microsoft/PTVS))
  - PyCharm ([www.jetbrains.com/pycharm/](http://www.jetbrains.com/pycharm/))
  - Emacs (Python mode and ElPy mode)
  - Notepad++
- **Python Style guide (PEP8)**
  - pylint, pep8, flake8
- **Python online**
  - Google colab ([colab.research.google.com](http://colab.research.google.com)), repl.it, [sagemath.org](http://sagemath.org), ...

Try to google "best ide python"



# Python basics

- Comments
- ";"
- Variable names
- int, float, str
- type conversion
- assignment (=)
- print(), help(), type()

# Python comments

A '#' indicates the beginning of a comment. From '#' until end of line is ignored by Python.

```
x = 42 # and here goes the comment
```

Comments useful to describe what a piece of code is supposed to do, what kind of input is expected, what is the output, side effects...

# The “;” in Python

- Normally statements follow in consecutive lines with identical indentation

```
x = 1
```

```
y = 1
```

- but Python also allows multiple statements on one line, separated by “;”

```
x = 1; y = 1
```



```
Command Prompt
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\au121>cd Desktop

C:\Users\au121\Desktop>pylint semicolon.py
No config file found, using default configuration

Module semicolon
C: 1, 0: Missing module docstring (missing-docstring)
C: 1, 0: Constant name "x" doesn't conform to UPPER_CASE naming style (invalid-name)
C: 1, 7: More than one statement on a single line (multiple-statements)
C: 1, 7: Constant name "y" doesn't conform to UPPER_CASE naming style (invalid-name)

Your code has been rated at -10.00/10

C:\Users\au121\Desktop>flake8 semicolon.py
semicolon.py:1:6: E702 multiple statements on one line (semicolon)

C:\Users\au121\Desktop>
```

neither **pylint** or **flake8** like “;”

- General Python [PEP 8](#) guideline: **avoid using “;”**
- Other languages like C, C++ and Java require “;” to end/separate statements

# Variable names

- Variable name = sequence of **letters** ‘a’-‘z’, ‘A’-‘Z’, **digits** ‘0’-‘9’, and **underscore** ‘\_’

v, volume, height\_of\_box, WidthOfBox, x0, \_v12\_34B, \_  
(snake\_case) (CamelCase)

- a name cannot start with a digit
- names are case sensitive (AB, Ab, aB and ab are different variables)

- Variable names are **references to objects in memory**
- **Use meaningful variables names**
- **Python 3 reserved keywords:** and, as, assert, break, class, continue, def, del, elif, else, except, False, finally, for, from, global, if, import, in, is, lambda, nonlocal, None, not, or, pass, raise, return, True, try, while, with, yield

# Question – Not a valid Python variable name?

- a) print
-  b) for Python reserved keyword
- c) \_100
- d) x
- e) \_
- f) python\_for\_ever
- g) Don't know

## Python shell

```
> print = 7
> print(42)
| Traceback (most recent call last):
| File "<stdin>", line 1, in <module>
| TypeError: 'int' object is not callable
```



print is a valid variable name, with default value a builtin *function* to print output to a shell – assigning a new value to print is very likely a bad idea  
(like many others sum, int, str, ...)

# Integer literals

- .... -4, -3, -2, -1, 0, 1, 2, 3, 4 ....
- Python integers can have an arbitrary number of digits (only limited by machine memory)
- Can be preceded by a plus (+) or minus (-)
- For readability underscores (\_) can be added between digits,

2\_147\_483\_647

(for more, see [PEP 515 - Underscores in Numeric Literals](#))

# Question – What statement will not fail?

- a)  $x = \underline{-}42$
-  b)  $\underline{-}10 = -1\underline{1}$
- c)  $x = 1\underline{\quad}0$
- d)  $x = +1\underline{\quad}0\underline{\quad}$
- e) Don't know

# Float literals

- Decimal numbers are represented using **float** – contain “.” or “e”
- Examples
  - 3.1415
  - -.00134
  - 124e3 =  $124 \cdot 10^3$
  - -2.345e2 = -234.5
  - 12.3e-4 = 0.00123
-  Floats are often only approximations, e.g. 0.1 is *not* 1/10
- Extreme values (CPython)
  - max = 1.7976931348623157e+308
  - min = 2.2250738585072014e-308
- NB: Use module `fractions` for exact fractions/rational numbers.

## Python shell

```
> 0.1 + 0.2 + 0.3
| 0.6000000000000001
> (0.1 + 0.2) + 0.3
| 0.6000000000000001
> 0.1 + (0.2 + 0.3)
| 0.6
> type(0.1)
| <class 'float'>
> 1e200 * 1e300
| inf
> 0.1+(0.2+0.3) == (0.1+0.2)+0.3
| False
> x = 0.1 + 0.2
> y = 0.3
> x == y
| False
> print(f'{x:.30f}') # 30 decimals
| 0.300000000000000044408920985006
> print(f'{y:.30f}') # 30 decimals
| 0.29999999999999988897769753748
> import sys
> sys.float_info.min
| 2.2250738585072014e-308
> sys.float_info.max
| 1.7976931348623157e+308
```



Associativity rule does not apply to floats

# Question – What addition order is “best”?

- a)  $1e10 + 1e-10 + -5e-12 + -1e10$
-  b)  $1e10 + -1e10 + 1e-10 + -5e-12$
- c)  $1e-10 + 1e10 + -1e10 + -5e-12$
- d)  $-5e-12 + -1e10 + 1e10 + 1e-10$
- e) Any order is equally good
- f) Don’t know

|          |   |                |
|----------|---|----------------|
| $1e10$   | = | 1000000000     |
| $-1e10$  | = | -1000000000    |
| $1e-10$  | = | 0.000000001    |
| $-5e-12$ | = | -0.00000000005 |

## Python shell

```
> 1e10 + 1e-10 + -5e-12 + -1e10
| 0.0
> 1e10 + -1e10 + 1e-10 + -5e-12
| 9.50000000000001e-11
> 1e-10 + 1e10 + -1e10 + -5e-12
| -5e-12
> -5e-12 + -1e10 + 1e10 + 1e-10
| 1e-10
```



a) - d) give four different outputs

# Approximating $\pi = 3.14159265359\dots$

$$\frac{\pi^2}{6} = \sum_{k=1}^{+\infty} \frac{1}{k^2} = \frac{1}{1^2} + \frac{1}{2^2} + \frac{1}{3^2} + \dots$$
$$= 1.6449340668\dots$$

Riemann zeta function  $\zeta(2)$

## pi\_approximation\_riemann.py

```
apx = 0.0
k = 0.0
while True:
 k = k + 1.0
 apx = apx + 1.0 / (k * k)
 print(k, apx)
```

## Output

```
...
94906261.0 1.6449340578345741
94906262.0 1.6449340578345744
94906263.0 1.6449340578345746
94906264.0 1.6449340578345748
94906265.0 1.644934057834575
94906266.0 1.644934057834575
94906267.0 1.644934057834575
94906268.0 1.644934057834575
94906269.0 1.644934057834575
94906270.0 1.644934057834575
...
...
```



This is not a course in numeric computations – but now you are warned....

# Python float $\equiv$ IEEE-754 double precision\*

- A binary number is a number in base 2 with digits/bits from {0,1}

$$10110_2 = 1 \cdot 2^4 + 0 \cdot 2^3 + 1 \cdot 2^2 + 1 \cdot 2^1 + 0 \cdot 2^0 = 16 + 4 + 2 = 22_{10}$$

- IEEE-754 64-bit double

| sign $s$<br>1 bit | exponent $e$<br>11 bits | coefficient $c$<br>52 bits |
|-------------------|-------------------------|----------------------------|
|-------------------|-------------------------|----------------------------|

$s = 0$        $c$   
 $+1$  

| Float value                                           | Case                        |
|-------------------------------------------------------|-----------------------------|
| $(-1)^s \cdot (1 + c \cdot 2^{-52}) \cdot 2^{e-1023}$ | $0 < e < 2047$              |
| $(-1)^s \cdot c \cdot 2^{-1074}$                      | $e = 0, c \neq 0$           |
| +0 and -0                                             | $e = 0, c = 0$              |
| $\pm\infty$ and $-\infty$                             | $e = 2047, c = 0$           |
| NaN ("not a number")                                  | $s = 0, e = 2047, c \neq 0$ |

```
Python shell
> 1e200 * 1e200
| inf
> -1e200 * 1e200
| -inf
> 1e-200 * 1e-200
| 0.0
> -1e-200 * 1e-200
| -0.0
> 1e200 * 1e200 * 0.0
| nan
```

(\*most often, but there is no guarantee given in the Python language specification that floats are represented using IEEE-754)

# String literals (type str)

- Sequence of characters enclosed by single (' ) or double (" ) quotes

```
"a 'quoted' word" "Hello World" 'abc'
'a "quoted" word' ' -_\' -_ - '
```

- Escape characters

|     |              |
|-----|--------------|
| \n  | newline      |
| \t  | tab          |
| \\\ | backslash    |
| \\' | single quote |
| \\" | double quote |

- A backslash (\ ) at the end of line, will continue line/string on next line
- Use triple single or double quotes (' ''' or """") for enclosing strings spanning more lines  
(in particular for Python Docstrings, see [PEP 257](#))

## string-test.py

```
print("abc")
print('de\'f')
print("ghi'")
print("jk\nl\"")
print("mn\
o")
print("p\\q\\tr")
```

## Output

```
$ python string-test.py
abc
de'f
'ghi'
'jk
l'"
mno
p\q r
```

# Question – What does the following print ?

```
print ("\\\"\\n\\n'")
```

a) \\\"\\n\\n'

b) \"\\nn'

 c) \"\\n  
'

d) "nn'

e) \"  
'

f) Don't know

# Long string literals

- Long string literals often need to be split over multiple lines
- In Python two (or more) string literals following each other will be treated as a single string literal (they can use different quotes)
- Putting parenthesis around multiple literals allows line breaks
- Advantages:
  - avoids the backslash at the end of line
  - can use indentation to increase readability
  - allows comments between literals

## long-string-literals.py

```
s1 = 'abc' "def" # two string literals
print(s1)
s2 = """ """
avoid escaping quotes
print(s2)
s3 = 'this is a really, really, really, \
really, really, long string'
print(s3)
s4 = ('this is a really, really,
 'really, really, really,
 'long string')
print(s4)
very_very_long_variable_name = (
 'this is a really, really, ' # line 1
 'really, really, really, ' # line 2
 "long string" # line 3
)
print(very_very_long_variable_name)
```

## Python shell

```
| abcdef
| """
| this is a really, really, really, really,
| really, long string
| this is a really, really, really, really,
| really, long string
| this is a really, really, really, really,
| really, long string
```

# Raw string literals

- By prefixing a string literal with an `r`, the string literal will be considered a **raw string** and backslashes become literal characters
- Useful in cases where you actually need backslashes in your strings, e.g. when working with Python's regular expression module `re`

## Python shell

```
> print('\let\epsilon\varepsilon') # \v = vertical tab
| \let\epsilon
 \varepsilon
> print('\\let\\epsilon\\varepsilon') # many backslashes
| \let\epsilon\varepsilon
> print(r'\let\epsilon\varepsilon') # more readable
| \let\epsilon\varepsilon
```

# print(...)

- print can print zero, one, or more values
- default behavior
  - print a space between values
  - print a line break after printing all values
- default behavior can be changed by **keyword arguments** “sep” and “end”

## Python shell

```
> print()
|
> print(7)
| 7
> print(2, 'Hello')
| 2 Hello
> print(3, 'a', 4)
| 3 a 4
> print(3, 'a', 4, sep=':')
| 3:a:4
> print(5); print(6)
| 5
| 6
> print(5, end=' ',); print(6)
| 5, 6
```

# print(...) and help(...)

## Python shell

```
> help(print)
| Help on built-in function print in module builtins:

print(...)
 print(value, ..., sep=' ', end='\n', file=sys.stdout, flush=False)
```

Prints the values to a stream, or to sys.stdout by default.

Optional keyword arguments:

file: a file-like object (stream); defaults to the current sys.stdout.

sep: string inserted between values, default a space.

end: string appended after the last value, default a newline.

flush: whether to forcibly flush the stream.

# Assignments

- $\text{variable} = \text{expression}$

x = 42

- Multiple assignments – right hand side evaluated before assignment


x, y, z = 2, 5, 7

- Useful for swapping

x, y = y, x

- Assigning multiple variables same value in left-to-right

x = y = z = 7

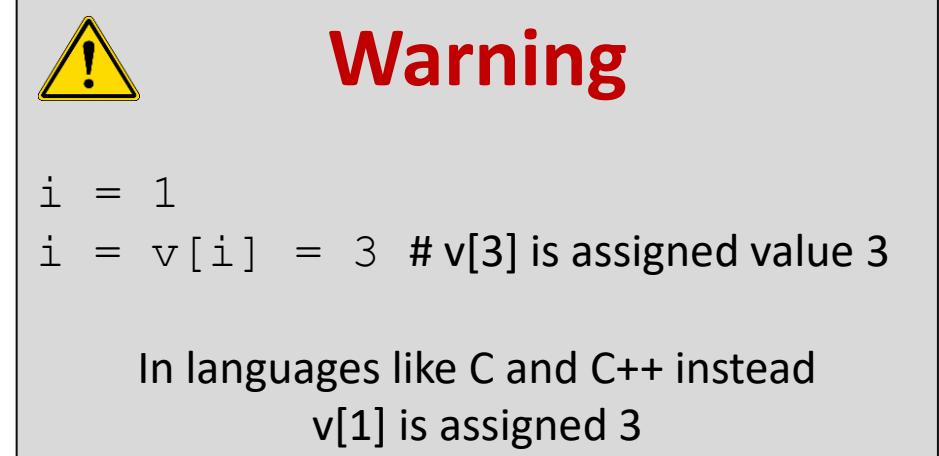

# Python is dynamically typed, type(...)

- The current type of a value can be inspected using the **type()** function (that returns a type object)
- In Python the values contained in a variable over time can be of different type
- In languages like C, C++ and Java variables are declared with a given type, e.g.

```
int x = 42;
```

and the different values stored in this variable must remain of this type

## Python shell

```
> x = 1
> type(x)
| <class 'int'>
> x = 'Hello'
> type(x)
| <class 'str'>
> type(42)
| <class 'int'>
> type(type(42))
| <class 'type'>
```

x new type



# Type conversion

- Convert a value to another type:

*new-type(value)*

- Sometimes done automatically:

$1.0 + 7 = 1.0 + \text{float}(7) = 8.0$

```
Python shell
> float(42)
| 42.0
> int(7.8)
| 7
> x = 7
> print("x = " + x)
| Traceback (most recent call last):
| File "<stdin>", line 1, in <module>
| TypeError: must be str, not int
> print("x = " + str(x))
| x = 7
> print("x = " + str(float(x)))
| x = 7.0
> int("7.3")
| Traceback (most recent call last):
| File "<stdin>", line 1, in <module>
| ValueError: invalid literal for int() with base 10: '7.3'
> int(float("7.3"))
| 7
```



string  
concatenation

**Questions –** str(float(int(float("7.5"))))) ?

- a) 7
- b) 7.0
- c) 7.5
- d) "7"
-  e) "7.0"
- f) "7.5"
- g) Don't know

# Control structures

- `input()`
- `if-elif-else`
- `while-break-continue`

# input

- The builtin function `input (message)` prints *message*, and waits for the user provides a line of input and presses return. The line of input is returned as a `str`
- If you e.g. expect input to be an `int`, then remember to convert the input using `int ()`


`name-age.py`

```
name = input('Name: ')
age = int(input('Age: '))
print(name, 'is', age, 'years old')
```

`Python shell`

```
> Name: Donald Duck
> Age: 84
| Donald Duck is 84 years old
```

# Branching – do either this or that ?

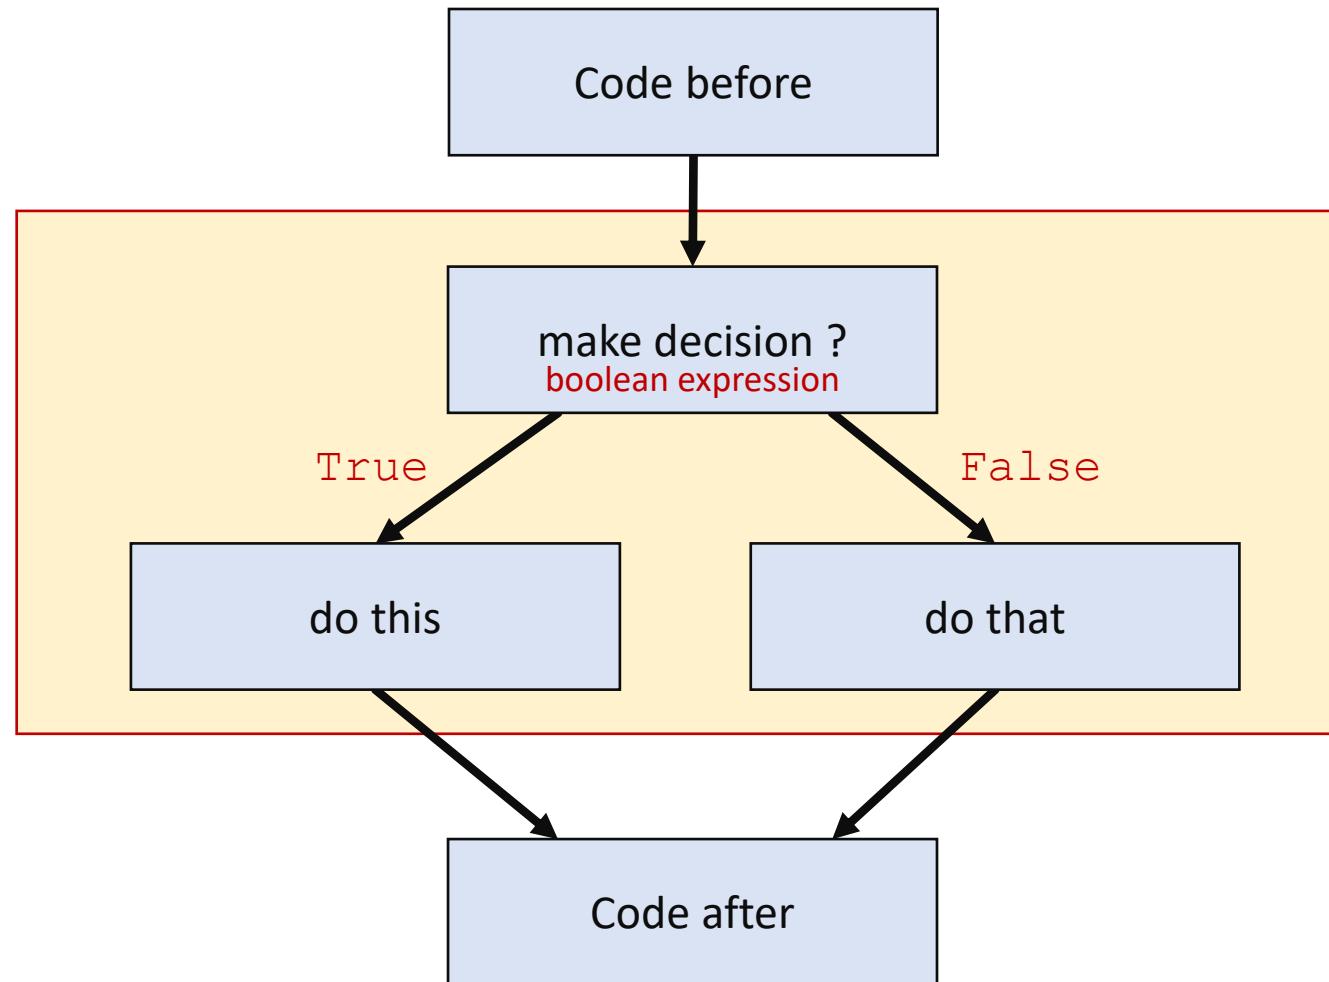

# Basic if-else

*if boolean expression:*

identical  
indentation

code

code

code

*else:*

identical  
indentation

code

code

code

**if-else.py**

```
if x % 2 == 0:
 print('even')
else:
 print('odd')
```

Identical indentation for a sequence of lines = the same spaces/tabs should precede code

# pass

- `pass` is a Python statement doing nothing. Can be used where a statement is required but you want to skip (e.g. code will be written later)
- Example (bad example, since `else` could just be omitted):

```
if-else.py
if x % 2 == 0:
 print('even')
else:
 pass
```

# if-elif-else

```
if condition:
 code
elif condition: # zero or more “elfi” ≡ “else if”
 code
else: # optional
 code
```

```
if (condition) {
 code
} else if (condition) {
 code
} else {
 code
}
```

Java, C, C++ syntax

**if.py**

```
if x == 0:
 print('zero')
```

**if-else.py**

```
if x % 2 == 0:
 print('even')
else:
 print('odd')
```

**elif.py**

```
if x < 0:
 print('negative')
elif x == 0:
 print('zero')
elif x == 1:
 print('one')
else:
 print('>= 2')
```

Other languages using indentation for blocking:  
ABC (1976), occam (1983), Miranda (1985)

# Questions – What value is printed?

```
x = 1
if x == 2:
 x = x + 1
else:
 x = x + 1
 x = x + 1
x = x + 1
print(x)
```

a) 1

b) 2

c) 3

 d) 4

e) 5

f) Don't know

# Nested if-statements

nested-if.py

```
if x < 0:
 print('negative')
elif x % 2 == 0:
 if x == 0:
 print('zero')
 elif x == 2:
 print('even prime number')
 else:
 print('even composite number')
else:
 if x == 1:
 print('one')
 else:
 print('some odd number')
```

# Common mistake

**if-if.py**

```
x = int(input())

if x == 0:
 print('zero')
if x % 2 == 0:
 print('even')
```

**Python shell**

```
> 0
| zero
| even
```



**if-elif.py**

```
x = int(input())

if x == 0:
 print('zero')
elif x % 2 == 0:
 print('even')
```

**Python shell**

```
> 0
| zero
```

# *if-else expressions*

- A very common computation is

```
if test:
 x = true-expression
else:
 x = false-expression
```

- In Python there is a shorthand for this:

```
x = true-expression if test else false-expression
```


think of this as the  
“common case” and the  
“exceptional case”

(see [What's New in Python 2.5 - PEP 308: Conditional Expressions](#))

- In C, C++ and Java the equivalent notation is (note the different order)

```
x = test ? true-expression : false-expression
```

# Repeat until done

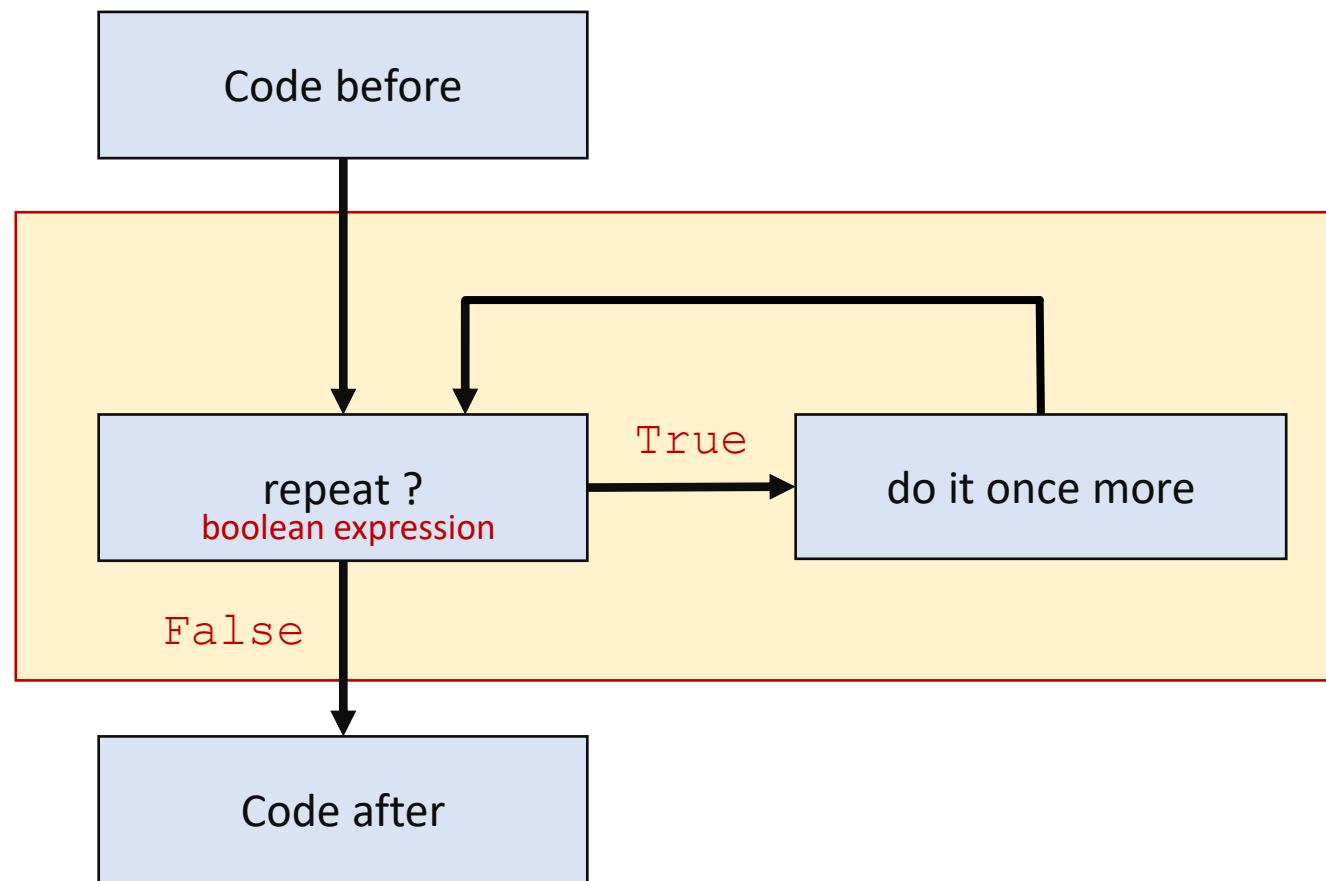

# while-statement

```
while condition:
 code
 ...
 break # jump to code after while loop
 ...
 continue # jump to condition at the
 ... # beginning of while loop
```

```
while (condition) {
 code
}
Java, C, C++ syntax
```

count.py

```
x = 1
while x <= 5:
 print(x, end=' ')
 x = x + 1
print('and', x)
```

Python shell

```
| 1 2 3 4 5 and 6
```

The function `randint(a, b)` from module `random` returns a random integer from  $\{a, a + 1, \dots, b - 1, b\}$

random-pair.py

```
from random import randint
while True:
 x = randint(1, 10)
 y = randint(1, 10)
 if abs(x - y) >= 2:
 break
 print('too close', x, y)
print(x, y)
```

Python shell

```
| too close 4 4
| too close 10 9
| 8 5
```

An exercise asks to  
simplify the code


# Computing $\lfloor \sqrt{x} \rfloor$ using binary search

int-sqrt.py

```
x = 20
low = 0
high = x + 1
while True: # low <= sqrt(x) < high
 if low + 1 == high:
 break
 mid = (high + low) // 2
 if mid * mid <= x:
 low = mid
 continue
 high = mid
print(low) # low = floor(sqrt(x))
```

Integer division  
 $\left\lfloor \frac{\text{high}+\text{low}}{2} \right\rfloor$

$\text{mid} \leq \sqrt{x}$   
 $\Updownarrow$   
 $\text{mid}^2 \leq x$

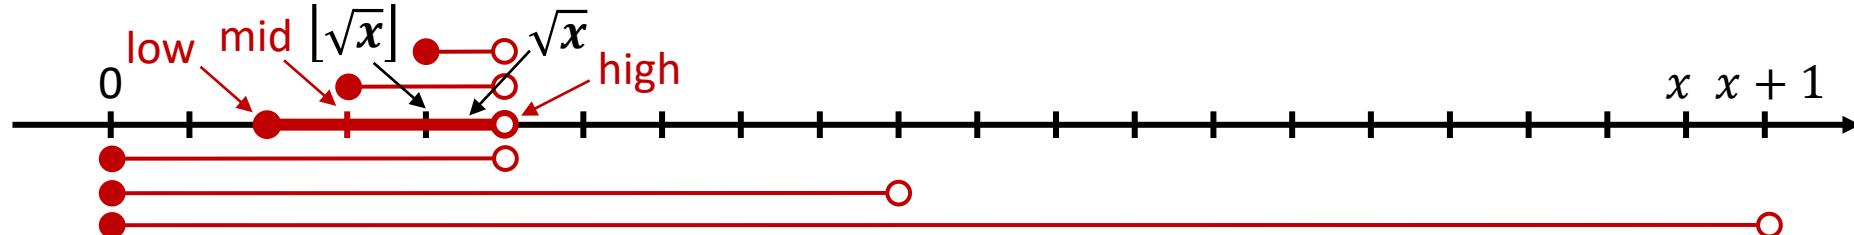


# Division using the Newton-Raphson method

- **Goal:** Compute  $1 / n$  only using  $+$ ,  $-$ , and  $*$
- $x = 1 / n \Leftrightarrow f(x) = n - 1 / x = 0$
- Problem reduces to finding **root** of  $f$
- Newton-Raphson:

$$x := x - f(x) / f'(x) = x - (n - 1/x) / (1/x^2) = (2 - n \cdot x) \cdot x$$

since  $f'(x) = 1 / x^2$  for  $f(x) = n - 1 / x$

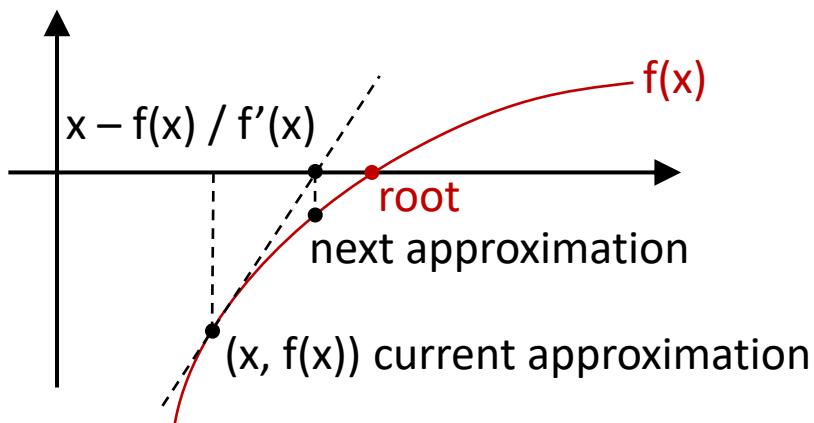

## division.py

```
n = 0.75 # n in [0.5, 1.0]
x = 1.0
last = 0.0
while last < x:
 print(x)
 last = x
 x = (2 - n * x) * x
print('Apx of 1.0 /', n, '=', x)
print('Python 1.0 /', n, '=', 1.0 / n)
```

## Python shell

```
| 1.0
| 1.25
| 1.328125
| 1.33331298828125
| 1.333333330228925
| 1.333333333333333
| Apx of 1.0 / 0.75 = 1.333333333333333
| Python 1.0 / 0.75 = 1.333333333333333
```

# Operations

- None, bool
- basic operations
- strings
- += and friends

# NoneType

- The type None has only one value: None
- Used when context requires a value, but none is really available
- **Example:** All functions must return a value. The function `print` has the *side-effect* of printing something to the standard output, but returns None
- **Example:** Initialize a variable with no value, e.g. list entries `mylist = [None, None, None]`

## Python shell

```
> x = print(42)
| 42
> print(x)
| None
```

# Type bool

- The type `bool` only has two values: `True` and `False`
- Logic truth tables:

| $x \text{ or } y$ | True | False |
|-------------------|------|-------|
| True              | True | True  |
| False             | True | False |

| $x \text{ and } y$ | True  | False |
|--------------------|-------|-------|
| True               | True  | False |
| False              | False | False |

| $x$   | $\text{not } x$ |
|-------|-----------------|
| True  | False           |
| False | True            |

# Scalar vs Non-scalar Types

- **Scalar types** (atomic/indivisible): int, float, bool, None
- **Non-scalar**: Examples strings and lists

```
"string"[3] = "i"
```

```
[2, 5, 6, 7][2] = 6
```

# Questions – What is `[7, 3, 5] [[1, 2, 3] [1]]` ?

- a) 1
- b) 2
- c) 3
-  d) 5
- e) 7
- f) Don't know

# Operations on int and float

**Result is float if and only if at least one argument is float,  
except \*\* with negative exponent always gives a float**

- +, -, \* addition multiplication, e.g.  $3.0 * 2 = 6.0$
- \*\* and pow(x, y) power, e.g.  $2 ** 3 = \text{pow}(2, 3) = 8, 2 ** -2 = 0.25$
- // integer division =  $[x / y]$   
e.g.  $15.0 // 4 = 3.0$ . Note:  $-8 // 3 = -3$
- / division returns float,  $6 / 3 = 2.0$
- abs(x) absolute value
- % integer division remainder (modulo)  
 $11 \% 3 = 2$   
 $4.7 \% 0.6 = 0.5000000000000003$

## Python shell

```
> 0.4 // 0.1
| 4.0
> 0.4 / 0.1
| 4.0
> 0.3 // 0.1
| 2.0
!> 0.3 / 0.1
| 2.999999999999996
> 10**1000 / 2
| OverflowError: integer division
| result too large for a float
```

# Running time for $3^{**}x // 3^{**}x$

Working with larger integers takes slightly more than linear time in the number of digits



## integer-division-timing.py

```
from time import time
import matplotlib.pyplot as plt

bits, compute_time = [], []

for i in range(42):
 x = 3 ** i // 2 ** i
 start = time()
 result = 3 ** x // 3 ** x # the computation we time
 end = time()
 t = end - start
 print('i =', i, 'x =', x, 'Result =', result, 'time(sec) =', t)
 bits.append(x)
 compute_time.append(t)

plt.title('Computing 3**x // 3**x')
plt.xlabel('x')
plt.ylabel('computation time (seconds)')
plt.plot(bits, compute_time, 'g:')
plt.plot(bits, compute_time, 'ro')
plt.show()
```

# module math

Many standard mathematical functions are available in the Python module “`math`”, e.g.

`sqrt, sin, cos, tan, asin, acos, atan, log(natural), log10, exp, ceil, floor, ...`

- To use all the functions from the `math` module use `import math`  
Functions are now available as e.g. `math.sqrt(10)` and `math.ceil(7.2)`
- To import selected functions you instead write `from math import sqrt, ceil`
- The library also contains some constants, e.g.  
`math.pi = 3.141592...` and `math.e = 2.718281...`
- Note: `x ** 0.5` significantly faster than `sqrt(x)`



## Python shell

```
> (0.1 + 0.2) * 10
| 3.0000000000000004
> math.ceil((0.1 + 0.2) * 10)
| 4
```

## Python shell

```
> import math
> math.sqrt(8)
| 2.8284271247461903
> from math import pi, sqrt
> pi
| 3.141592653589793
> sqrt(5)
| 2.23606797749979
> from math import sqrt as kvadratrod
> kvadratrod(3)
| 1.7320508075688772

> import timeit
> timeit.timeit("1e10**0.5")
| 0.021124736888936863
> timeit.timeit("sqrt(1e10)" , "from math import sqrt")
| 0.1366314052865789
> timeit.timeit("math.sqrt(1e10)" , "import math")
| 0.1946660841634582
```

# Rounding up integer fractions

- Python:  $\lceil x/y \rceil = -(-x//y)$

| $-\lceil -13/3 \rceil$ |                |                |
|------------------------|----------------|----------------|
| Python                 | Java           | C              |
| $-(-13//3) = 5$        | $-(-13/3) = 4$ | $-(-13/3) = 4$ |

⚠ The intermediate result  $x/y$  in `math.ceil(x/y)`

is a float with limited precision

- Alternative computation:

$$\lceil x/y \rceil = (x + (y-1)) // y$$

## Python shell

```
> from math import ceil
> from timeit import timeit
> 13 / 3
| 4.333333333333333
> 13 // 3
| 4
> -13 // 3
| -5
> -(-13 // 3)
| 5
> ceil(13 / 3)
| 5
> -(-222222222222222223 // 2)
| 111111111111111112
> ceil(222222222222222223 / 2)
| 11111111111111110656
⚠
> timeit('ceil(13 / 3)', 'from math import ceil')
| 0.2774667127609973
> timeit('-(-13 // 3)') # negation trick is fast
| 0.05231945830200857
```

# floats : Overflow, inf, -inf, nan

- There exists special float values  
inf, -inf, nan  
representing “+infinity”, “-infinity” and  
“not a number”
- Can be created using e.g.  
`float('inf')`  
or imported from the `math` module
- Some overflow operations generate an  
`OverflowError`, other return `inf`  
and allow calculations to continue !
- Read the IEEE 754 standard if you want to  
know more details...

## Python shell

```
> 1e250 ** 2
| OverflowError:
| (34, 'Result too large')
> 1e250 * 1e250
| inf
> -1e250 * 1e250
| -inf
> import math
> math.inf
| inf
> type(math.inf)
| <class 'float'>
> math.inf / math.inf
| nan
> type(math.nan)
| <class 'float'>
> math.nan == math.nan
| False
> float('inf') - float('inf')
| nan
```

# Operations on bool

- The operations `and`, `or`, and `not` behave as expected when the arguments are `False`/`True`.
- The three operators also accept other types, where the following values are considered *false*:

`False, None, 0, 0.0, "", [], ...`

(see The Python Standard Library > Built-in Types > [True Value Testing](#) for more *false* values)

- Short-circuit evaluation***: The rightmost argument of `and` and `or` is only evaluated if the result cannot be determined from the leftmost argument alone. The result is either the leftmost or rightmost argument (see truth tables), i.e. the result is not necessarily `False`/`True`.

`True or 7/0` is completely valid since `7/0` will never be evaluated  
(which otherwise would throw a `ZeroDivisionError` exception)

| x                  | x or y | x                  | x and y | x                  | not x              |
|--------------------|--------|--------------------|---------|--------------------|--------------------|
| <code>false</code> | y      | <code>false</code> | x       | <code>false</code> | <code>True</code>  |
| otherwise          | x      | otherwise          | y       | otherwise          | <code>False</code> |

# Questions – What is "abc" and 42 ?

- a) False
- b) True
- c) "abc"
-  d) 42
- e) TypeError
- f) Don't know

# Comparison operators (e.g. int, float, str)

`==` test if two objects are equal, returns bool  
not to be confused with the assignment operator (`=`)

`!=` not equal

`>`

`>=`

`<`

`<=`

## Python shell

```
> 3 == 7
| False
> 3 == 3.0
| True
> "-1" != -1
| True
> "abc" == "ab" + "c"
| True
> 2 <= 5
| True
> -5 > 5
| False
> 1 == 1.0
| True
> 1 == 1.0000000000000001
| True
> 1 == 1.0000000000000001
| False
```



# Chained comparisons

- A recurring condition is often

$$x < y \text{ and } y < z$$

- If  $y$  is a more complex expression, we would like to avoid computing  $y$  twice, i.e. we often would write

```
tmp = complex expression
x < tmp and tmp < z
```

- In Python this can be written as a **chained comparisons** (which is shorthand for the above)

$$x < y < z$$

- Note: Chained comparisons do not exist in C, C++, Java, ...

# Questions – What is $1 < 0 < 6/0$ ?

- a) True
- b) False
- c) 0
- d) 1
- e) 6
- f) ZeroDivisionError
- g) Don't know

# Binary numbers and operations

- Binary number = integer written in base 2:  $101010_2 = 42_{10}$
- Python constant prefix 0b:  $0b101010 \rightarrow 42$
- `bin(x)` converts integer to string: `bin(49) → "0b110001"`
- `int(x, 2)` converts binary string value to integer: `int("0b110001", 2) → 49`
- Bitwise operations
  - | Bitwise OR
  - & Bitwise AND
  - ~ Bitwise NOT ( $\sim x$  equals to  $-x - 1$ )
  - ^ Bitwise XOR
- Example: `bin(0b1010 | 0b1100) → "0b1110"`
- Hexadecimal = base 16, Python prefix 0x: `0x30 → 48, 0xA0 → 160, 0xFF → 255`
- << and >> integer bit shifting left and right, e.g. `12 >> 2 → 3, and 1 << 4 → 16`

# Operations on strings

- `len(str)` returns length of `str`
- `str[index]` returns `index+1`'th symbol in `str`
- `str1 + str2` returns concatenation of two strings
- `int * str` concatenates `str` with itself `int` times
- Formatting: % operator or .format() function  
old Python 2 way    since Python 3.0  
or formatted string literals (f-strings) with prefix  
since Python 3.6  
letter `f` and Python expressions in `{ }`  
(see [pyformat.info](#) for an introduction)

From “[What’s New In Python 3.0](#)”, 2009: A new system for built-in string formatting operations replaces the % string formatting operator. (However, the % operator is still supported; it will be deprecated in Python 3.1 and removed from the language at some later time.) Read [PEP 3101](#) for the full scoop.

## Python shell

```
> len("abcde")
| 5
> "abcde" [2]
| 'c'
> x, y = 2, 3
> "x = %s, y = %s" % (x, y)
| 'x = 2, y = 3'
> "x = {}, y = {}".format(x, y)
| 'x = 2, y = 3'
> "x = {1}, y = {0}".format(y, x)
| 'x = 2, y = 3'
> f'x + y = {x + y}'
| 'x + y = 5'
> f'{x + y = }' # >= Python 3.8
| 'x + y = 5'
> f'{x} / {y} = {x / y:.3}'
| '2 / 3 = 0.667'
> "abc" + "def"
| 'abcdef'
> 3 * "x--"
| 'x--x--x--'
> 0 * "abc"
| ''
```

# ... more string functions

- `str[-index]` returns the symbol i positions from the right, the rightmost `str[-1]`
- `str[from : to]` substring starting at index `from` and ending at index `to-1`
- `str[from : -to]` substring starting at `form` and last at index `len(str) - to - 1`
- `str[from : to : step]` only take every `step`'th symbol in `str[from : to]`
  - `from` or/and `to` can be omitted and defaults to the beginning/end of string
- `chr(x)` returns a string of length 1 containing the `x`'th Unicode character
- `ord(str)` for a string of length 1, returns the Unicode number of the symbol
- `str.lower()` returns string in lower case
- `str.split()` split string into list of words, e.g.

```
"we love python".split() = ['we', 'love', 'python']
```

## Python shell

```
> s = 'this is a string'
> s.capitalize()
| 'This is a string'
> s.title()
| 'This Is A String'
> s.upper()
| 'THIS IS A STRING'
> s.title().swapcase()
| 'tHIS iS a sTRING
> s.removeprefix('this is ')
| 'a string'
> s.removesuffix(' string')
| 'this is a'
> s.replace('is', 'IS')
| 'tHIS IS a string'
> s.ljust(30)
| 'this is a string'
> s.center(30)
| ' this is a string'
> s.rjust(30, '.')
| '.....this is a string'
> s.count('i')
| 3
> '12345'.zfill(8)
| '00012345'
```

# Questions – What is `s[2:42:3]`?

```
s = 'abwwdexy lwtopavghevt xypxxxyattx hxwoadnxxx'
 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44
```

- a) 'wwdexy\_\_\_\_lwtopavghevt\_xypxxxyattx\_hxwoadn'
-  b) 'we\_love\_python'
- c) 'we\_love\_java'
- d) Don't know

# Strings are immutable

- Strings are non-scalar, i.e. for `s = "abcdef"`, `s[3]` will return "d"
- Strings are **immutable** and cannot be changed once created.  
I.e. the following natural update **is not possible** (but is e.g. allowed in C)

`s[3] = "x"`

- To replace the "d" with "x" in `s`, instead create the new string

`s = s[:3] + "x" + s[4:]`

# Operators

## Precedence rules & Associativity

Example: \* has higher precedence than +

$$2 + 3 * 4 \equiv 2 + (3 * 4) \rightarrow 14 \quad \text{and} \quad (2 + 3) * 4 \rightarrow 20$$

All operators in same group are evaluated left-to-right

$$2 + 3 - 4 - 5 \equiv ((2 + 3) - 4) - 5 \rightarrow -4$$

except for \*\*, that is evaluated right-to-left

$$2^{**}2^{**}3 \equiv 2^{**}(2^{**}3) \rightarrow 256$$

Rule: Use **parenthesis** whenever in doubt of precedence!

| Precedence<br>(low to high) |        |    |
|-----------------------------|--------|----|
|                             | or     |    |
|                             | and    |    |
|                             | not x  |    |
| in                          | not in |    |
| is                          | is not |    |
| ==                          | <      | <= |
| !=                          | >      | >= |
|                             |        |    |
|                             | ^      |    |
|                             | &      |    |
| <<                          | >>     |    |
| +                           | -      |    |
| *                           | @      |    |
| /                           | //     | %  |
| +x                          | -x     | ~x |
| **                          |        |    |

# Long expressions

- Long expressions can be broken over several lines by putting parenthesis around it
- The PEP8 guidelines recommend to limit **all** lines to a maximum of 79 characters

```
Python shell
> (1
 + 2 +
 3)
| 6
```

# `+=` and friends

- Recurring statement is

```
x = x + value
```

- In Python (and many other languages) this can be written as

```
x += value
```

- This also applies to other operators like

```
+ = - = * = / = // = ** =
| = & = ^ = <<= >> =
```

## Python shell

```
> x = 5
> x *= 3
> x
| 15
> a = 'abc'
> a *= 3
> a
| 'abcabcabc'
```

# `:=` assignment expressions (the “Walrus Operator”)



- Syntax

```
name := expression
```

- Evaluates to the value of expression, with the side effect of assigning result to name
- Useful for naming intermediate results/repeating subexpressions for later reusage
- See [PEP 572](#) for further details and restrictions of usage
- In some languages, e.g. Java, C and C++, “`=`” also plays the role of “`:=`”, implying “`if (x=y)`” and “`if (x==y)`” mean quite different things (common typo)

## Python shell

```
> (x := 2 * 3) + 2 * x
| 18
> print(1 + (x := 2 * 3), 2 + x)
| 7 8
> x := 7
| SyntaxError
> (x := 7) # valid, but not recommended
> while line := input():
 print(line.upper())
> abc
| ABC
```

# Lists

- List syntax
- List operations
- copy.deepcopy
- range
- while-else
- for
- for-break-continue-else

# List operations

- List syntax  $[value_0, value_1, \dots, value_{k-1}]$
- List indexing  $L[index]$ ,  $L[-index]$
- List **slices**  $L[from:to]$ ,  $L[from:to:step]$  or  $L[slice(from, to, step)]$
- Creating a copy of a list  $L[:]$  or  $L.copy()$
- List concatenation (creates new list)  $X + Y$
- List repetition (repeated concatenation with itself)  $42 * L$
- Length of list  $\text{len}(L)$
- Check if element is in list  $e \text{ in } L$  (returns True or False)
- Index of first occurrence of element in list  $L.\text{index}(e)$
- Number of occurrences of element in list  $L.\text{count}(e)$
- Check if element is not in list  $e \text{ not in } L$  (same as  $\text{not } e \text{ in } L$ )
- $\text{sum}(L)$     $\text{min}(L)$     $\text{max}(L)$

# List modifiers (lists are mutable)

- Extend list with elements ( $X$  is modified)  $X.extend(Y)$
- Append an element to a list ( $L$  is modified)  $L.append(42)$
- Replace sublist by another list (length can differ)  $X[i:j] = Y$
- Delete elements from list  $del L[i:j:k]$
- Remove & return element at position  $L.pop(i)$
- Remove first occurrence of element  $L.remove(e)$
- Reverse list  $L.reverse()$
- $L *= 42$
- $L.insert(i, x)$  same as  $L[i:i] = [x]$

## Python shell

```
> x = [1, 2, 3, 4, 5]
> x[2:4] = [10, 11, 12]
> x
| [1, 2, 10, 11, 12, 5]
> x = [1, 2, 11, 5, 8]
> x[1:4:2] = ['a', 'b']
| [1, 'a', 11, 'b', 8]
```

# Questions – What is `x` ?

```
x = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
x[2:8:3] = ['a', 'b']
```

- a) [1, 2, 'a', 'b', 5, 6, 7, 8, 9, 10]
- b) [1, 'a', 3, 4, 5, 6, 7, 'b', 9, 10]
- c) [1, 2, 3, 4, 5, 6, 7, 'a', 'b']
-  d) [1, 2, 'a', 4, 5, 'b', 7, 8, 9, 10]
- e) ValueError
- f) Don't know

# Questions – What is `y` ?

```
y = [1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19]
y = y[3:15:3][1:4:2]
```

- a) [3, 6, 9, 12, 15]
-  b) [7, 13]
- c) [1, 9]
- d) [4, 7, 10, 13, 2, 4 ]
- e) TypeError
- f) Don't know

# Nested lists (multi-dimensional lists)

- Lists can contain lists as elements, that can contain lists as elements, that ...
- Can e.g. be used to store multi-dimensional data (list lengths can be non-uniform)

**Note:** For dealing with matrices the NumPy module is a better choice



## multidimensional-lists.py

```
list1d = [1, 3, 5, 2]
list2d = [[1, 2, 3, 4],
 [5, 6, 7, 9],
 [0, 8, 2, 3]]
list3d = [[[5,6], [4,2], [1,7], [2,4]],
 [[1,2], [6,3], [2,5], [7,5]],
 [[3,8], [1,5], [4,3], [2,4]]]
```


```
print(list1d[2])
print(list2d[1][2])
print(list3d[2][0][1])
```

## Python shell

```
| 5
| 7
| 8
```


# aliasing

```
a = [13, 27, 7, 42]
b = a
a[2] = 12
```

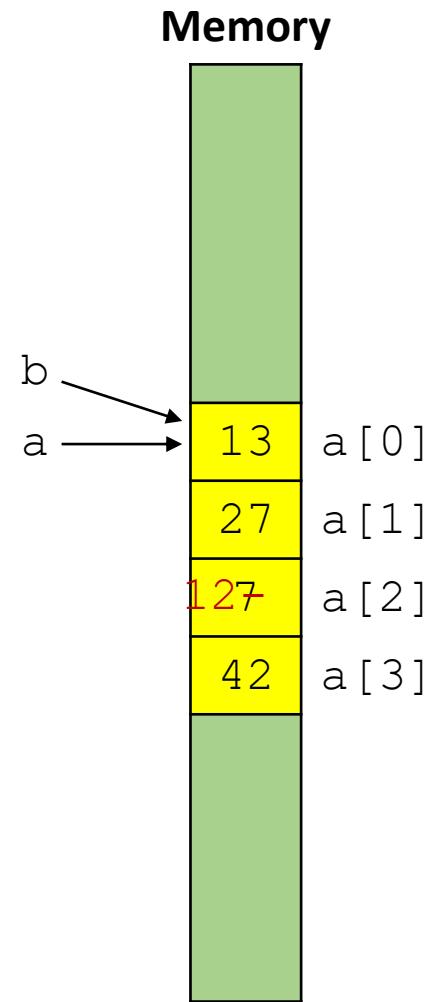


$y = x$       VS       $y = x[:]$

$a = [13, 27, 7, 42]$   
 $b = a$   
 $a[2] = 12$

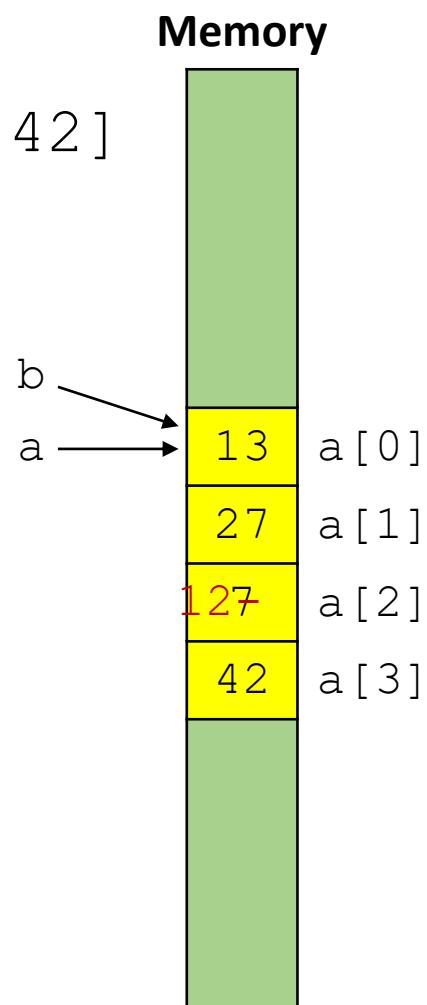

$a = [13, 27, 7, 42]$   
 $b = a[:]$   
 $a[2] = 12$

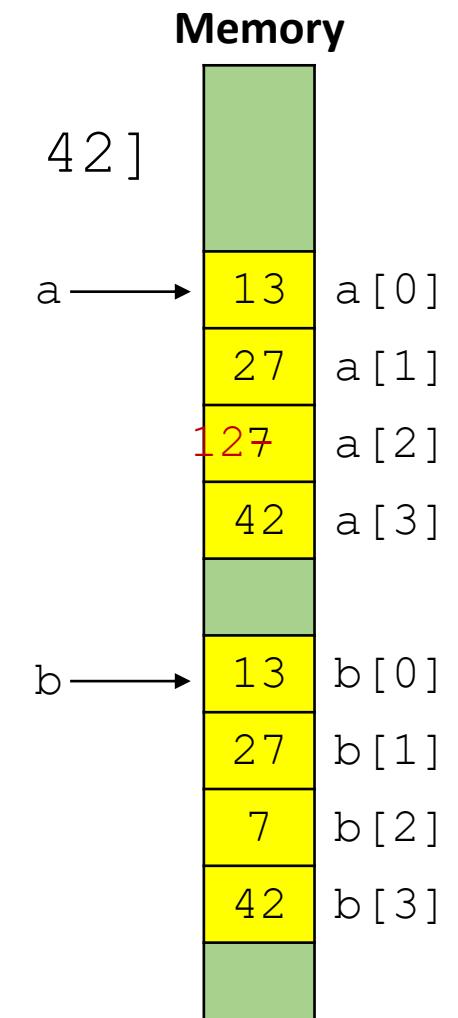

# $\times [ :]$ vs nested structures


```
a = [[3, 5], [7, 11]]
```

```
b = a
```

```
c = a[:]
```

```
a[0][1] = 4
```

```
c[1] = b[0]
```

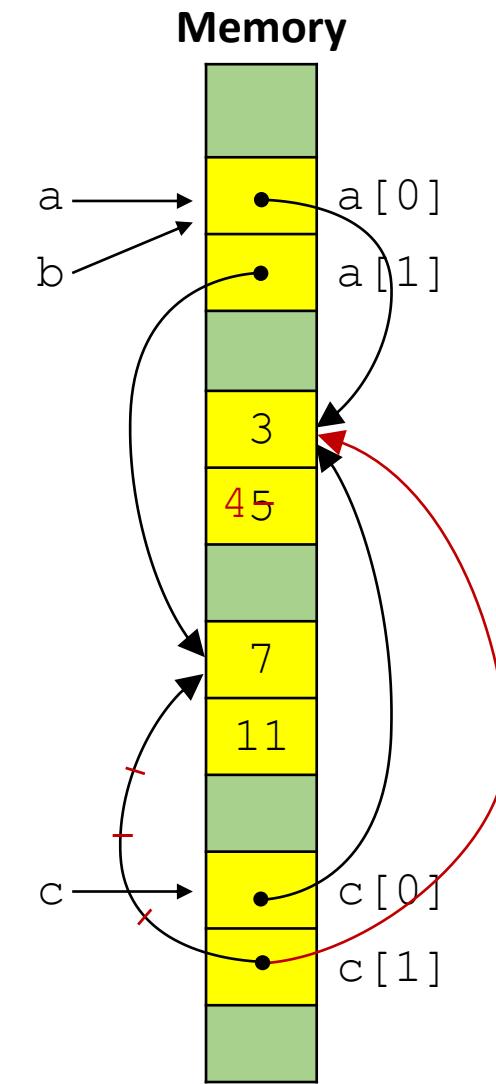

# Question – what is c ?

- a) `[ [3, 5], [7, 11] ]`
- b) `[ [3, 5], [3, 5] ]`
- c) `[ [3, 4], [3, 5] ]`
-  d) `[ [3, 4], [3, 4] ]`
- e) Don't know


`a = [ [3, 5], [7, 11] ]`

`b = a`

`c = a[ : ]`

`a[0][1] = 4`

`c[1] = b[0]`

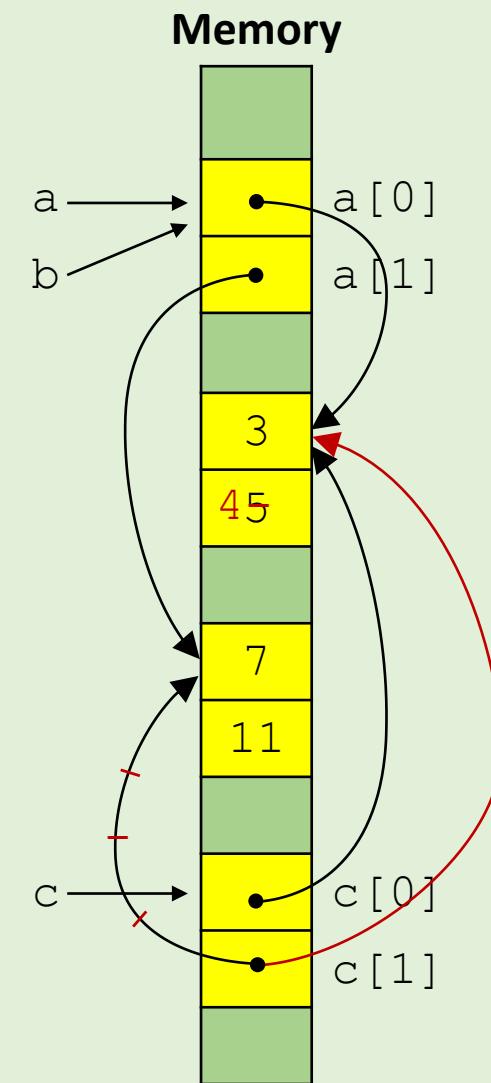


# copy.deepcopy

- To make a copy of all parts of a composite value use the function **deepcopy** from module `copy`

## Python shell

```
> from copy import deepcopy
> a = [[3, 5], 7]
> b = deepcopy(a)
> a[0][0] = 4
> a
| [[4,5],7]
> b
| [[3,5],7]
```

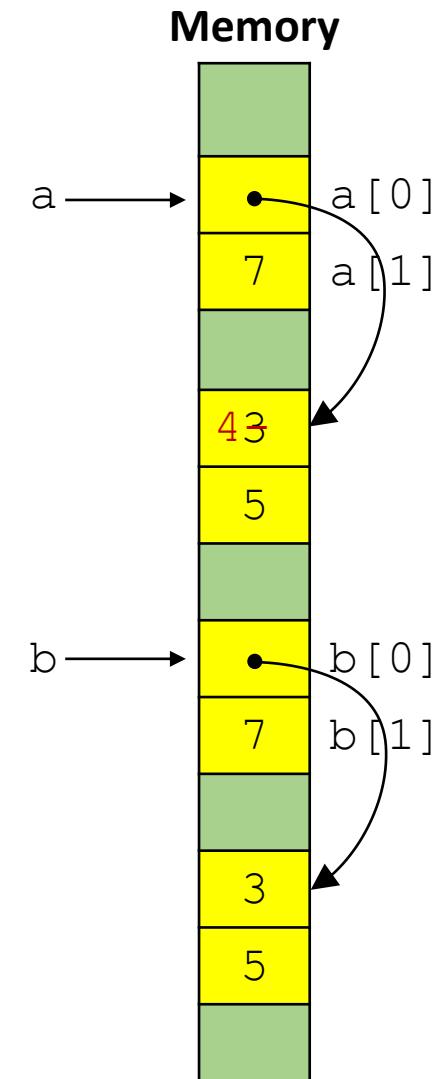

# Initializing a 2-dimensional list



## Python shell

```
> x = [1] * 3
> x
[1, 1, 1]
> y = [[1] * 3] * 4
> y
[[1, 1, 1], [1, 1, 1], [1, 1, 1], [1, 1, 1]]
> y[0][0] = 0
> y
[[0, 1, 1], [0, 1, 1], [0, 1, 1], [0, 1, 1]]
```

## Python shell

```
> y = []
> for _ in range(4): y.append([1] * 3)
> y[0][0] = 0
> y
[[0, 1, 1], [1, 1, 1], [1, 1, 1], [1, 1, 1]]
```

# range(*from*, *to*, *step*)

 In Python 2, `range` generates the explicit list, i.e. always use memory proportional to the length; `xrange` in Python 2 corresponds to `range` in Python 3; Python 3 is more memory friendly

- `range` (*from*, *to*, *else*) generates the **sequence** of numbers starting with *from*, with increments of *step*, and smaller/greater than *to* if *step* positive/negative

|                               |                 |                                                 |
|-------------------------------|-----------------|-------------------------------------------------|
| <code>range(5)</code>         | : 0, 1, 2, 3, 4 | (default <i>from</i> = 0, <i>step</i> = 1)      |
| <code>range(3, 8)</code>      | : 3, 4, 5, 6, 7 | (default <i>step</i> = 1)                       |
| <code>range(-2, 7, 3)</code>  | : -2, 1, 4      | ( <i>from</i> and <i>to</i> can be any integer) |
| <code>range(2, -5, -2)</code> | : 2, 0, -2, -4  | (decreasing sequence if <i>step</i> negative)   |

- Ranges are immutable, can be indexed like a list, sliced, and compared (i.e. generate the same numbers)
- `list(range(...))` generates the explicit list of numbers

## Python shell

```
> range(1, 10000000, 3)[2]
| 7
> range(1, 10000000, 3)[100:120:4]
| range(301, 361, 12)
> range(1, 10000000, 3)[100:120:4][2:3]
| range(325, 337, 12)
> list(range(5, 14, 3))
| [5, 8, 11]
```

Question – What is `range(3, 20, 4)[2:4][1]` ?

- a) 3
- b) 7
- c) 11
-  d) 15
- e) 19
- f) Don't know

# for - loop

- For every element in a **sequence** execute a block of code:

```
for var in sequence:
 block
```

- Sequences can e.g. be lists, strings, ranges
- `break` and `continue` can be used like in a while-loop to break out of the for-loop or continue with the next element in the sequence

## Python shell

```
> for x in [1, "abc", [2, 3], 5.0]:
> print(x)
1
abc
[2, 3]
5.0
> for x in "abc":
> print(x)
a
b
c
> for x in range(5, 15, 3):
> print(x)
5
8
11
14
```

# Question – What is printed ?

Python shell

```
> for i in range(1, 4):
> for j in range(i, 4):
> print(i, j, sep=':', end=' ')
```

- a) 1:1 1:2 1:3 2:1 2:2 2:3 3:1 3:2 3:3
-  b) 1:1 1:2 1:3 2:2 2:3 3:3
- c) 1:1 2:1 3:1 1:2 2:2 3:2 1:3 2:3 3:3
- d) 1:1 2:1 3:1 2:2 3:2 3:3
- e) Don't know

# Question – **break**, what is printed ?

Python shell

```
> for i in range(1, 4):
> for j in range(1, 4):
> print(i, j, sep=':', end=' ')
> if j >= i:
> break
```

- a) *nothing*
- b) 1:1
-  c) 1:1 2:1 2:2 3:1 3:2 3:3
- d) 1:1 2:2 3:3
- e) Don't know



In nested `for`- and `while`-loops,  
`break` only breaks the innermost loop

```
***** COMMODORE 64 BASIC V2 *****
64K RAM SYSTEM 38911 BASIC BYTES FREE
READY.
10 FOR I=1 TO 10
20 PRINT I
30 NEXT
RUN
1
2
3
4
5
6
7
8
9
10
READY.
```

```
***** COMMODORE 64 BASIC V2 *****
64K RAM SYSTEM 38911 BASIC BYTES FREE
READY.
10 FOR I=1 TO 3
20 FOR J=I TO 3
30 PRINT I,J
40 NEXT
50 NEXT
RUN
1
112233
123233
READY.
```

# Palindromic substrings

- Find all **palindromic** substrings of length  $\geq 2$ , i.e. substrings spelled identically forward and backwards:

abraca**d**rabra**t**ra**ll**alla  
  i   j           i    j

- Algorithm:** Test all possible substrings (brute force/exhaustive search)
- Note:** the slice `t [ ::-1 ]` is `t` reversed

## palindrom.py

```
s = "abracadabrabratrallalla"

for i in range(len(s)):
 for j in range(i + 2, len(s) + 1):
 t = s[i:j]
 if t == t[::-1]:
 print(t)
```

## Python shell

```
aca
alla
allalla
ll
llall
lal
alla
ll
```

# Sieve of Eratosthenes

- Find all prime numbers  $\leq n$
- Algorithm:

A diagram illustrating the Sieve of Eratosthenes algorithm. It shows a sequence of numbers from 2 to 14. The first number, 2, is circled in red. All multiples of 2 are then circled in red: 4, 6, 8, 10, 12, and 14. Next, the number 3 is circled in red. All multiples of 3 are then circled in red: 9 and 12. The number 5 is circled in red. All multiples of 5 are then circled in red: 10 and 15 (but 15 is not shown). The number 7 is circled in red. All multiples of 7 are then circled in red: 14. Finally, the number 11 is circled in red. All multiples of 11 are then circled in red: 22 (but 22 is not shown). The number 13 is circled in red. All multiples of 13 are then circled in red: 26 (but 26 is not shown).

## eratosthenes.py

```
n = 100
prime = [True] * (n + 1)

for i in range(2, n):
 for j in range(2 * i, n + 1, i):
 prime[j] = False
```

```
for i in range(2, n + 1):
 if prime[i]:
 print(i, end=' ')
```

## Python shell

```
| 2 3 5 7 11 13 17 19 23 29 31 37 41
 43 47 53 59 61 67 71 73 79 83 89
 97
```

# while-else and for-else loops

- Both for- and while-loops can have an optional “else”:

```
for var in sequence:
 block
else:
 block
```

```
while condition:
 block
else:
 block
```

- The “else” block is only executed if no `break` is performed in the loop
- The “else” construction for loops is specific to Python, and does not exist in e.g. C, C++ and Java



# Linear search

linear-search-while.py

```
L = [7, 3, 6, 4, 12, 'a', 8, 13]
x = 4

i = 0
while i < len(L):
 if L[i] == x:
 print(x, "at position", i, "in", L)
 break
 i = i + 1

if i >= len(L):
 print(x, "not in", L)
```

linear-search-while-else.py

```
i = 0
while i < len(L):
 if L[i] == x:
 print(x, "at position", i, "in", L)
 break
 i = i + 1
else:
 print(x, "not in", L)
```

linear-search-for.py

```
found = False
for i in range(len(L)):
 if L[i] == x:
 print(x, "at position", i, "in", L)
 found = True
 break

if not found:
 print(x, "not in", L)
```

linear-search-for-else.py

```
for i in range(len(L)):
 if L[i] == x:
 print(x, "at position", i, "in", L)
 break
else:
 print(x, "not in", L)
```

linear-search-builtin.py

```
if x in L:
 print(x, "at position", L.index(x), "in", L)
else:
 print(x, "not in", L)
```

# Some performance considerations

# String concatenation

- To concatenate two (or few) strings use

$str_1 + str_2$   
 $var += str$

- To concatenate several/many strings use


`' '.join( [str1, str2, str3, ... , strn] )`

- Concatenating several strings by repeated use of `+` generates explicitly the longer-and-longer intermediate results; using `join` avoids this slowdown



## Python shell

```
> s = 'A' + 'B' + 'C'
> s
| 'ABC'
> 'x'.join(['A', 'B', 'C'])
| 'AxBxC'
> s = ''
> s += 'A'
> s += 'B'
> s += 'C'
> s
| 'ABC'
> L = []
> L.append('A')
> L.append('B')
> L.append('C')
> L
| ['A', 'B', 'C']
> s = ' '.join(L)
> s
| 'ABC'
```

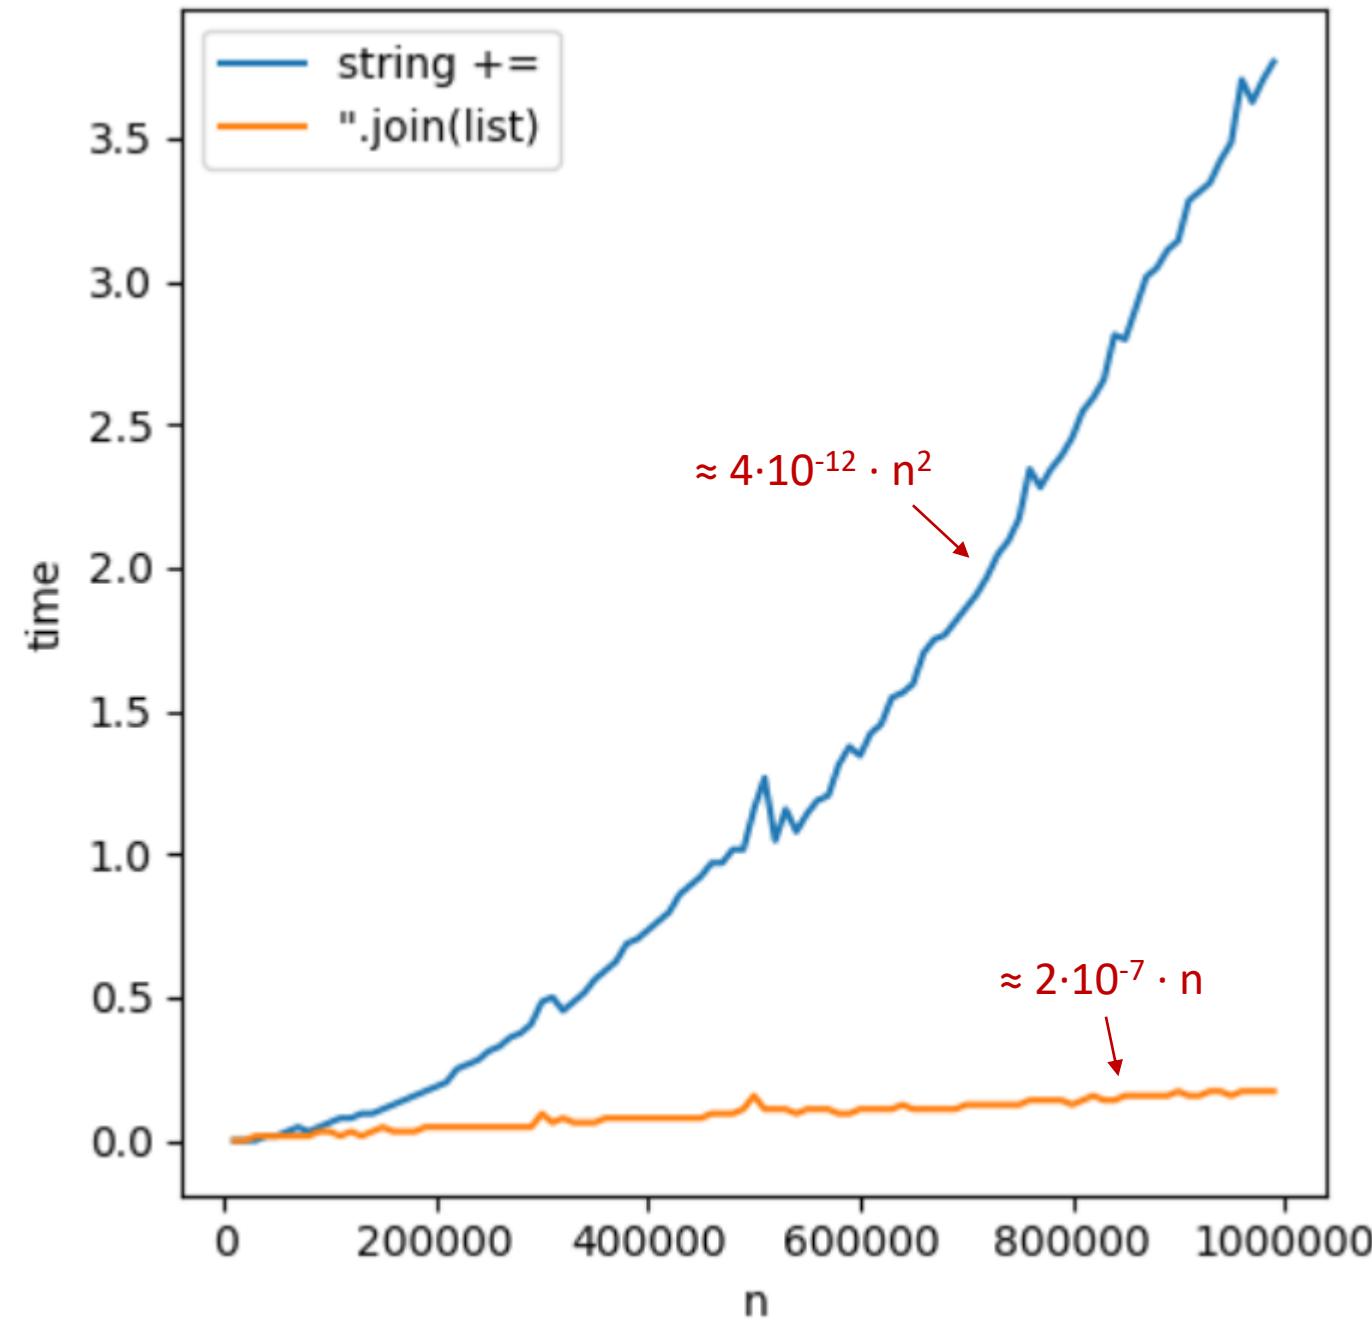

### string-concatenation.py

```
from time import time
from matplotlib import pyplot as plt

ns = range(10_000, 1_000_000, 10_000)
time_string = []
time_list = []
for n in ns:
 start = time()
 s = ''
 for _ in range(n):
 s += 'abcdefg' # slow
 end = time()
 time_string.append(end - start)


 start = time()
 substrings = []
 for _ in range(n):
 substrings.append('abcdefg');
 s = ''.join(substrings);
 end = time()
 time_list.append(end - start)

plt.plot(ns, time_string, label='string +=')
plt.plot(ns, time_list, label=".join(list)")
plt.xlabel('n')
plt.ylabel('time')
plt.legend()
plt.show()
```




# The internal implementation of Python lists

- Accessing and updating list positions take the same time independently of position
- Creating new / deleting entries in a list depends on position,  
Python optimizes towards updates at the end
- Try to organize your usage of lists to insert / delete elements at the end  
`L.append(element)` and `L.pop()`
- Python lists internally have space for adding  $\approx 12.5\%$  additional entries at the end;  
when the reserved extra space is exhausted the list is moved to a new chunk of  
memory with  $\approx 12.5\%$  extra space

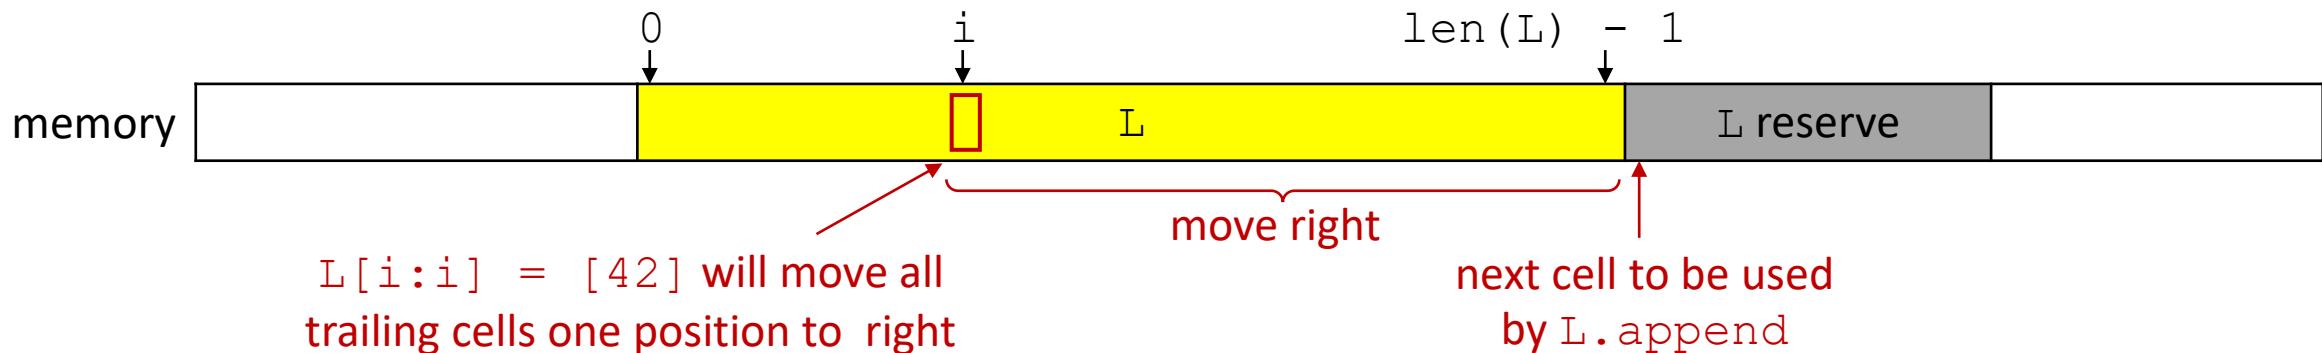

# List insertions at front vs end

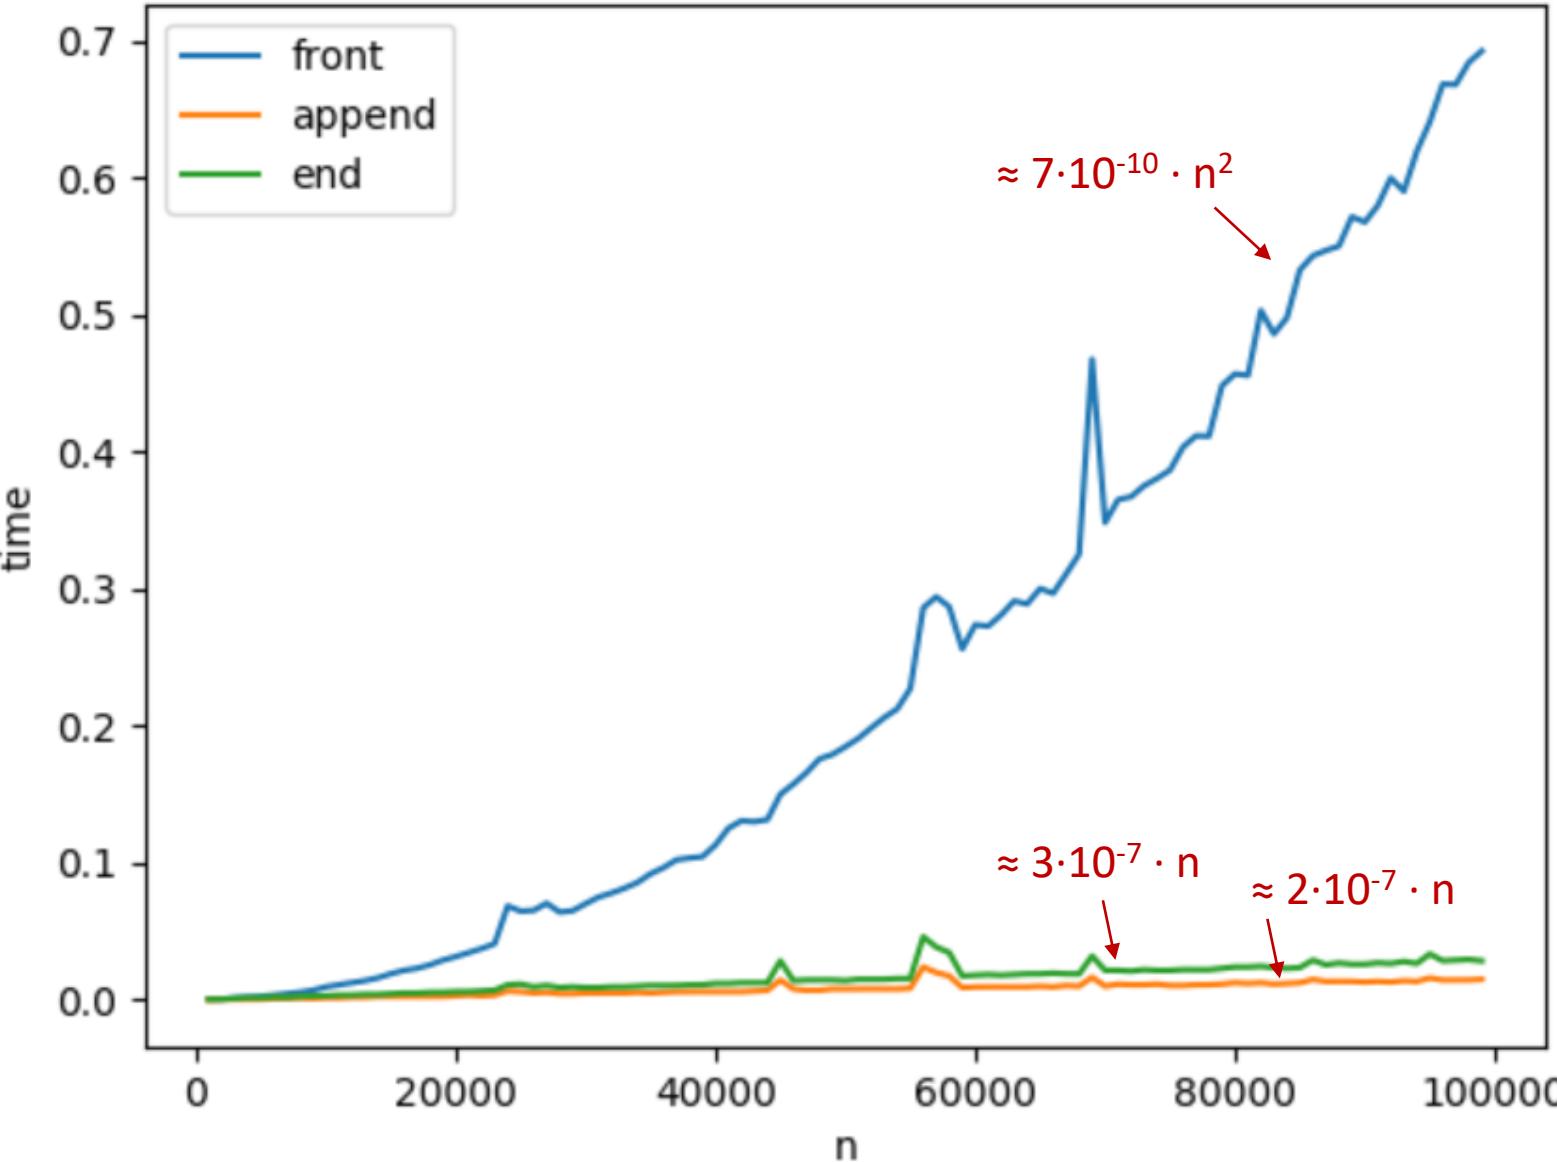

```
list-insertions.py
from time import time
from matplotlib import pyplot as plt
ns = range(1000, 100_000, 1000)
time_end = []
time_append = []
time_front = []
for n in ns:
 start = time()
 L = []
 for i in range(n):
 L[i:i] = [i] # insert after list
 end = time()
 time_end.append(end - start)


 start = time()
 L = []
 for i in range(n):
 L.append(i) # append to list
 end = time()
 time_append.append(end - start)

 start = time()
 L = []
 for i in range(n):
 L[0:0] = [i] # insert at front
 end = time()
 time_front.append(end - start)

plt.plot(ns, time_front, label='front')
plt.plot(ns, time_append, label='append')
plt.plot(ns, time_end, label='end')
plt.xlabel('n')
plt.ylabel('time')
plt.legend()
plt.show()
```

⚠️

# Updates (insertions + deletions) in the middle of a list

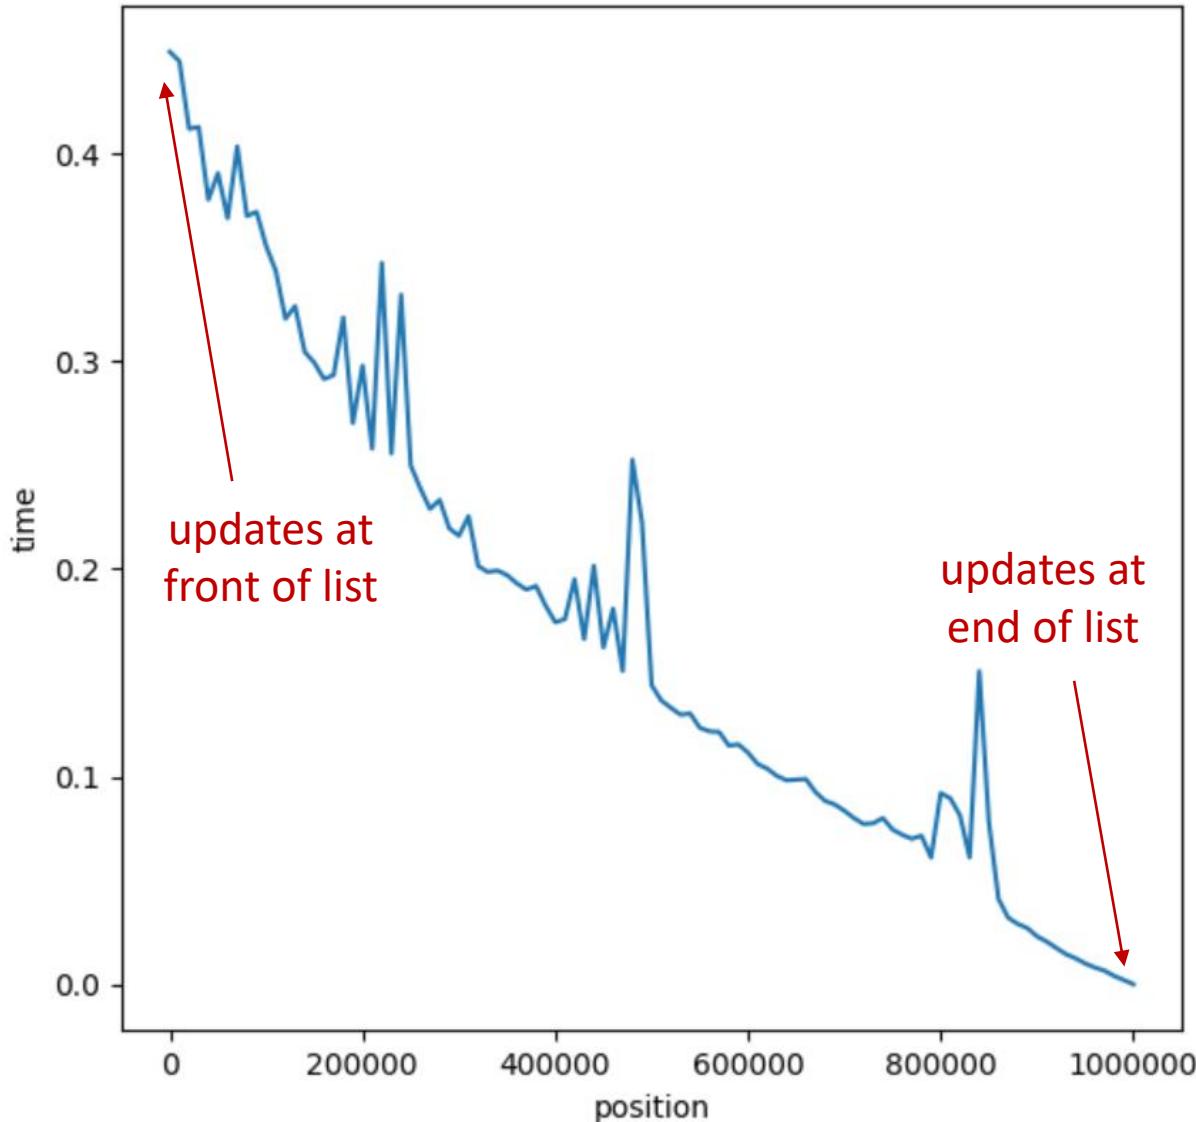

## list-updates.py

```
from time import time
from matplotlib import pyplot as plt

ns = range(0, 1_000_001, 10_000)
time_pos = []
L = list(range(1_000_000)) # L = [0, ..., 999_999]
for i in ns:
 start = time()
 for _ in range(1000):
 L[i:i] = [42] # insert element before L[i]
 del L[i] # remove L[i] from L
 end = time()
 time_pos.append(end - start)

plt.plot(ns, time_pos)
plt.xlabel('position')
plt.ylabel('time')
plt.show()
```

# Tuples and lists

- tuples
- lists
- mutability
- list comprehension
- for-if, for-for
- list()
- any(), all()
- enumerate(), zip()

# Tuples

$(\text{value}_0, \text{ value}_1, \dots, \text{ value}_{k-1})$

- Tuples can contain a sequence of zero or more elements, enclosed by "()" and ")"
- Tuples are **immutable**
- Tuple of length 0: ()
- Tuple of length 1: (value,)  
Note the **comma** to make a tuple of length one distinctive from an expression in parenthesis
- In many contexts a tuple with  $\geq 1$  elements can be written without parenthesis
- Accessors to lists also apply to tuples, slices, ...

## Python shell

```
> (1, 2, 3)
| (1, 2, 3)
> ()
| ()
> (42) !!!!!
| 42
> (42,)
| (42,)
> 1, 2
| (1, 2)
> 42,
| (42,)
> x = (3, 7)
> x
| (3, 7)
> x = 4, 6
> x
| (4, 6)
> x[1] = 42
| TypeError: 'tuple' object does
| not support item assignment
```

# Question – What value is $((42,))$ ?


- a) 42
- b)  $(42)$
-  c)  $(42,)$
- d)  $((42,),)$
- e) Don't know

# Question – What is x ?


```
x = [1, [2, 3], (4, 5)]
x[2][0] = 42
```

- a) [1, [42, 3], (4, 5)]
- b) [1, [2, 3], (42, 5)]
- c) [1, [2, 3], 42]
-  d) TypeError
- e) Don't know


# Question – What tree is ('A', (( 'B' , 'C' ) , 'D' ) ) ?

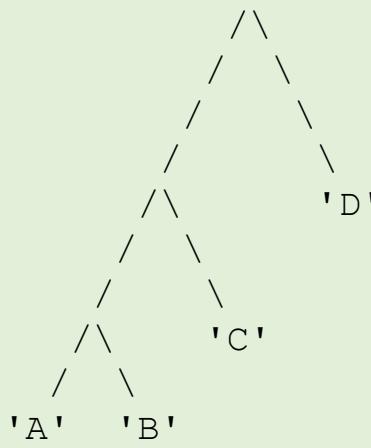


a)

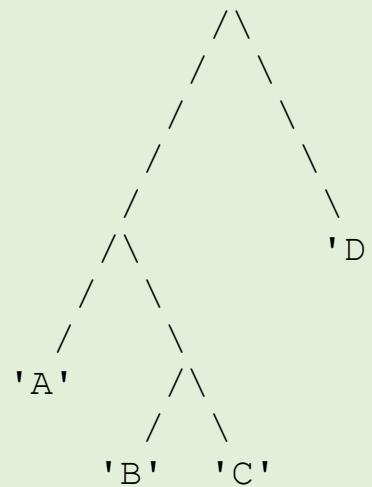


b)

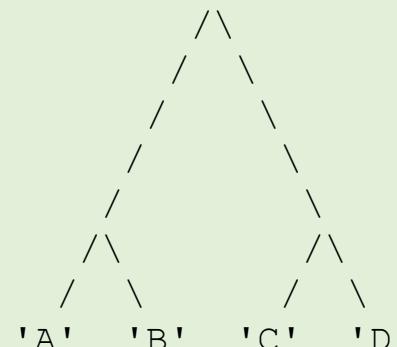

c)

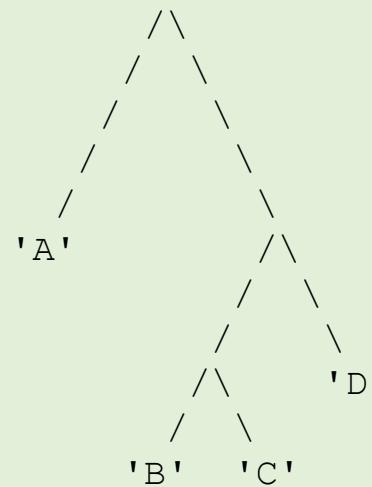

d)

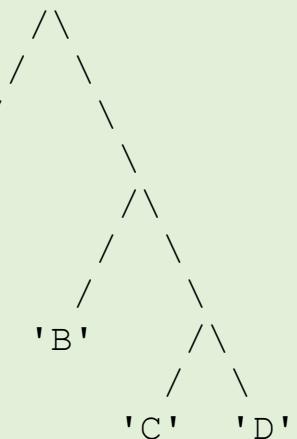

e)

f) Don't know

# Tuple assignment

Unpacking

```
Python shell
> point = (10, 25)
> x, y = point
> x
| 10
> y
| 25
```

- Parallel assignments

$$x, y, z = a, b, c$$

is a shorthand for a tuple assignment (right side is a single tuple)

$$(x, y, z) = (a, b, c)$$

- First the right-hand side is evaluated completely, and then the individual values of the tuple are assigned to  $x, y, z$  left-to-right (length must be equal on both sides)

# Nested tuple/lists assignments

- Let hand side can be nested  
(great for unpacking data)

```
(x, (y, (a[0], w)), a[1])
= 1, (2, (3, 4)), 5
```

- [...] and (...) on left side matches both lists and tuples of equal length  
(but likely you would like to be consistent with type of parenthesis)

## Python shell

```
> two_points = [(10, 25), (30, 40)]
> (x1, y1, x2, y2) = two_points
| ValueError: not enough values to
unpack (expected 4, got 2)
> ((x1, y1), (x2, y2)) = two_points
> a = [None, None]
> v = ((2, (3, 4)), 5)
> ((y, (a[0], w)), a[1]) = v
> a
| [3, 5]
> [x, y, z] = (3, 5, 7)
> (x, y, z) = [3, 5, 7]
> [x, (y, z), w] = (1, [2, 3], 4)
> [x, (y, z), w] = (1, [2, (5, 6)], 4)
> z
| (5, 6)
```

# Unpacking a sequence with one element



Python shell

```
> x = [42] # simple assignment
> x
| [42]
> x, = [42] # unpacking, implicit parenthesis
> x
| 42
> (x,) = [42] # unpacking
> x
| 42
> x, = [1, 2, 3]
| ValueError: too many values to unpack (expected 1)
```

# Tuples vs lists: $a += b$

- Lists

Extends existing list, i.e. same as `a.extend(b)`

- Tuples

Must create a new tuple `a + b` and assign to `a`  
(since tuples are immutable)

## Python shell

```
> (1, 2) + (3, 4)
| (1, 2, 3, 4)
> x = [1, 2]
> y = x
> y += [3, 4]
> y
| [1, 2, 3, 4]
> x
| [1, 2, 3, 4] !
```

```
> x = (1, 2)
> y = x
> y += (3, 4)
> y
| (1, 2, 3, 4)
> x
| (1, 2) !
```

# More on += on lists

- Since `a += b` is the same as `a.extend(b)` we can also do

```
Python shell
> x = [1, 2, 3]
> x += [4, 5, 6]
> x += (7, 8, 9)
> x += range(10, 13) # 10, 11, 12
> x += 'abc' # 'a', 'b', 'c'
> print(x)
| [1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 'a', 'b', 'c']
> x = [1, 2, 3] + (4, 5, 6)
| TypeError: can only concatenate list (not "tuple") to list
```

- For tuples += only accepts tuples

# \*variable assignment

- For a tuple of variable length a single *\*variable name* on the left side will be assigned a list of the remaining elements not matched by variables preceding/following \*
- Example

```
a, *b, c = t
```

is equivalent to

```
a = t[0]
```

```
b = t[1:-1]
```

```
c = t[-1]
```

- There can be a single \* in a left-hand-side tuple (but one new \* in each nested tuple)

## Python shell

```
> (a, *b, c, d) = (1, 2, 3, 4, 5, 6)
> b
| [2, 3, 4]
> (a, *b, c, d) = (1, 2, 3)
> b
| []
> (a, *b, c, d) = (1, 2)
| ValueError: not enough values to
| unpack (expected at least 3, got 2)
> v = ((1,2,3),4,5,6,(7,8,9,10))
> ((a, *b), *c, (d, *e)) = v
> b
| [2, 3]
> c
| [4, 5, 6]
> e
| [8, 9, 10]
> head, *tail = [1, 2, 3, 4]
> head
| 1
> tail
| [2, 3, 4]
```

# Question – What is b ?

`(*a, (b, ), c) = ((1, 2), ((3, 4)), ((5, )), (6))`

a) (1, 2)

b) (3, 4)

 c) 5

d) (5, )

e) (6)

f) Don't know

## Python shell

```
> (*a,(b,),c) = ((1,2),((3,4)),((5,)),(6))
> a
| [(1, 2), (3, 4)]
> b
| 5
> c
| 6
```

# \* in list and tuple construction


- When constructing a list or tuple you can insert zero or more elements from another list/tuple/sequence by inserting *\*expression*
- There can be an arbitrary number of \* expressions in a tuple or list construction

## Python shell

```
> A = (1, 2, 3)
> B = ['B', 'C']
> L = [A, B, 4, 5]
> L
| [(1, 2, 3), ['B', 'C'], 4, 5]
> len(L)
| 4
> L = [*A, *B, 4, 5]
> L
| [1, 2, 3, 'B', 'C', 4, 5]
> len(L)
| 7
> (*A, *B, 4, 5)
| (1, 2, 3, 'B', 'C', 4, 5)
```

## Python shell

```
> from timeit import timeit
> timeit('A + A + A + A + A + A + A + A', setup='A = [1,2,3,4,5,6,7,8,9,10]')
| 0.665172699955292 # repeated concatenation can be slow
!> timeit('[*A, *A, *A, *A, *A, *A, *A, *A]', setup='A = [1,2,3,4,5,6,7,8,9,10]')
| 0.32599859999027103 # * notation can be faster for multiple concatenation
```

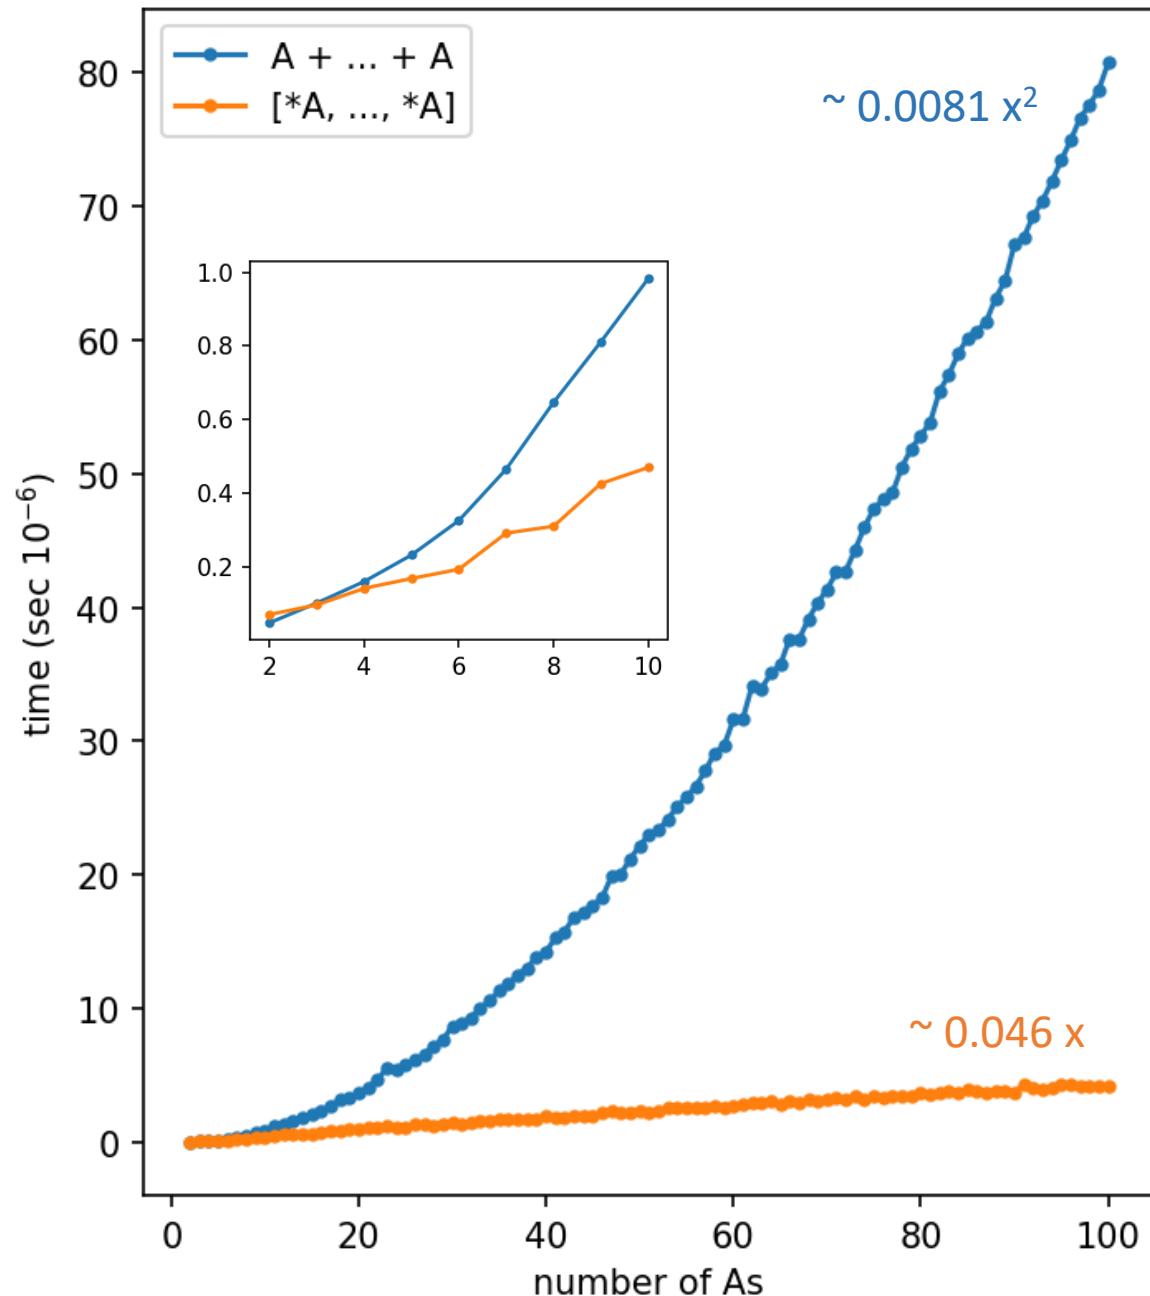

### list\_catenation.py

```

import matplotlib.pyplot as plt
from timeit import timeit

ns = range(2, 101)
P, S = [], []
for n in ns:
 setup = 'A = list(range(10))'
 plus = ' + '.join(['A'] * n)
 star = '[' + ', '.join(['*A'] * n) + ']'
 P.append(timeit(plus, setup=setup))
 S.append(timeit(star, setup=setup))

plt.plot(ns, P, '.-', label='A + ... + A')
plt.plot(ns, S, '.-', label='[*A, ..., *A]')
plt.legend()
plt.ylabel('time (sec 10^{-6})')
plt.xlabel('number of As')
plt.show()

```

# List comprehension (cool stuff)

- Example:

```
[x*x for x in [1, 2, 3]]
```

returns

```
[1, 4, 9]
```

- General

*[expression for variable in sequence]*

returns a list, where *expression* is computed for each element in *sequence* assigned to *variable*

## Python shell

```
> [2*x for x in [1,2,3]]
| [2, 4, 6]
> [2*x for x in (1,2,3)]
| [2, 4, 6]
> [2*x for x in range(10,15)]
| [20, 22, 24, 26, 28]
> [2*x for x in 'abc']
| ['aa', 'bb', 'cc']
> [(None, None) for _ in range(2)]
| [(None, None), (None, None)]
```

# List comprehension (it's just syntactic sugar...)

```
Python shell
> [x*2 for x in [1, 2, 3]]
| [2, 4, 6]

> L = []
> for x in [1, 2, 3]:
> L.append(x*2)
> L
| [2, 4, 6]
```

# List comprehension (more cool stuff)

- Similarly to the left-hand-side in assignments, the variable part can be a (nested) tuple of variables for unpacking elements:

[*expression* **for** *tuple of variables* **in** *sequence*]

## Python shell

```
> points = [(3, 4), (2, 5), (4, 7)]
> [(x, y, x*y) for (x, y) in points]
| [(3, 4, 12), (2, 5, 10), (4, 7, 28)]
> [(x, y, x*y) for x, y in points]
| [(3, 4, 12), (2, 5, 10), (4, 7, 28)]
> [x, y, x*y for (x, y) in points]
| SyntaxError: invalid syntax
```



parenthesis required for  
the constructed tuples

# List comprehension – for-if and multiple for

- List comprehensions can have nested for-loops

[*expression* for  $v_1$  in  $s_1$  for  $v_2$  in  $s_2$  for  $v_3$  in  $s_3$ ]

- Can select a subset of the elements by adding an if-condition

[*expression* for  $v_1$  in  $s_1$  if *condition*]

- and be combined...

## Python shell

```
> [(x, y) for x in range(1, 3) for y in range(4, 6)]
| [(1, 4), (1, 5), (2, 4), (2, 5)]
> [x for x in (1, 2) for x in (4, 5)] !!!!!
| [4, 5, 4, 5]
> [x for x in range(1, 101) if x % 7 == 1 and x % 5 == 2]
| [22, 57, 92]
> [(x, y, x*y) for x in range(1, 11) if 6 <= x <= 7 for y in range(x, 11) if 6 <= y <= 7 and not x == y]
| [(6, 7, 42)]
```

# Question – What will print the same?

```
points = [(3, 7), (4, 10), (12, 3), (9, 11), (7, 5)]
print([(x, y) for x, y in points if x < y])
```

- a) `print([x, y for x, y in points if x < y] )`
- b) `print([(x, y) for p in points if p[0] < p[1]] )`
- c) `print([p for p in points if p[0] < p[1]] )`
- d) `print([[x, y] for x, y in points if x < y] )`
- e) Don't know

# any, all

- `any(L)` checks if at least one element in the sequence L is true (list, tuple, ranges, sequence, strings, ...)

```
any([False, True, False])
```

- `all(L)` checks if all elements in the sequence L are true

```
all([False, False, True])
```

- `any` and `all` return `True` or `False`

## Python shell

```
> any((False, True, False))
| True
> any([False, False, False])
| False
> any([])
| False
> all([False, False, True])
| False
> all((True, True, True))
| True
> all(())
| True
> L = (7, 42, 13)
> any([x == 42 for x in L])
| True
> all([x == 42 for x in L])
| False
```

# Example – computing primes

Python shell

```
> [x for x in range(2, 50) if all([x % f for f in range(2, x)])]
| [2, 3, 5, 7, 11, 13, 17, 19, 23, 29, 31, 37, 41, 43, 47]

> [10 % f for f in range(2, 10)]
| [0, 1, 2, 0, 4, 3, 2, 1]
> all([10 % f for f in range(2, 10)]) # == 0 is considered False
| False
> [13 % f for f in range(2, 13)]
| [1, 1, 1, 3, 1, 6, 5, 4, 3, 2, 1]
> all([13 % f for f in range(2, 13)])
| True
```

# enumerate

`list(enumerate(L)) )`

returns

`[ (0, L[0]), (1, L[1]), ..., (len(L) - 1, L[-1]) ]`

## Python shell

```
> points = [(1, 2), (3, 4), (5, 6)]
> [(idx, x * y) for idx, (x, y) in enumerate(points)]
| [(0, 2), (1, 12), (2,30)]

> L = ('a', 'b', 'c')
> list(enumerate(L))
| [(0, 'a'), (1, 'b'), (2, 'c')]

> L_ = []
> for idx in range(len(L)):
> L_.append((idx, L[idx]))
> print(L_)
| [(0, 'a'), (1, 'b'), (2, 'c')]
> list(enumerate(['a', 'b', 'c'], start=7))
| [(7, 'a'), (8, 'b'), (9, 'c')]
```

# zip

`list(zip(L1, L2, ..., Lk)) = [(L1[0], L2[0], ..., Lk[0]), ..., (L1[n-1], L2[n-1], ..., Lk[n-1])]`  
where  $n = \min(\text{len}(L_1), \text{len}(L_2), \dots, \text{len}(L_k))$

- Example (“matrix transpose”):

```
list(zip([1, 2, 3],
 [4, 5, 6],
 [7, 8, 9]))
```

returns

```
[(1, 4, 7),
 (2, 5, 8),
 (3, 6, 9)]
```

## Python shell

```
> x = [1, 2, 3]
> y = [4, 5, 6]
| zip(x, y)
> <zip at 0xb02b530>
> points = list(zip(x, y))
> print(points)
| [(1, 4), (2, 5), (3, 6)]
```

## Python shell

```
> first = ['Donald', 'Mickey', 'Scrooge']
> last = ['Duck', 'Mouse', 'McDuck']

> for i, (a, b) in enumerate(zip(first, last), start=1):
> print(i, a, b)

| 1 Donald Duck
| 2 Mickey Mouse
| 3 Scrooge McDuck
```

# (Simple) functions

- You can define your own functions using:

```
def function-name (var1, ..., vark):
 body code
```

- If the body code executes  
*return expression*

the result of *expression* will be returned by the function. If *expression* is omitted or the body code terminates without performing *return*, then *None* is returned

- When *calling* a function *name* (*value*<sub>1</sub>, ..., *value*<sub>*k*</sub>) body code is executed with *var*<sub>*i*</sub>=*value*<sub>*i*</sub>

## Python shell

```
> def sum3(x, y, z):
 return x + y + z

> sum3(1, 2, 3)
| 6
> sum3(5, 7, 9)
| 21

> def powers(L, power):
 P = [x**power for x in L]
 return P

> powers([2, 3, 4], 3)
| [8, 27, 64]
```

# Question – What tuple is printed ?

```
def even(x):
 if x % 2 == 0:
 return True
 else:
 return False
```


```
print((even(7), even(6)))
```

- a) (False, False)
-  b) (False, True)
- c) (True, False)
- d) (True, True)
- e) Don't know

# Geometric orientation test

## Purpose of example

- illustrate tuples
- list comprehension
- matplotlib.pyplot
- floats are strange

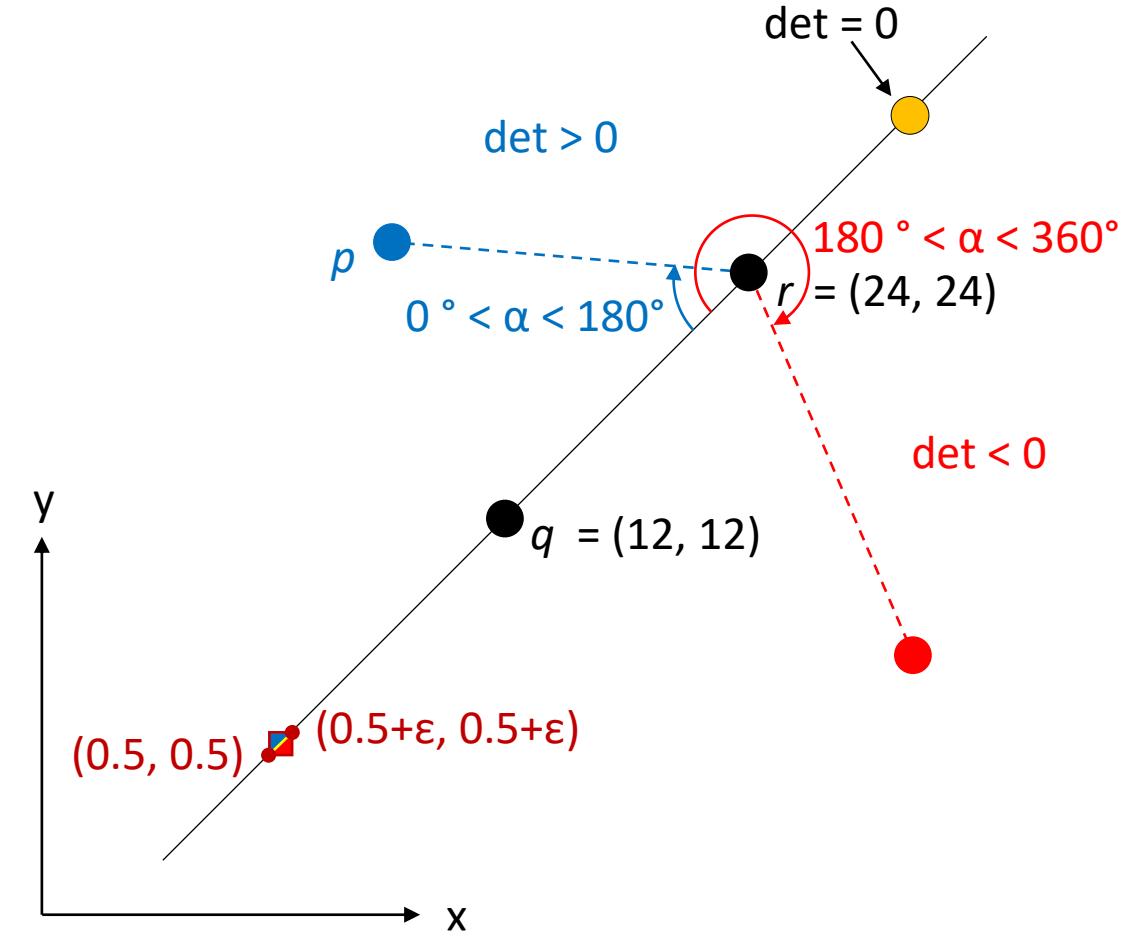

$$\det = \begin{vmatrix} 1 & q_x & q_y \\ 1 & r_x & r_y \\ 1 & p_x & p_y \end{vmatrix} = \underbrace{r_x p_y - p_x r_y - q_x p_y + p_x q_y + q_x r_y - r_x q_y}_{6! = 720 \text{ different orders to add}}$$

$6! = 720$  different orders to add



## sign-plot.py

```
import matplotlib.pyplot as plt


N = 256
delta = 1 / 2**54
q = (12, 12)
r = (24, 24)
P = [] # points (i, j, det)


for i in range(N):
 for j in range(N):
 p = (1/2 + i * delta, 1/2 + j * delta)
 det = (q[0]*r[1] + r[0]*p[1] + p[0]*q[1]
 - r[0]*q[1] - p[0]*r[1] - q[0]*p[1])
 P.append((i, j, det))


pos = [(i, j) for i, j, det in P if det > 0]
neg = [(i, j) for i, j, det in P if det < 0]
zero = [(i, j) for i, j, det in P if det == 0]


plt.subplot(facecolor='lightgrey', aspect='equal')
plt.xlabel('i')
plt.ylabel('j', rotation=0)


for points, color in [(pos, "b") , (neg, "r") , (zero, "y")]:
 X = [i for i, j in points]
 Y = [j for i, j in points]
 plt.plot(X, Y, color + ".")
plt.plot([-1, N], [-1, N], "k-")
plt.show()
```

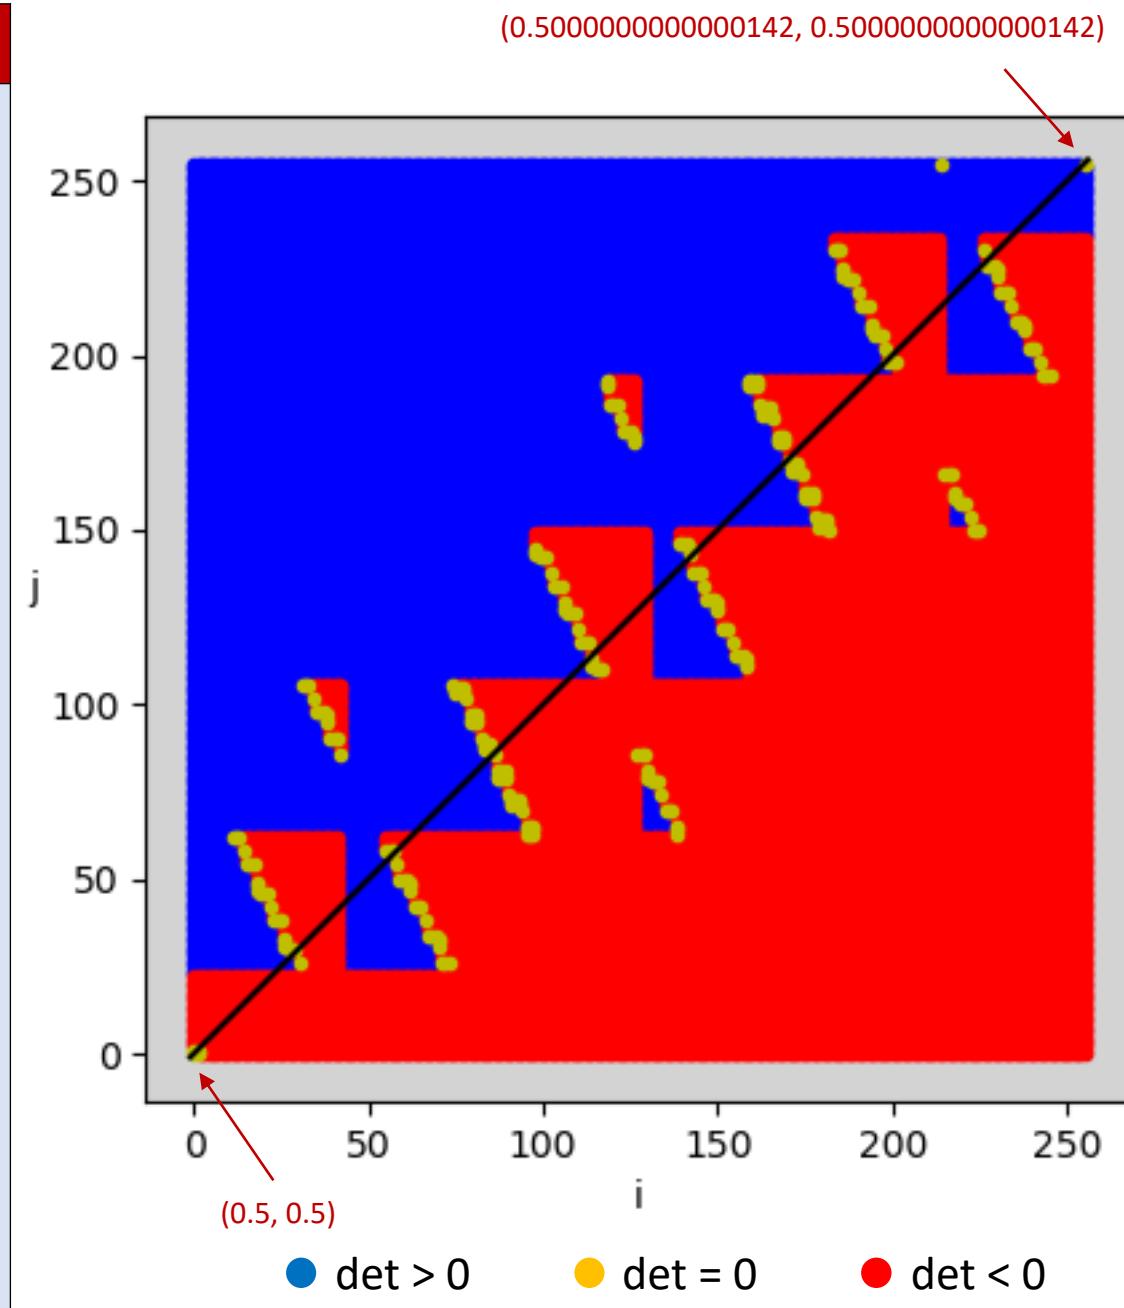


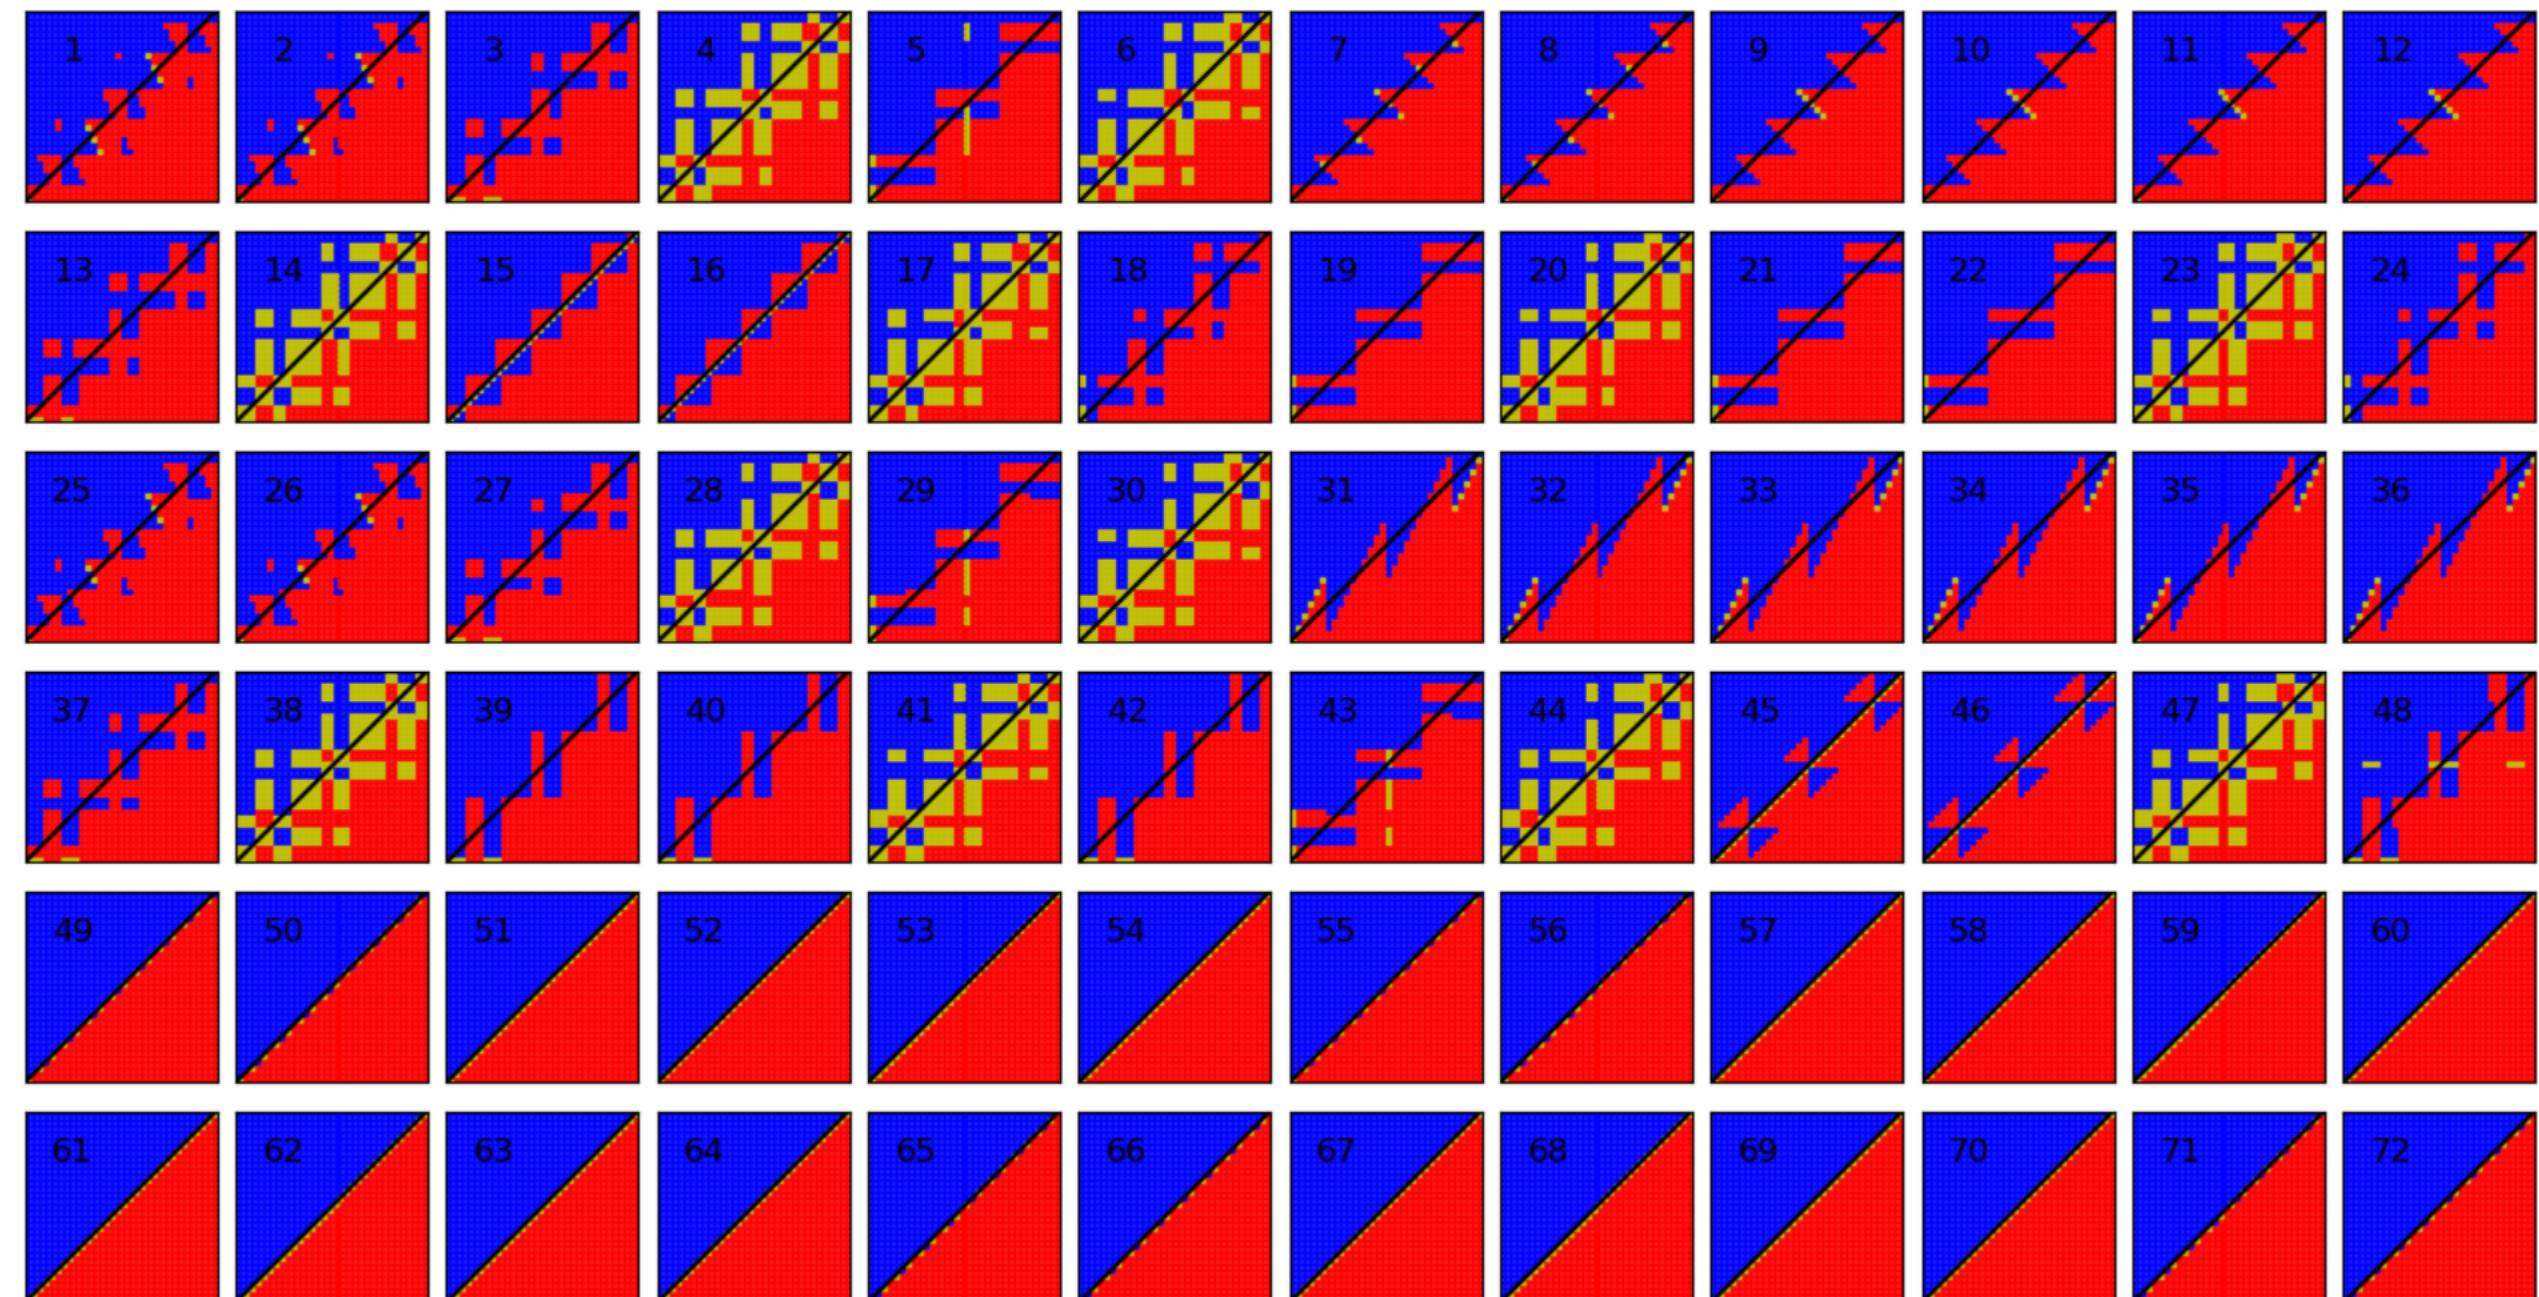


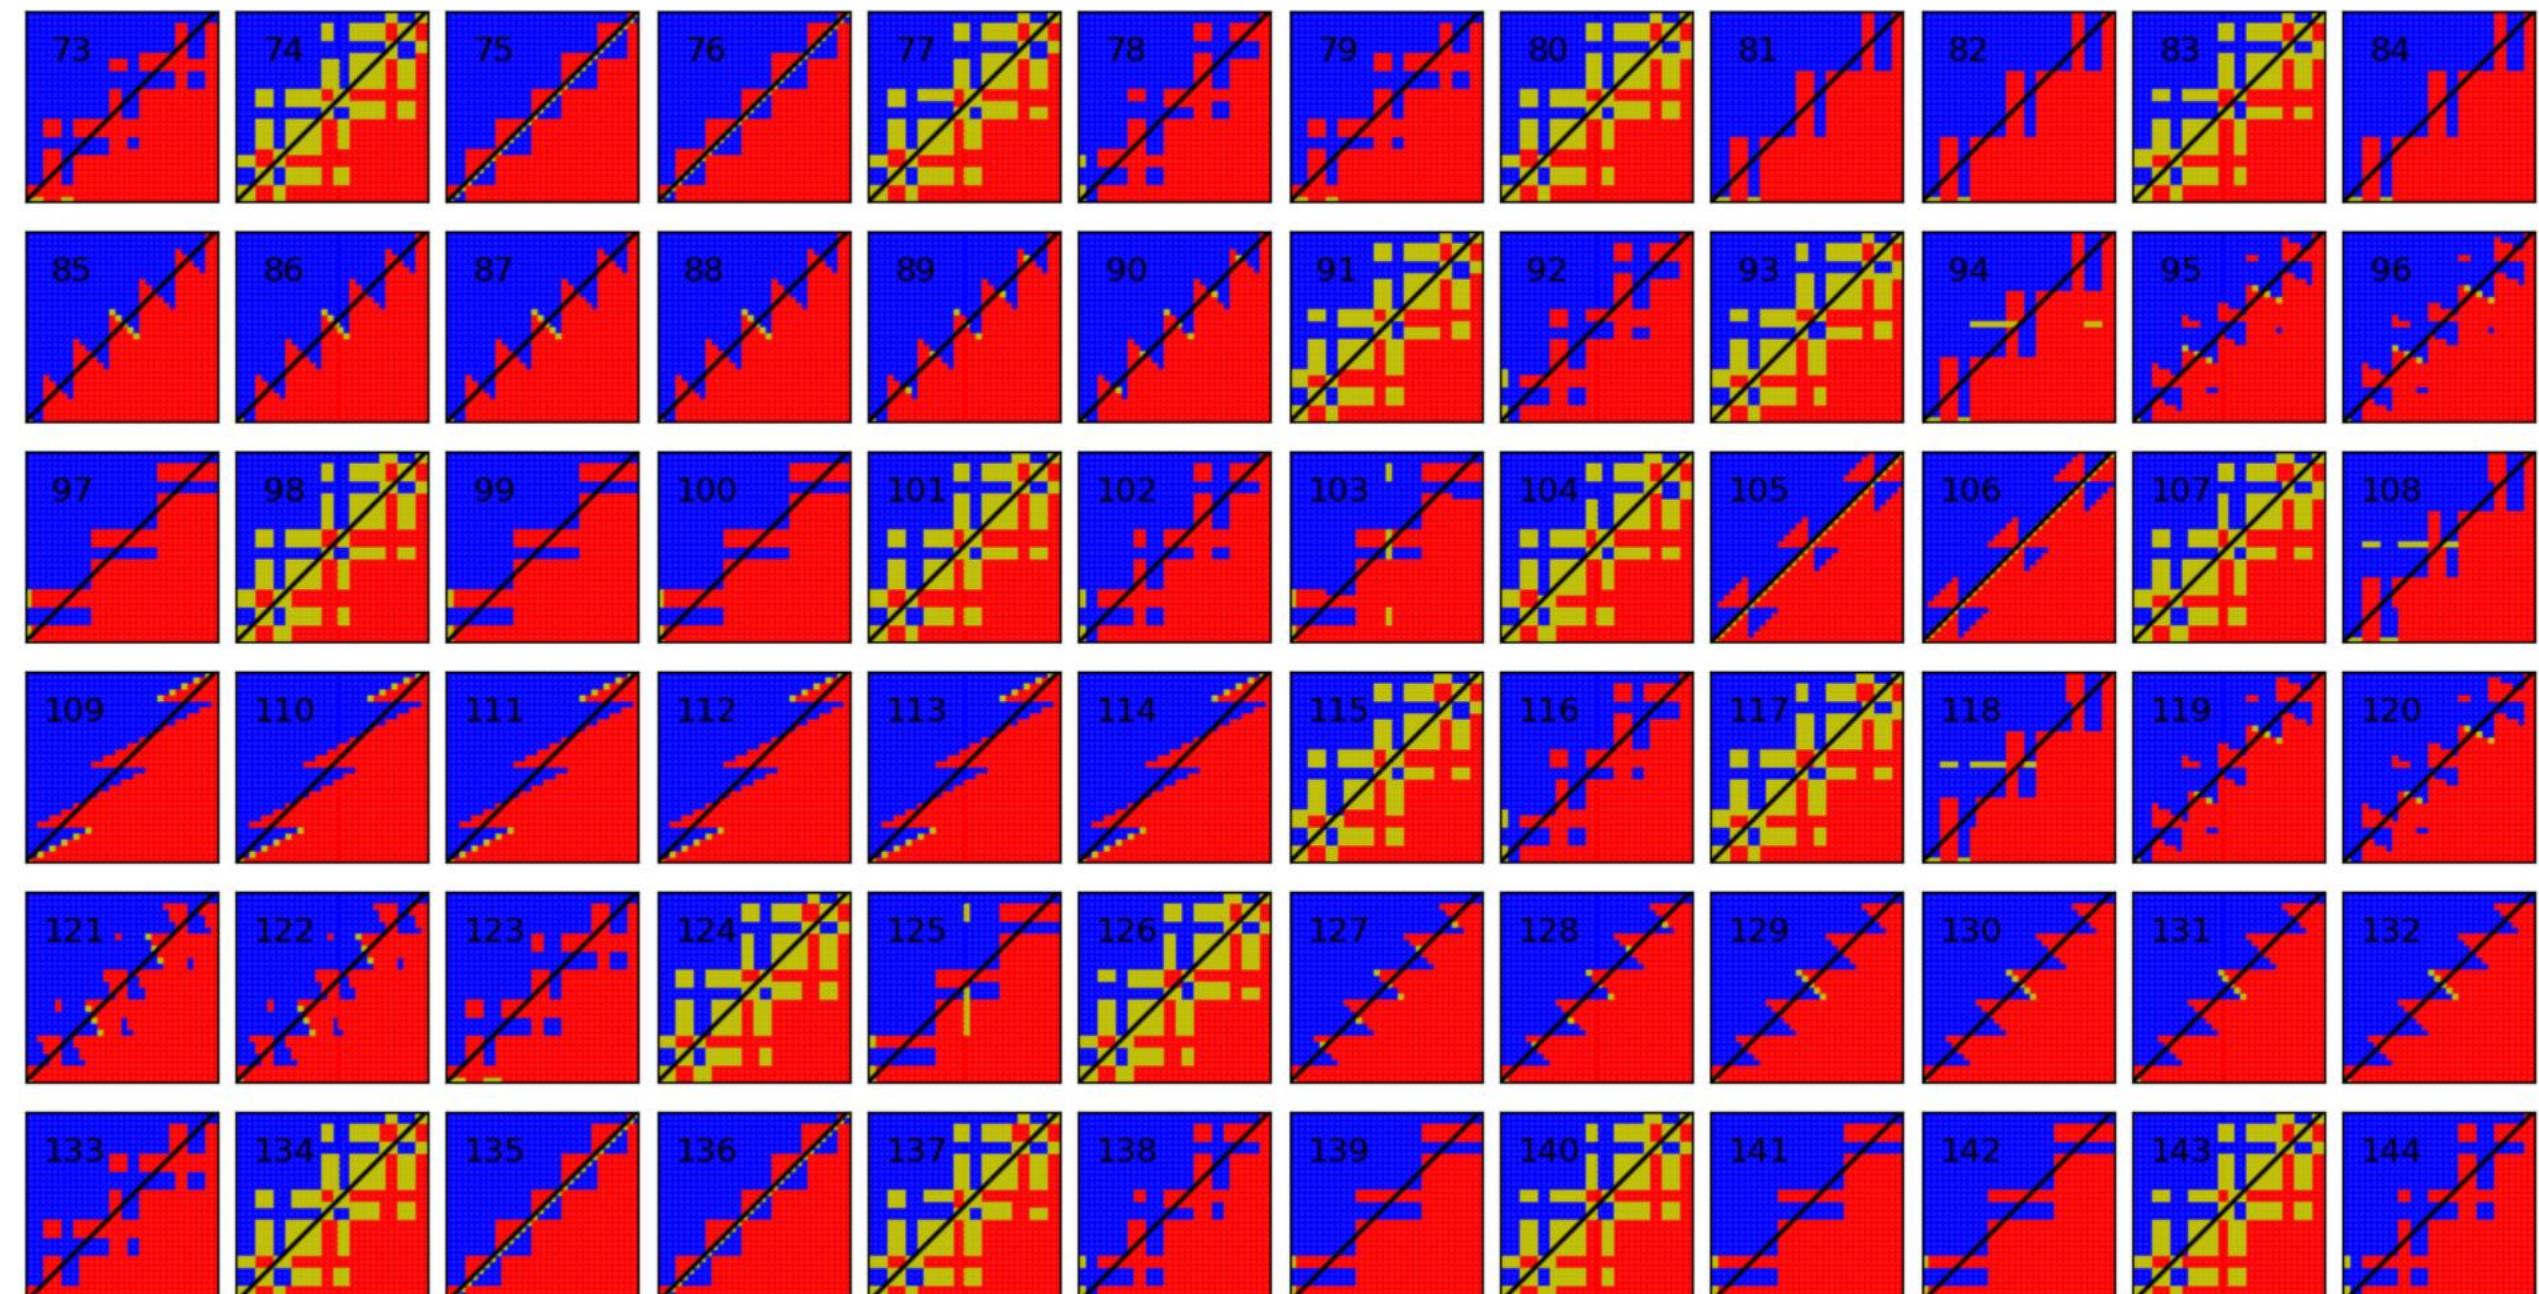


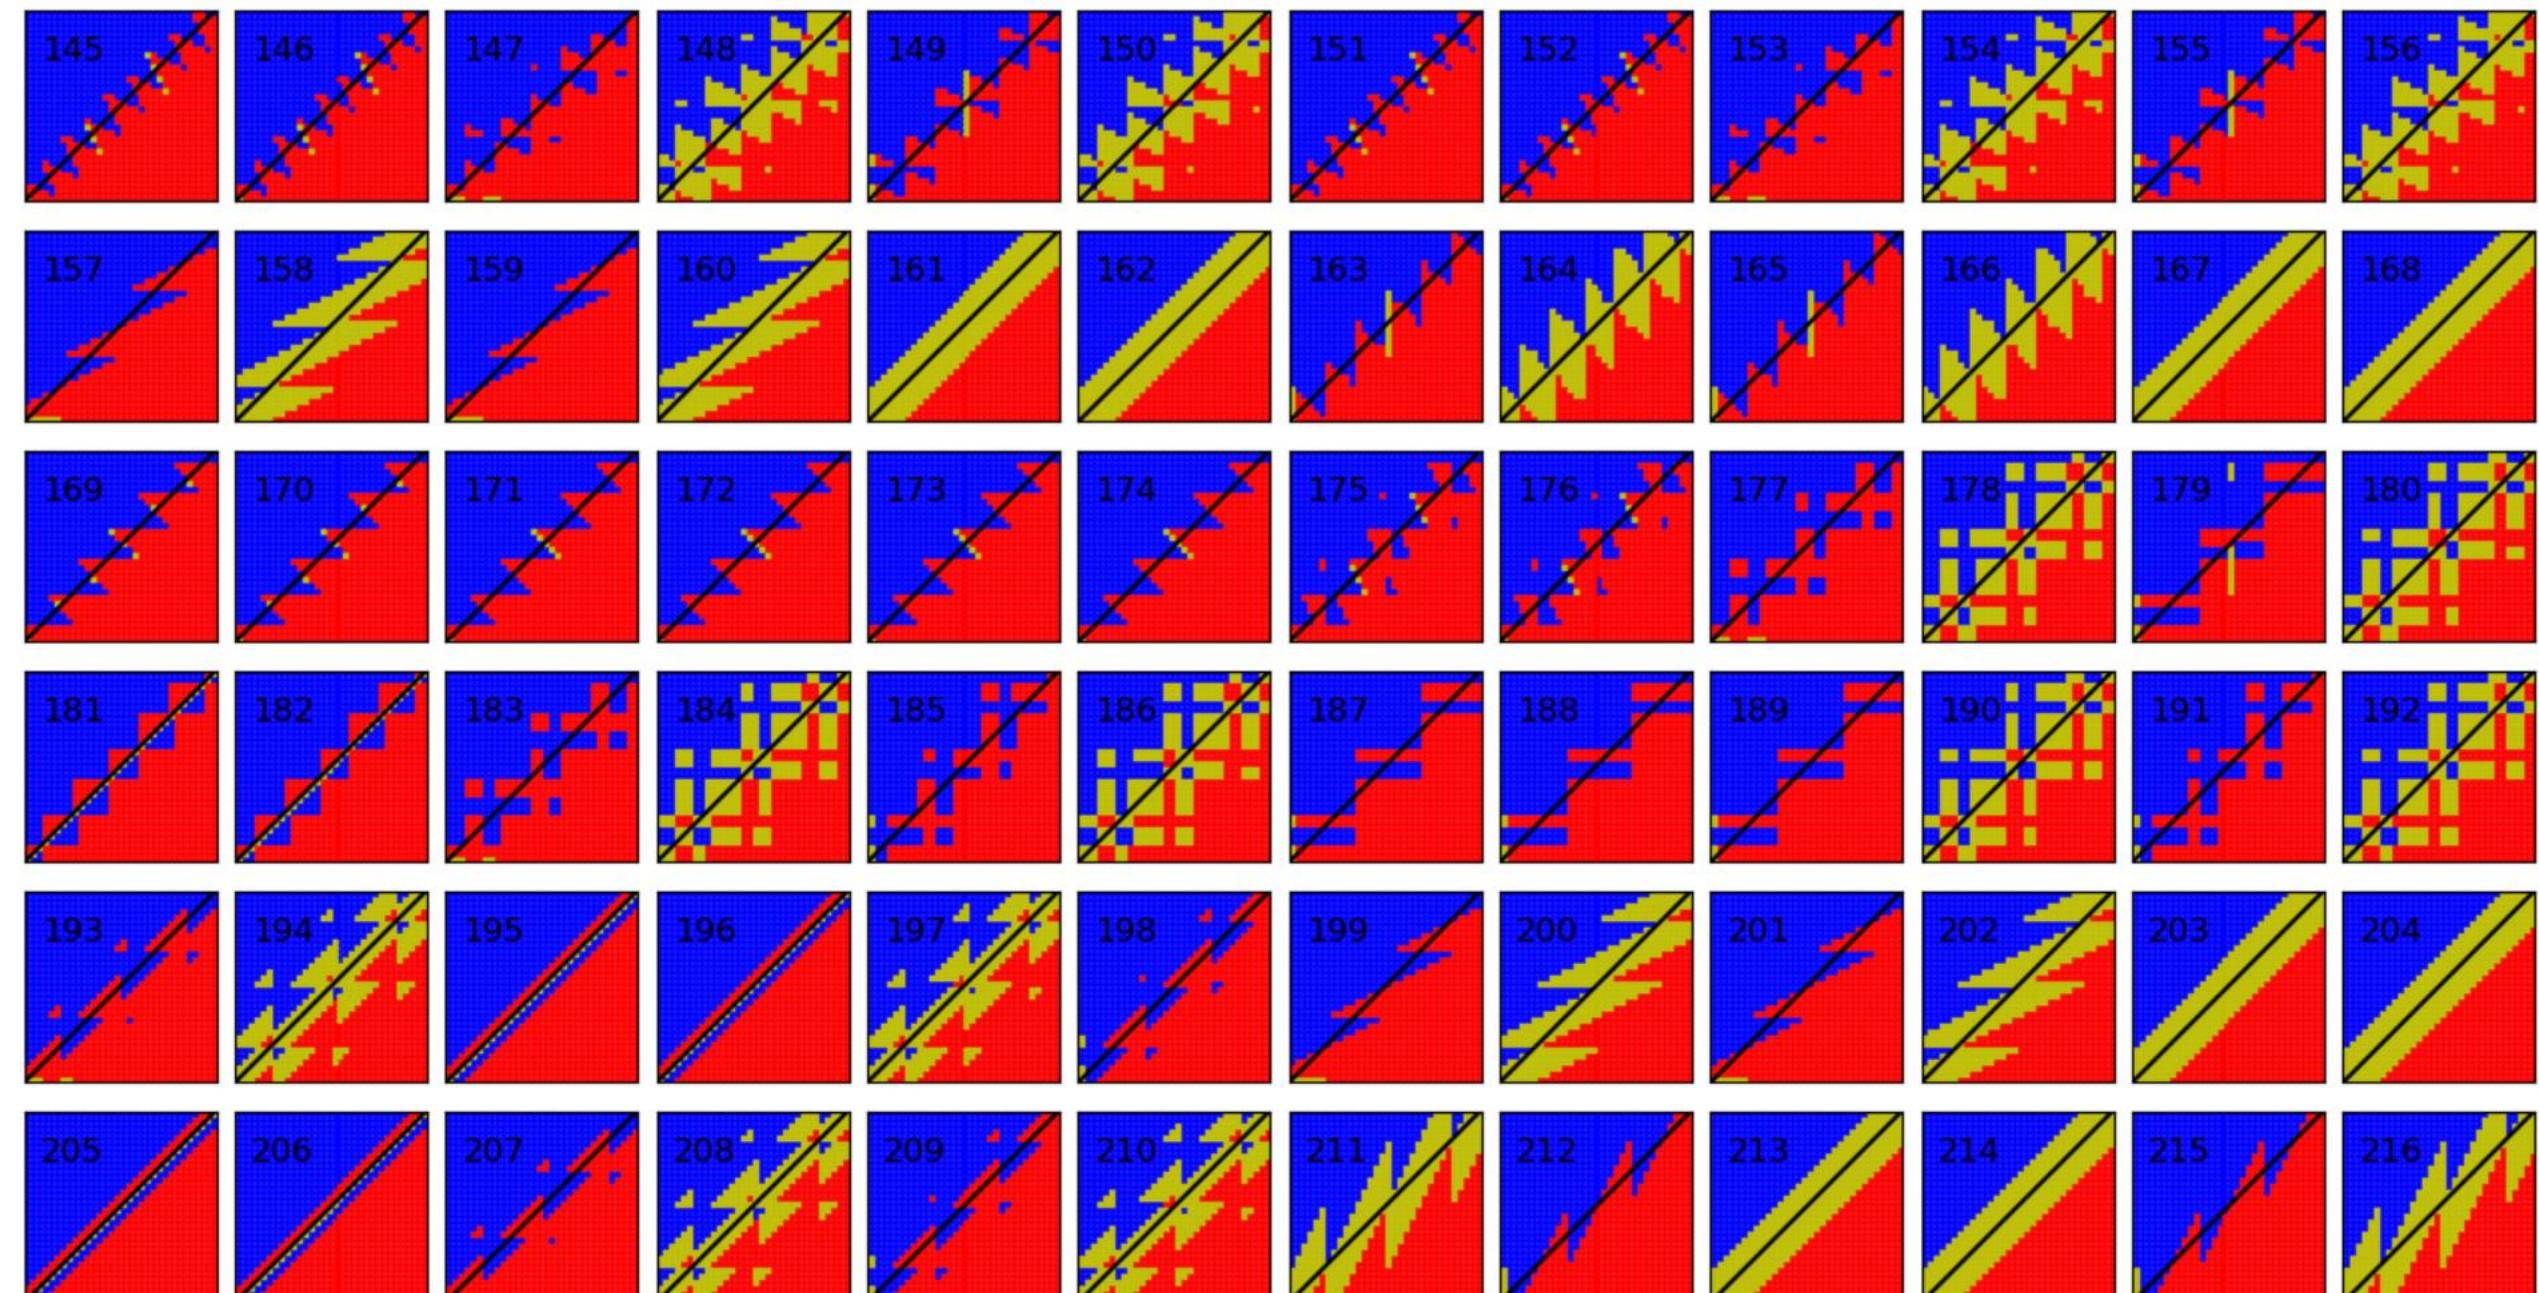


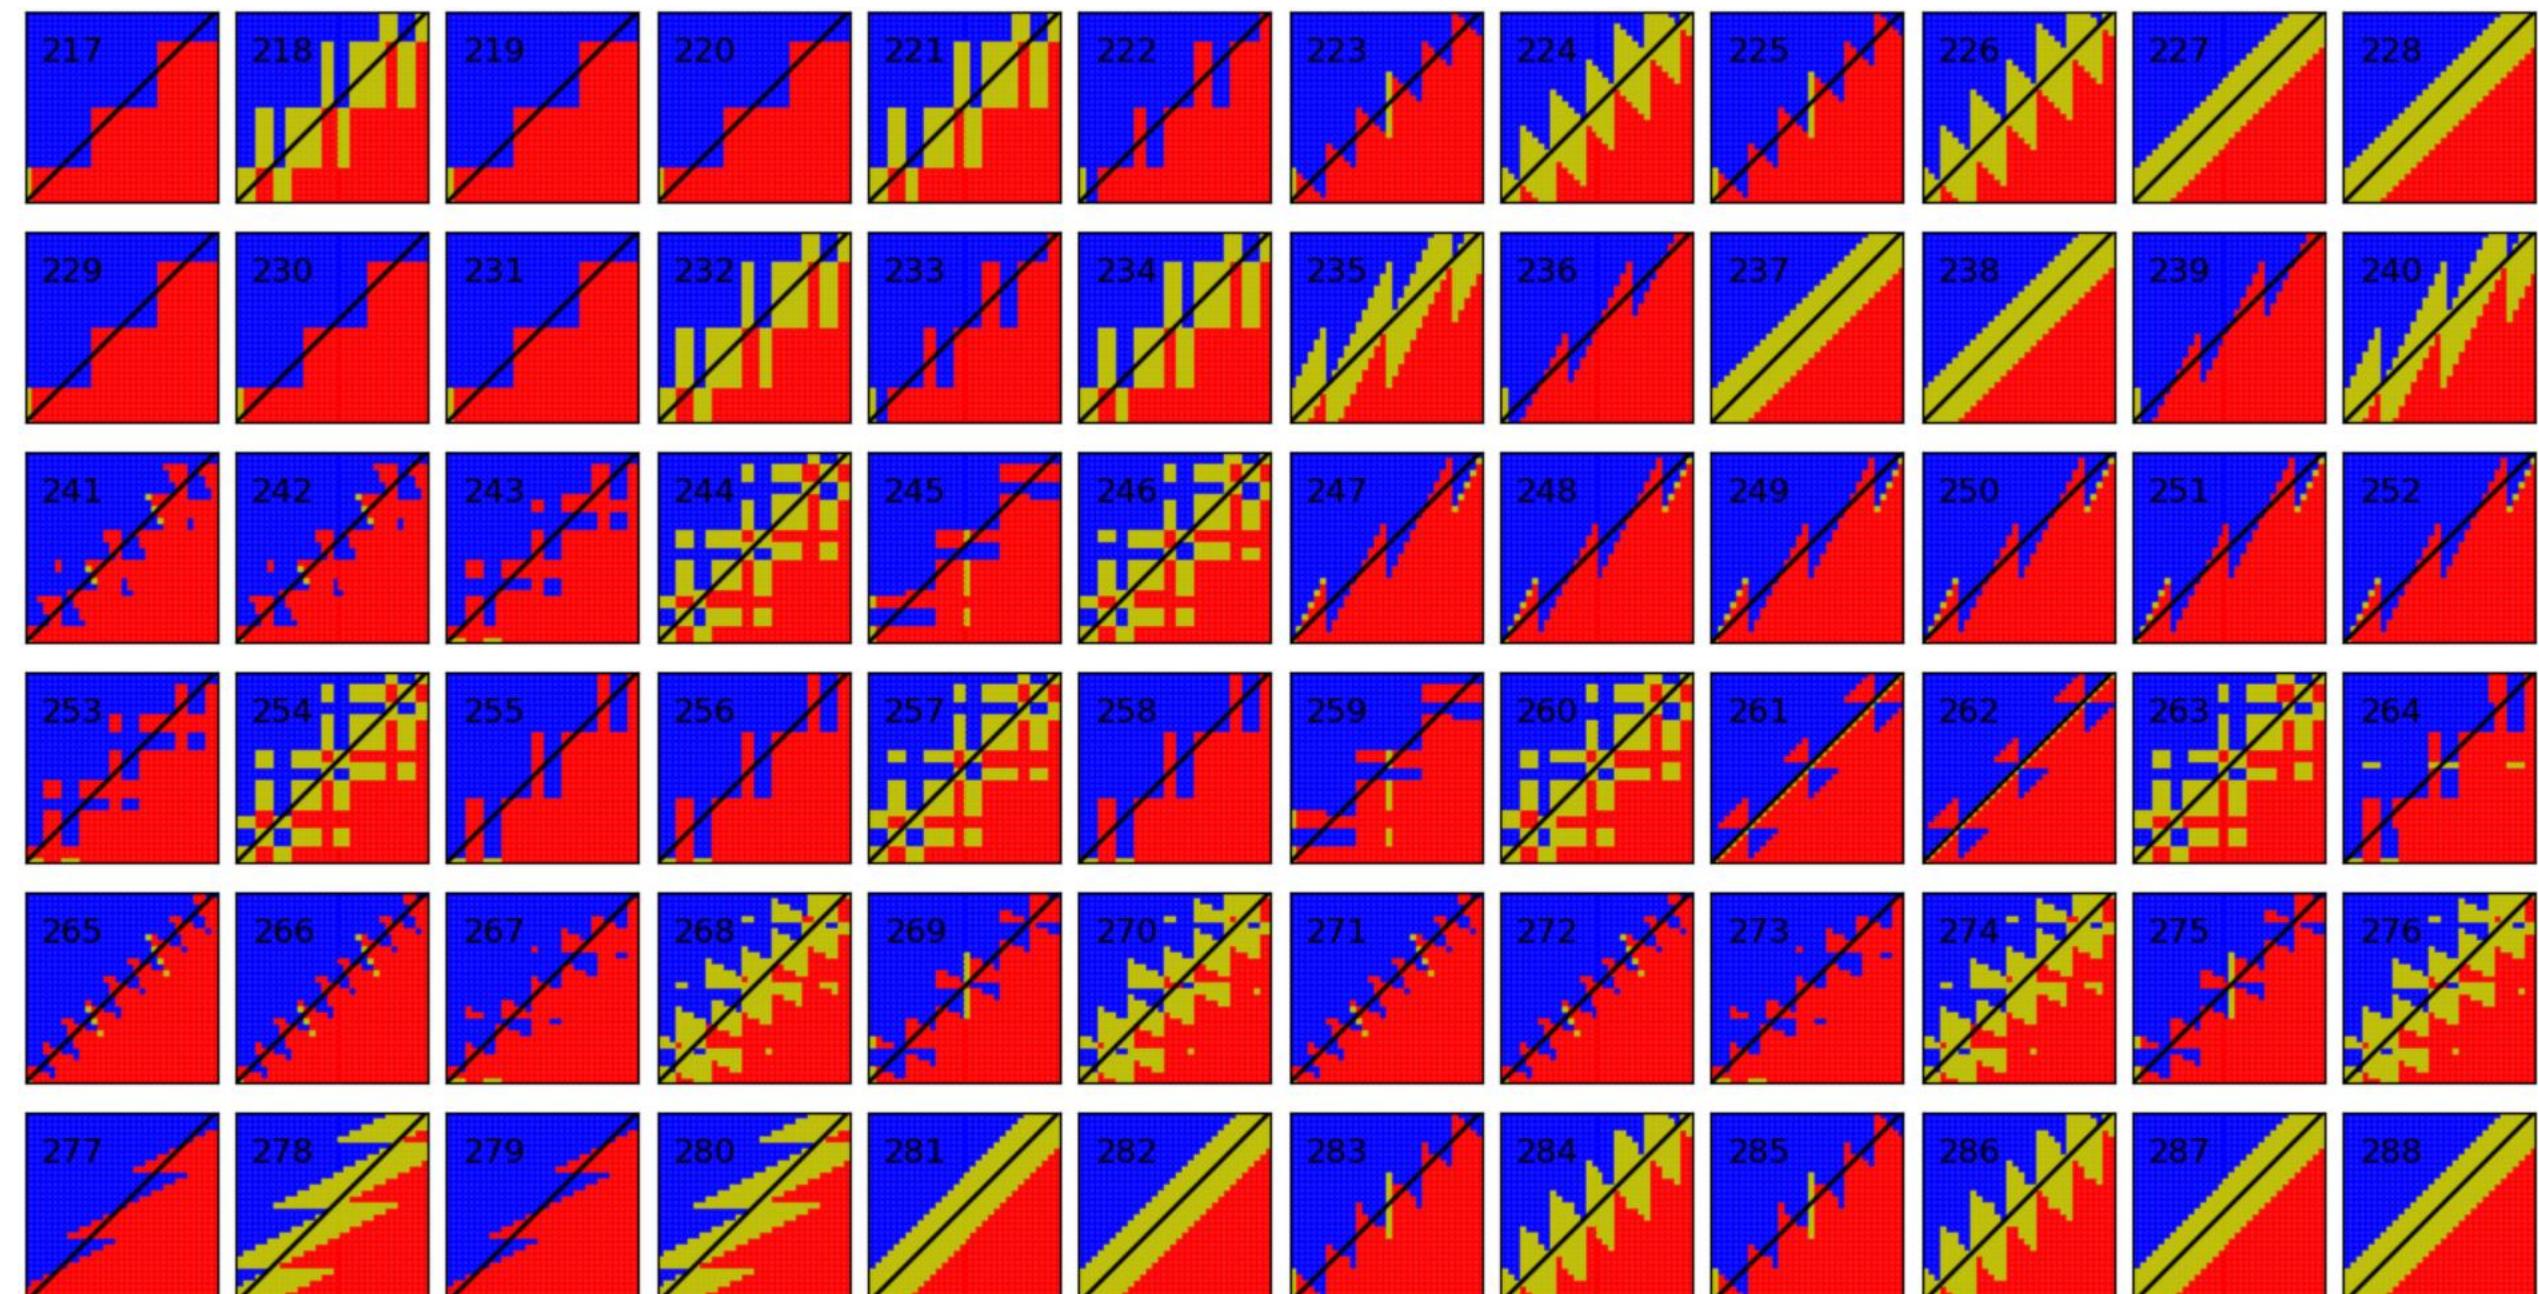


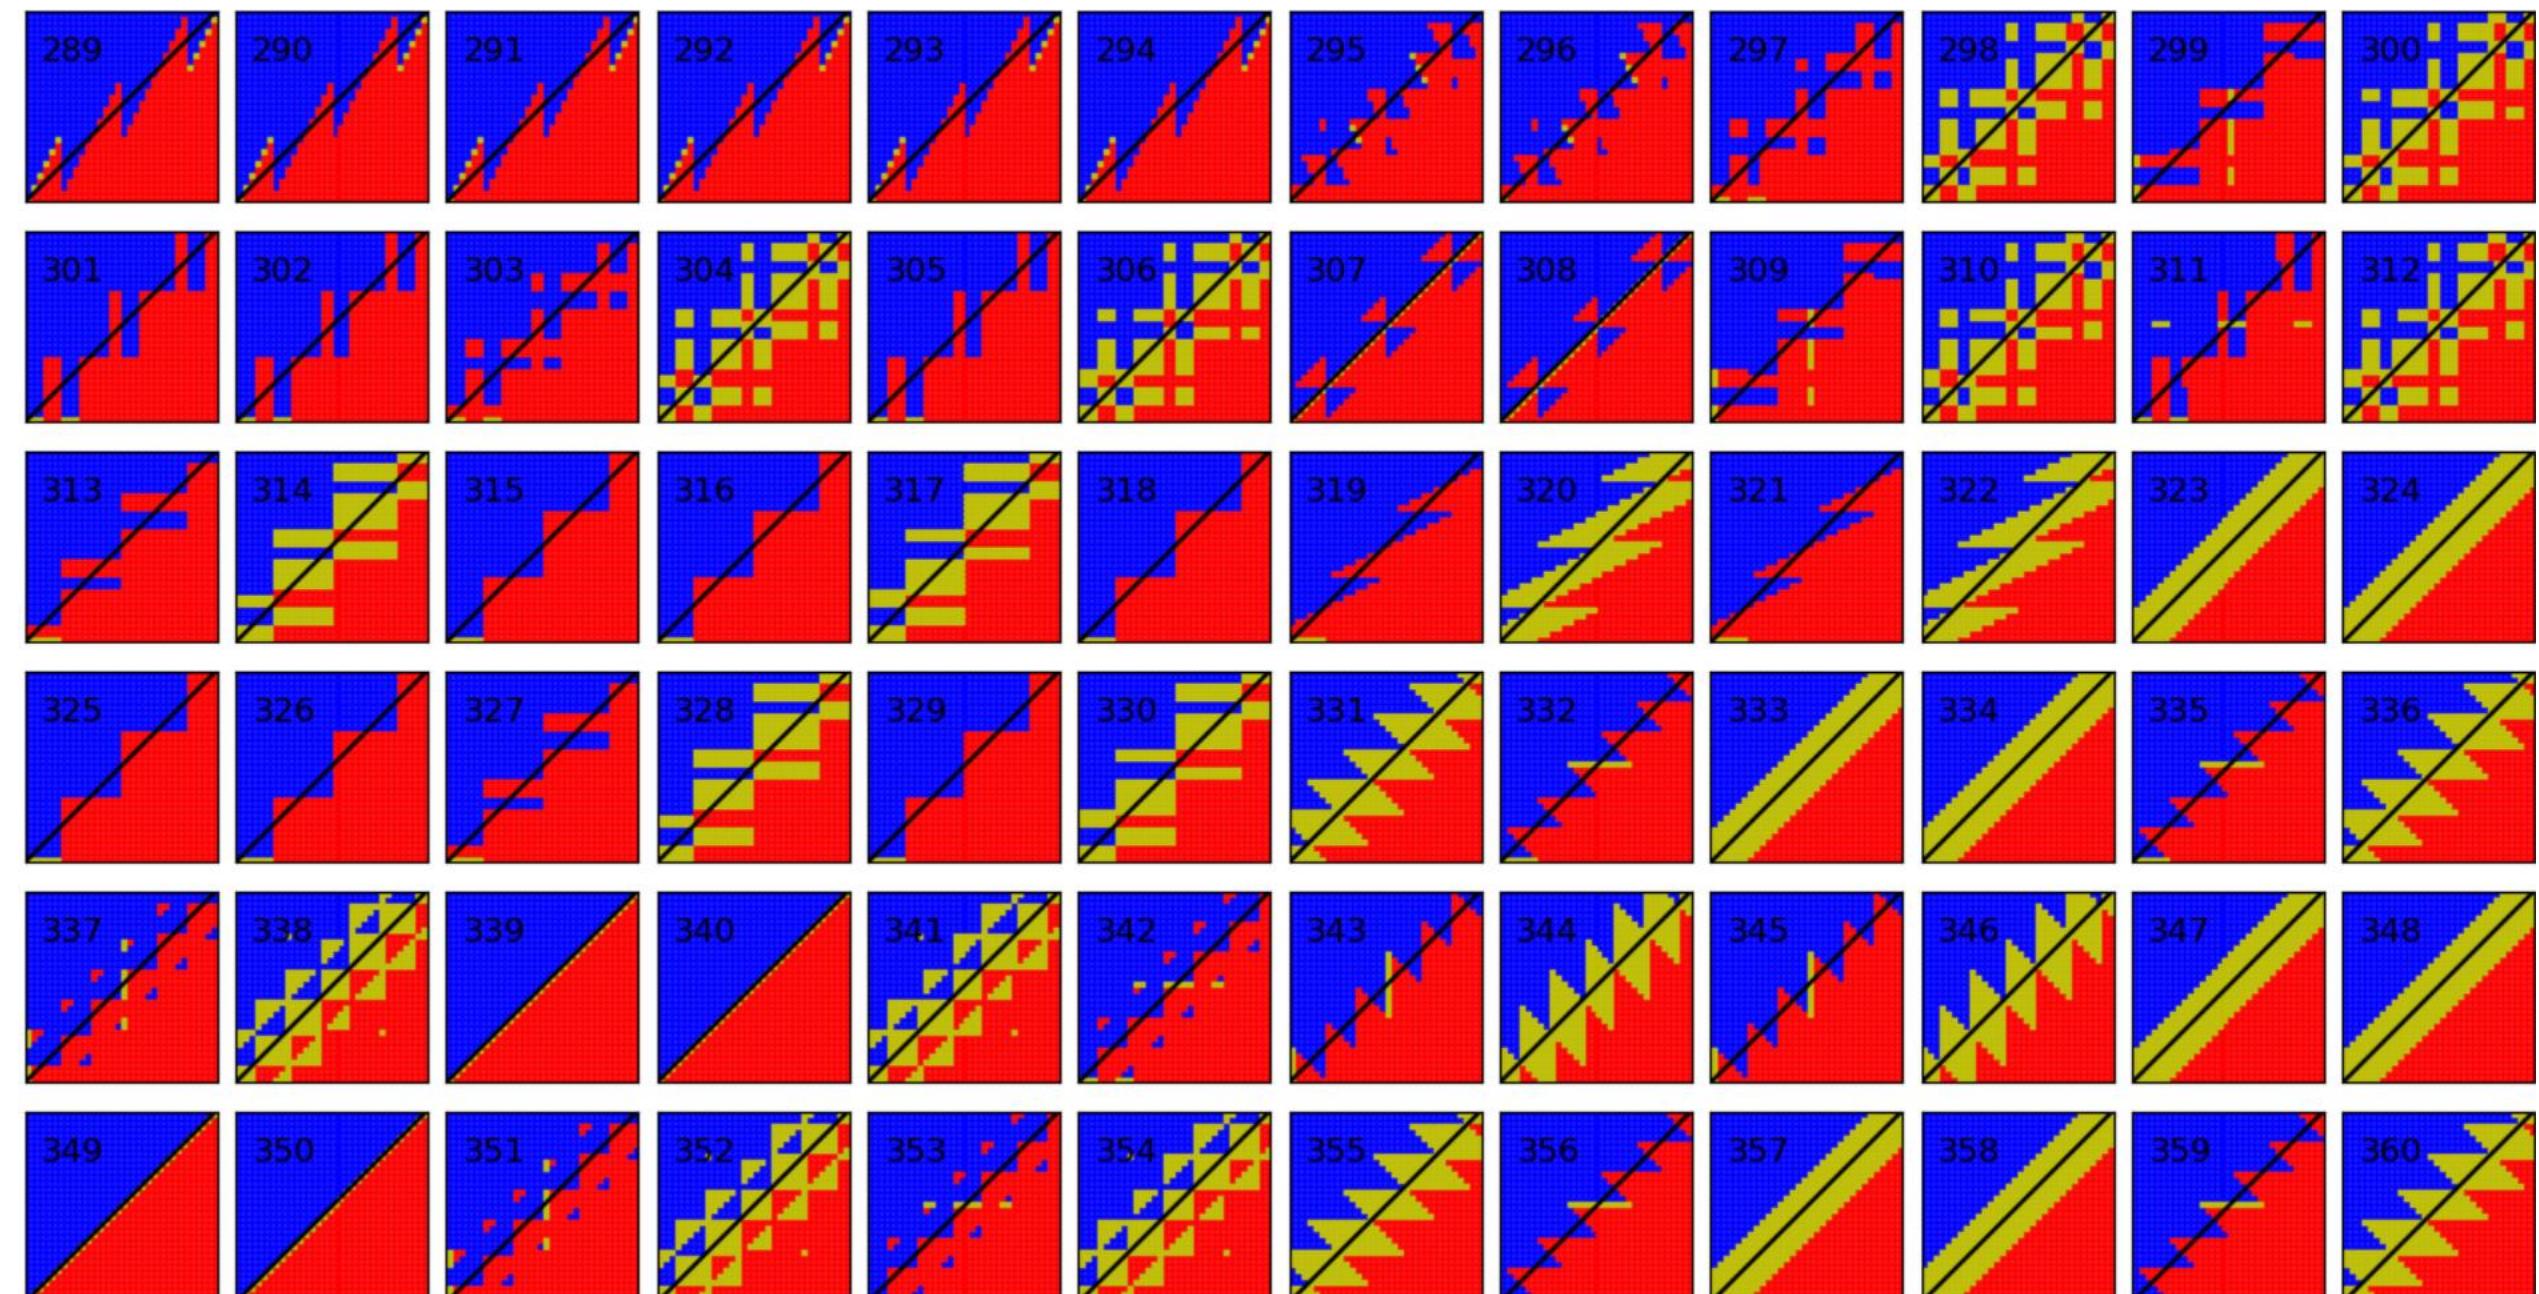


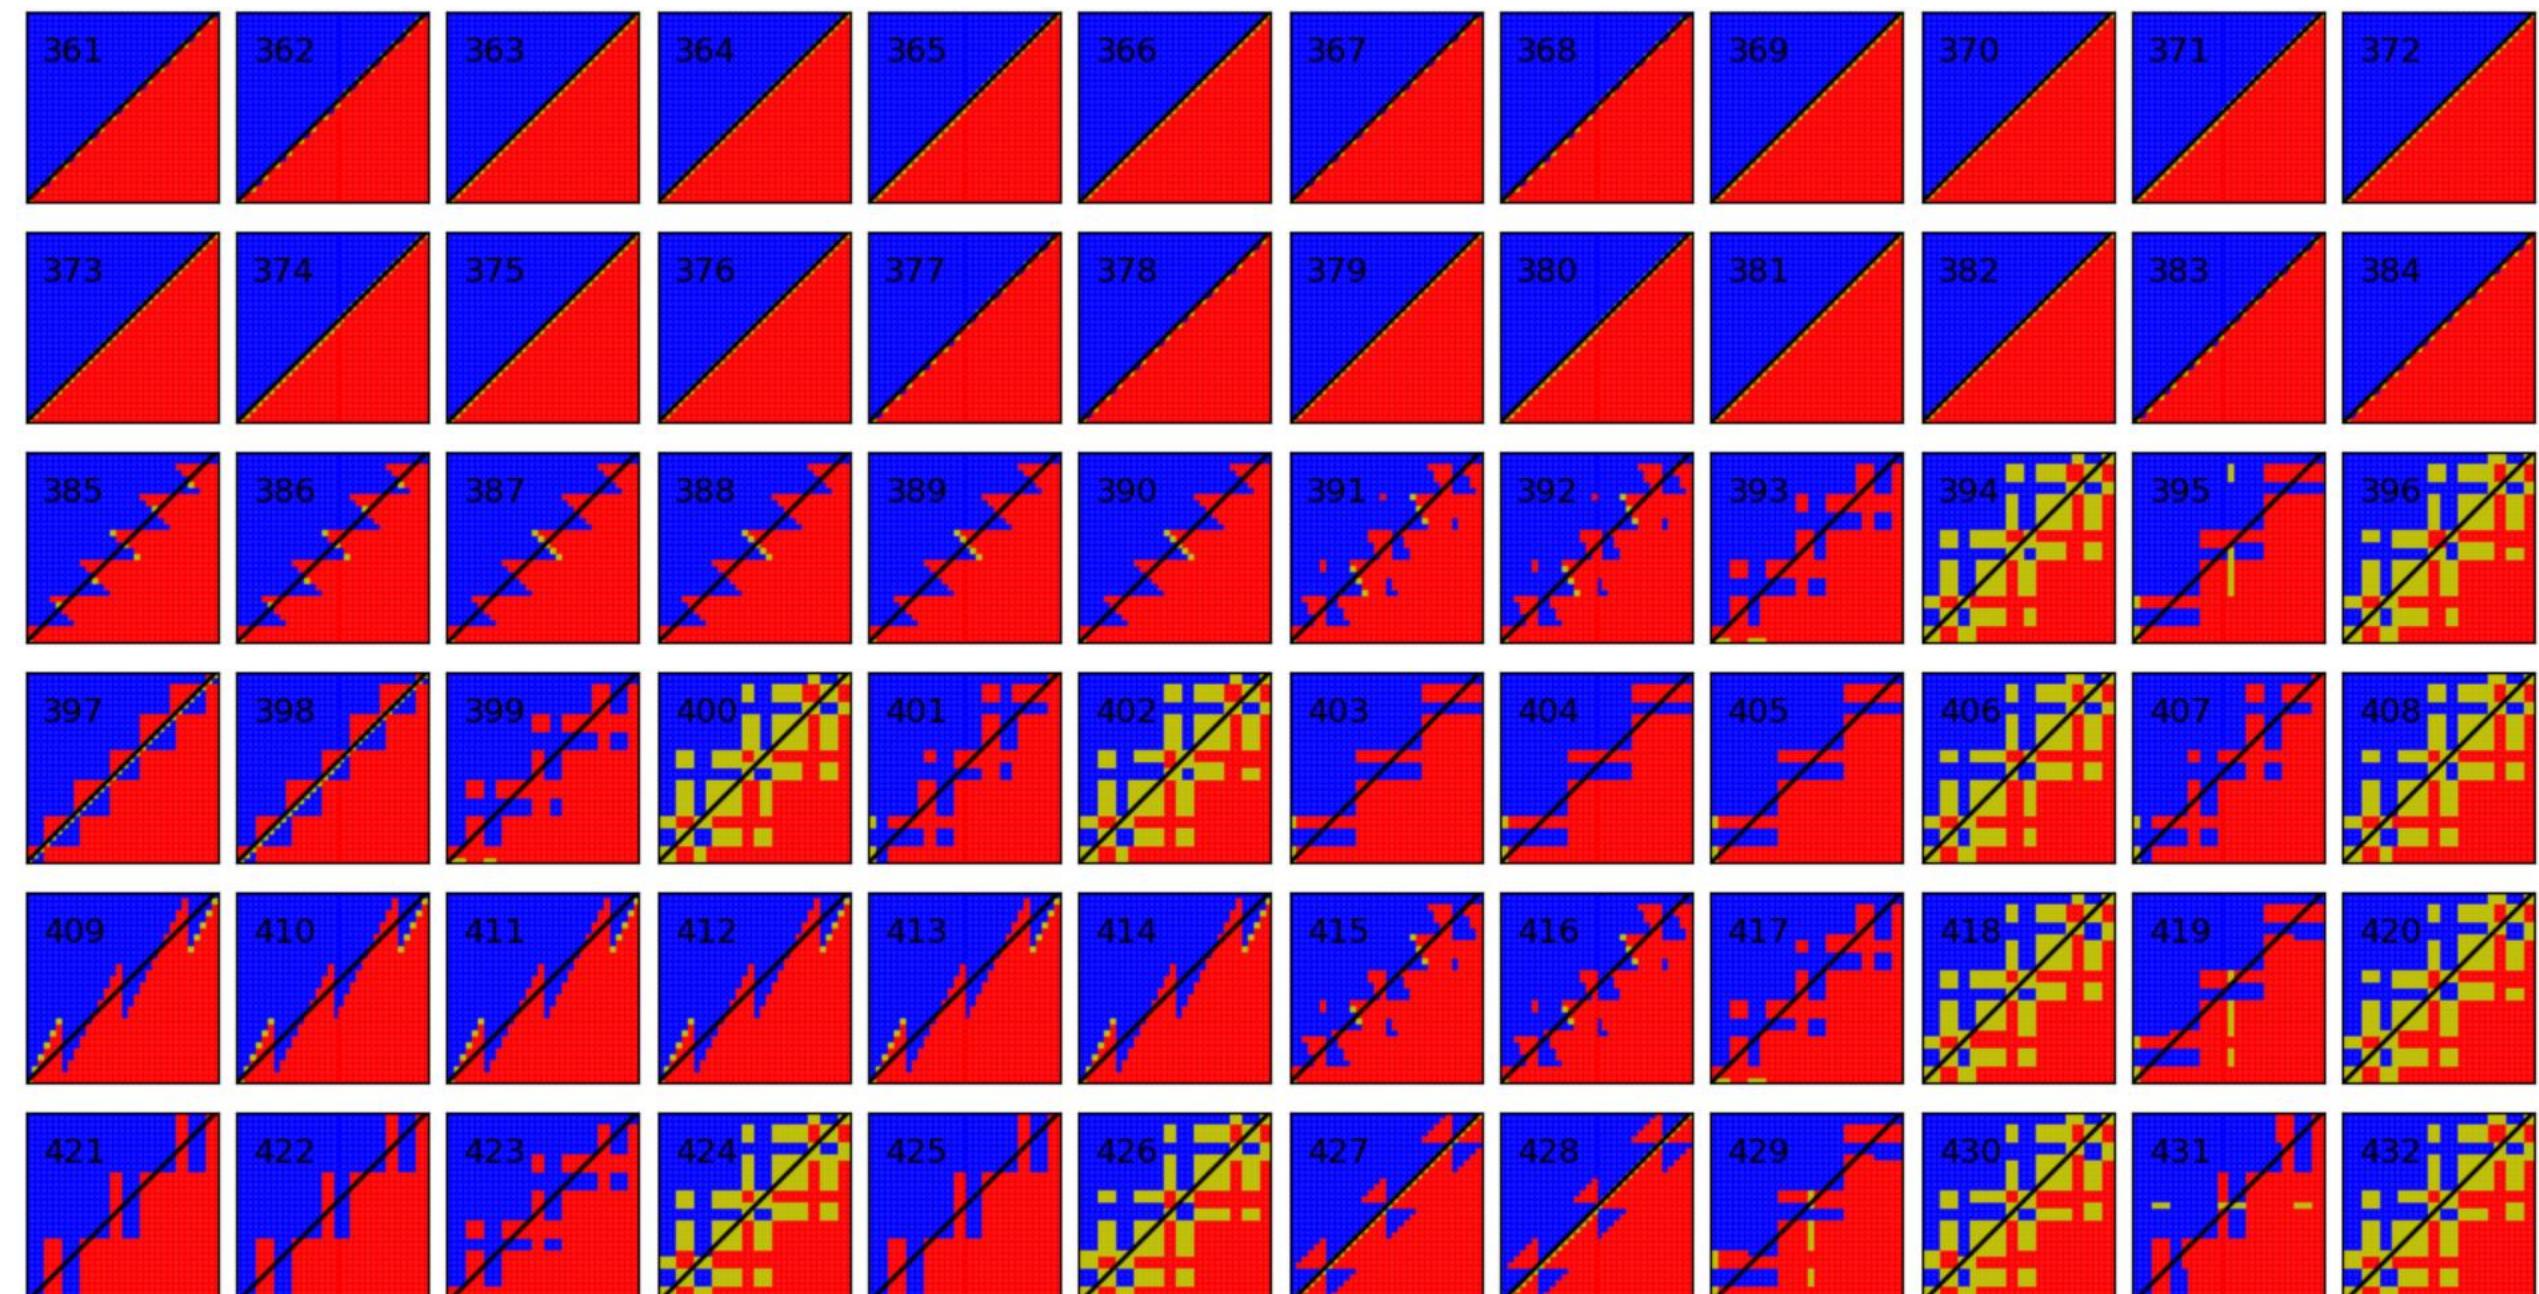

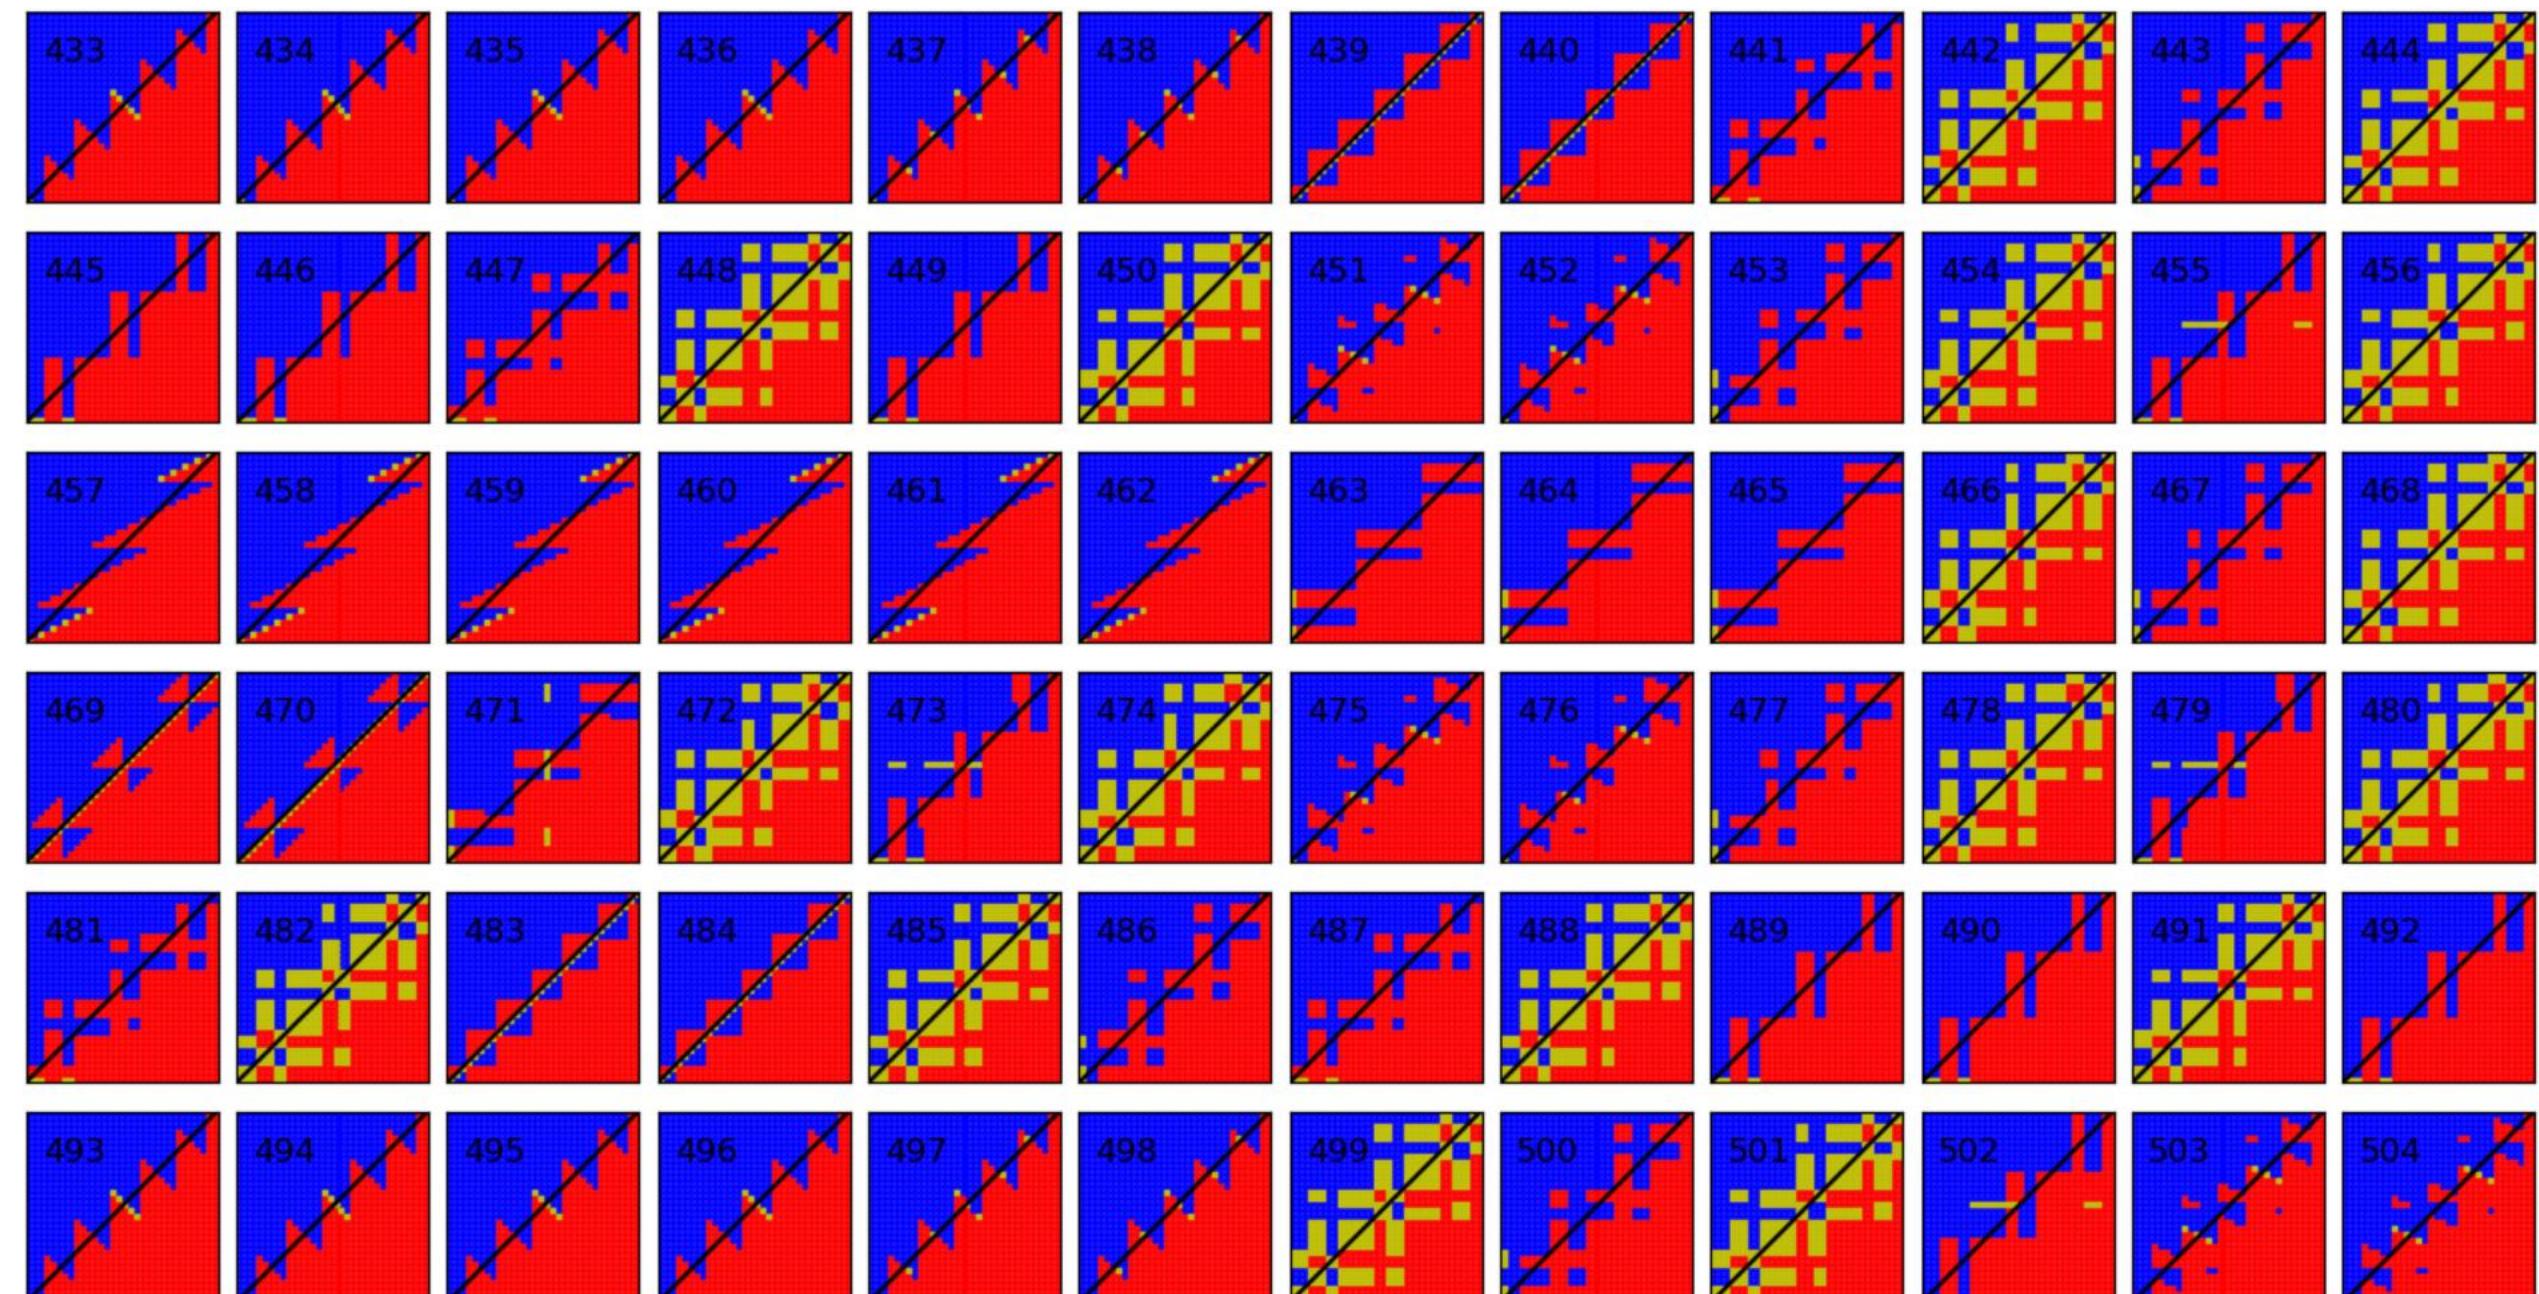

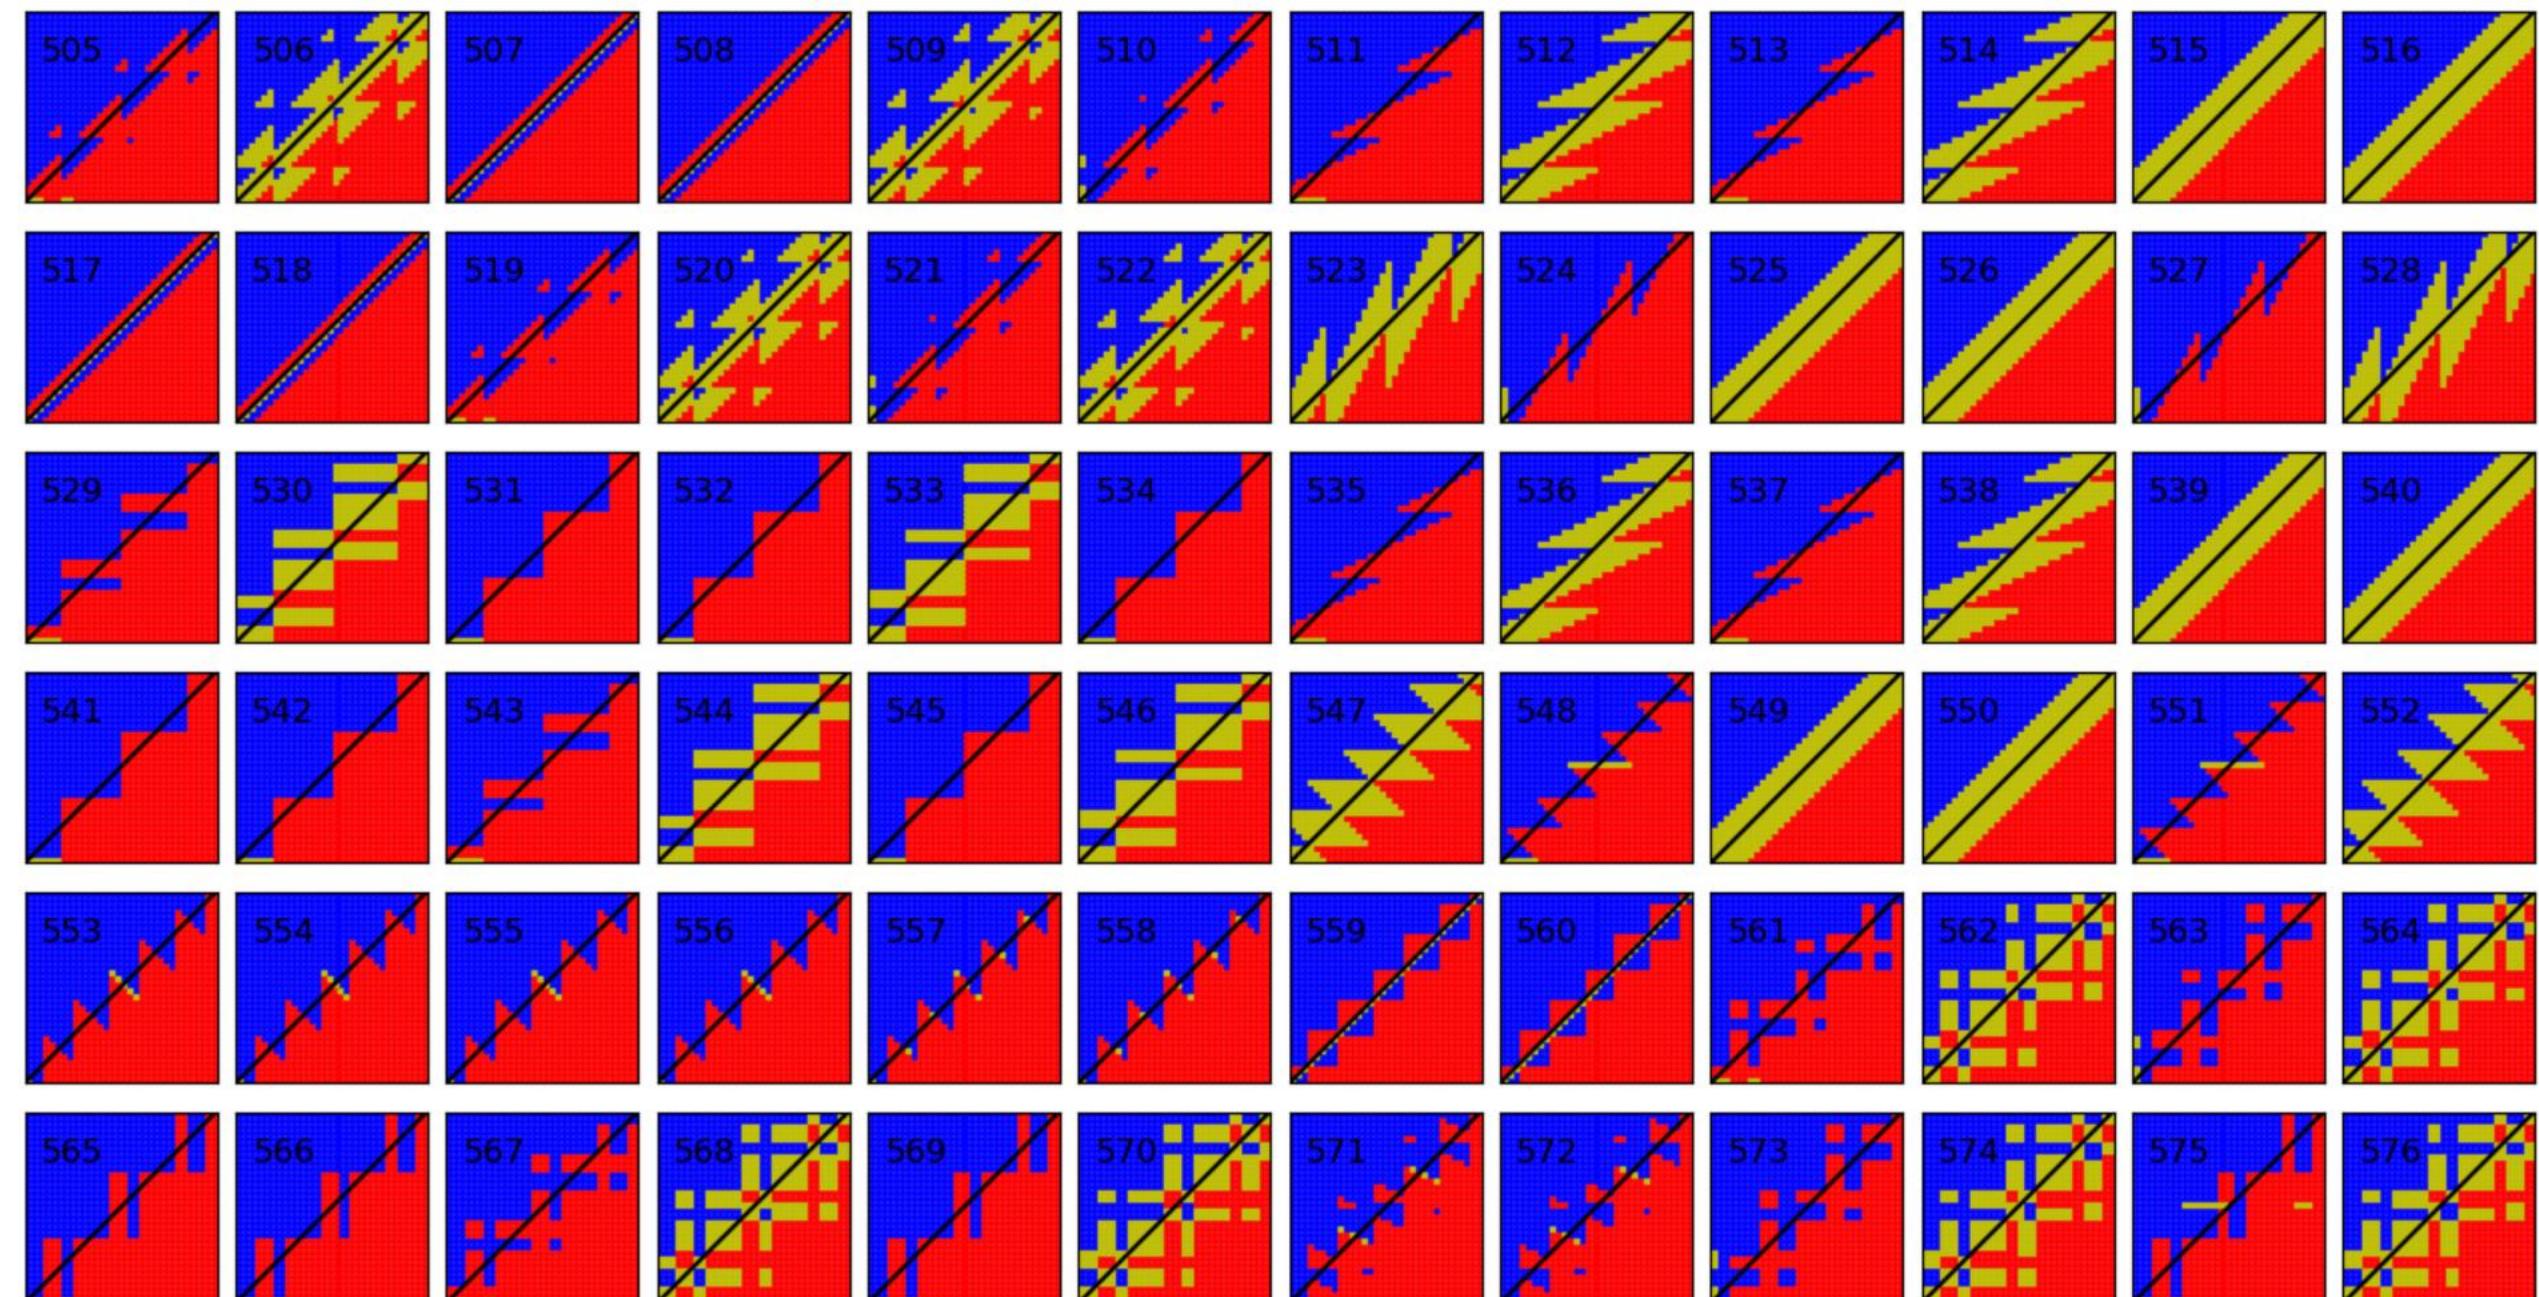

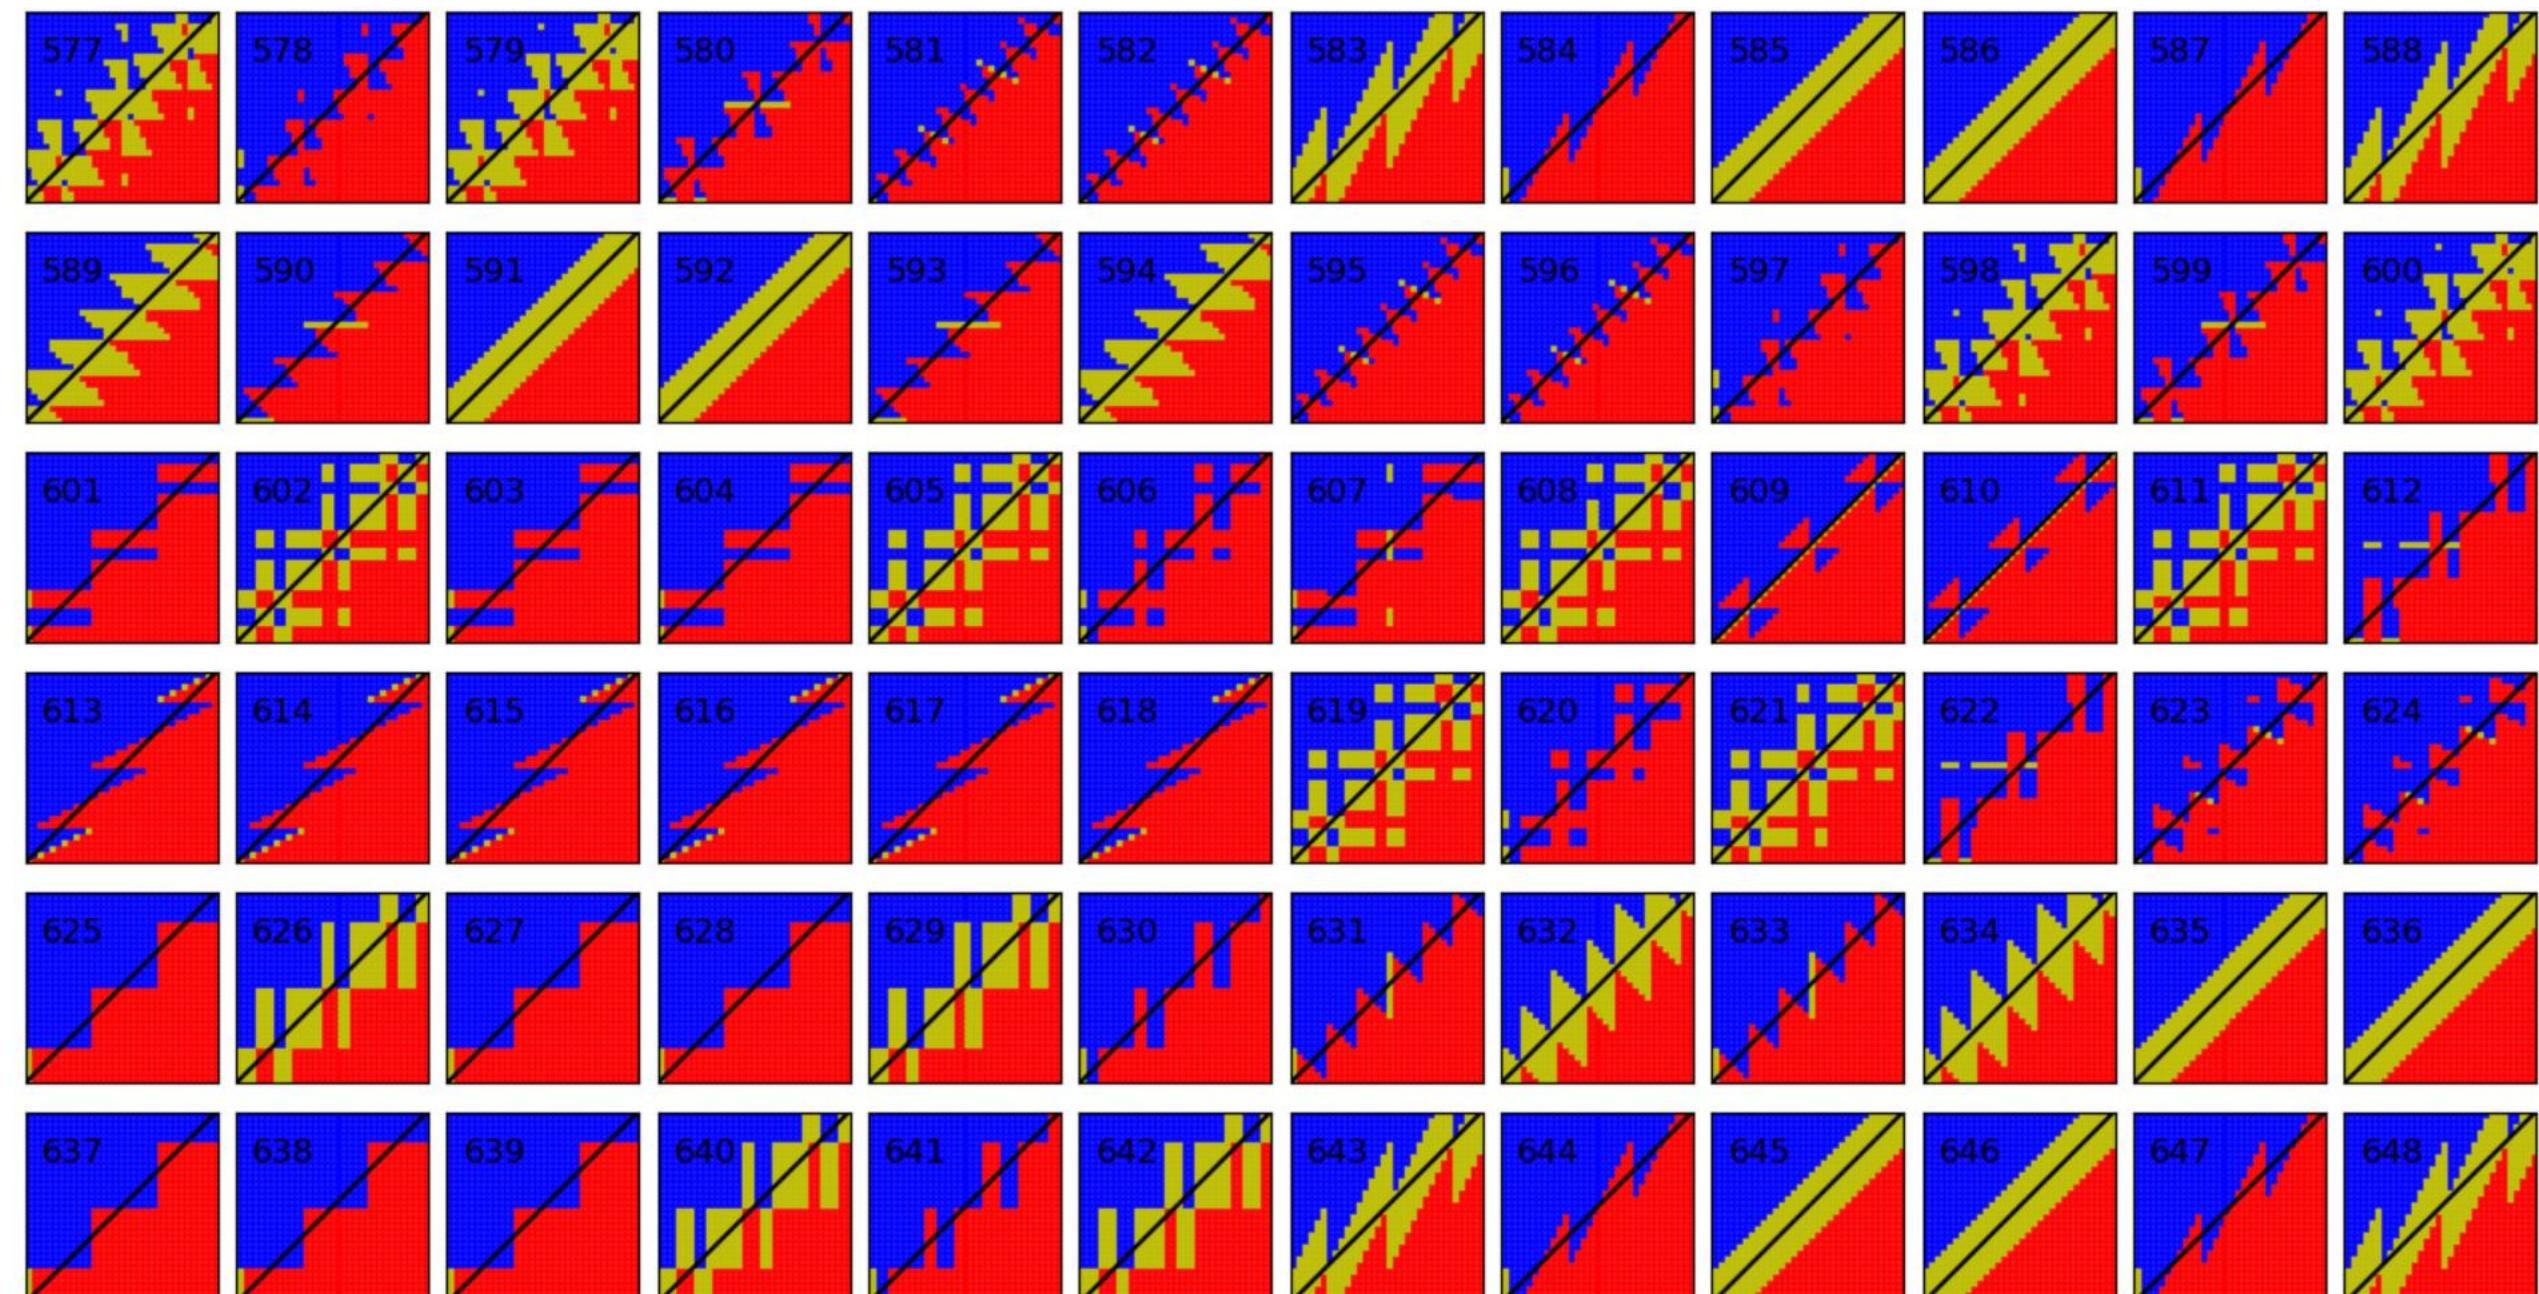

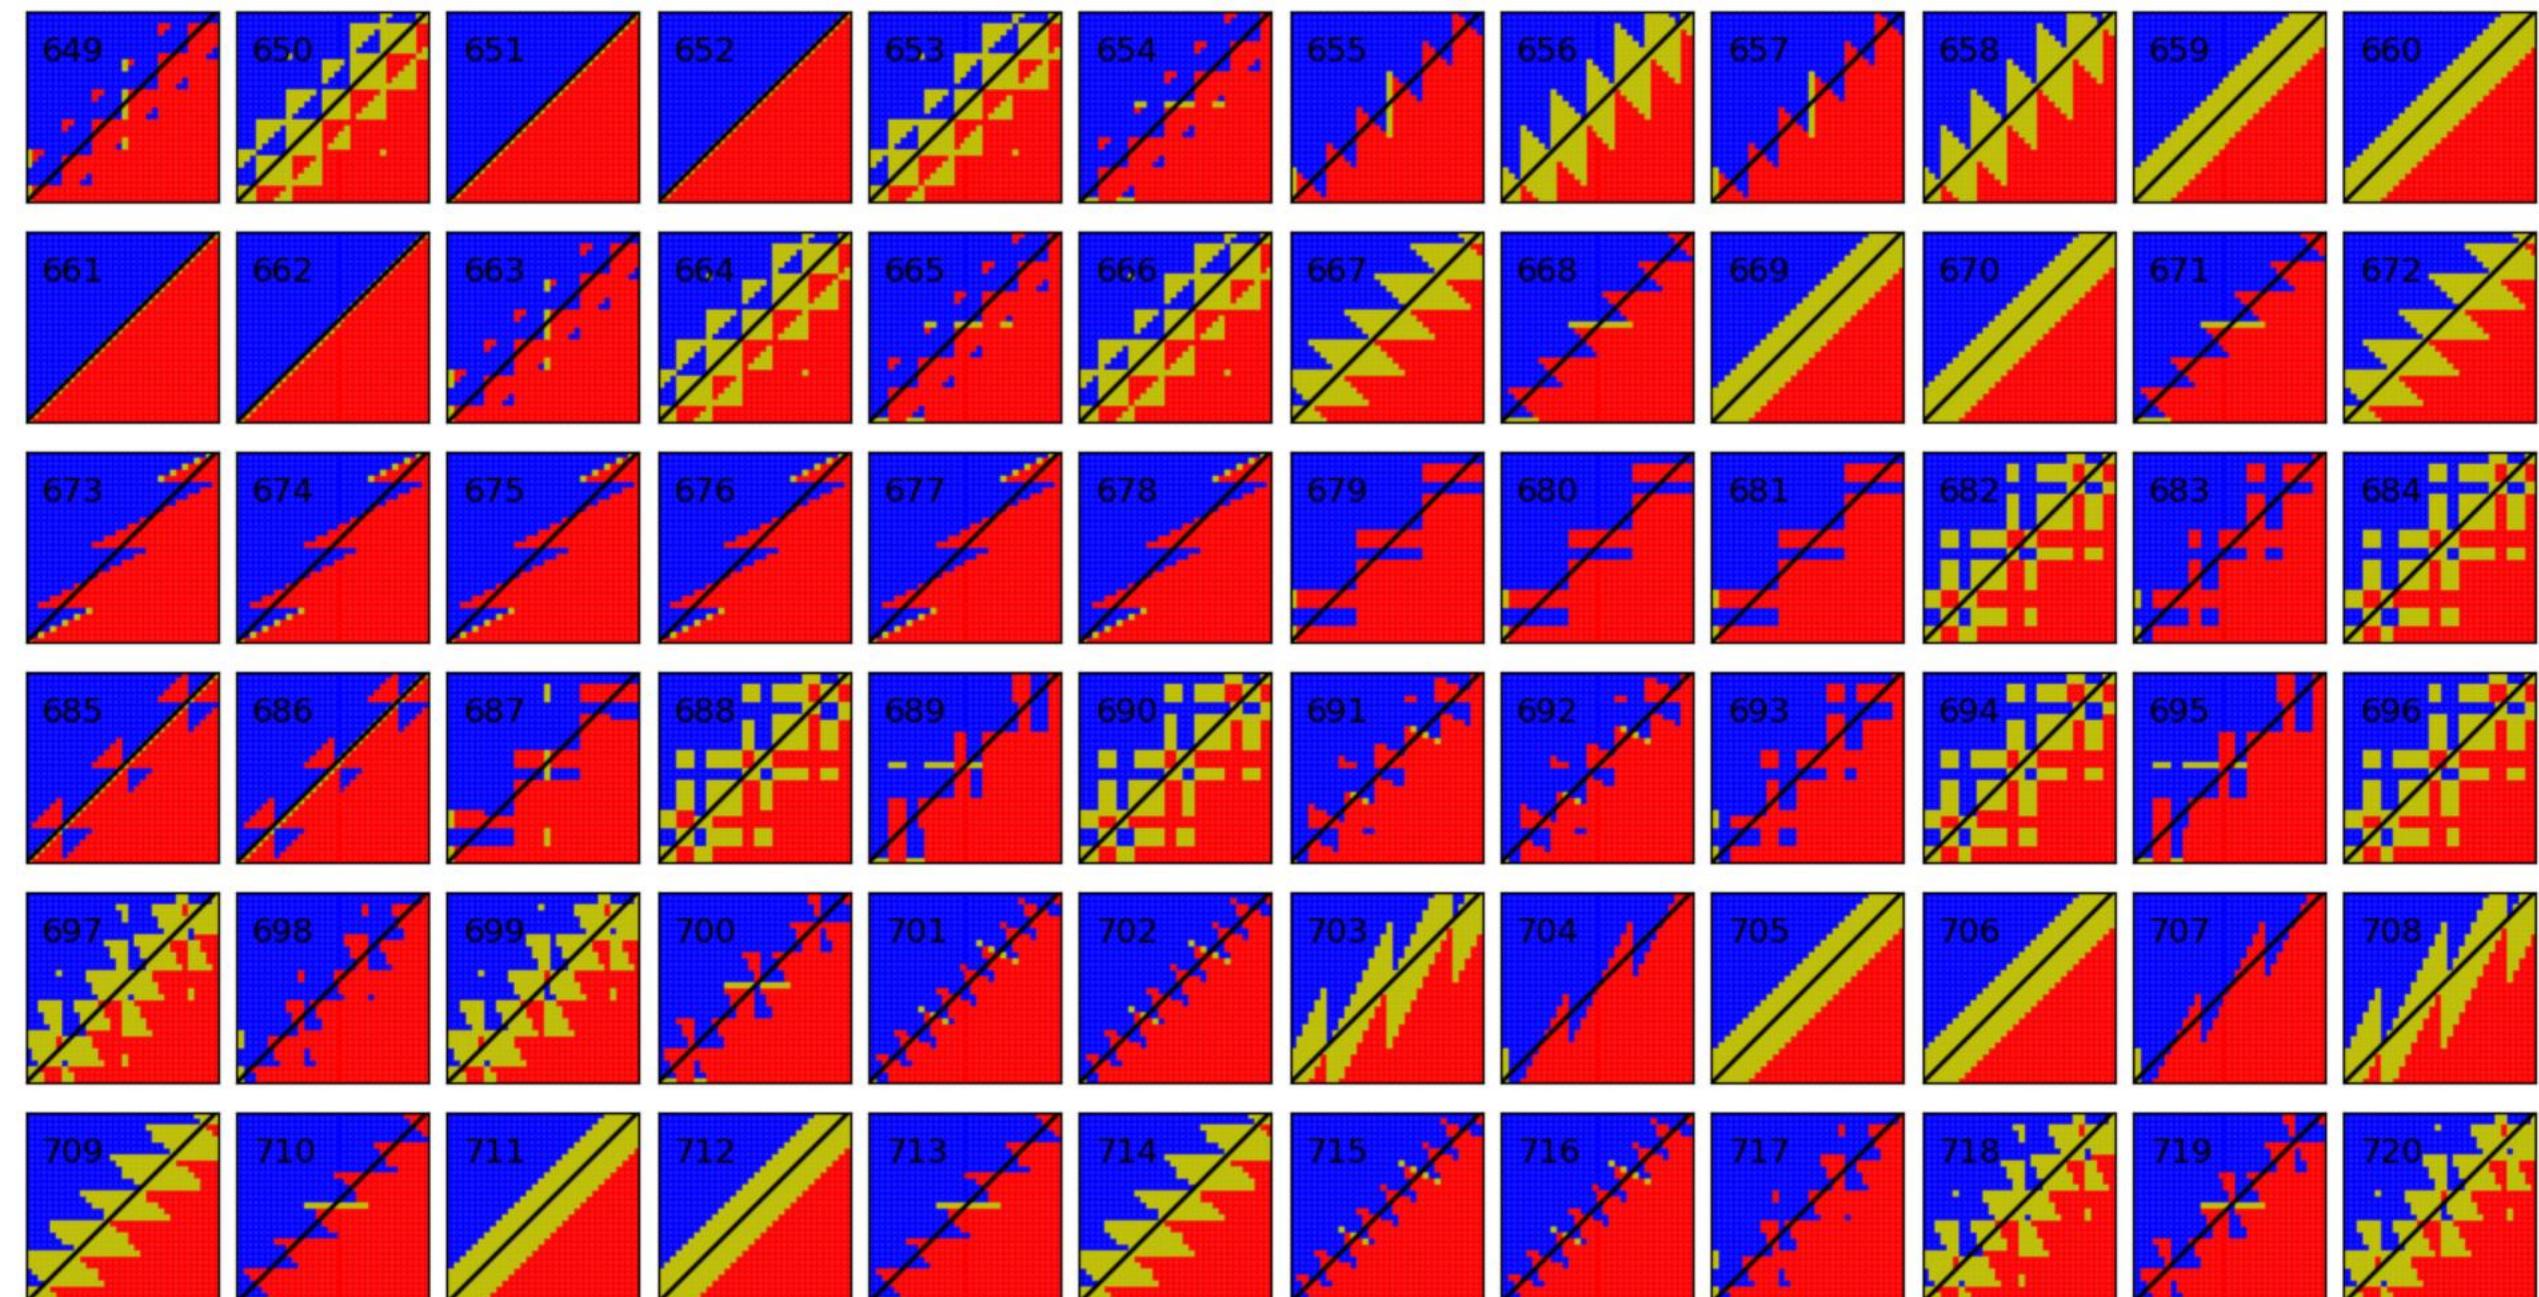

# Dictionaries and Sets

- dict
- set
- frozenset
- set/dict comprehensions

# Dictionaries (type dict)

{ $key_1: value_1, \dots, key_k: value_k$ }

- Stores a mutable set of (key, value) pairs, denoted *items*, with distinct keys, i.e. *maps* keys to values
- Constructing empty dictionary: `dict()` or `{}`
- `dict[key]` lookup for key in dictionary, and returns associated value. Key must be present, otherwise a `KeyError` is raised
- `dict[key] = value` assigns value to key, overriding existing value if present

| key    | value  |
|--------|--------|
| 'a'    | 7      |
| 'foo'  | '42nd' |
| 5      | 29     |
| '5'    | 44     |
| 5.5    | False  |
| False  | True   |
| (3, 4) | 'abc'  |



distinct keys,  
i.e. not `"=="`

# Dictionaries (type dict)

## Python shell

```
> d = {'a': 42, 'b': 57}
> d
| {'a': 42, 'b': 57}

> d.keys()
| dict_keys(['a', 'b'])

> list(d.keys())
| ['a', 'b']

> d.items()
| dict_items([('a', 42), ('b', 57)])

> list(d.items())
| [('a', 42), ('b', 57)]
```

```
> for key in d:
 print(key)
| a
| b

> for key, val in d.items():
 print('Key', key, 'has value', val)
| Key a has value 42
| Key b has value 57

> {5: 'a', 5.0: 'b'}
| {5: 'b'}
```



## Python shell

```
> surname = dict(zip(['Donald', 'Mickey', 'Scrooge'], ['Duck', 'Mouse', 'McDuck']))
> surname['Mickey']
| 'Mouse'
```

# Dictionaries (type dict)

## Python shell

```
> gradings = [('A', 7), ('B', 4), ('A', 12), ('C', 10), ('A', 7)]
> grades = {} # empty dictionary
> for student, grade in gradings:
 if student not in grades: # is key in dictionary
 grades[student] = []
 grades[student].append(grade)
> grades
| {'A': [7, 12, 7], 'B': [4], 'C': [10]}
> print(grades['A'])
| [7, 12, 7]
> print(grades['E']) # can only lookup keys in dictionary
| KeyError: 'E'
> print(grades.get('E')) # .get returns None if key not in dictionary
| None
> print(grades.get('E', [])) # change default return value
| []
> print(grades.get('A', []))
| [7, 12, 7]
```

# Dictionary initialization

Python shell

```
> d1 = {'A': 7, 'B': 42}
> d2 = dict([('A', 7), ('B', 42)]) # list of (key, value) pairs
> d3 = dict(A=7, B=42) # keyword arguments to constructor
> d1 == d2 == d3
| True
```

- Note: *keyword initialization* only works if keys are strings which are valid keyword arguments to a function – but saves writing a lot of quotes

Python shell

```
> d1 = dict(A=1, B=2)
> d2 = dict(B=3, C=4)
> d1 | d2 # merge dictionaries
| {'A': 1, 'B': 3, 'C': 4} # rightmost value for 'B' wins
> **d1, **d2, 'D': 5 # ** inserts dictionary content
| {'A': 1, 'B': 3, 'C': 4, 'D': 5} # rightmost value for 'B' wins
> d1 |= d2 # same as d1.update(d2)
> d1
| {'A': 1, 'B': 3, 'C': 4}
```

⚠ | and |=  
new in  
Python 3.9  
[PEP 584](#)

| Dictionary operation                     | Description                                                                                   |
|------------------------------------------|-----------------------------------------------------------------------------------------------|
| <code>len(d)</code>                      | Items in dictionary                                                                           |
| <code>d[key]</code>                      | Lookup key                                                                                    |
| <code>d[key] = value</code>              | Update value of key                                                                           |
| <code>del d[key]</code>                  | Delete an existing key                                                                        |
| <code>key in d</code>                    | Key membership                                                                                |
| <code>key not in d</code>                | Key non-membership                                                                            |
| <code>clear()</code>                     | Remove all items                                                                              |
| <code>copy()</code>                      | Shallow copy                                                                                  |
| <code>get(key), get(key, default)</code> | <code>d[key]</code> if key in dictionary, otherwise <code>None</code> or <code>default</code> |
| <code>items()</code>                     | <i>View</i> of the dictionaries items                                                         |
| <code>keys()</code>                      | <i>View</i> of the dictionaries keys                                                          |
| <code>values()</code>                    | <i>View</i> of the dictionaries values                                                        |
| <code>pop(key)</code>                    | Remove key and return previous value                                                          |
| <code>popitem()</code>                   | Remove and return an arbitrary item                                                           |
| <code>update()</code>                    | Update key/value pairs from another dictionary                                                |

# Tuples as dictionary keys

- A tuple can be used as a dictionary key, and parenthesis can be omitted

```
Python shell -
> d = {('a', 1): 7, ('b', 2): 42}
> d[('b', 2)]
| 42
> d['b', 2] # same as above, parenthesis omitted
| 42
> T = [[None, None], [42, None]] # 2D table as lists-of-lists
> T[1][0]
| 42
> T[1, 0] # wrong, T is a list (of lists)
| TypeError: list indices must be integers or slices, not tuple
> T = {(1, 0): 42} # 2D table as dictionary
> T[1, 0] # dictionary lookup with tuple (1, 0) as key
| 42
> T[1][0] # wrong, T has only one key = the tuple (1, 0)
| KeyError: 1
```

# Order returned by `list(d.keys())` ?

## The Python Standard Library Mapping Types — dict

“Dictionaries preserve insertion order. Note that updating a key does not affect the order. Keys added after deletion are inserted at the end.” (since Python 3.7)

[docs.python.org/3/library/stdtypes.html](https://docs.python.org/3/library/stdtypes.html)

## Python shell

```
> d = {'d': 1, 'c': 2, 'b': 3, 'a': 4}
> d['x'] = 5 # new key at end
> d['c'] = 6 # overwrite value
> del d['b'] # remove key 'b'
> d['b'] = 7 # reinsert key 'b' at end
> d
| {'d': 1, 'c': 6, 'a': 4, 'x': 5, 'b': 7}
```



[Raymond Hettinger @ Twitter](#)

See also [Raymond's talk @ PyCon 2017](#)  
[Modern Python Dictionaries](#)  
[A confluence of a dozen great ideas](#)

# Dictionary comprehension

- Similarly to creating a list using list comprehension, one can create a set of key-value pairs:

```
{key : value for variable in list}
```

## Python shell

```
> names = ['Mickey', 'Donald', 'Scrooge']
> list(enumerate(names, start=1))
| [(1, 'Mickey'), (2, 'Donald'), (3, 'Scrooge')]
> dict(enumerate(names, start=1))
| {1: 'Mickey', 2: 'Donald', 3: 'Scrooge'}
> {name: idx for idx, name in enumerate(names, start=1)}
| {'Mickey': 1, 'Donald': 2, 'Scrooge': 3}
```

# Sets (set and frozenset)

{ *value*<sub>1</sub>, ..., *value*<sub>k</sub> }

- Values of type set represent mutable sets, where “==” elements only appear once
- Do not support: indexing, slicing
- frozenset is an immutable version of set

## Python shell

```
> S = {2, 5, 'a', 'c'}
> T = {3, 4, 5, 'c'}
> S | T
| {2, 3, 4, 5, 'a', 'c'}
> S & T
| {5, 'c'}
> S ^ T
| {2, 3, 4, 'a'}
> S - T
| {2, 'a'}
> {4, 5, 5.0, 5.1}
| {4, 5, 5.1}
```



| Operation       | Description                              |
|-----------------|------------------------------------------|
| S   T           | Set union                                |
| S & T           | Set intersection                         |
| S - T           | Set difference                           |
| S ^ T           | Symmetric difference                     |
| set()           | Empty set<br>( {} = empty dictionary ! ) |
| set(L)          | Create set from sequence                 |
| x in S          | Membership                               |
| x not in S      | Non-membership                           |
| S.isdisjoint(T) | Disjoint sets                            |
| S <= T          | Subset                                   |
| S < T           | Proper subset                            |
| S >= T          | Superset                                 |
| S > T           | Proper superset                          |
| len(S)          | Size of S                                |
| S.add(x)        | Add x to S (not frozenset)               |

<https://docs.python.org/3/tutorial/datastructures.html#sets>

<https://docs.python.org/3/library/stdtypes.html#set-types-set-frozenset>

# Question – What value has the expression ?

```
sorted({ 5, 5.5, 5.0, '5' })
```

- a) { '5', 5, 5.0, 5.5 }
- b) {5, 5.5 }
- c) ['5', 5.0, 5.5 ]
- d) ['5', 5, 5.5 ]
-  e) TypeError
- f) Don't know

# Sets of (frozen) sets

- Sets are mutable, i.e. cannot be used as dictionary keys or elements in sets
- Frozen sets can



## Python shell

```
> S = {{'a'}, {'a', 'b'}, {'a', 'c'}}
| TypeError: unhashable type: 'set'
> S = {frozenset({'a'}), frozenset({'a', 'b'}), frozenset({'a', 'c'})}
> frozenset({'a', 'b'}) in S
| True
> {'a', 'b'} in S # automatically converts unhashable set to frozenset
| True
> {'a', 'b'} == frozenset(['a', 'b']) # frozenset from list
| True
> D = {frozenset({'a', 'b'}): 42} # dictionary
> frozenset({'a', 'b'}) in D
| True
> {'a', 'b'} in D # dictionaries are not that friendly as sets
| TypeError: unhashable type: 'set'
```

# Set comprehension

- Similarly to creating a list using list comprehension, one can create a set of values (also using nested for- and if-statements):

{*value* **for** *variable* **in** *list*}

- A value occurring multiple times as *value* will only be included once

**primes\_set.py**

```
n = 101
not_primes = {m for f in range(2, n) for m in range(2 * f, n, f)}
primes = set(range(2, n)) - not_primes
```

**Python shell**

```
> L = ['a', 'b', 'c']
> {(x,(y,z)) for x in L for y in L for z in L if x != y and y != z and z != x}
| {('a',('b','c')),('a',('c','b')),('b',('a','c')),...,('c',('b','a'))}
> L = {'a', 'b', 'c'}
> {(x,(y,z)) for x in L for y in L - {x} for z in L - {x, y}}
| {('c',('b','a')),('c',('a','b')),('a',('c','b')),...,('b',('a','c'))}
```


# Hash, equality, and immutability

- Keys for dictionaries and sets must be *hashable*, i.e. have a `__hash__()` method returning an integer that does not change over their lifetime and an `__eq__()` method to check for equality with “==”

```
'abc'.__hash__() could e.g. return 624337162
(624337162).__hash__() would also return 624337162
```

- All built-in immutable types are hashable. In particular tuples of immutable values are hashable. I.e. trees represented by nested tuples like `((('a'), 'b'), ('c', ('d', 'e')))` can be used as dictionary keys or stored in a set

# Sketch of internal set implementation

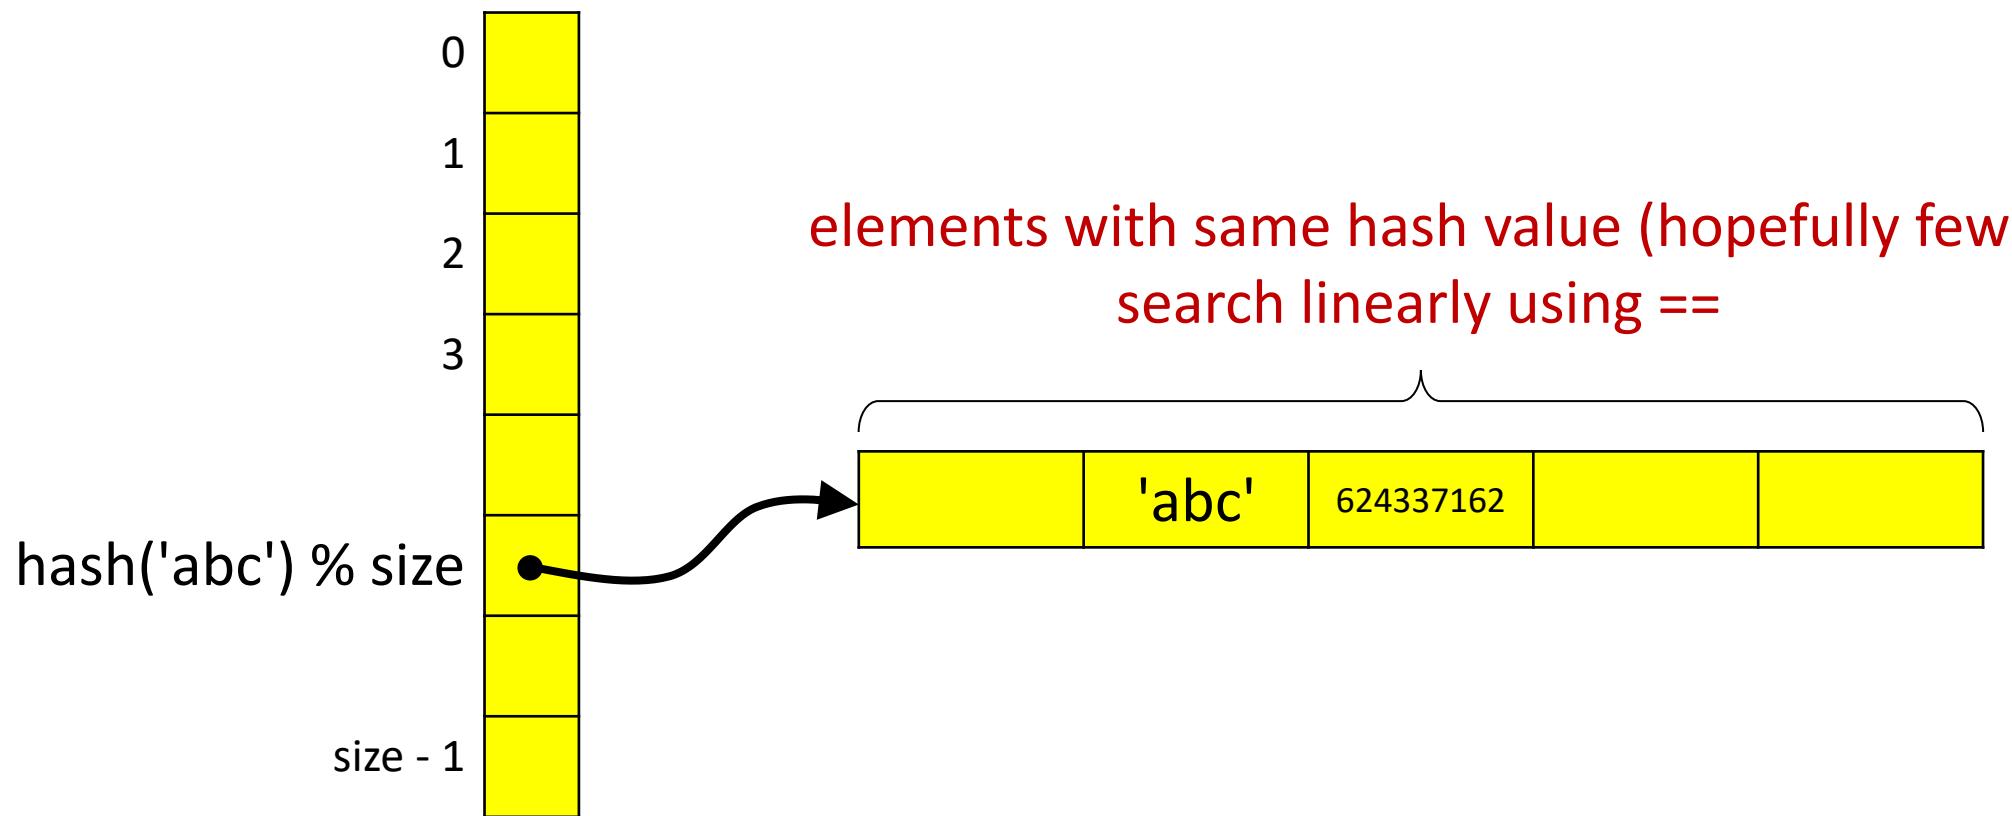

Raymond Hettinger,  
Modern Python Dictionaries  
- A confluence of a dozen great ideas

# Module **`collections`** (container datatypes)

- Python builtin containers for data: list, tuple, dict, and set.
- The module **`collections`** provides further alternatives  
(but these are not part of the language like the builtin containers)

`deque`

double ended queue

`namedtuple`

tuples allowing access to fields by name

`Counter`

special dictionary to count occurrences of elements

...

# deque – double ended queues

- Extends lists with efficient updates at the front
-  Inserting at the front of a standard Python list takes linear time in the size of the list – very slow for long lists

## Python shell

```
> L = list()
> L.append(1)
> L.append(2)
> L.insert(0, 0) # insert at the front
> L.insert(0, -1) # slow for long lists
> L.insert(0, -2)
> L
| [-2, -1, 0, 1, 2]
```

```
> from collections import deque
> d = deque() # create empty deque
> d.append(1)
> d.append(2)
> d.appendleft(0) # efficient
> d.appendleft(-1)
> d.appendleft(-2)
> d
| deque([2, 1, 0, -1, -2])
> for e in d: print(e, end=' ',)
| -2, -1, 0, 1, 2,
```

# namedtuple – tuples with field names

- Compromise between tuple and dict, can increase code readability

## Python shell

```
> person = ('Donald Duck', 1934, '3 feet') # as tuple
> person[1] # not clear what is accessed
| 1934
> person = {'name': 'Donald Duck', 'appeared': 1934, 'height': '3 feet'} # as dict
> person['appeared'] # more clear what is accessed, but [...] overhead
| 1934

> from collections import namedtuple
> Person = namedtuple('Person', ['name', 'appeared', 'height']) # create new type
> person = Person('Donald Duck', 1934, '3 feet') # as namedtuple
> person
| Person(name='Donald Duck', appeared=1934, height='3 feet')
> person.appeared # short and clear
| 1934
> person[1] # still possible
| 1934
```

# Counter – dictionaries for counting

## Python shell


```
> from collections import Counter
> fq = Counter('abracadabra') # create new counter from a sequence
> fq
| Counter({'a': 5, 'b': 2, 'r': 2, 'c': 1, 'd': 1}) # frequencies of the letters
> fq['a']
| 5
> fq.most_common(3)
| [('a', 5), ('b', 2), ('r', 2)]
> fq['x'] += 5 # increase count of 'x', also valid if 'x' not in Counter yet
> Counter('aaabbbcc') - Counter('aabdd') # counters can be subtracted
| Counter({'b': 2, 'c': 2, 'a': 1})
> Counter([1, 2, 1, 3, 4, 5]) + Counter([3, 3, 3]) # counters can be added
| Counter({3: 4, 1: 2, 2: 1, 4: 1, 5: 1})
> T = 'AfD adsf dsa f dsaf daf dsaf DSA fda f SA dsa f dsa fdsa f dsAf sAf f dsaf'
> Counter(T.lower().split()).most_common(3)
| [('f', 5), ('dsa', 4), ('dsaf', 4)]
```

# Handin 3 & 4 – Triplet distance (Dobson, 1975)


```
((('A', 'F'), 'B'), ('D', ('C', 'E'))))
```

```
((('D', 'A'), 'B'), 'F'), ('C', 'E'))
```

(a)

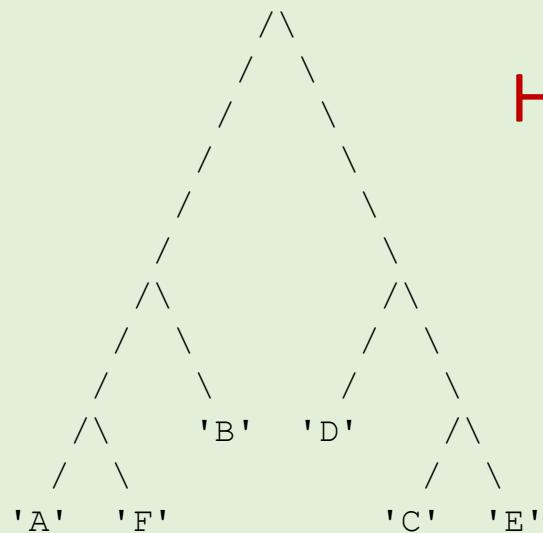


(b)

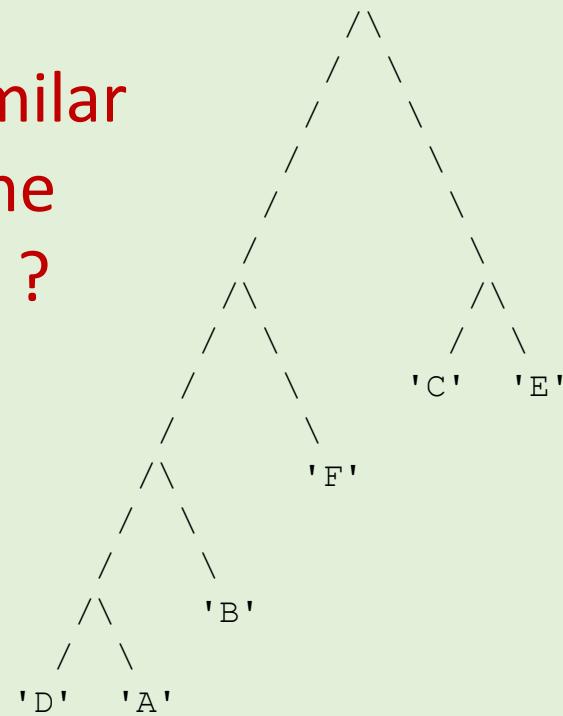

# How similar are the trees ?

# Handin 3 & 4 – Triplet distance (Dobson, 1975)

Consider all  $\binom{n}{3}$  subsets of size three, and count how many do not have identical substructure (topology) in the two trees.

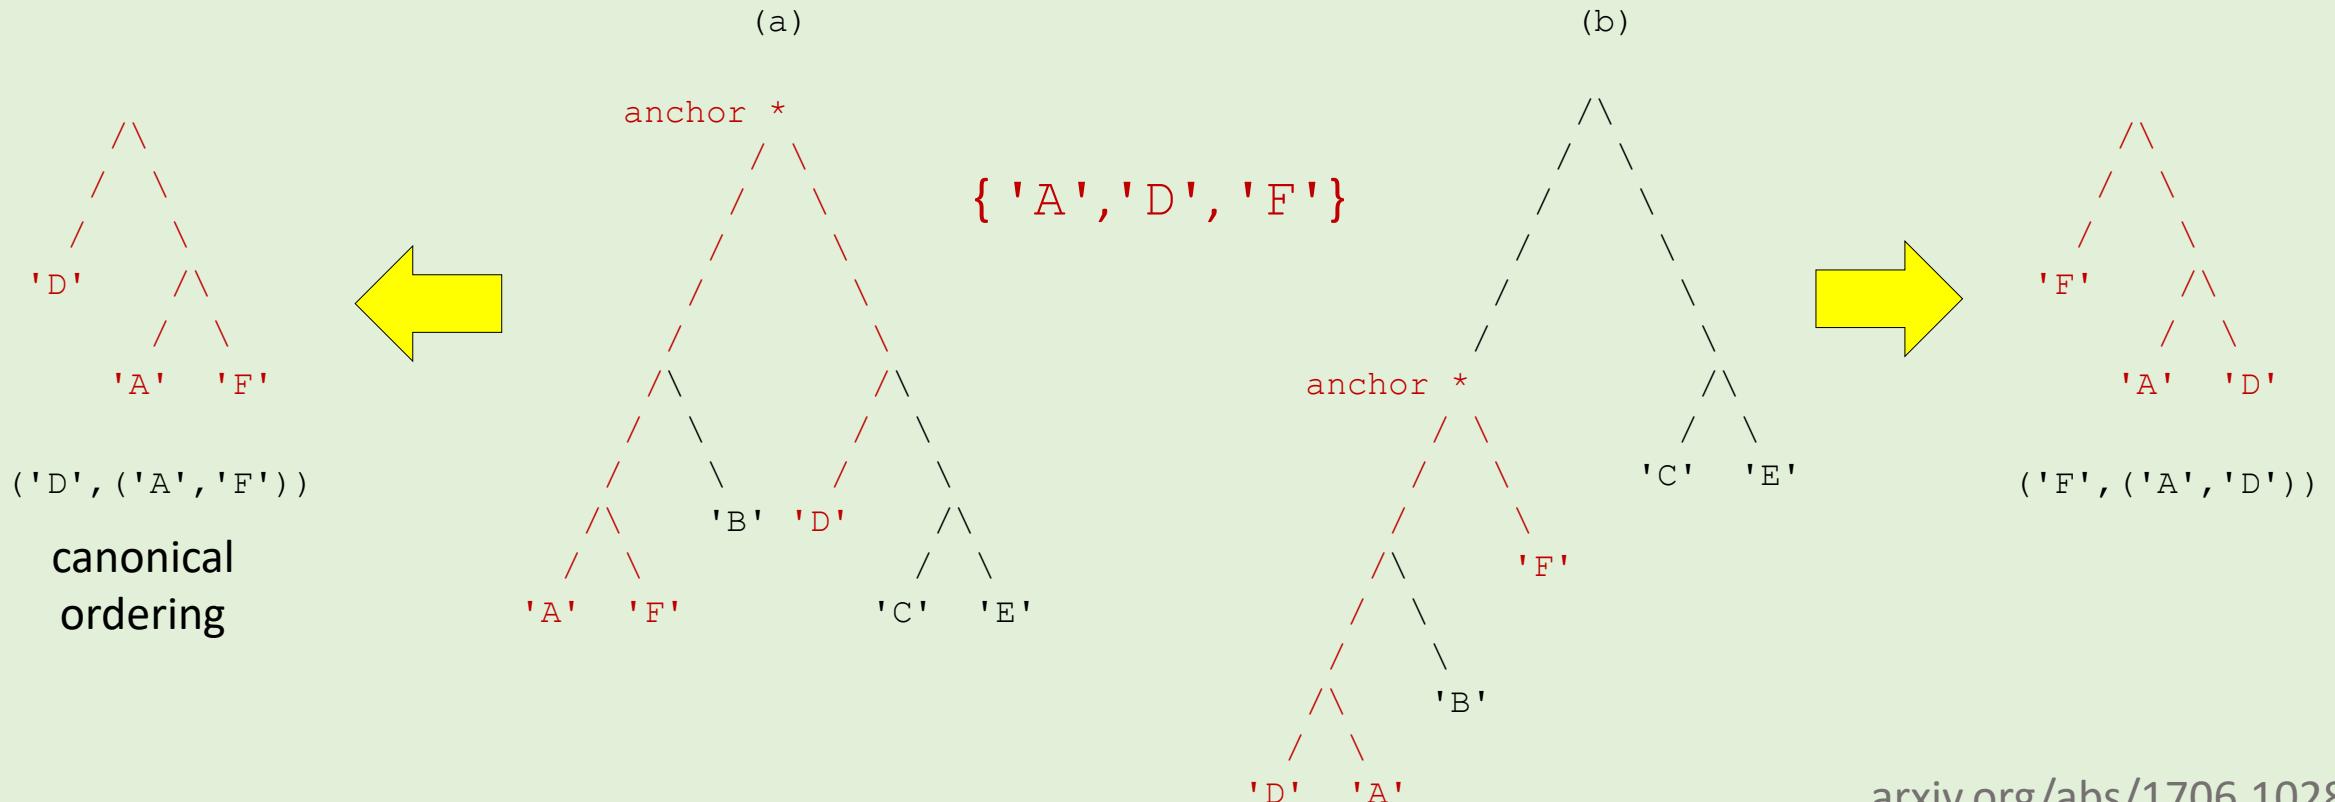

# Functions

- functions
- return
- scoping
- arguments
- keyword arguments
- \*, \*\*
- global variables

# (Simple) functions

- You can define your own functions using:

```
def function-name (var1, ..., vark):
 body code
```

*var*<sub>1</sub>, ..., *var*<sub>*k*</sub> are the *formal parameters*

- If the body code executes

return *expression*

the result of *expression* will be returned by the function. If expression is omitted or the body code terminates without performing return, then None is returned

- When calling a function *name* (*value*<sub>1</sub>, ..., *value*<sub>*k*</sub>) body code is executed with *var*<sub>*i*</sub>=*value*<sub>*i*</sub>

## Python shell

```
> def sum3(x, y, z):
 return x + y + z

> sum3(1, 2, 3)
| 6
> sum3(5, 7, 9)
| 21

> def powers(L, power):
 P = [x**power for x in L]
 return P

> powers([2,3,4], 3)
| [8, 27, 64]
```

# Questions – `poly(3, "10", '3')` ?

```
def poly(z, x, y):
 return z * x + y
```

- a) 33
- b) 1010103
- c) '33'
-  d) '1010103'
- e) TypeError
- f) Don't know

# Why functions ?

- Avoid writing the same code multiple times,  
*re-usability*
- Be able to *name a functionality*
- Clearly state the functionality of a piece of code, *abstraction*:  
*Input* = arguments, *output* = return value (and/or side effects)
- *Encapsulate* code with clear interface to the dependency to the outside world/code
- Share functionality in modules/libraries/packages with other users,  
*code sharing*
- Increase *readability* of code, smaller independent blocks of code
- Easier systematically *testing* of code
- ...

**Some other Python language features helping structuring programs**

- Object orientation
- Modules
- Decorators
- Context managers
- Exceptions
- Doc strings
- doctest

# Local variables in functions

- The formal arguments and variables assigned to in the body of a function are created as temporary *local variables*

| Global variables | Local variables |
|------------------|-----------------|
| sum3 <function>  | x 4             |
| a 3              | y 5             |
| y 42             | z 6             |
|                  | a 9             |
|                  | b 15            |

state just before return b

## Python shell

```
> def sum3(x, y, z):
 a = x + y
 b = a + z
 return b

> a = 3
> y = 42
> w = sum3(4, 5, 6)
> w
| 15
> a
| 3
> b
| NameError: name 'b' is not defined
> x
| NameError: name 'x' is not defined
> y
| 42
> sum3
| <function sum3 at 0x0356DA98>
```

# Global variables

- Variables in function bodies that are only read, are considered access to *global variables*

## Python shell

```
> prefix = "The value is"

> def nice_print(x):
 print(prefix, x)

> nice_print(7)
| The value is 7
> prefix = "Value ="
> nice_print(42)
| Value = 42
```

| Global variables                          | Local variables |
|-------------------------------------------|-----------------|
| nice_print <function><br>prefix "Value =" | x 42            |

state just before returning from 2<sup>nd</sup> nice\_print

# Global vs local variables

- If a function contains an assignment to a variable, the variable is local throughout the function – also before the first assignment

## Python shell

```
> x = 42
> def f():
 print(x) # refers to local variable
 x = 7 # x declared local variable
> f()
| UnboundLocalError: local variable 'x' referenced before assignment
```



# global

- Global variables that should be updated in the function body must be declared global in the body:

global *variable*, *variable*, ...

- Note: If you only need to read a global variable, it is not required to be declared global (but would be polite to the readers of your code)

Since `counter` assigned in body, `counter` will be considered to be a local variable

## Python shell

```
> counter = 1
> def counted_print(x):
 global counter
 print(f'{counter} {x}')
 counter += 1
> counted_print(7)
| (1) 7
> counted_print(42)
| (2) 42
> def counted_print(x):
 print(f'{counter} {x}')
 counter += 1
> counted_print(7)
| UnboundLocalError: local variable
| 'counter' referenced before
| assignment!
```

# Question – What value is printed ?

```
x = 1
def f(a):
 global x
 x = x + 1
 return a + x
print(f(2) + f(4))
```

- a) 6
- b) 7
- c) 8
- d) 9
- e) 10



- f) 11
- g) 12
- h) Don't know

# Arbitrary number of arguments

- If you would like your function to be able to take a variable number of additional arguments in addition to the required, add a `*variable` as the last argument
- In a function call `variable` will be assigned a tuple with all the additional arguments

## Python shell

```
> def my_print(x, y, *L):
 print("x =", x)
 print("y =", y)
 print("L =", L)

> my_print(2, 3, 4, 5, 6, 7)
| x = 2
| y = 3
| L = (4, 5, 6, 7)
> my_print(42)
| TypeError: my_print() missing 1
 required positional argument: 'y'
```

# Unpacking a list of arguments in a function call

- If you have list  $L$  (or tuple) containing the arguments to a *function call*, you can unpack them in the function call using  $*L$

```
L = [x, y, z]
f(*L)
```

is equivalent to calling

```
f(L[0], L[1], L[2])
```

i.e.

```
f(x, y, z)
```

- Note that  $f(L)$  would pass a single argument to  $f$ , namely a list
- In a function call several  $*$  expressions can appear, e.g.  $f(*L1, x, *L2, *L3)$

## Python shell

```
> import math
> def norm(x, y):
 return math.sqrt(x * x + y * y)
> norm(3, 5)
| 5.830951894845301
> point = (3, 4)
> print(*point, sep=':')
| 3:4
> norm(point)
| TypeError: norm() missing 1 required positional argument: 'y'
> norm(*point)
| 5.0
> def dist(x0, y0, x1, y1):
 return math.sqrt((x1 - x0) ** 2 + (y1 - y0) ** 2)
> p = 3, 7
> q = 7, 4
> dist(p, q)
| TypeError: dist() missing 2 required positional arguments: 'x1' and 'y1'
> dist(*p, *q)
| 5.0
```

# Question – How many arguments should f take ?

```
a = [1, 2, 3]
b = [4, 5]
c = (6, 7, 8)
d = (9, 10)
f (*a, b, c, *d)
```

a) 4

b) 5

c) 6



d) 7

e) 8

f) 9

g) 10

h) Don't know

# Question – What is `list(zip(*zip(*L)))` ?

```
L = [[1, 2, 3], [4, 5], [6, 7, 8]]
```

- a) [([([1, 2, 3],),), ([([4, 5],),), ([([6, 7, 8],),)])]
- b) [(([1, 4, 6],), ((2, 5, 7),))]
- c) [(1, 2), (4, 5), (6, 7)]
- d) [(1, 2, 3), (4, 5), (6, 7, 8)]
- e) [([1, 2, 3], [4, 5], [6, 7, 8])]
- f) Don't know

## Python shell

```
> list(zip((1, 2, 3), (4, 5, 6)))
| [(1, 4), (2, 5), (3, 6)]
```

# Keyword arguments

- Previously we have seen the following (strange) function calls

```
print(7, 14, 15, sep=":", end="")
enumerate(my_list, start=1)
```

- name*= refers to one of the formal arguments, known as a **keyword argument**
- A *name* can appear at most once in a function call
- In function calls keyword arguments must follow positional arguments
- Improves readability when arguments have non-obvious order

```
complicated_function(
 name="Mickey",
 city="Duckburg",
 state="Calisota",
 occupation="Detective",
 gender="Male"
)
```

| Python shell                        |
|-------------------------------------|
| > def sub(x, y):       return x - y |
| > sub(9, 4)   5                     |
| > sub(y=9, x=4)   -5                |

# Keyword arguments, default values

- When calling a function arguments can be omitted if the corresponding arguments in the function definition have default values *argument=value*
- Arguments with default values must be after those without

Python shell

```
> def my_print(a, b, c=5, d=7):
 print(f'{a=} {b=} {c=} {d=}')

> my_print(2, d=3, b=4)
| a=2, b=4, c=5, d=3
```

# Question – What is `f(6, z=2)` ?

```
def f(x, y=3, z=7):
 return x + y + z
```

- a) 10
-  b) 11
- c) 16
- d) `TypeError: f() missing 1 required positional argument: 'y'`
- e) Don't know

# Keyword arguments, mutable default values



- Be carefull: Default value will be shared among calls (which can be usefull)

## The Python Language Reference 8.7 Function definitions

"Default parameter values are evaluated from left to right **when the function definition is executed**. This means that the expression is evaluated once, when the function is defined, and that the same "pre-computed" value is used for each call. This is especially important to understand when a default parameter is a mutable object, such as a list or a dictionary: if the function modifies the object (e.g. by appending an item to a list), the default value is in effect modified. This is generally not what was intended. A way around this is to use None as the default"

## Python shell

```
> def list_append(e, L=[]):
 L.append(e)
 return L
> list_append('x', ['y', 'z'])
['y', 'z', 'x']
> list_append("a")
['a']
> list_append("b")
['a', 'b']
> list_append("c")
['a', 'b', 'c']
```



## Python shell

```
> def list_append(e, L=None):
 if L == None:
 L = []
 L.append(e)
 return L
> list_append('x', ['y', 'z'])
['y', 'z', 'x']
> list_append("a")
['a']
> list_append("b")
['b']
> list_append("c")
['c']
```

# Function call, dictionary of keyword arguments

- If you happen to have a *dictionary* containing the keyword arguments you want to pass to function, you can give all dictionary items as arguments using the single argument `**dictionary`

Python shell

```
> print(3, 4, 5, sep=":", end="#\n")
| 3:4:5#
> print_kwarg = {'sep': ':', 'end': '#\n'}
> print(3, 4, 5, **print_kwarg)
| 3:4:5#
```

# Function definition, arbitrary keyword arguments

- If you want a function to accept arbitrary keyword arguments, add an argument `**argument` to the function definition
- When the function is called `argument` will be assigned a dictionary containing the excess keyword arguments

```
Python shell
> def my_print(a, b=3, **c):
 print("a =", a)
 print("b =", b)
 print("c =", c)

> my_print(x=27, y=42, a=7)
| a = 7
| b = 3
| c = {'x': 27, 'y': 42}
```

# Example

## Python shell

```
> L1 = [1, 'a']
> L2 = ['b', 2, 3]
> D1 = {'y':4, 's':10}
> D2 = {'t':11, 'z':5.0}

> def f(a, b, c, d, e, *f, q=0, x=1, y=2, z=3, **kw):
 print(f"{a=}, {b=}, {c=}, {d=}, {e=}, {f=}\n"
 f"{q=}, {x=}, {y=}, {z=}, {kw=}")
> f(7, *L1, 9, *L2, x=7, **D1, w=42, **D2)
| a=7, b=1, c=a, d=9, e=b, f=(2, 3)
| q=0, x=7, y=4, z=5.0, kw={'w': 42, 's': 10, 't': 11}
```

non-keyword arguments must appear before keyword arguments

all arguments must have distinct names

# A confusing example

Python shell

```
> def f(*a, **kw):
 print(f' {a=} {kw=} ')
> f(a=42) # no positional arguments
| a=() kw={'a': 42}
```

# Forwarding function arguments


- \* and \*\* can e.g. be used to forward (unknown) arguments to other function calls

Python shell

```
> def my_print(*positional_arguments, sep=":", **keyword_arguments):
 print(*positional_arguments, sep=sep, **keyword_arguments)
> my_print(7, 42)
| 7:42
> my_print("x", "y", end="<")
| x:y<
> my_print("x", "y", sep="_")
| x_y
```

# Local function definitions and namespaces

- Function definitions can contain (nested) local function definitions, only accessible inside the function
- static/lexical scoping*, i.e. can see from the code which variables are in scope

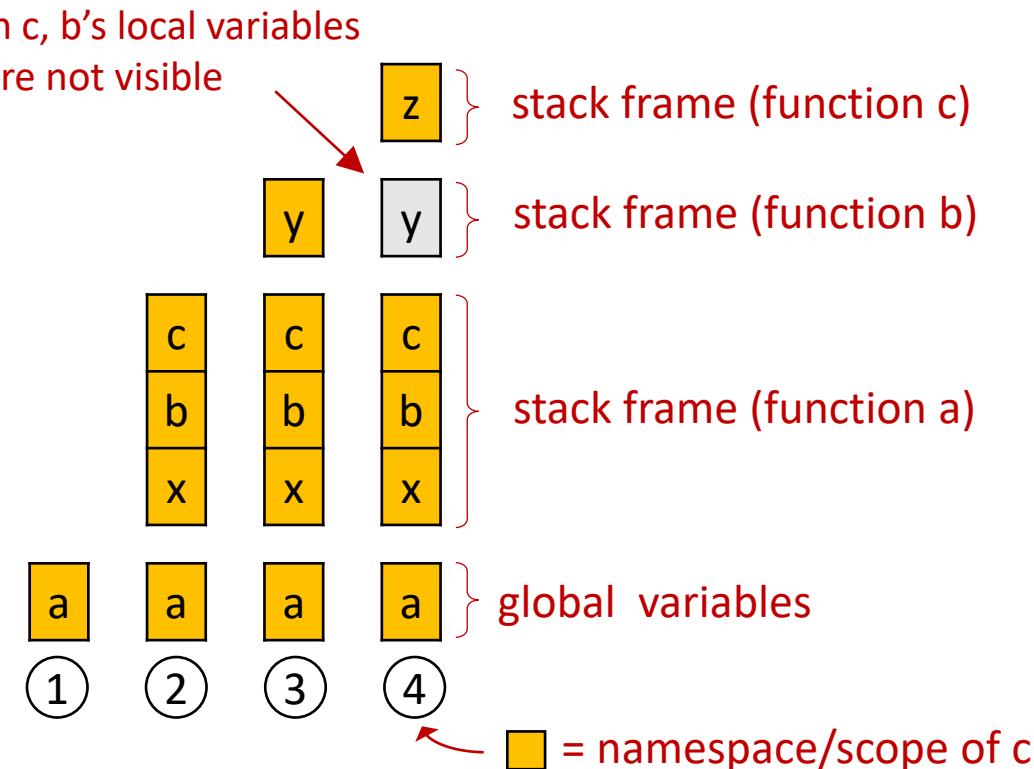

Python shell

```
> def a(x):
 def b(y):
 print(f'b: {y=} {x=}')
 c(y + 1)
 def c(z):
 print(f'c: {z=} {x=}')
 print(f'a: {x=}')
 b(x + 1)
> a(42)
| a: x=42
| b: y=43 x=42
| c: z=44 x=42
```

# Example – nested function definitions

Python shell

```
> def a(x):
 def b(y):
 print(f'Enter b ({y=}, {x=})')
 c(y + 1)
 print('leaving b')

 def c(x): # x hides argument of function a
 def d(z):
 print(f'Enter d ({z=}, {x=})')
 print('leaving d')

 print(f'Enter c ({x=})')
 d(x + 1)
 print('leaving c')

 print(f'Enter a ({x=})')
 b(x + 1)
 print('leaving a')
```

```
> a(5)
| Enter a (x=5)
| Enter b (y=6, x=5)
| Enter c (x=7)
| Enter d (z=8, x=7)
| leaving d
| leaving c
| leaving b
| leaving a
```

# Functions must be defined before you can call them...

Python shell

```
> f()
| NameError: name 'f' is not defined
> def f():
 print('Hi')
> f()
| Hi
> def f():
 g() # g not yet defined locally !!
 def g():
 print('Howdy')
> f()
| UnboundLocalError: cannot access local variable 'g' where it is not associated with a value
> def f():
 def g():
 print('Howdy')
 g()
> f()
| Howdy
```

# Example – nested functions and default values

Python shell

```
> def init_none(var_name):
> print('initializing', var_name)
> return None # redundant line
>
> def f(a=init_none('a')):
> def g(b=init_none('b')):
> print('b =', b)
> print("a =", a)
> g(a + 1)
>
> initializing a
>
> f(10)
> initializing b !!
> a = 10
> b = 11
```

# nonlocal

- The keyword `nonlocal` makes local identifiers refer to previously bound variables in the nearest *enclosing scope excluding globals*
- `nonlocal variable, variable, ...`

## Python shell

```
> x = 0

> def f():
 y = 1
 def f_helper(z):
 global x
 nonlocal y
 print(f'({x}:{y}) {z}')
 y += 1
 x += 3
 f_helper(7)
 f_helper(42)

> f()
| (0:1) 7
| (3:2) 42
> f()
| (6:1) 7
| (9:2) 42
```

# Positional and keyword only arguments

- A function definition can contain `/` and `*` as arguments
- Arguments before `/` must be provided as positional arguments in a call
- Arguments after `*` cannot be positional arguments

## Python shell

```
> def f(a, /, b, *, c):
 print(a, b, c)

> f(a=1, b=2, c=3)
| TypeError: f() got some positional-only arguments passed as keyword arguments: 'a'
> f(1, b=2, c=3)
| 1 2 3
> f(1, 2, c=3)
| 1 2 3
> f(1, 2, 3)
| TypeError: f() takes 2 positional arguments but 3 were given
```

# A note on Python and functions

- Similarities between Python and other languages:
  - functions are widely supported (sometimes called methods and procedures)
  - scoping rules is present in many languages (but details differ)
- Python specific (but nice):
  - how to handle global, local and nonlocal variables
  - keyword arguments
  - \*, \*\*

# Recursion


- symbol table
- stack frames

# Recursion

Recursive function

=

"function that calls itself"

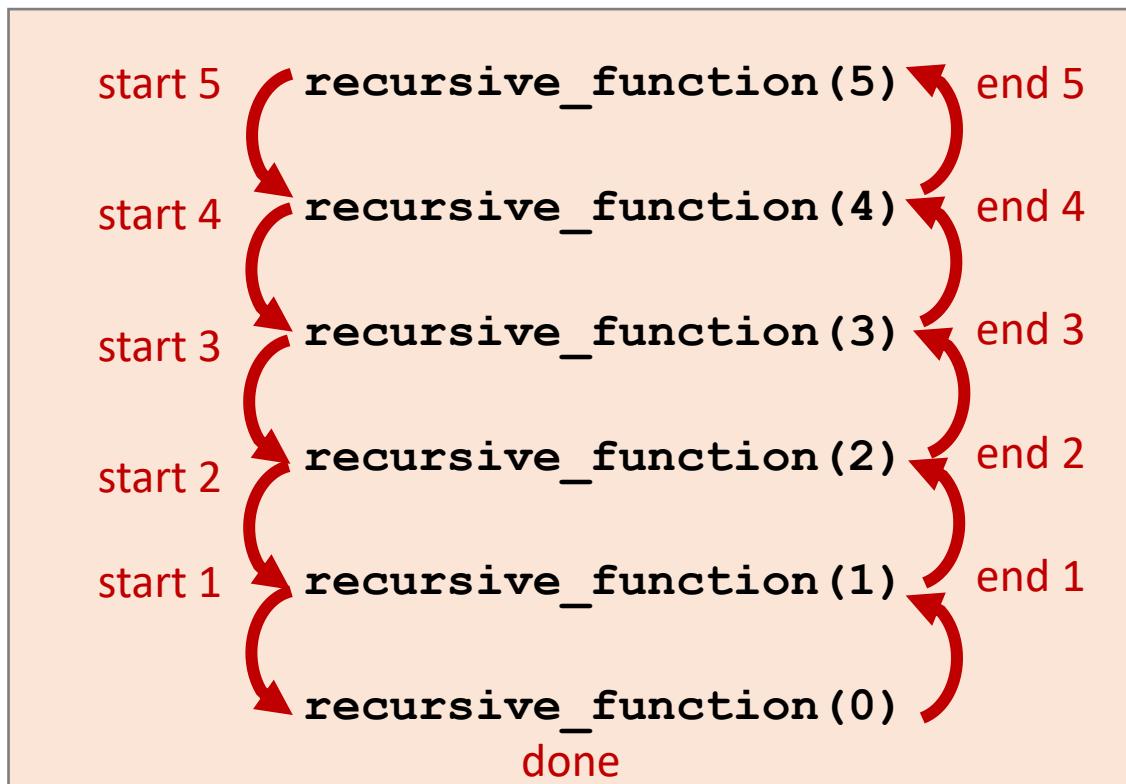


Python shell

```
> def recursive_function(x):
 if x > 0:
 print("start", x)
 recursive_function(x - 1)
 print("end", x)
 else:
 print("done")
```

```
> recursive_function(5)
```

```
| start 5
| start 4
| start 3
| start 2
| start 1
| done
| end 1
| end 2
| end 3
| end 4
| end 5
```

# Recursion

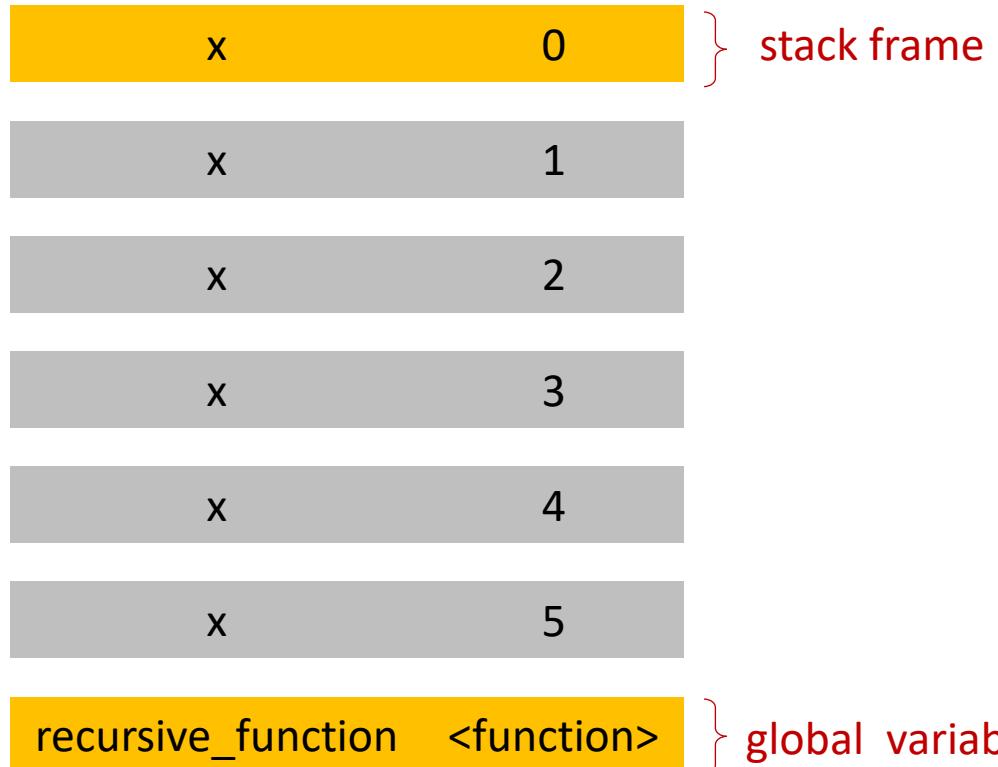

Recursions stack when  $x = 0$  is reached

## Python shell


```
> def recursive_function(x):
 if x > 0:
 print("start", x)
 recursive_function(x - 1)
 print("end", x)
 else:
 print("done")
```

```
> recursive_function(5)
| start 5
| start 4
| start 3
| start 2
| start 1
| done
| end 1
| end 2
| end 3
| end 4
| end 5
```

## Python shell

```
> def rec(x):
 if x > 0:
 print("start", x)
 rec(x - 1)
 rec(x - 1)
 print("end", x)
 else:
 print("done")
```

## Recursion tree

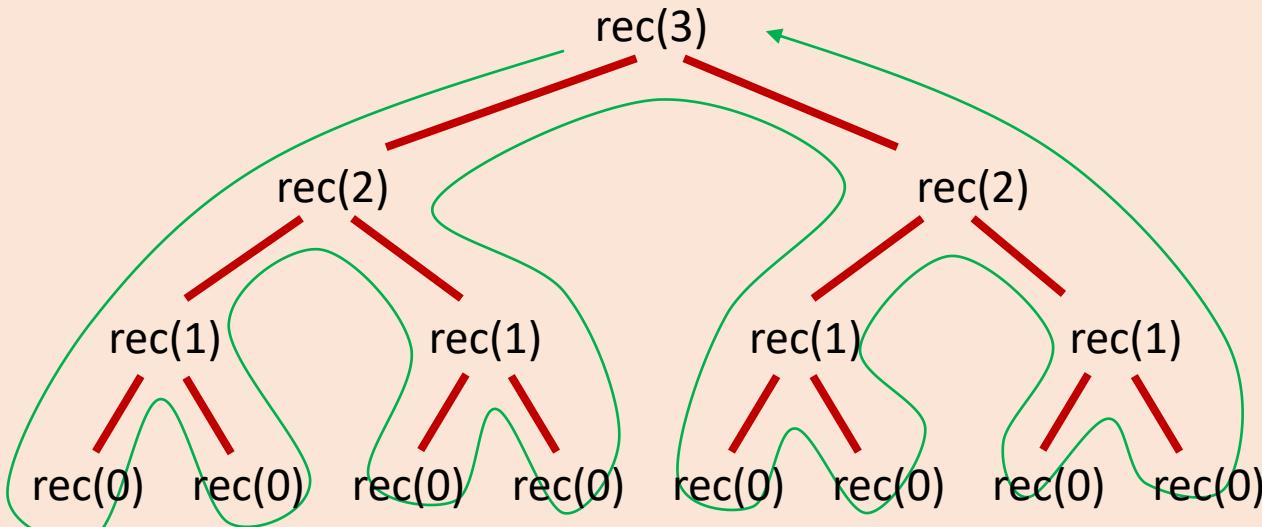

## Python shell

```
> rec(3)
| start 3
| start 2
| start 1
| done
| done
| end 1
| start 1
| done
| done
| end 1
| end 2
| start 2
| start 1
| done
| done
| end 1
| start 1
| done
| done
| end 1
| end 2
| end 3
```

# Question – How many times does `rec(5)` print “done”?

Python shell

```
> def rec(x):
 if x > 0:
 print("start", x)
 rec(x - 1)
 rec(x - 1)
 rec(x - 1)
 print("end", x)
 else:
 print("done")
```

- a) 3
- b) 5
- c) 15
- d) 81
- e) 125
- f)  $243 = 3^5$
- g) Don't know



# Factorial

$$n! = n \cdot \underbrace{(n-1) \cdot (n-2) \cdots 3 \cdot 2 \cdot 1}_{(n-1)!}$$

**Observation**  
(recursive definition)

$$\begin{aligned}1! &= 1 \\n! &= n \cdot (n-1)!\end{aligned}$$

**factorial.py**

```
def factorial(n):
 if n <= 1:
 return 1
 return n * factorial(n - 1)
```

**factorial.py**

```
def factorial(n):
 return n * factorial(n - 1) if n > 1 else 1
```

**factorial\_iterative.py**

```
def factorial(n):
 result = 1
 for i in range(2, n + 1):
 result *= i
 return result
```

# Binomial coefficient $\binom{n}{k}$

- $\binom{n}{k}$  = number of ways to pick k elements from a set of size n
- $$\binom{n}{k} = \begin{cases} 1 & \text{if } k = 0 \text{ or } k = n \\ \binom{n-1}{k} + \binom{n-1}{k-1} & \text{otherwise} \end{cases}$$

**binomial\_recursive.py**

```
def binomial(n, k):
 if k == 0 or k == n:
 return 1
 return binomial(n - 1, k) + binomial(n - 1, k - 1)
```

- Unfolding computation shows  $\binom{n}{k}$  1's are added → slow

# Tracing the recursion

- At beginning of function call, **print** arguments
- Before returning, **print** return value
- Keep track of recursion depth in a argument to print **indentation**

**binomial\_trace.py**

```
def binomial(n, k, indent=0):
 print(' ' * indent + f'binomial({n}, {k})')
 if k == 0 or k == n:
 result = 1
 else:
 result = binomial(n - 1, k, indent=indent + 1) + \
 binomial(n - 1, k - 1, indent=indent + 1)
 print(' ' * indent + f'return {result}')
 return result
```

Python shell

```
> binomial(4, 2)
binomial(4, 2)
 binomial(3, 2)
 binomial(2, 2)
 return 1
 binomial(2, 1)
 binomial(1, 1)
 return 1
 binomial(1, 0)
 return 1
 return 2
 return 3
binomial(3, 1)
 binomial(2, 1)
 binomial(1, 1)
 return 1
 binomial(1, 0)
 return 1
 return 2
 return 3
binomial(2, 0)
 return 1
 return 3
return 6
6
```

# Binomial coefficient $\binom{n}{k}$

Observation  $\binom{n}{k} = \frac{n !}{(n - k) ! \cdot k !}$

```
binomial_factorial.py
```

```
def binomial(n, k):
 return factorial(n) // factorial(k) // factorial(n - k)
```

- Unfolding computation shows  $2n - 2$  multiplications and 2 divisions → **fast**
- Intermediate value  $n !$  can have significantly more digits than result (**bad**)

# Binomial coefficient $\binom{n}{k}$

Observation 
$$\binom{n}{k} = \frac{n \cdot (n - 1) \cdot (n - 2) \cdots (n - k + 1)}{k \cdot (k - 1) \cdot (k - 2) \cdots 1} = \binom{n - 1}{k - 1} \cdot \frac{n}{k}$$

`binomial_recursive_product.py`

```
def binomial(n, k):
 if k == 0:
 return 1
 else:
 return binomial(n - 1, k - 1) * n // k
```

- Unfolding computation shows  $k$  multiplications and divisions → **fast**
- Multiplication with fractions  $\geq 1$  → intermediate numbers limited size

# Questions – Which correctly computes $\binom{n}{k}$ ?

Observation  $\binom{n}{k} = \frac{n \cdot (n - 1) \cdot (n - 2) \cdots (n - k + 1)}{k \cdot (k - 1) \cdot (k - 2) \cdots 1}$

- a) binomial\_A
-  b) binomial\_B
- c) both
- d) none
- e) Don't know

binomial\_iterative.py

```
def binomial_A(n, k):
 result = 1
 for i in range(k):
 result = result * (n - i) // (k - i)
 return result

def binomial_B(n, k):
 result = 1
 for i in range(k) [::-1]:
 result = result * (n - i) // (k - i)
 return result
```

Python shell

```
> binomial_A(5, 2)
| 8
> binomial_B(5, 2)
| 10
```


# Recursively print all leaves of a tree

- Assume a recursively nested tuple represents a tree with strings as leaves

Python shell

```
> def print_leaves(tree):
 if isinstance(tree, str):
 print("Leaf:", tree)
 else:
 for child in tree:
 print_leaves(child)

> print_leaves(('a', ('b', 'c')))
| Leaf: a
| Leaf: b
| Leaf: c
```

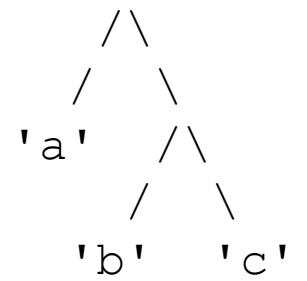


# Question – How many times is `print_leaves` function called in the example?

Python shell

```
> def print_leaves(tree):
 if isinstance(tree, str):
 print("Leaf:", tree)
 else:
 for child in tree:
 print_leaves(child)

> print_leaves([('a', ('b', 'c'))))
| Leaf: a
| Leaf: b
| Leaf: c
```



- a) 3
- b) 4
- c) 5
- d) 6
- e) Don't know

## Python shell

```
> def collect_leaves_wrong(tree, leaves = set()):
 if isinstance(tree, str):
 leaves.add(tree)
 else:
 for child in tree:
 collect_leaves_wrong(child, leaves)
return leaves

> def collect_leaves_right(tree, leaves = None):
 if leaves == None:
 leaves = set()
 if isinstance(tree, str):
 leaves.add(tree)
 else:
 for child in tree:
 collect_leaves_right(child, leaves)
return leaves
```



```
> collect_leaves_wrong(('a',('b','c')))
| {'a', 'c', 'b'}
> collect_leaves_wrong(('d',('e','f')))
| {'b', 'e', 'a', 'f', 'c', 'd'}

> collect_leaves_right(('a',('b','c')))
| {'b', 'a', 'c'}
> collect_leaves_right(('d',('e','f')))
| {'f', 'd', 'e'}
```

## Python shell

```
> def collect_leaves(tree):
 leaves = set()

 def traverse(tree):
 nonlocal leaves # can be omitted
 if isinstance(tree, str):
 leaves.add(tree)
 else:
 for child in tree:
 traverse(child)

 traverse(tree)
 return leaves

> collect_leaves([('a', ('b', 'c')))
| {'b', 'a', 'c'}
> collect_leaves([('d', ('e', 'f'))))
| {'f', 'd', 'e'}
```

# Maximum recursion depth ?

- Pythons maximum allowed recursion depth can be increased by


```
import sys
sys.setrecursionlimit(1500)
```

## Python shell


```
> def f(x):
 print("#", x)
 f(x + 1)

> f(1)
1
2
3
...
975
976
977
978
RecursionError: maximum
recursion depth exceeded
while pickling an object
```

# Koch Curves

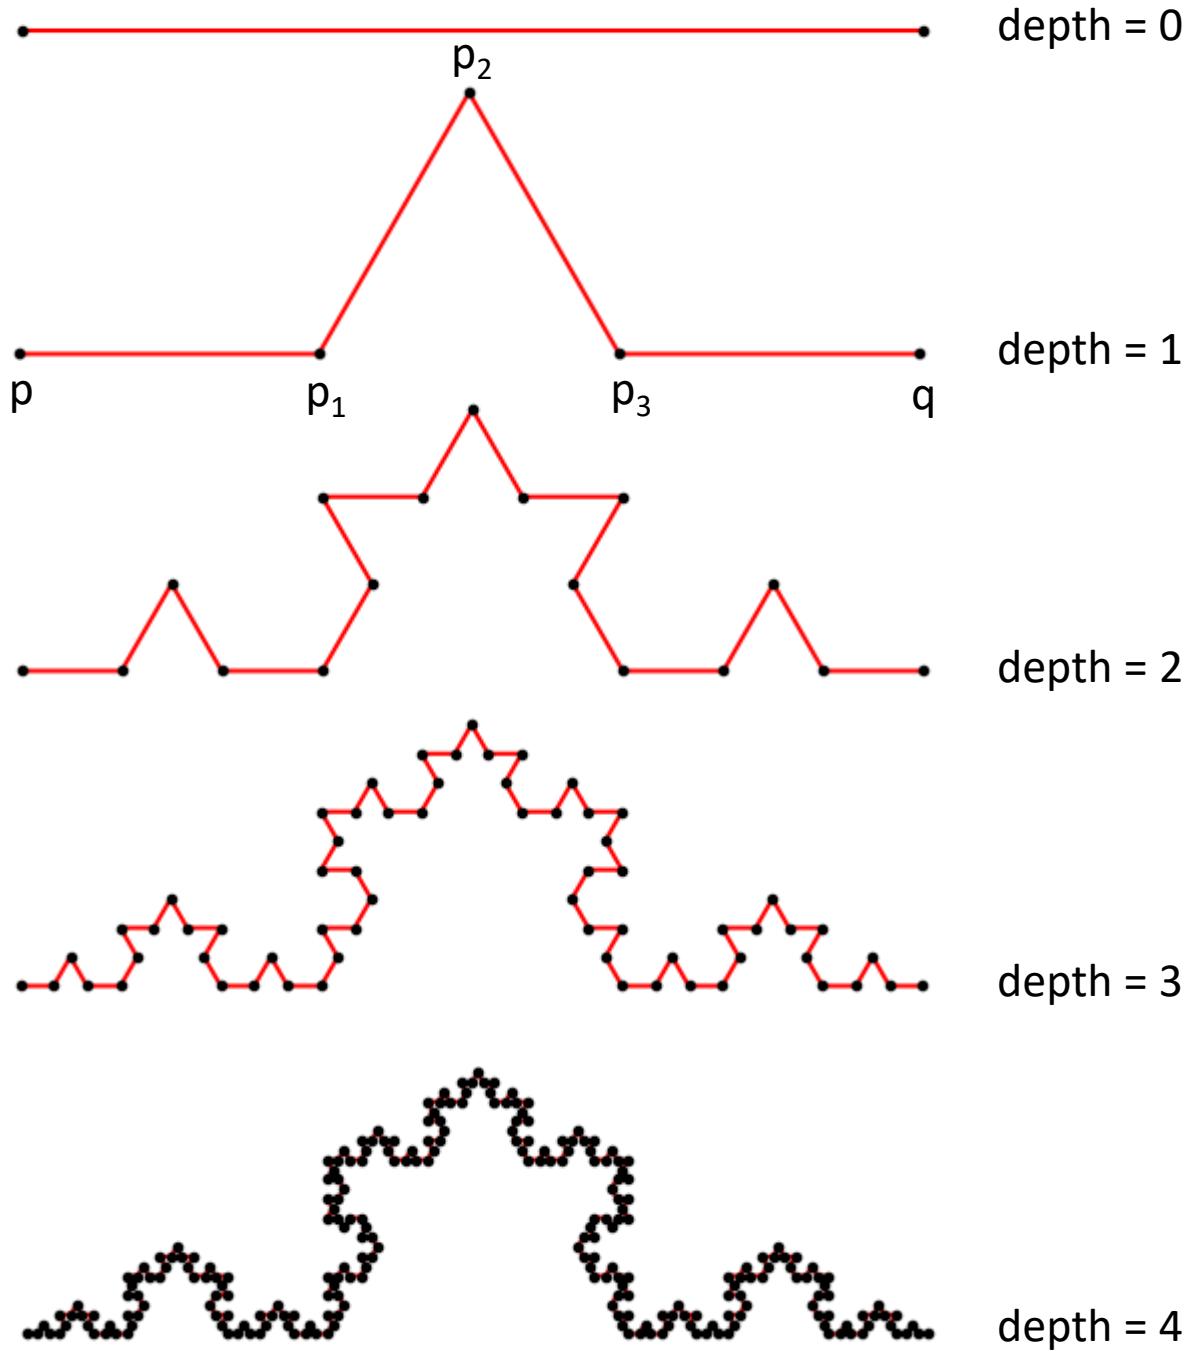

# Koch Curves

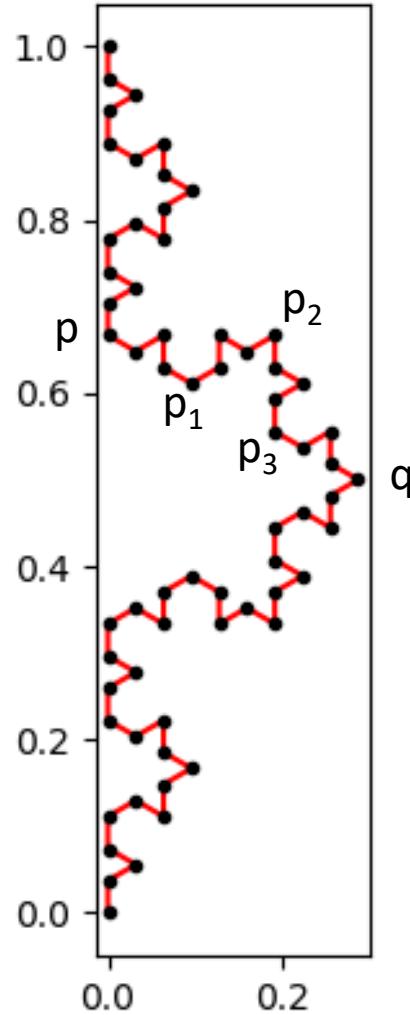

koch\_curve.py

```
import matplotlib.pyplot as plt
from math import sqrt


def koch(p, q, depth=3):
 if depth == 0:
 return [p, q]

 (px, py), (qx, qy) = p, q
 dx, dy = qx - px, qy - py
 h = 1 / sqrt(12)
 p1 = px + dx / 3, py + dy / 3
 p2 = px + dx / 2 - h * dy, py + dy / 2 + h * dx
 p3 = px + dx * 2 / 3, py + dy * 2 / 3
 return (koch(p, p1, depth - 1)[-1]
 + koch(p1, p2, depth - 1)[-1]
 + koch(p2, p3, depth - 1)[-1]
 + koch(p3, q, depth - 1))

points = koch((0, 1), (0, 0), depth=3)
X, Y = zip(*points)
plt.subplot(aspect='equal')
plt.plot(X, Y, 'r-')
plt.plot(X, Y, 'k.')
plt.show()
```

remove last point  
(equal to first point in  
next recursive call)

# Z-curves

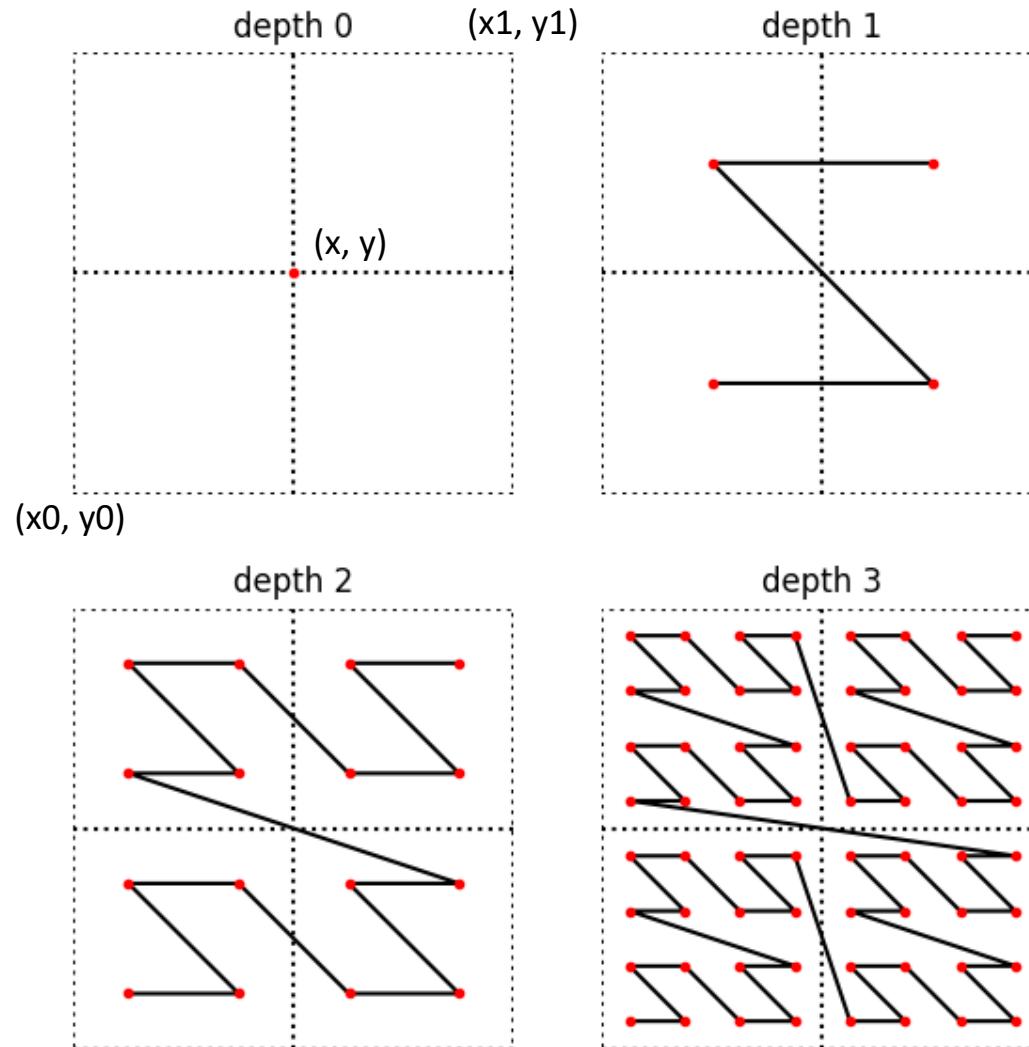

## z\_curve.py

```
import matplotlib.pyplot as plt

def z_curve(depth, x0=0, y0=0, x1=1, y1=1):
 x, y = (x0 + x1) / 2, (y0 + y1) / 2
 if depth == 0:
 return [(x, y)]
 return [
 *z_curve(depth - 1, x0, y0, x, y),
 *z_curve(depth - 1, x, y0, x1, y),
 *z_curve(depth - 1, x0, y, x, y1),
 *z_curve(depth - 1, x, y, x1, y1)
]

for depth in range(4):
 X, Y = zip(*z_curve(depth))
 plt.subplot(2, 2, 1 + depth, aspect='equal')
 plt.title(f'depth {depth}')
 plt.axis('off')
 plt.axis([0, 1, 0, 1])
 plt.plot(
 [0, 1, 1, 0, 0], [0, 0, 1, 1, 0], 'k:', # dash box
 [0.5, 0.5], [0, 1], 'k:', # dash vertical
 [0, 1], [0.5, 0.5], 'k:', # dash horizontal
 X, Y, 'k-', # Z-curve
 X, Y, 'r.', # Z-curve points
)
plt.show()
```

# Recursion and iteration

- algorithm examples

# Standard 52-card deck

|          | Ace | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Jack | Queen | King |
|----------|-----|---|---|---|---|---|---|---|---|----|------|-------|------|
| Clubs    |     |   |   |   |   |   |   |   |   |    |      |       |      |
| Diamonds |     |   |   |   |   |   |   |   |   |    |      |       |      |
| Hearts   |     |   |   |   |   |   |   |   |   |    |      |       |      |
| Spades   |     |   |   |   |   |   |   |   |   |    |      |       |      |


# Selection sort

## selection\_sort.py

```
def selection_sort(L):
 unsorted = L[:]
 result = []

 while unsorted:
 e = min(unsorted)
 unsorted.remove(e)
 result.append(e)


 return result
```

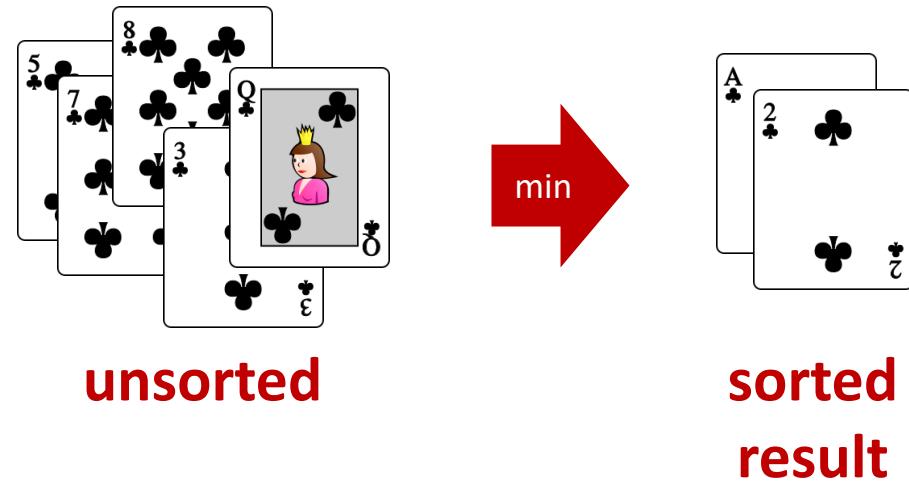

- `min` and `.remove` scan the remaining `unsorted` list for each element moved to `result`
- order  $|L|^2$  comparisons

# Sorting a pile of cards (Merge sort)


- If one card in pile, i.e. pile is sorted
- Otherwise
  - 1) Split pile into two piles, **left** and **right**, of approximately same size
  - 2) Sort **left** and **right** recursively (independently)
  - 3) Merge **left** and **right** (which are sorted)

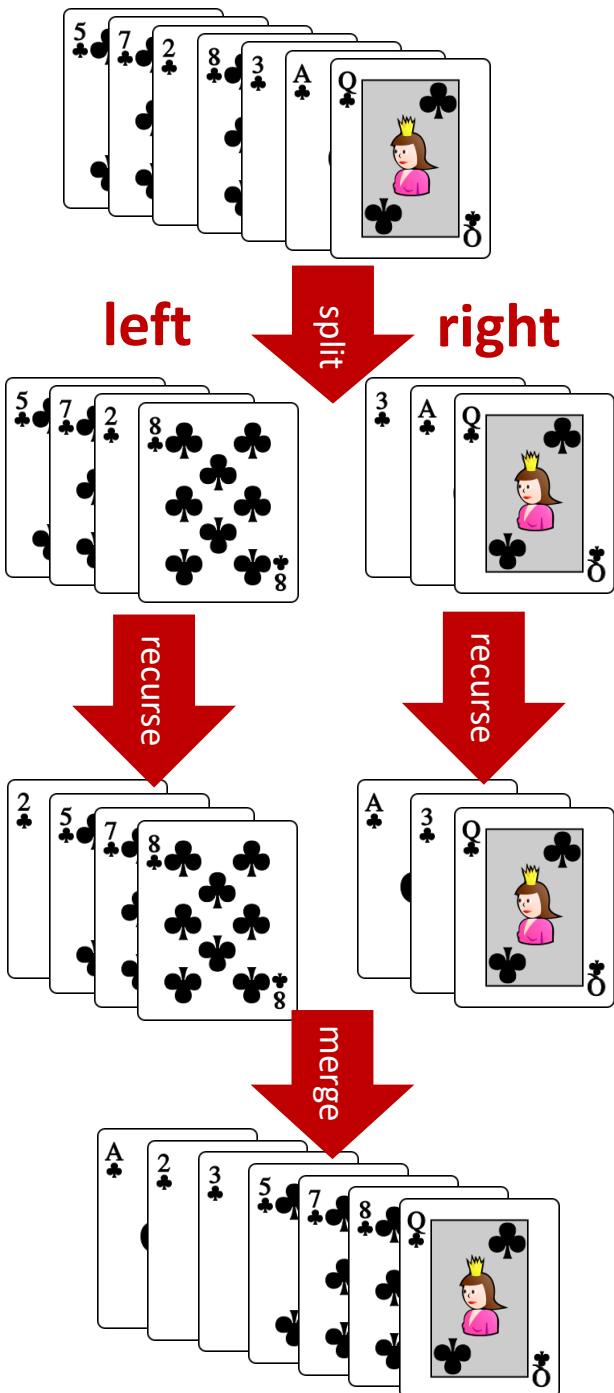

## merge\_sort.py

```
def merge_sort(L):
 n = len(L)
 if n <= 1:
 return L[:]
 mid = n // 2
 left, right = L[:mid], L[mid:]
 return merge(merge_sort(left), merge_sort(right))

def merge(A, B):
 n = len(A) + len(B)
 C = n * [None]
 a, b = 0, 0
 for c in range(n):
 if a < len(A) and (b == len(B) or A[a] < B[b]):
 C[c] = A[a]
 a = a + 1
 else:
 C[c] = B[b]
 b = b + 1
 return C
```

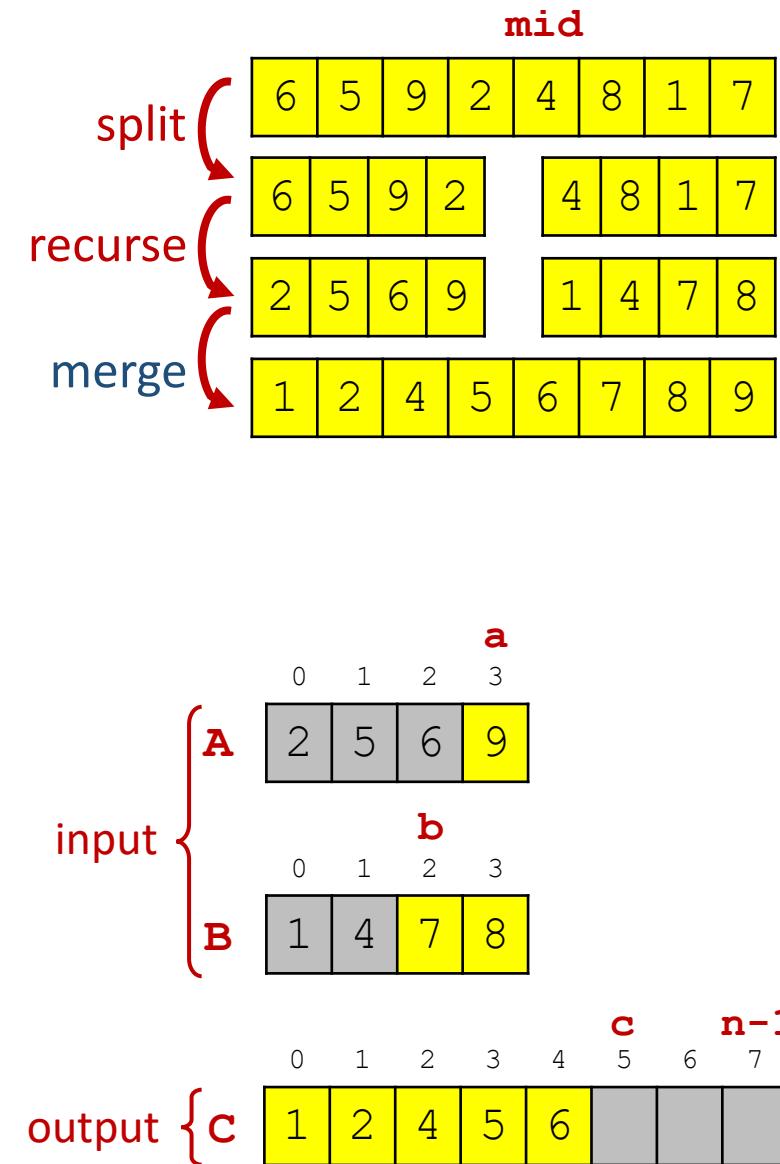

# Question – Depth of recursion for 52 elements

- a) 1
  - b) 2
  - c) 3
  - d) 4
  - e) 5
  - f) 6
  -  g) 7
  - h) 8
  - i) 9
  - j) 10
  - k) Don't know
- Max recursive subproblem size  
 $52 \rightarrow 26 \rightarrow 13 \rightarrow 7 \rightarrow 4 \rightarrow 2 \rightarrow 1$
- Depth 4 for 8 elements

|   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 6 | 5 | 9 | 2 | 4 | 8 | 1 | 7 |   |   |   |   |   |
| 6 | 5 | 9 | 2 |   | 4 | 8 | 1 | 7 |   |   |   |   |
| 6 | 5 |   | 9 | 2 |   | 4 | 8 |   | 1 | 7 |   |   |
| 6 |   | 5 |   | 9 | 2 |   | 4 | 8 |   | 1 | 7 |   |
|   | 6 |   | 5 |   | 9 | 2 |   | 4 | 8 |   | 1 | 7 |

# Question – Order of comparisons by Merge sort ?

- a)  $\sim n$
- b)  $\sim n\sqrt{n}$
-  c)  $\sim n \log_2 n$
- d)  $\sim n^2$
- e)  $\sim n^3$
- f) Don't know

merge\_sort.py

```
def merge_sort(L):
 n = len(L)
 if n <= 1:
 return L[:]
 else:
 mid = n // 2
 left, right = L[:mid], L[mid:]
 return merge(merge_sort(left), merge_sort(right))

def merge(A, B):
 n = len(A) + len(B)
 C = n * [None]
 a, b = 0, 0
 for c in range(n):
 if a < len(A) and (b == len(B) or A[a] < B[b]):
 C[c] = A[a]
 a = a + 1
 else:
 C[c] = B[b]
 b = b + 1
 return C
```

# Merge sort without recursion

- Start with piles of size one
- Repeatedly merge two smallest piles

`merge_sort.py`

```
def merge_sort_iterative(L):
 Q = [[x] for x in L]
 while len(Q) > 1:
 Q.insert(0, merge(Q.pop(), Q.pop()))
 return Q[0]

from collections import deque

def merge_sort_deque(L):
 Q = deque([[x] for x in L])
 while len(Q) > 1:
 Q.appendleft(merge(Q.pop(), Q.pop()))
 return Q[0]
```

⚠ insert at front of list inefficient

deques are a generalization of lists with efficient updates at both ends

`merge_sort_iterative([7,1,9,3,-2,5])`

**Values of Q in while-loop**

```
[[7], [1], [9], [3], [-2], [5]]
[[-2, 5], [7], [1], [9], [3]]
[[3, 9], [-2, 5], [7], [1]]
[[1, 7], [3, 9], [-2, 5]]
[[-2, 3, 5, 9], [1, 7]]
[[-2, 1, 3, 5, 7, 9]]
```

**Note:** Lists in Q appear in non-increasing length order, where longest  $\leq 2 \cdot$  shortest

# Question – Number of iterations of while-loop ?

merge\_sort\_iterative([7, 1, 9, 3, -2, 5])

- a) 1
- b) 2
- c) 3
- d) 4
-  e) 5
- f) 6
- g) 7
- h) Don't know

```
merge_sort.py
def merge_sort_iterative(L):
 Q = [[x] for x in L]
 while len(Q) > 1:
 Q.insert(0, merge(Q.pop(), Q.pop()))
 return Q[0]
```

# Quicksort (randomized)

quicksort.py


```
import random

def quicksort(L):
 if len(L) <= 1:
 return L[:]

 idx = random.randint(0, len(L) - 1)
 pivot = L[idx]
 other = L[:idx] + L[idx + 1:]

 small = [e for e in other if e < pivot]
 large = [e for e in other if e >= pivot]

 return quicksort(small) + [pivot] + quicksort(large)
```

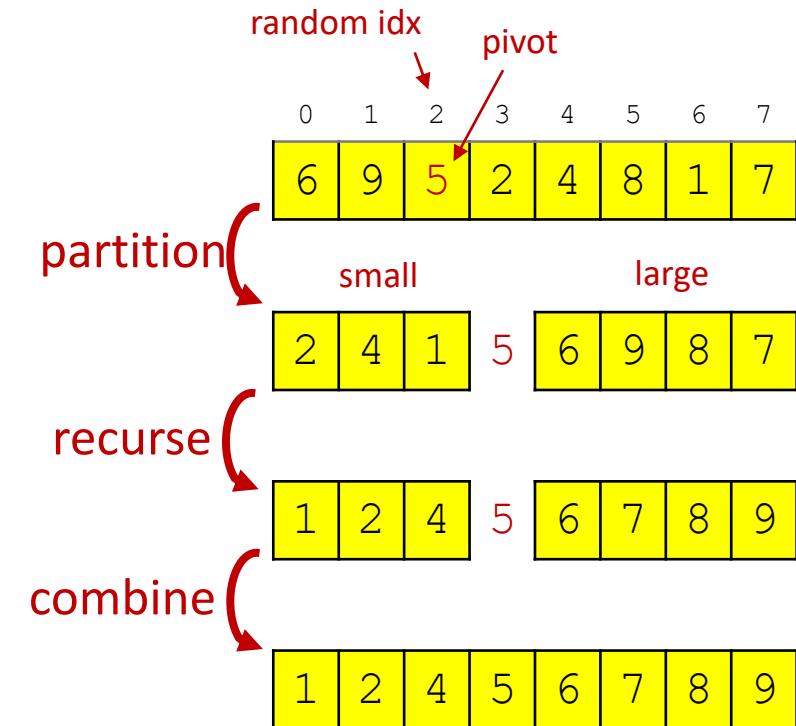

order  $|L| \cdot \log_2 |L|$  comparisons, expected


# Sorting comparison (single run)

tuned merge-sort (Tim-sort)  
implementation in C



| $ L $    | Selection sort | Merge sort Recursive | Merge sort Iterative | Merge sort Deque | Quicksort | sorted (Python builtin) |
|----------|----------------|----------------------|----------------------|------------------|-----------|-------------------------|
| $2^{10}$ | 0.006          | 0.002                | 0.003                | 0.002            | 0.002     | 0.00004                 |
| $2^{11}$ | 0.02           | 0.004                | 0.006                | 0.000            | 0.003     | 0.0001                  |
| $2^{12}$ | 0.09           | 0.008                | 0.01                 | 0.008            | 0.007     | 0.0003                  |
| $2^{13}$ | 0.37           | 0.02                 | 0.04                 | 0.03             | 0.02      | 0.0007                  |
| $2^{14}$ | 1.50           | 0.04                 | 0.10                 | 0.06             | 0.03      | 0.002                   |
| $2^{15}$ | 6.19           | 0.08                 | 0.26                 | 0.13             | 0.07      | 0.003                   |
| $2^{16}$ | 25.67          | 0.18                 | 0.81                 | 0.26             | 0.14      | 0.008                   |
| $2^{17}$ | 104.20         | 0.38                 | 2.96                 | 0.61             | 0.29      | 0.02                    |
| $2^{18}$ |                | 0.81                 | 10.78                | 1.29             | 0.62      | 0.04                    |
| $2^{19}$ |                | 1.69                 | 41.71                | 2.58             | 1.48      | 0.09                    |
| $2^{20}$ |                | 3.65                 | 167.31               | 5.15             | 3.30      | 0.20                    |
| $2^{21}$ |                | 7.85                 |                      | 9.68             | 7.53      | 0.45                    |
| $2^{22}$ |                | 16.69                |                      | 19.09            | 17.6      | 1.00                    |


# Sorting comparison

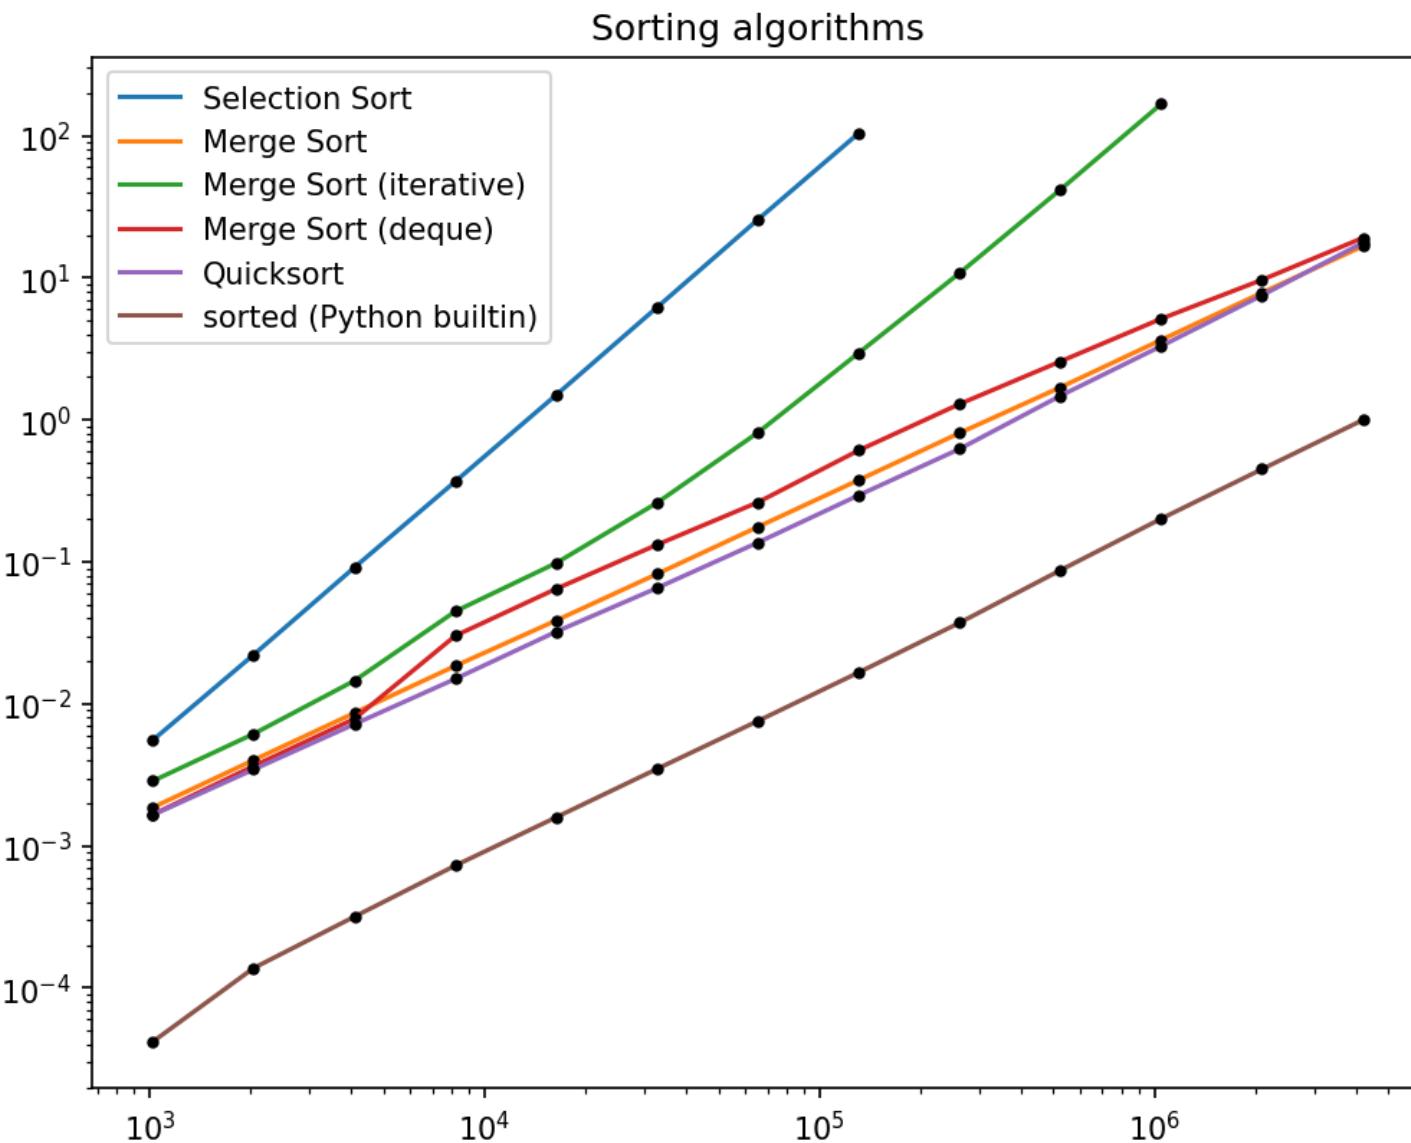

# Find zero

- Given a list L of integers starting with a negative and ending with a positive integer, and where  $|L[i+1] - L[i]| \leq 1$ , find the position of a zero in L.

$L = [-5, -4, -3, -3, -4, -3, -2, -1, 0, 1, 2, 1, 0, -1, -2, -1, 0, 1, 2, 3, 2]$

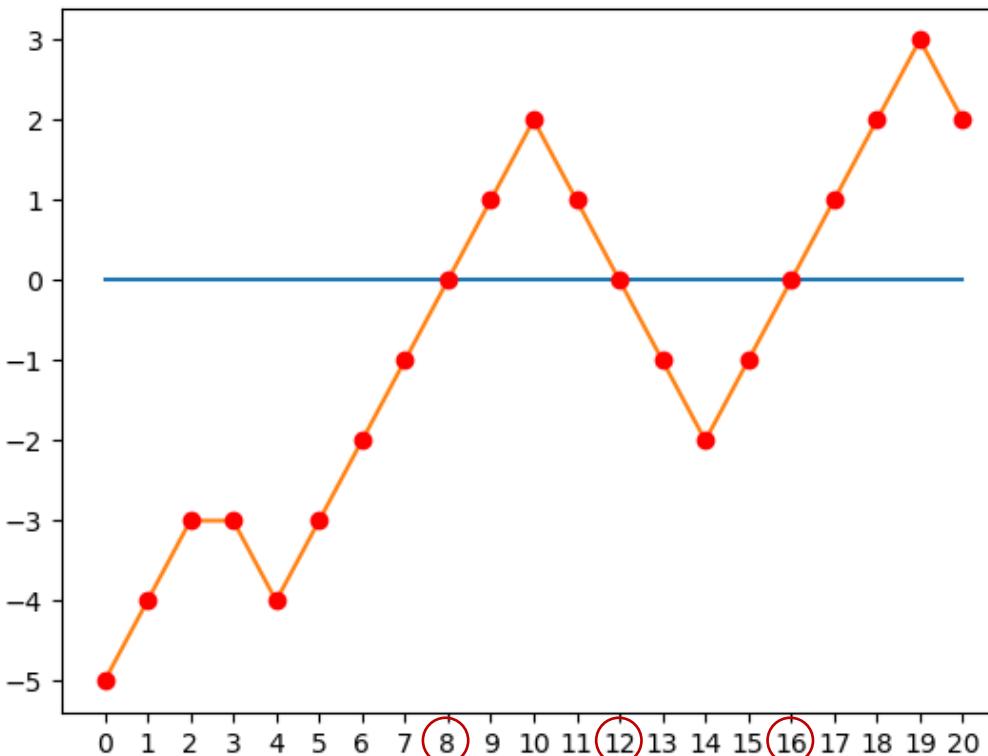


## find\_zero.py

```
def find_zero_loop(L):
 i = 0
 while L[i] != 0:
 i += 1
 return i

def find_zero_enumerate(L):
 for i, e in enumerate(L):
 if e == 0:
 return i

def find_zero_index(L):
 return L.index(0)
```

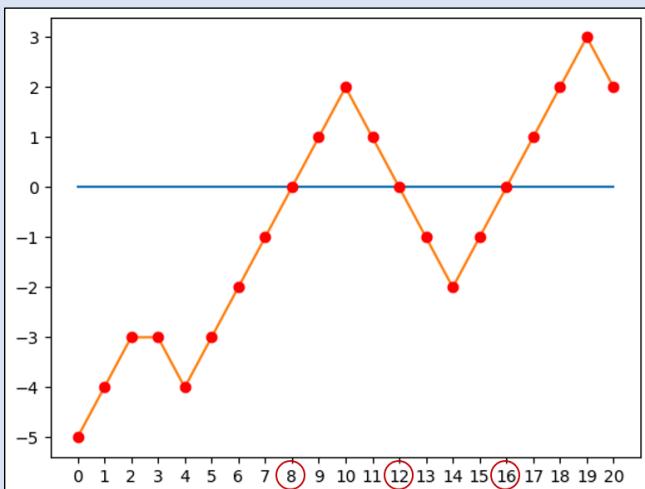

```
def find_zero_binary_search(L):
 low = 0
 high = len(L) - 1
 while True: # L[low] < 0 < L[high]
 mid = (low + high) // 2
 if L[mid] == 0:
 return mid
 elif L[mid] < 0:
 low = mid
 else:
 high = mid

def find_zero_recursive(L):
 def search(low, high):
 mid = (low + high) // 2
 if L[mid] == 0:
 return mid
 elif L[mid] < 0:
 return search(mid, high)
 else:
 return search(low, mid)
 return search(0, len(L) - 1)
```

## find\_zero.py

```
def find_zero_loop(L):
 i = 0
 while L[i] != 0:
 i += 1
 return i

def find_zero_enumerate(L):
 for i, e in enumerate(L):
 if e == 0:
 return i

def find_zero_index(L):
 return L.index(0)
```

| Function ( $ L  = 10^6$ ) | Time, sec |
|---------------------------|-----------|
| find_zero_loop            | 0.13      |
| find_zero_enumerate       | 0.10      |
| find_zero_index           | 0.015     |
| find_zero_binary_search   | 0.000015  |
| find_zero_recursive       | 0.000088  |

```
def find_zero_binary_search(L):
 low = 0
 high = len(L) - 1
 while True: # L[low] < 0 < L[high]
 mid = (low + high) // 2
 if L[mid] == 0:
 return mid
 elif L[mid] < 0:
 low = mid
 else:
 high = mid

def find_zero_recursive(L):
 def search(low, high):
 mid = (low + high) // 2
 if L[mid] == 0:
 return mid
 elif L[mid] < 0:
 return search(mid, high)
 else:
 return search(low, mid)
 return search(0, len(L) - 1)
```

# Greatest Common Divisor (GCD)

## Notation

$x \uparrow y$  denotes  $y$  is divisible by  $x$ , e.g.  $3 \uparrow 12$   
i.e.  $y = a \cdot x$  for some integer  $a$

$$\gcd(90, 24)$$

## Definition

$$\gcd(m, n) = \max \{ x \mid x \uparrow m \text{ and } x \uparrow n \}$$

## Fact

if  $x \uparrow y$  and  $x \uparrow z$  then  $x \uparrow(y + z)$  and  $x \uparrow(y - z)$

## Observation

(recursive definition)

$$\gcd(m, n) = \begin{cases} m & \text{if } m = n \\ \gcd(m, n - m) & \text{if } m < n \\ \gcd(m - n, n) & \text{if } m > n \end{cases}$$

| m  | n  |
|----|----|
| 90 | 24 |
| 66 | 24 |
| 42 | 24 |
| 18 | 24 |
| 18 | 6  |
| 12 | 6  |
| 6  | 6  |

# Greatest Common Divisor (GCD)

gcd\_slow.py

```
def gcd(m, n):
 while m != n:
 if n > m:
 n = n - m
 else:
 m = m - n
 return m
```

gcd.py

```
def gcd(m, n):
 while n != 0:
 m, n = n, m % n
 return m
```

gcd\_slow\_recursive.py

```
def gcd(m, n):
 if m == n:
 return m
 elif m > n:
 return gcd(m - n, n)
 else:
 return gcd(m, n - m)
```

gcd\_recursive.py

```
def gcd(m, n):
 if n == 0:
 return m
 else:
 return gcd(n, m % n)
```

gcd\_recursive\_one\_line.py

```
def gcd(m, n):
 return m if n == 0 else gcd(n, m % n)
```

# Permutations

- Generate a list L of all permutations of a tuple

Python shell

```
> permutations(('a', 'b', 'c'))
| [('a', 'b', 'c'), ('b', 'a', 'c'), ('b', 'c', 'a'),
| ('a', 'c', 'b'), ('c', 'a', 'b'), ('c', 'b', 'a')]
```

permutations.py

```
def permutations(L):
 if len(L) == 0:
 return [L[:]] # empty tuple (ensures same type as L)
 else:
 P = permutations(L[1:])
 return [p[:i] + L[:1] + p[i:] for p in P for i in range(len(L))]
```

- An implementation of permutations exists in the itertools module

# Maze solver

## Input

- First line #rows and #columns
- Following #rows lines contain strings containing #column characters
- There are exactly one 'A' and one 'B'
- '.' are free cells and '#' are blocked cells

## Output

- Print whether there is a path from 'A' to 'B' or not

## maze input

```
11 19
#####A#####
#.....#.#
#.###.###.#.
#...#.#. #. #
#.#.###.#.#.###.#
#.#.#. #. ...
#.####.####. #. #
#.#.#. #. ...
#.#. ####. #####. #. #
#.#.#. #. ...
#.....#.#. #
#####B## ##
```

# Maze solver (recursive)

maze\_solver.py

```
def explore(i, j):
 global solution, visited

 if (0 <= i < n and 0 <= j < m and
 maze[i][j] != "#" and not visited[i][j]):

 visited[i][j] = True

 if maze[i][j] == 'B':
 solution = True

 explore(i - 1, j)
 explore(i + 1, j)
 explore(i, j - 1)
 explore(i, j + 1)
```

maze input

```
11 19
#####A#####
#.....#.#####
#.###.###.##.#
#...#.####.#.#
#.##.##.##.##.
#.##.##.##.##.
#.##.##.##.##.
#.##.##.##.##.
#.##.##.##.##.
#.....#.#####
#####B#####

```

```
def find(symbol):
 for i, row in enumerate(maze):
 j = row.find(symbol)
 if j >= 0:
 return (i, j)

n, m = [int(x) for x in input().split()]
maze = [input() for i in range(n)]

solution = False
visited = [m * [False] for i in range(n)]

explore(*find('A'))

if solution:
 print("path from A to B exists")
else:
 print("no path")
```

# Maze solver (iterative)

maze\_solver\_iterative.py

```
def explore(i, j):
 global solution, visited

 Q = [(i, j)] # cells to visit

 while Q:
 i, j = Q.pop()
 if (0 <= i < n and 0 <= j < m and
 maze[i][j] != '#' and not visited[i][j]):

 visited[i][j] = True

 if maze[i][j] == 'B':
 solution = True

 Q.append((i - 1, j))
 Q.append((i + 1, j))
 Q.append((i, j - 1))
 Q.append((i, j + 1))
```

```
def find(symbol):
 for i, row in enumerate(maze):
 j = row.find(symbol)
 if j >= 0:
 return (i, j)

n, m = [int(x) for x in input().split()]
maze = [input() for i in range(n)]

solution = False
visited = [m*[False] for i in range(n)]

explore(*find('A'))

if solution:
 print("path from A to B exists")
else:
 print("no path")
```

# Question – How difficult is the triplet project on a scale 1 – 10 ?

- a) 1 (I'm offended by how trivial the project was)
- b) 2 (very easy)
- c) 3 (a quite standard review exercise)
- d) 4 (not too complicated, got some known concepts repeated)
- e) 5 (good exercise to repeat standard programming techniques)
- f) 6 (had to use more advanced techniques in a familiar way)
- g) 7 (quite complicated, but manageable)
- h) 8 (very abstract exercise, using complicated language constructs)
- i) 9 (very complicated – barely manageable spending all my time)
- j) 10 (this is a research project – could be an MSc thesis/PhD project)
- k) 25 (this is wayyy too complicated for a university course)

# Functions as objects

- lambda
- higher-order functions
- map, filter, reduce

# Aliasing functions – both user defined and builtin

Python shell

```
> def square(x):
 return x * x
> square
| <function square at 0x0329A390>
> square(8)
| 64
> kvadrat = square
| kvadrat(5)
| 25
> kvadrat
| <function square at 0x0329A390>
> len
| <built-in function len>
> length = len
> length([1, 2, 3])
| 3
```

# Functions as values

square\_or\_double.py

```
def square(x):
 return x * x

def double(x):
 return 2 * x

while True:
 answer = input("square or double ? ")
 if answer == "square":
 f = square ←
 break
 if answer == "double":
 f = double ←
 break

 answer = input("numbers: ")
 L_in = [int(x) for x in answer.split()]
 L_out = [f(x) for x in L_in]
 print(L_out)
```

Python shell

```
| square or double ? square
| numbers: 3 6 7 9
| [9, 36, 49, 81]
|
| square or double ? double
| numbers: 2 3 4 7 9
| [4, 6, 8, 14, 18]
```

f will refer to one of the functions  
square and double refer to  
call the function f is referring to  
with argument x

# Functions as values and namespaces

`say.py`

```
def what_says(name):
 def say(message):
 print(name, "says:", message)
 return say

alice = what_says("Alice")
peter = what_says("Peter")

alice("Where is Peter?")
peter("I am here")
```

`Python shell`

```
| Alice says: Where is Peter?
| Peter says: I am here
```

- `what_says` is a function returning a function (`say`)
- Each call to `what_says` with a single string as its argument **creates a new `say` function** with the current `name` argument in its namespace
- In each call to a an instance of a `say` function, `name` refers to the string in the namespace when the function was created, and `message` is the string given as an argument in the call

# Question – What list is printed ?

```
def f(x):
 def g(y):
 nonlocal x
 x = x + 1
 return x + y
 return g
a = f(3)
b = f(6)
print([a(3), b(2), a(4)])
```

a) [7, 7, 10]  
b) [7, 9, 8]  
 c) [7, 9, 9]  
d) [7, 9, 12]  
e) [7, 10, 10]  
f) Don't know

# map

- `map(function, list)` applies the function to each element of the sequence list
- `map(function, list1, ..., listk)` requires function to take k arguments, and creates a sequence with the i'th element being `function(list1[i], ..., listk[i])`

## Python shell

```
> def square(x):
 return x * x

> list(map(square, [1,2,3,4,5]))
| [1, 4, 9, 16, 25]

> def triple_sum(x, y, z):
 return x + y + z

> list(map(triple_sum, [1,2,3], [4,5,6], [7,8,9]))
| [12, 15, 18]

> list(map(triple_sum, *zip(*[(1,4,7), (2,5,8), (3,6,9)])))
| [12, 15, 18]
```

# sorted

- A list  $L$  can be sorted using `sorted(L)`
- A user defined order on the elements can be defined by providing a function using the keyword argument `key`, that maps elements to values with some default ordering

## Python shell

```
> def length_square(p):
 x, y = p
 return x**2 + y**2 # no sqrt

> L = [(5, 3), (2, 5), (1, 9), (2, 2), (3, 4)]
> list(map(length_square, L))
| [34, 29, 82, 8, 25]
> sorted(L) # default lexicographical order
| [(1, 9), (2, 2), (2, 5), (3, 4), (5, 3)]
> sorted(L, key=length_square) # order by length
| [(2, 2), (3, 4), (2, 5), (5, 3), (1, 9)]
```

# Question – What list does sorted produce ?

```
sorted([2, 3, -1, 5, -4, 0, 8, -6], key=abs)
 key 2 3 1 5 4 0 8 6
```

- a) [-6, -4, -1, 0, 2, 3, 5, 8]
- b) [0, 2, 3, 5, 8, -1, -4, -6]
-  c) [0, -1, 2, 3, -4, 5, -6, 8]
- d) [8, 5, 3, 2, 0, -1, -4, -6]
- e) [0, 1, 2, 3, 4, 5, 6, 8]
- f) Don't know

## Python shell

```
> abs(7)
| 7
> abs(-42)
| 42
```

# filter

- `filter(function, list)` returns the subsequence of `list` where function evaluates to true
- Essentially the same as

```
[x for x in list if function(x)]
```

## Python shell

```
> def odd(x):
 return x % 2 == 1

> filter(odd, range(10))
| <filter object at 0x03970FD0>
> list(filter(odd, range(10)))
| [1, 3, 5, 7, 9]
```

# reduce (in module functools)

- Python's "reduce" function is in other languages often denoted "foldl"

$$\text{reduce}(f, [x_1, x_2, x_3, \dots, x_k]) = f(\dots f(f(x_1, x_2), x_3) \dots, x_k)$$

## Python shell

```
> from functools import reduce

> def power(x, y):
 return x ** y

> reduce(power, [2, 2, 2, 2, 2])
| 65536
```

# lambda (anonymous functions)

- If you need to define a *short* function, that *returns a value*, and the function is only *used once* in your program, then a lambda function might be appropriate:

```
lambda arguments: expression
```

- Creates a function with no name that takes zero or more arguments, and returns the value of the single expression

## Python shell

```
> f = lambda x, y : x + y
> f(2, 3)
|
| 5
> list(filter(lambda x: x % 2, range(10)))
|
| [1, 3, 5, 7, 9]
```

# History of lambda in programming languages

- lambda calculus invented by Alonzo Church in 1930s
- Lisp has had lambdas since 1958
- C++ got lambdas in C++11 in 2011
- Java first got lambdas in Java 8 in 2014
- Python has had lambdas since Version 1.0 in 1994

# Examples: sorted using lambda

## Python shell

```
> L = ['AHA' , 'Oasis' , 'ABBA' , 'Beatles' , 'AC/DC' , 'B. B. King' , 'Bangles' , 'Alan Parsons']

> # Sort by length, secondary after input position (default, known as stable)
> sorted(L, key=len)
| ['AHA' , 'ABBA' , 'Oasis' , 'AC/DC' , 'Beatles' , 'Bangles' , 'B. B. King' , 'Alan Parsons']

> # Sort by length, secondary alphabetically
> sorted(L, key=lambda s: (len(s), s))
| ['AHA' , 'ABBA' , 'AC/DC' , 'Oasis' , 'Bangles' , 'Beatles' , 'B. B. King' , 'Alan Parsons']

> # Sort by most 'a's, if equal by number of 'b's, etc.
> sorted(L, key=lambda s: sorted([a.lower() for a in s if a.isalpha()]))
| ['Alan Parsons' , 'ABBA' , 'AHA' , 'Beatles' , 'Bangles' , 'AC/DC' , 'Oasis' , 'B. B. King']

> sorted([a.lower() for a in 'AC/DC' if a.isalpha()])
| ['a' , 'c' , 'c' , 'd']
```

# min and max

- Similarly to sorted, the functions min and max take a keyword argument key, to map elements to values with some default ordering

## Python shell

```
> max(['w', 'xyz', 'abcd', 'uv'])
| 'xyz'
> max(['w', 'xyz', 'abcd', 'uv'], key=len)
| 'abcd'
> sorted([210, 13, 1010, 30, 27, 103], key=lambda x: str(x)[::-1])
| [1010, 210, 30, 103, 13, 27]
> min([210, 13, 1010, 30, 27, 103], key=lambda x: str(x)[::-1])
| 1010
```

# defaultdict (from module collections)

- An extension of the built-in dict that automatically initializes undefined items on access by calling a function (factory) to produce a default value to be inserted

defaultdict (*function to create default value, normal dict arguments*)

## Python shell

```
> scores = {'Mickey': [2, 3, 1], 'Goofy': [1, 0, 2]}
> scores['Gladstone'] # access to undefined key in a standard dictionary
| KeyError: 'Gladstone'

> from collections import defaultdict
> scores = defaultdict(lambda : [], {'Mickey': [2, 3, 1], 'Goofy': [1, 0, 2]})
> scores
| defaultdict(<function <lambda> at 0x0000026460F0BBE0>, {'Mickey': [2, 3, 1], 'Goofy': [1, 0, 2]})

> scores['Gladstone'] # calls lambda without arguments to initialize scores['Gladstone']
| []
> scores
| defaultdict(<function <lambda> at ...>, {'Mickey': [2, 3, 1], 'Goofy': [1, 0, 2], 'Gladstone': []})
> scores = defaultdict(list, Mickey=[2, 3, 1], Goofy=[1, 0, 2])
> scores['daisy'].append(7) # calls list() to initialize scores['daisy']
> scores
| defaultdict(<class 'list'>, {'Mickey': [2, 3, 1], 'Goofy': [1, 0, 2], 'daisy': [7]})
```

## polynomial.py

```
def linear_function(a, b):
 return lambda x: a * x + b

def degree_two_polynomial(a, b, c):
 def evaluate(x):
 return a * x**2 + b * x + c
 return evaluate

def polynomial(coefficients):
 return lambda x: sum([c * x**p for p, c in enumerate(coefficients)])

def combine(f, g):
 def evaluate(*args, **kwargs):
 return f(g(*args, **kwargs))
 return evaluate

f = linear_function(2, 3)
for x in [0, 1, 2]:
 print(f'f({x}) = {f(x)}')

p = degree_two_polynomial(1, 2, 3)
for x in [0, 1, 2]:
 print(f'p({x}) = {p(x)}')

print(f'{polynomial([3, 2, 1])(2) = }')

h = combine(abs, lambda x, y: x - y)
print(f'{h(3, 5) = }')
```

## Python shell

```
f(0) = 3
f(1) = 5
f(2) = 7
p(0) = 3
p(1) = 6
p(2) = 11
polynomial([3, 2, 1])(2) = 11
h(3, 5) = 2
```

# Question – What value is $h(1)$ ?

linear\_combine.py

```
def combine(f, g):
 def evaluate(*args, **kwargs):
 return f(g(*args, **kwargs))

 return evaluate

def linear_function(a, b):
 return lambda x: a * x + b


f = linear_function(2, 3)
g = linear_function(4, 5)

h = combine(f, g)

print(h(1))
```

- a) 5
- b) 9
- c) 16
-  d) 21
- e) 25
- f) Don't know

# Namespace example

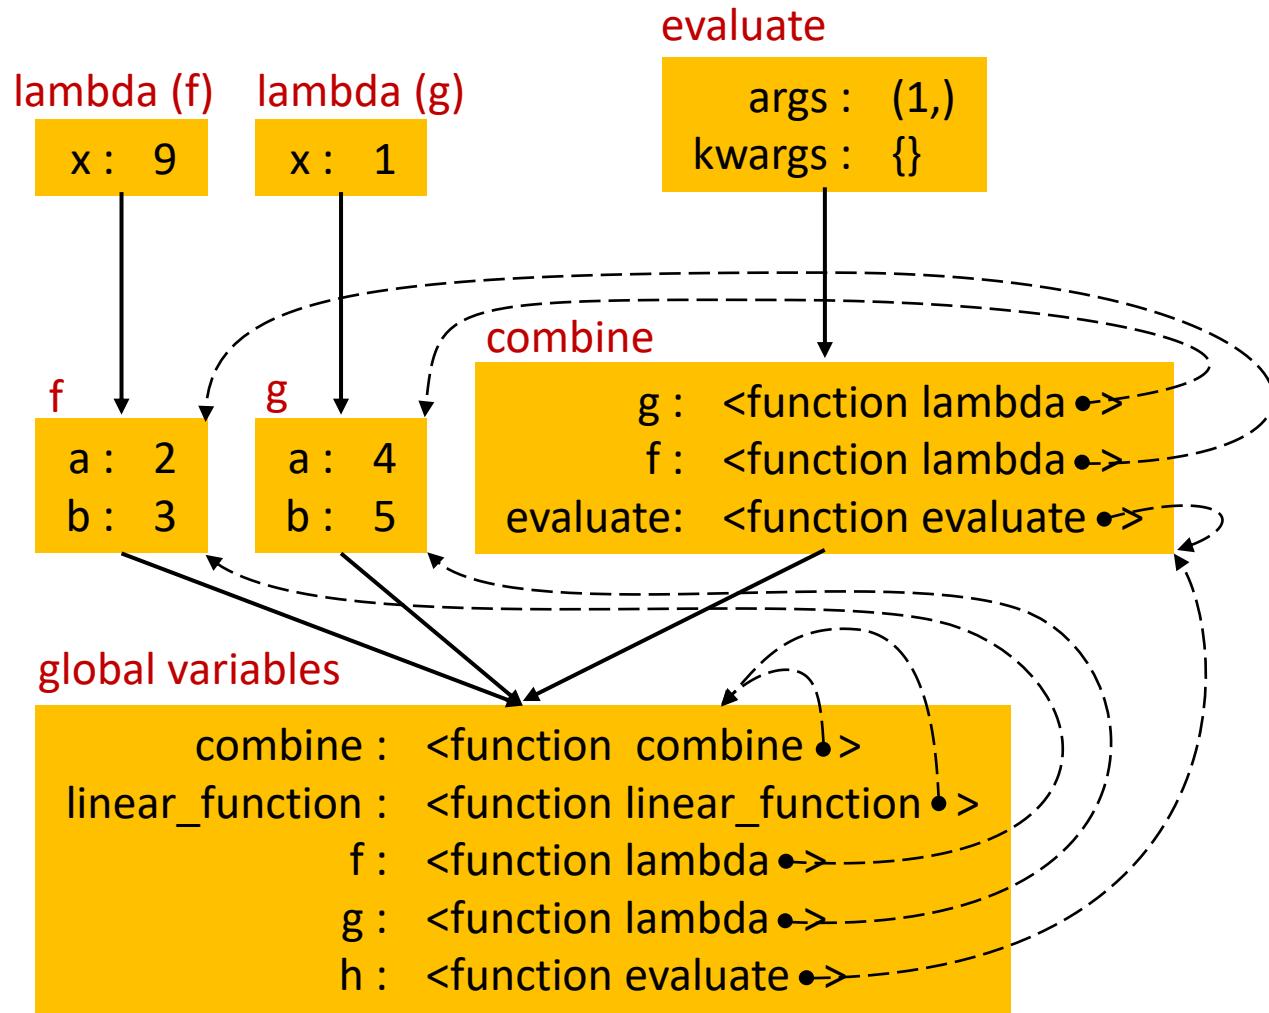

## linear\_combine.py

```
def combine(f, g):
 def evaluate(*args, **kwargs):
 return f(g(*args, **kwargs))

 return evaluate

def linear_function(a, b):
 return lambda x: a * x + b

f = linear_function(2, 3)
g = linear_function(4, 5)

h = combine(f, g)

print(h(1))
```

# partial (trace of computation)

partial\_trace.py

```
def partial(fn, *args):
 def new_f(*a):
 print(f'new_f: fn={fn.__name__}, args={args}, a={a} ')
 answer = fn(*args, *a)
 print(f'answer={answer}')
 return answer

 return new_f

def f(x, y, z):
 print(f'f({x},{y},{z})')
 return x + 2 * y + 3 * z

g = partial(f, 7)
h = partial(f, 2, 1)
k = partial(g, 1, 2)

print(f'{g(2, 1)=}\n') # 7 + 2 * 2 + 3 * 1 = 14
print(f'{h(3)=}\n') # 2 + 2 * 1 + 3 * 3 = 13
print(f'{k()=}\n') # 7 + 2 * 1 + 3 * 2 = 15
```

Python shell

```
new_f: fn=f, args=(7,), a=(2, 1)
f(7,2,1)
answer=14
g(2, 1)=14

new_f: fn=f, args=(2, 1), a=(3,))
f(2,1,3)
answer=13
h(3)=13

new_f: fn=new_f, args=(1, 2), a=()
new_f: fn=f, args=(7,), a=(1, 2))
f(7,1,2)
answer=15
answer=15
k ()=15
```

Python shell

```
> def f(x): return x
> g = lambda x: x
> f.__name__
| 'f'
> g.__name__
| '<lambda>'
```

# Object oriented programming

- classes, objects
- self
- construction
- encapsulation

# Object Oriented Programming

- **Programming paradigm**, other paradigms are e.g.
  - *functional programming* where the focus is on functions, lambda's and higher order functions, and
  - *imperative programming* focusing on sequences of statements changing the state of the program
- Core concepts are **objects**, **methods** and **classes**,
  - allowing one to construct *abstract data types*, i.e. user *defined types*
  - objects have states
  - methods manipulate objects, defining the interface of the object to the rest of the program
- OO supported by many programming languages, including Python

# Object Oriented Programming - History

## (selected programming languages)

**Mid 1960's** **Simula 67**

(Ole-Johan Dahl and Kristen Nygaard, Norsk Regnesentral Oslo)  
Introduced classes, objects, virtual procedures

**1970's** **Smalltalk** (Alan Kay, Dan Ingalls, Adele Goldberg, Xerox PARC)

Object-oriented programming, fully dynamic system  
(opposed to the static nature of Simula 67 )

**1985** **Eiffel** (Bertrand Meyer, Eiffel Software)

Focus on software quality, capturing the full software cycle


**1985** **C++** (Bjarne Stroustrup [MSc Aarhus 1975], AT&T Bell Labs)

**1995** **Java** (James Gosling, Sun)

**2000** **C#** (Anders Hejlsberg (studied at DTU) et al., Microsoft)

**1991** **Python** (Guido van Rossum)

Multi-paradigm programming language, fully dynamic system

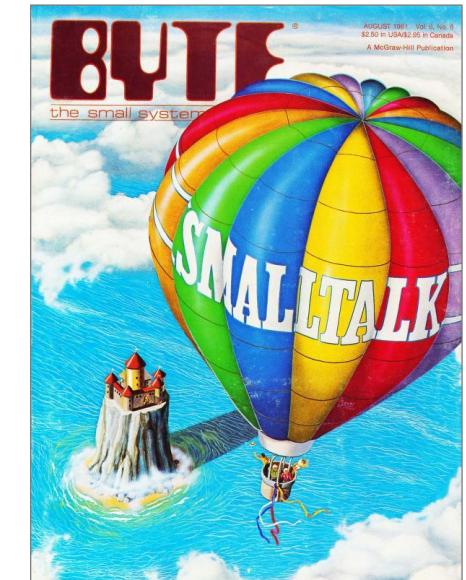


Byte Magazine,  
August 1981


**Note:** Java, C++, Python, C# are among Top 5 on TIOBE January 2023 index of popular languages (only non OO language among Top 5 was C)

# Design Patterns (not part of this course)


## *reoccurring patterns in software design*

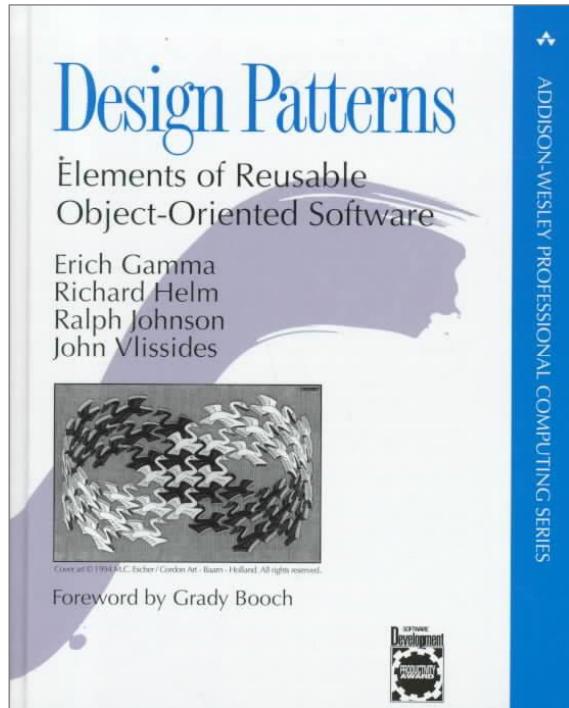


**The Classic book 1994**  
(C++ cookbook)

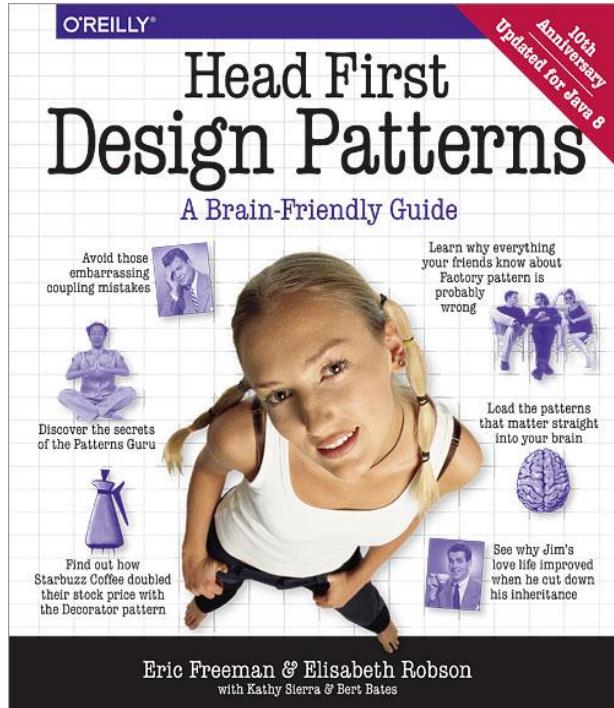


**A very alternative book 2004**  
(Java, very visual)

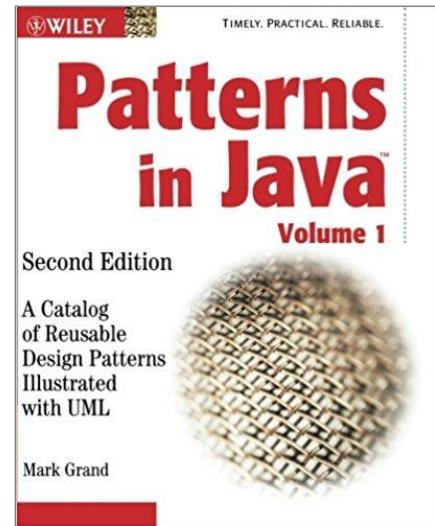

**Java cookbook 2003**

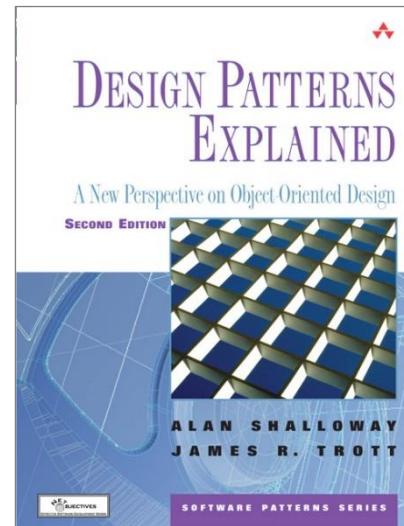

**Java textbook 2004**

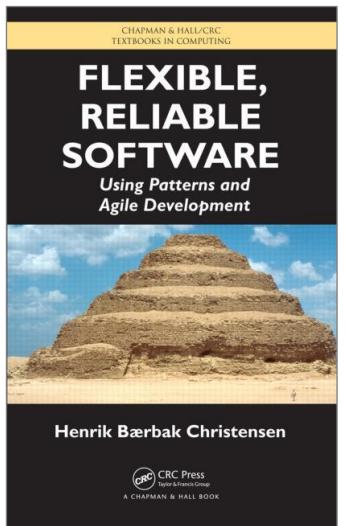

**Java textbook 2010**

...and many more books on the topic of Design Patterns, also with Python

# Some known classes, objects, and methods

| Type / class | Objects                    | Methods (examples)                  |
|--------------|----------------------------|-------------------------------------|
| int          | 0 -7 42 1234567            | .__add__(x), .__eq__(x), .__str__() |
| str          | "" 'abc' '12_a'            | .isdigit(), .lower(), .__len__()    |
| list         | [] [1,2,3] ['a', 'b', 'c'] | .append(x), .clear(), .__mul__(x)   |
| dict         | {'foo': 42, 'bar': 5}      | .keys(), .get(), .__getitem__(x)    |
| NoneType     | None                       | .__str__()                          |

## Example:


The function `str(obj)` calls the methods  
`obj.__str__()` or `obj.__repr__()`, if  
`obj.__str__` does not exist.

`print` calls `str`.

## Python shell

```
> 5 + 7 # + calls .__add__(7)
| 12
> (5).__add__(7) # eq. to 5 + 7
| 12
> (7).__eq__(7) # eq. to 7 == 7
| True
> 'aBCd'.lower()
| 'abcd'
> 'abcde'.__len__()
.__len__() called by len(...)
| 5
> ['x', 'y'].__mul__(2)
| ['x', 'y', 'x', 'y']
> {'foo': 42}.__getitem__('foo')
eq. to {'foo': 42}['foo']
| 42
> None.__str__() # used by str(...)
| 'None'
> 'abc'.__str__(), 'abc'.__repr__()
| ('abc', "'abc'")
```

# Classes and Objects

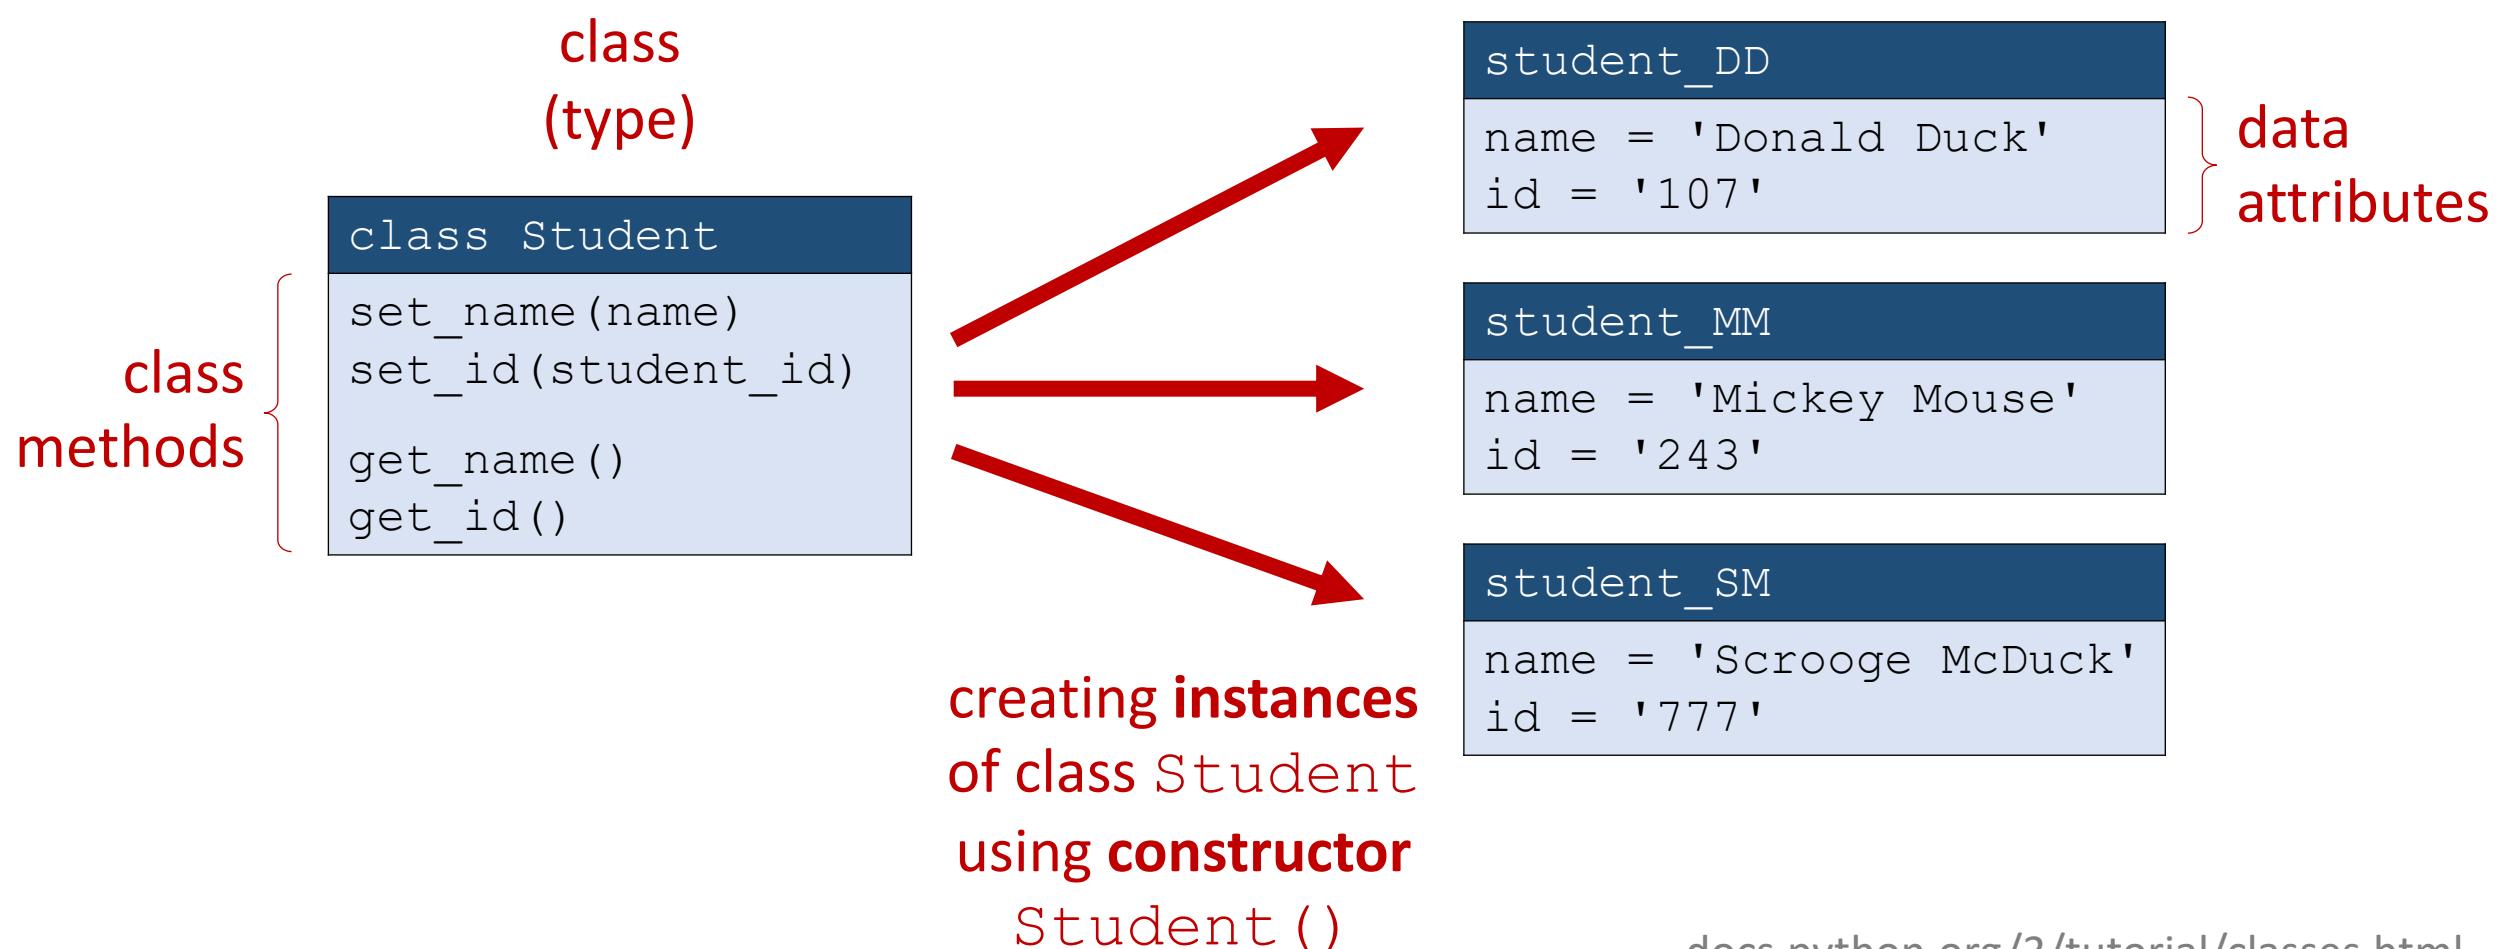

# Using the Student class

student.py

```
student_DD = Student()
student_MM = Student()
student_SM = Student()

student_DD.set_name('Donald Duck')
student_DD.set_id('107')

student_MM.set_name('Mickey Mouse')
student_MM.set_id('243')

student_SM.set_name('Scrooge McDuck')
student_SM.set_id('777')

students = [student_DD, student_MM, student_SM]

for student in students:
 print(student.get_name(),
 "has id",
 student.get_id())
```

Python shell

```
| Donald Duck has id 107
| Mickey Mouse has id 243
| Scrooge McDuck has id 777
```

Call **constructor** for class  
Student. Each call returns  
a new Student object.

Call class methods to set  
data attributes

Call class methods to read  
data attributes

# class Student

class definitions start with the keyword **class**

often called **mutator methods**, since they change the state of an object

often called **accessor methods**, since they only read the state of an object

class method definitions start with keyword **def** (like normal function definitions)

```
student.py
class Student:
 '''Documentation of class'''

 def set_name(self, name):
 self.name = name

 def set_id(self, student_id):
 self.id = student_id

 def get_name(self):
 return self.name

 def get_id(self):
 return self.id
```

name of class

docstring containing documentation for class

the first argument to all class methods is a reference to the object called upon, and by convention the first argument should be named **self**.

use **self.** to access an attribute of an object or class method (attribute reference)

**Note** In other OO programming languages the explicit reference to **self** is not required (in Java and C++ **self** is the keyword **this**)

# When are object attributes initialized ?

Python shell

```
> x = Student()
> x.set_name("Gladstone Gander")
> x.get_name()
| 'Gladstone Gander'
> x.get_id()
| !AttributeError: 'Student' object has no attribute 'id'
```



- Default behaviour of a class is that instances are created with no attributes defined, but has access to the attributes / methods of the class
- In the previous class `Student` both the `name` and `id` attributes were first created when set by `set_name` and `set_id`, respectively

# Class construction and `__init__`

- When an object is created using `class_name()` it's initializer method `__init__` is called.
- To initialize objects to contain default values, (re)define this function.

`student.py`

```
class Student:
 def __init__(self):
 self.name = None
 self.id = None

 ... previous method definitions ...
```

# Question – What is printed ?

Python shell

```
> class C:
 def __init__(self):
 self.v = 0
 def f(self):
 self.v = self.v + 1
 return self.v
> x = C()
> print(x.f() + x.f())
```

- a) 1
- b) 2
-  c) 3
- d) 4
- e) 5
- f) Don't know

# \_\_init\_\_ with arguments

- When creating objects using `class_name(args)` the initializer method is called as `__init__(args)`
- To initialize objects to contain default values, (re)define this function to do the appropriate initialization

**student.py**

```
class Student:
 def __init__(self, name=None, student_id=None):
 self.name = name
 self.id = student_id

 ... previous method definitions ...
```

**Python shell**

```
> p = Student("Pluto")
> print(p.get_name())
| Pluto
> print(p.get_id())
| None
```

# Are accessor and mutator methods necessary ?

No - but good programming style

## Python shell

```
> p = Pair(3, 5)
> p.sum()
| 8
> p.set_a(4)
> p.sum()
| 9
> p.a # access object attribute
| 4
> p.b = 0 # update object attribute
> p.sum()
| 9 # the_sum not updated
```



## pair.py

```
class Pair:
 """ invariant: the_sum = a + b """
 def __init__(self, a, b):
 self.a = a
 self.b = b
 self.the_sum = self.a + self.b
 def set_a(self, a):
 self.a = a
 self.the_sum = self.a + self.b
 def set_b(self, b):
 self.b = b
 self.the_sum = self.a + self.b
 def sum(self):
 return self.the_sum
```

constructor

mutator

accessor

# Defining order on instances of a class (sorting)

- To define an order on objects, define the “<” operator by defining `__lt__`
- When “<” is defined a list `L` of students can be sorted using `sorted(L)` and `L.sort()`

`student.py`

```
class Student:
 def __lt__(self, other):
 return self.id < other.id
```

... previous method definitions ...

`Python shell`

```
> student_DD < student_MM
| True
> [x.id for x in students]
| ['243', '107', '777']
> [x.id for x in sorted(students)]
| ['107', '243', '777']
```

# Converting objects to `str`

- To be able to convert an object to a string using `str(object)`, define the method `__str__`
- `__str__` is e.g. used by `print`

`Student_constructor.py`

```
class Student:
 def __str__(self):
 return ("Student('%s', '%s')"
 % (self.name, self.id))
```

... previous method definitions ...

`Python shell`

```
> print(student_DD) # without __str__
| <__main__.Student object at 0x03AB6B90>
> print(student_DD) # with __str__
| Student('Donald Duck', '107')
```

# Nothing is private in Python

- Python does not support **hiding information** inside objects
- Recommendation is to start attributes with underscore, if these should be used only locally inside a class, i.e. be considered "private"
- **PEP8:** "Use one leading underscore only for non-public methods and instance variables"

private\_attributes.py

```
class My_Class:
 def set_xy(self, x, y):
 self._x = x
 self._y = y

 def get_sum(self):
 return self._x + self._y

obj = My_Class()
obj.set_xy(3, 5)

print("Sum =", obj.get_sum())
print("_x =", obj._x)
```

Python shell

```
| Sum = 8
| _x = 3
```

# C++ private, public

## C++ vs Python

1. argument types
2. return types
3. void = NoneType
4. **private / public** access specifier
5. types of data attributes
6. data attributes must be defined in class
7. object creation
8. no self in class methods

### private\_attributes.cpp

```
#include <iostream>
using namespace std;

class My_Class {
private:④
 ⑤int x, y;⑥
public:④ ⑧① ①
 ②③void set_xy(int a, int b) {
 x = a;
 y = b
 };
 ② int get_sum() {
 return x + y;
 };
};

main() {
 ⑦ My_Class obj;
 obj.set_xy(3, 5);
 cout << "Sum = " << obj.get_sum() << endl;
 cout << "x = " << obj.x<< endl;
}
```



invalid reference

# Java private, public

## Java vs Python

1. argument types
2. return types
3. void = NoneType
4. **private / public** access specifier
5. types of data attributes
6. data attributes must be defined in class
7. object creation
8. no self in class methods

**private\_attributes.java**

```
class My_Class {
 ④ private int x, y; ⑥ ⑧ ①
 ④ public void set_xy(int a, int b) {
 x = a; y = b;
 } ② ⑧
 ④ public int get_sum() { return x + y; };
};

class private_attributes {
 public static void main(String args[]) {
 ⑦ My_Class obj = new My_Class();
 obj.set_xy(3, 5);
 System.out.println("Sum = " + obj.get_sum());
 System.out.println("x = " + obj.x);
 }
}
```

invalid reference 

# Name mangling (partial privacy)

- Python handles references to class attributes inside a class definition with *at least two leading underscores and at most one trailing underscore* in a special way:  
`_attribute` is textually replaced by  
`_classname__attribute`
- Note that [Guttag, p. 200] states "that attribute is not visible outside the class" – which only is partially correct (see example)


```
name_mangling.py
```

```
class MySecretBox:
 def __init__(self, secret):
 self.__secret = secret
```

```
Python shell
```

```
> x = MySecretBox(42)
> print(x.__secret)
| AttributeError: 'MySecretBox'
| object has no attribute
| '__secret'
> print(x._MySecretBox__secret)
| 42
```

# Class attributes

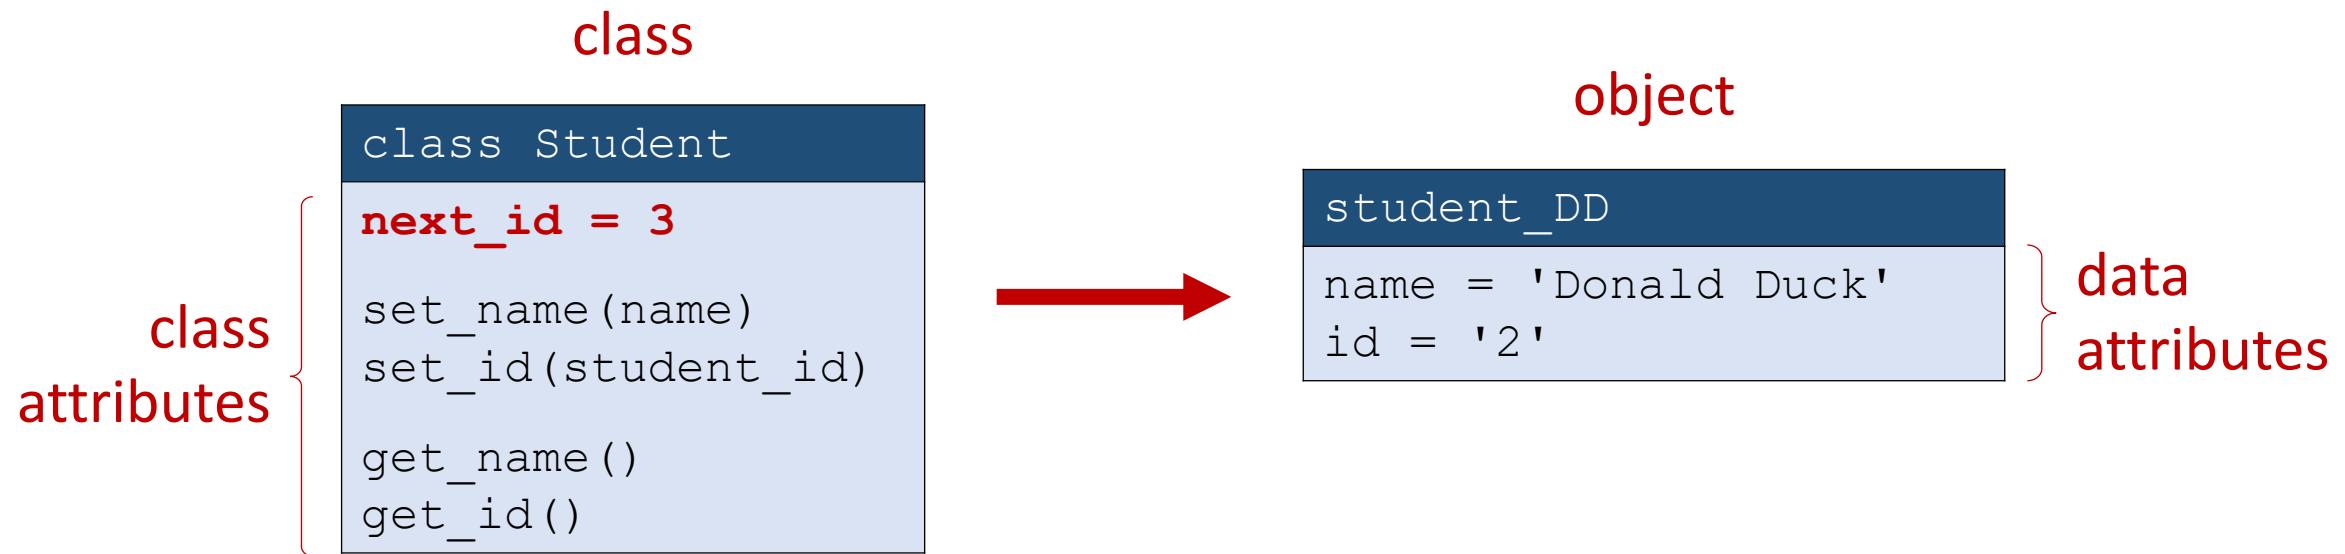

- `obj.attribute` first searches the objects attributes to find a match, if no match, continues to search the attributes of the class
- Assignments to `obj.attribute` are always to the objects attribute (possibly creating the attribute)
- Class attributes can be accessed directly as `class.attribute` (or `obj.__class__.attribute`)

# Class data attribute

- `next_id` is a class attribute
- Accessed using `Student.next_id`
- The lookup ① can be replaced with `self.next_id`, since only the class has this attribute, looking up in the object will be propagated to a lookup in the class attributes
- In the update ② it is crucial that we update the class attribute, since otherwise the incremented value will be assigned as an object attribute  
(What will the result be?)

## student\_auto\_id.py

```
class Student:
 next_id = 1 # class attribute
 def __init__(self, name):
 self.name = name
 self.id = str(Student.next_id) ①
 ② Student.next_id += 1
 def get_name(self):
 return self.name
 def get_id(self):
 return self.id

students = [Student('Scrooge McDuck'),
 Student('Donald Duck'),
 Student('Mickey Mouse')]

for student in students:
 print(student.get_name(),
 "has student id",
 student.get_id())
```

## Python shell

```
| Scrooge McDuck has student id 1
| Donald Duck has student id 2
| Mickey Mouse has student id 3
```

# Question – What does obj.get() return ?


Python shell

```
> class MyClass:
 x = 2


 def get(self):
 self.x = self.x + 1
 return MyClass.x + self.x

> obj = MyClass()
> print(obj.get())
| ?
```

- a) 4
-  b) 5
- c) 6
- d) UnboundLocalError
- e) Don't know

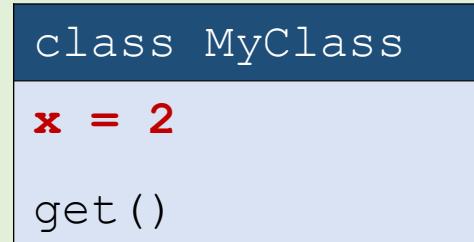

# Class data attribute example (in Python)

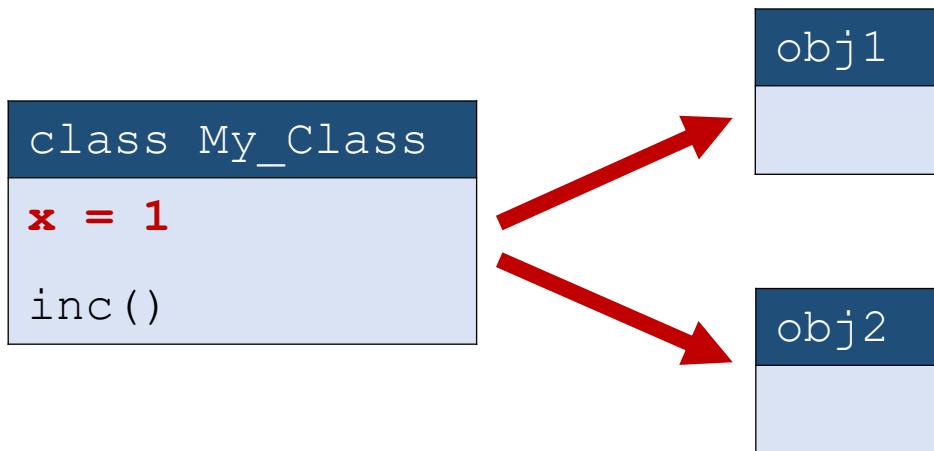

`class_attributes.py`

```
class My_Class:
 x = 1 # class attribute

 def inc(self):
 My_Class.x = self.x + 1

obj1 = My_Class()
obj2 = My_Class()
obj1.inc()
obj2.inc()

print(obj1.x, obj2.x)
```

`Python shell`

```
| 3 3
```

- Note that `My_Class.x` and `self.x` refer to the same class attribute (since `self.x` has never been assigned a value)


# \_\_dict\_\_, \_\_name\_\_ and \_\_class\_\_

## Python shell

```
> MM = Student('Mickey Mouse')
> MM.__dict__ # objects attributes
| {'name': 'Mickey Mouse', 'id': '1'}
> MM.__class__ # objects class (reference to object of type class)
| <class '__main__.Student'>
> Student.__name__ # class name (string)
| 'Student'
> Student.__dict__ # class attributes
| mappingproxy({
 '__module__': '__main__', # module where class defined
 'next_id': 2, # class data attribute
 '__init__': <function Student.__init__ at 0x000002831344CD30>, # class method
 'get_name': <function Student.get_name at 0x000002831344CE50>, # class method
 'get_id': <function Student.get_id at 0x000002831344CEE0>, # class method
 '__dict__': <attribute '__dict__' of 'Student' objects>, # attributes of class
 '__weakref__': <attribute '__weakref__' of 'Student' objects>, # (for garbage collecting)
 '__doc__': None # docstring
})
```

# Java static

- In Java *class attributes*, i.e. attribute values shared by all instances, are labeled **static**
- Python allows both class and instance attributes with the same name – in Java at most one of them can exist

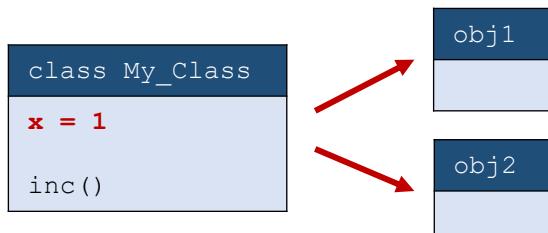

## static\_attributes.java

```
class My_Class {
 public static int x = 1;
 public void inc() { x += 1; }
}


class static_attributes {
 public static void main(String args[]) {
 My_Class obj1 = new My_Class();
 My_Class obj2 = new My_Class();
 obj1.inc();
 obj2.inc();
 System.out.println(obj1.x);
 System.out.println(obj2.x);
 }
}
```

## Java output

```
| 3
| 3
```

# C++ static

- In C++ *class attributes*, i.e. attribute values shared by all instances, are labeled **static**
- ISO C++ forbids in-class initialization of non-const static member
- Python allows both class and instance attributes with the same name – in C++ at most one of them can exist

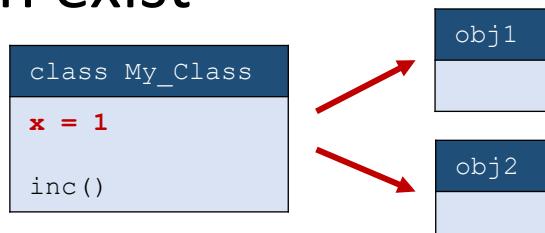

## static\_attributes.cpp

```
#include <iostream>
using namespace std;

class My_Class {
public:
 static int x; // "= 1" is not allowed
 void inc() { x += 1; }

};

int My_Class::x = 1; // class initialization

int main() {
 My_Class obj1;
 My_Class obj2;
 obj1.inc();
 obj2.inc();
 cout << obj1.x << endl;
 cout << obj2.x << endl;
}
```

## C++ output

```
| 3
| 3
```

# Constants

- A simple usage of class data attributes is to store a set of constants (but there is nothing preventing anyone to change these values)

```
Python shell
> class Color:
 RED = "ff0000"
 GREEN = "00ff00"
 BLUE = "0000ff"
> Color.RED
| 'ff0000'
```

# PEP8 Style Guide for Python Code (some quotes)

- Class names should normally use the **CapWords** convention.
- Always use **self** for the first argument to instance methods.
- Use one **leading underscore** only for **non-public** methods and **instance variables**.
- For **simple public data attributes**, it is best to expose just the attribute name, **without complicated accessor/mutator methods**.
- Always decide whether a class's methods and instance variables (collectively: "attributes") should be **public** or **non-public**. If in doubt, choose non-public; it's easier to make it public later than to make a public attribute non-public.

# Some methods many classes have

| Method                           | Description                                                                                                                                      |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>__eq__(self, other)</code> | Used to test if two elements are equal<br>Two elements where <code>__eq__</code> is true must have equal <code>__hash__</code>                   |
| <code>__str__(self)</code>       | Used by <code>str</code> and <code>print</code>                                                                                                  |
| <code>__repr__(self)</code>      | Used by <code>repr</code> , e.g. for printing to the IDE shell<br>(usually something that is a valid Python expression for <code>eval()</code> ) |
| <code>__len__(self)</code>       | Length (integer) of object, e.g. lists, strings, tuples, sets, dictionaries                                                                      |
| <code>__doc__(self)</code>       | The docstring of the class                                                                                                                       |
| <code>__hash__(self)</code>      | Returns hash value (integer) of object<br>Dictionary keys and set values must have a <code>__hash__</code> method                                |
| <code>__lt__(self, other)</code> | Comparison (less than, <) used by <code>sorted</code> and <code>sort()</code>                                                                    |
| <code>__init__(self, ...)</code> | Class initializer                                                                                                                                |

# Class hierarchies

- inheritance
- method overriding
- super
- multiple inheritance

# Calling methods of a class

- If an object  $obj$  of class  $C$  has a method  $method$ , then usually you call  $obj.method()$
- It is possible to call the method in the class directly using  $C.method$ , where the object is the first argument  
 $C.method(obj)$

x.py

```
class X:
 def set_x(self, x):
 self.x = x

 def get_x(self):
 return self.x

obj = X()

obj.set_x(42)

print("obj.get_x() =", obj.get_x())
print("obj.x =", obj.x)
print("X.get_x(obj) =", X.get_x(obj))
```

Python shell

```
| obj.get_x() = 42
| obj.x = 42
| X.get_x(obj) = 42
```

# Classes and Objects

```
class Person

set_name(name)
get_name()

set_address(address)
get_address()
```

```
class Student

set_name(name)
get_name()

set_address(address)
get_address()

set_id(student_id)
get_id()

set_grade(course, grade)
get_grades()
```

instance



**Observation:** students and employees are persons with additional attributes

```
Person object

name = 'Mickey Mouse'
address = 'Mouse Street 42, Duckburg'
```

instance



```
Student object

name = 'Donald Duck'
address = 'Duck Steet 13, Duckburg'
id = '1094'
grades = {'programming' : 'A' }
```

```
Employee object

name = 'Goofy'
address = 'Clumsy Road 7, Duckburg'
employer = 'Yarvard University'
```

# Classes and Objects

```
class Person

set_name(name)
get_name()

set_address(address)
get_address()
```

```
class Student

set_name(name) person
get_name() attributes

set_address(address)
get_address()

set_id(student_id)
get_id()

set_grade(course, grade)
get_grades()
```

**Goal** – avoid redefining the 4 methods below from person class again in student class

**person.py**

```
class Person:
 def set_name(self, name):
 self.name = name

 def get_name(self):
 return self.name

 def set_address(self, address):
 self.address = address

 def get_address(self):
 return self.address
```

# Classes inheritance

```
class Person
 set_name(name)
 get_name()

 set_address(address)
 get_address()
```

```
class Student
 set_name(name) person
 get_name() attributes

 set_address(address)
 get_address()

 set_id(student_id)
 get_id()

 set_grade(course, grade)
 get_grades()
```

class Student **inherits from** class Person  
class Person **is the base class** of Student

person.py

```
class Student(Person):
 def set_id(self, student_id):
 self.id = student_id

 def get_id(self):
 return self.id

 def set_grade(self, course, grade):
 self.grades[course] = grade

 def get_grades(self):
 return self.grades
```

# Classes constructors

```
class Person

set_name(name)
get_name()

set_address(address)
get_address()
```

```
class Student

set_name(name) person
get_name() attributes

set_address(address)
get_address()

set_id(student_id)
get_id()

set_grade(course, grade)
get_grades()
```

person.py

```
class Person:
 def __init__(self):
 self.name = None
 self.address = None

 ...
```

```
class Student(Person):
 def __init__(self):
 self.id = None
 self.grades = {}
 Person.__init__(self)

 ...
```

} constructor for  
Person class

} constructor for  
Student class

## Notes

- 1) If Student.\_\_init\_\_ is not defined, then Person.\_\_init\_\_ will be called
- 2) Student.\_\_init\_\_ must call Person.\_\_init\_\_ to initialize the name and address attributes

# super()

```
class Person

set_name(name)
get_name()

set_address(address)
get_address()
```

```
class Student

set_name(name) person
get_name() attributes

set_address(address)
get_address()

set_id(student_id)
get_id()

set_grade(course, grade)
get_grades()
```

## person.py

```
class Person:
 def __init__(self):
 self.name = None
 self.address = None

 ...
```

```
class Student(Person):
 def __init__(self):
 self.id = None
 self.grades = {}
 Person.__init__(self)
 super().__init__()

 ...
```

} alternative  
constructor

## Notes

- 1) Function `super()` searches for attributes in base class
- 2) `super` is often a keyword in other OO languages, like Java and C++
- 3) Note `super().__init__()` does not need `self` as argument

# Method search order

```
class Person

set_name(name)
get_name()

set_address(address)
get_address()
```

↑ parent class

```
class Student(Person)

set_id(student_id)
get_id()


set_grade(course, grade)
get_grades()
```

instance of

```
Student object

name = 'Donald Duck'
address = 'Duck Steet 13, Duckburg'
id = '1094'
grades = {'programming' : 'A' }
```

# Class hierarchy

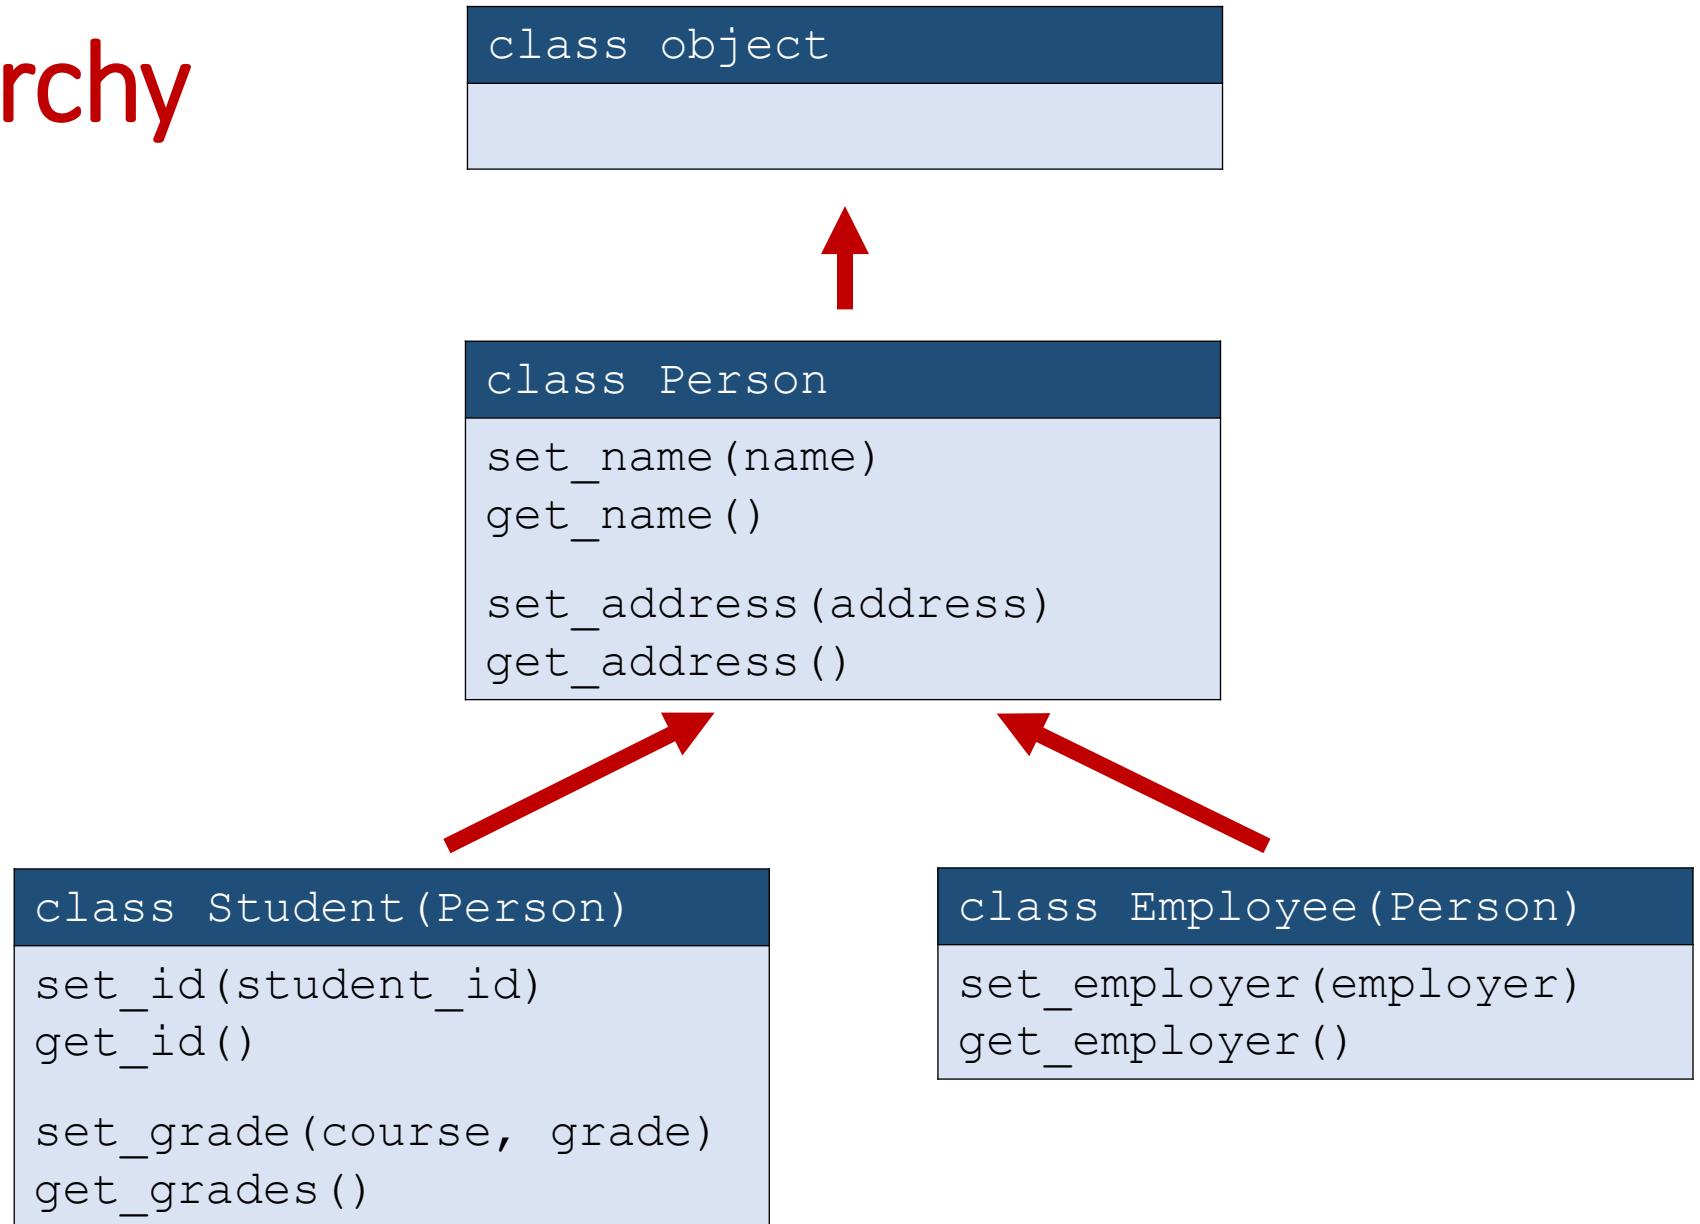

# Method overriding

overloading.py

```
class A:
 def say(self):
 print("A says hello")

class B(A): # B is a subclass of A
 def say(self):
 print("B says hello")
 super().say()
```

Python shell

```
> B().say()
| B says hello
| A says hello
```

In Java one can use the keyword "finally" to prevent any subclass to override a method

# Question – What does `b.f()` print ?

Python shell

```
> class A():
 def f(self):
 print("Af")
 self.g()
 def g(self):
 print("Ag")

> class B(A):
 def g(self):
 print("Bg")

> b = B()
> b.f()
| ?
```

- a) AttributeError
- b) Af Ag
-  c) Af Bg
- d) Don't know

# Undefind methods in superclass ?

Python shell

```
> class A():
 def f(self):
 print("Af")
 self.g()

 def g(self):
 print("Ag")

> class B(A):
 def g(self):
 print("Bg")

> b = B()
> b.f()
| Af
| Bg
> a = A()
> a.f()
| Af
| Ag
```

Python shell

```
> class A():
 def f(self):
 print("Af")
 self.g() ← method g undefined in class A;
 subclasses must implement g
 to be able to call f

> class B(A):
 def g(self):
 print("Bg") in Java, A would have been
 required to be declared an
 abstract class

> b = B()
> b.f()
| Af
| Bg
can create instance of A
> a = A() ← fails since g is not
> a.f() ← defined in class A
| Af
| AttributeError: 'A' object has no attribute 'g'
```

# Name mangling and inheritance



Python shell

```
> class A():
 def f(self):
 print("Af")
 self.__g()
 def __g(self):
 print("Ag")
> class B(A):
 def __g(self):
 print("Bg")
> b = B()
> b.f()
| Af
| Ag
```

- The call to `A.__g` in `A.f` forces a call to `__g` to stay within `A`
- Recall that due to name mangling, `__g` is accessible as `A._A__g`

# Multiple inheritance

- A class can inherit attributes from multiple classes (in example two)
- When calling a method defined in several ancestor classes, Python executes only one of the these (in the example `say_hello`)
- Which one is determined by the so called "C3 Method Resolution Order" (originating from the Dylan language)

## `multiple_inheritance.py`

```
class Alice:
 def say_hello(self):
 print("Alice says hello")
 def say_good_night(self):
 print("Alice says good night")

class Bob:
 def say_hello(self):
 print("Bob says hello")
 def say_good_morning(self):
 print("Bob says good morning")

class X(Alice, Bob): # Multiple inheritance
 def say(self):
 self.say_good_morning()
 self.say_hello() # C3 resolution
 Alice.say_hello(self) # from Alice
 Bob.say_hello(self) # from Bob
 self.say_good_night()
```

## Python shell

```
> X().say()
Bob says good morning
Alice says hello
Alice says hello
Bob says hello
Alice says good night
```

since Alice before Bob  
in list of super classes

# C3 Method resolution order

- Use `help(class)` to determine the resolution order for the class
- or access the `__mro__` attribute of the class

## Python shell

```
> X.__mro__
| (<class '__main__.X'>, <class '__main__.Alice'>,
| <class '__main__.Bob'>, <class 'object'>)
> help(X)
Help on class X in module __main__:
class X(Alice, Bob)
 | Method resolution order:
 | X
 | Alice
 | Bob
 | builtins.object
 | Methods defined here:
 | say(self)
 |
 | -----
 |
 | Methods inherited from Alice:
 | say_good_night(self)
 | say_hello(self)
 |
 | ...
 |
 | -----
 |
 | Methods inherited from Bob:
 | say_good_morning(self)
```

# Question – Who says hello ? Bob says good morning

inheritance.py

```
class Alice:
 def say_hello(self):
 print("Alice says hello")

class Bob:
 def say_hello(self):
 print("Bob says hello")
 def say_good_morning(self):
 self.say_hello()
 print("Bob says good morning")

class X(Alice, Bob): # Multiple inheritance
 pass

X().say_good_morning()
```



- a) Alice
- b) Bob
- c) Dont' know

...example of code injection using multiple inheritance and where body of new class is empty

# Comparing objects and classes

- `id(obj)` returns a unique identifier for an object (in CPython the memory address)
- `obj1 is obj2` tests if `id(obj1) == id(obj2)`
- `type(obj)` and `obj.__class__` return the class of an object
- `isinstance(object, class)` checks if an object is of a particular class, or a *derived subclass*
- `issubclass(class1, class2)` checks if `class1` is a subclass of `class2`

# is is not for integers, strings, ... and is is not ==

## Python shell

```
> 500 + 500 is 1000
| True
> x = 500
> x + x is 1000
| False
> x + x == 1000 # int.__eq__(...)
| True
> for x in range(0, 1000):
 if x - 1 + 1 is not x:
 print(x)
 break
| 257
> for x in range(0, -1000, -1):
 if x + 1 - 1 is not x:
 print(x)
 break
```



## Python shell

```
> "abc" is "abc"
| True
> "abc" is "xabc"[1:]
| False
> x, y = "abc", "xabc"[1:]
> x, y
| ('abc', 'abc')
> x is y
| False
> x == y # x.__eq__(y)
| True
```



- Only use `is` on objects !
- Even though `isinstance(42, object)` and `isinstance("abc", object)` are true, do not use `is` on integers and strings !

# Comparison of OO in Python, Java and C++

- private, public, .... – in Python everything in an object is public
- class inheritance – core concept in OO programming
  - Python and C++ support multiple inheritance
  - Java only allows single inheritance, but Java “interfaces” allow for something like multiple inheritance
- Python and C++ allow overloading standard operators (+, \*, ...). In Java it is not possible
- Overloading methods
  - Python extremely dynamic (hard to say anything about the behaviour of a program in general)
  - Java and C++’s type systems allow several methods with same name in a class, where they are distinguished by the type of the arguments, whereas Python allows only one method that can have \* and \*\* arguments

# Python is really dynamic... (this is ugly – likely don't do this at home)

Python shell

```
> class Pair:
 def __init__(self, x, y):
 self._x = x
 self._y = y

> point = Pair(3, 5)
> print(point) # class Pair has no __str__ method, uses object.__str__
| <__main__.Pair object at 0x0000027571904B50>

> Pair.__str__ = lambda self: f'Pair({self._x}, {self._y})'
> print(point)
| Pair(3, 5)
```



dynamically add a method to an existing class (and all existing instances),  
e.g. technique used by the class decorator @functools.total\_ordering

# C++ example

- Multiple methods with identical name (`print`)
- The types distinguish the different methods

## printing.py

```
class MyClass:
 def print(self, value):
 if isinstance(value, int):
 print('An integer', value)
 elif isinstance(value, str):
 print('A string', value)

C = MyClass()
C.print(42)
C.print("abc")
```

## printing.cpp

```
#include <iostream>
using namespace std;

class MyClass {
public:
 void print(int x) {
 cout << "An integer " << x << endl;
 }

 void print(string s) {
 cout << "A string " << s << endl;
 }
};

main() {
 MyClass C;
 C.print(42);
 C.print("abc");
}
```

## Shell

```
| An integer 42
| A string abc
```

# Exceptions and file input/output

- try-raise-except-finally
- Exception
- control flow
- match - case
- file open/read/write
- sys.stdin, sys.stdout, sys.stderr

# Exceptions – Error handling and control flow

- **Exceptions** is a widespread technique to handle run-time **errors** / abnormal behaviour (e.g. in Python, Java, C++, JavaScript, C#)
- **Exceptions** can also be used as an **advanced control flow mechanism** (e.g. in Python, Java, JavaScript)
  - *Problem: How to perform a "break" in a recursive function ?*

# Built-in exceptions (class hierarchy)

```
BaseException
+-- SystemExit
+-- KeyboardInterrupt
+-- GeneratorExit
+-- Exception
 +-- StopIteration
 +-- StopAsyncIteration
 +-- ArithmeticError
 | +-- FloatingPointError
 | +-- OverflowError
 | +-- ZeroDivisionError
 +-- AssertionError
 +-- AttributeError
 +-- BufferError
 +-- EOFError
 +-- ImportError
 | +-- ModuleNotFoundError
 +-- LookupError
 | +-- IndexError
 | +-- KeyError
 +-- MemoryError
 +-- NameError
 | +-- UnboundLocalError
 +-- TypeError
 +-- ValueError
 | +-- UnicodeError
 +-- UnicodeDecodeError
 +-- UnicodeEncodeError
 +-- UnicodeTranslateError
```

```
+-- OSError
| +-- BlockingIOError
| +-- ChildProcessError
| +-- ConnectionError
| | +-- BrokenPipeError
| | +-- ConnectionAbortedError
| | +-- ConnectionRefusedError
| | +-- ConnectionResetError
| +-- FileExistsError
| +-- FileNotFoundError
| +-- InterruptedError
| +-- IsADirectoryError
| +-- NotADirectoryError
| +-- PermissionError
| +-- ProcessLookupError
| +-- TimeoutError
+-- ReferenceError
+-- RuntimeError
| +-- NotImplementedError
| +-- RecursionError
+-- SyntaxError
| +-- IndentationError
| | +-- TabError
+-- SystemError
+-- Warning
 +-- DeprecationWarning
 +-- PendingDeprecationWarning
 +-- RuntimeWarning
 +-- SyntaxWarning
 +-- UserWarning
 +-- FutureWarning
 +-- ImportWarning
 +-- UnicodeWarning
 +-- BytesWarning
 +-- ResourceWarning
```

# Typical built-in exceptions

and unhandled behaviour

## Python shell

```
> 7 / 0
| ZeroDivisionError: division by zero
> int('42x')
| ValueError: invalid literal for int() with base 10: '42x'
> x = y
| NameError: name 'y' is not defined
> L = list(range(1000000000))
| MemoryError
> 2.5 ** 1000
| OverflowError: (34, 'Result too large')
> t = (3, 4)
> t[0] = 7
| TypeError: 'tuple' object does not support item assignment
> t[3]
| IndexError: tuple index out of range
> t.x
| AttributeError: 'tuple' object has no attribute 'x'
> x = {}
> x['foo']
| KeyError: 'foo'
> def f(x): f(x + 1)
> f(0)
| RecursionError: maximum recursion depth exceeded
> def f(): x = x + 1
> f()
| UnboundLocalError: local variable 'x' referenced before assignment
```

# Catching exceptions – Fractions (I)

**fraction1.py**

```
while True:
 numerator = int(input('Numerator = '))
 denominator = int(input('Denominator = '))
 result = numerator / denominator
 print('%s / %s = %s' % (numerator, denominator, result))
```

**Python shell**

```
| Numerator = 10
| Denominator = 3
| 10 / 3 = 3.333333333333335
| Numerator = 20
| Denominator = 0
| ZeroDivisionError: division by zero
```

# Catching exceptions – Fractions (II)

`fraction2.py`

```
while True:
 numerator = int(input('Numerator = '))
 denominator = int(input('Denominator = '))
 try:
 result = numerator / denominator
 except ZeroDivisionError:
 print('cannot divide by zero')
 continue
 print('%s / %s = %s' % (numerator, denominator, result))
```

catch  
exception

`Python shell`

```
| Numerator = 10
| Denominator = 0
| cannot divide by zero
| Numerator = 20
| Denominator = 3
| 20 / 3 = 6.666666666666667
| Numerator = 42x
| ValueError: invalid literal for int() with base 10: '42x'
```

# Catching exceptions – Fractions (III)

**fraction3.py**

```
while True:
 try:
 numerator = int(input('Numerator = '))
 denominator = int(input('Denominator = '))
 except ValueError:
 print('input not a valid integer')
 continue
 try:
 result = numerator / denominator
 except ZeroDivisionError:
 print('cannot divide by zero')
 continue
 print('%s / %s = %s' % (numerator, denominator, result))
```

catch exception

catch exception

**Python shell**

```
| Numerator = 5
| Denominator = 2x
| input not a valid integer
| Numerator = 5
| Denominator = 2
| 5 / 2 = 2.5
```

## fraction3.py

```
while True:
 try:
 numerator = int(input('Numerator = '))
 denominator = int(input('Denominator = '))
 except ValueError:
 print('input not a valid integer')
 continue
 try:
 result = numerator / denominator
 print('%s / %s = %s' % (numerator, denominator, result))
 except ZeroDivisionError:
 print('cannot divide by zero')
```

# Python shell

# exception not caught

# Catching exceptions – Fractions (IV)

**fraction4.py**

```
while True:
 try:
 numerator = int(input('Numerator = '))
 denominator = int(input('Denominator = '))
 result = numerator / denominator
 print('%s / %s = %s' % (numerator, denominator, result))
 except ValueError:
 print('input not a valid integer')
 except ZeroDivisionError:
 print('cannot divide by zero')
```

catch  
exceptions

**Python shell**

```
| Numerator = 3
| Denominator = 0
| cannot divide by zero
| Numerator = 3x
| input not a valid integer
| Numerator = 4
| Denominator = 2
| 4 / 2 = 2.0
```

# Keyboard interrupt (Ctrl-c)

- throws **KeyboardInterrupt** exception

infinite-loop1.py

```
print('starting infinite loop')

x = 0
while True:
 x = x + 1

print('done (x = %s)' % x)
input('type enter to exit')
```

Python shell

```
starting infinite loop
Traceback (most recent call last):
 File 'infinite-loop1.py', line 4, in <module>
 x = x + 1
KeyboardInterrupt
```

infinite-loop2.py

```
print('starting infinite loop')

try:
 x = 0
 while True:
 x = x + 1
except KeyboardInterrupt:
 pass

print('done (x = %s)' % x)
input('type enter to exit')
```

Python shell

```
starting infinite loop
done (x = 23890363) # Ctrl-c
type enter to exit
```

# Keyboard interrupt (Ctrl-c)

- Be aware that you likely would like to leave the Ctrl-c generated **KeyboardInterrupt** exception unhandled, except when stated explicitly

read-int1.py

```
while True:
 try:
 x = int(input('An integer: '))
 break
 except ValueError: # only ValueError
 continue

print('The value is:', x)
```

Python shell

```
| An integer: Ctrl-c
| KeyboardInterrupt
```

read-int2.py

```
while True:
 try:
 x = int(input('An integer: '))
 break
 except: # all exceptions
 continue

print('The value is:', x)
```


Python shell

```
| An integer: Ctrl-c
| An integer: Ctrl-c
| An integer:
```

catches  
KeyboardInterrupt

- (left) KeyboardInterrupt is unhandled (right) it is handled (intentionally?)

# Exception class hierarchy

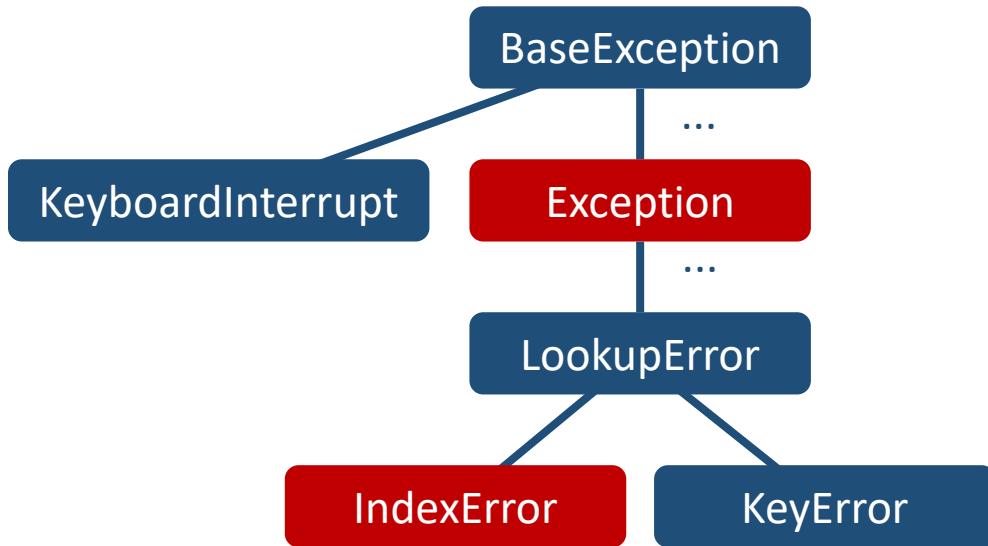

**except-twice1.py**

```
try:
 L[4]
except IndexError: # must be before Exception
 print('IndexError')
except Exception:
 print('Fall back exception handler')
```

**except-twice2.py**

```
try:
 L[4]
except Exception: # and subclasses of Exception
 print('Fall back exception handler')
except IndexError:
 print('IndexError') # unreachable
```



# try statement syntax

```
try:
 code

 except ExceptionType1:
 code # executed if raised exception instanceof
 # ExceptionType1 (or subclass of ExceptionType1)

 except ExceptionType2:
 code # executed if exception type matches and none of
 # the previous except statements matched

 ...

 else:
 code # only executed if no exception was raised

 finally:
 code # always executed independent of exceptions
 # typically used to clean up (like closing files)
```

arbitrary number of except cases

# except variations

```
except:
```

```
 # catch all exceptions
```



```
except ExceptionType:
```

# only catch exceptions of class ExceptionType  
# or subclasses of ExceptionType

```
except (ExceptionType1, ExceptionType2, ..., ExceptionTypek):
```

```
 # catch any of k classes (and subclasses)
```

```
except ExceptionType as e:
```

```
 # catch exception and assign exception object to e
 # e.args contains arguments to the raised exception
```

# Raising exceptions

- An exception is raised (or thrown) using one of the following (the first being an alias for the second):

```
raise ExceptionType
```

```
raise ExceptionType()
```

```
raise ExceptionType(args)
```

abstract.py

```
class A():
 def f(self):
 print('f')
 self.g()

 def g(self):
 raise NotImplementedError

class B(A):
 def g(self):
 print('g')
```

Python shell

```
> B().f()
| f
| g
> A().f()
| f
| NotImplementedError
```

# User exceptions

- New exception types are created using `class` inheritance from an existing exception type (possibly defining `__init__`)

```
tree-search.py

class SolutionFound(Exception): # new exception
 pass

def recursive_tree_search(x, t):
 if isinstance(t, tuple):
 for child in t:
 recursive_tree_search(x, child)
 elif x == t:
 raise SolutionFound # found x in t

def tree_search(x, t):
 try:
 recursive_tree_search(x, t)
 except SolutionFound:
 print('found', x)
 else:
 print('search for', x, 'unsuccessful')
```

## Python shell

```
> tree_search(8, ((3,2),5,(7,(4,6))))
| search for 8 unsuccessful
> tree_search(7, ((3,2),5,(7,(4,6))))
| found 7
```

# match – case (since Python 3.10)

- Assume we want to do different things depending on the value of an expression (different *cases*)
- Can be done using `if`, but also using `match – case`, that is also evaluated top-down

`match-case.py`

```
x = 7

if x == 1:
 print('x is one')
elif x == 2:
 print('x is two')
elif x == 3 or x == 4 or x == 5:
 print('x is three, four or five')
else:
 print(x, 'is not in the range 1-5')
```

`Python shell`

```
| 7 is not in the range 1-5
```

`match-case.py`

```
x = 7

match x: # match expression
 case 1:
 print('x is one')
 case 2:
 print('x is two')
 case 3 | 4 | 5: # match any of the cases
 print('x is three, four or five')
 case value: # else, value = variable name
 print(value, 'is not in the range 1-5')
```

`Python shell`

```
| 7 is not in the range 1-5
```

# match – case

Can match...

- simple values
- named variable values
- guards (if)
- sequences of values
- dictionaries
- builtin types
- user defined classes
- nested structures of the above

## match-case.py

```
class Color:
 RED = 'ff0000'
 GREEN = '00ff00'
 BLUE = '0000ff'

class Point:
 __match_args__ = ('x', 'y')

 def __init__(self, x, y):
 self.x = x
 self.y = y

 def __repr__(self):
 return f'Point({self.x}, {self.y})'
```

## match-case.py

```
match x:
 case 42:
 return 'the integer 42'
 case 1 | 2 | 3 | 4 | 5:
 return 'integer in range(1, 6)'
 case (1, 2):
 return 'sequence containing the elements 1 and 2'
 case [x, 2]:
 return 'sequence of length 2, last=2, first=' + str(x)
 case (x, y) if x + y == 7: # guard
 return 'sequence with two values with sum 7'
 case [0, 1, *x]: # x is list of remaining elements in sequence
 return 'sequence starting with 1 and 2, and tail ' + str(x)
 case {'a': 7, 'b': x}:
 return 'dictionary "a" -> 7, "b" -> ' + str(x)
 case (('a' | 'b'), ('c' | 'd')):
 return 'tuple length 2, first "a" or "b", last "c" or "d"'
 case ((x | y) as fst, (x | y) as snd):
 return '(fst, snd), where fst=' + str(fst) + ', snd=' + str(snd)
 case float(value): # test on builtin type
 return 'a float ' + str(value)
 case Color.RED: # class or object attribute
 return 'the color red'
 case Point(x=7, y=value): # Point object with attributes x and y
 return 'a Point object with x=7, and y=' + str(value)
 case Point(x, y): # requires __match_args__ in class Point
 return 'a point Point(' + str(x) + ', ' + str(y) + ')'
 case e: # ! using the wildcard _ would not bind to a variable
 return 'cannot match ' + repr(e)
```

## Python shell

```
> for x in [42, 1, [1, 2], [7, 2], range(3, 5), (3, (5, 7)), (0, 1, 2, 3, 4, 5), {'a':7, 'b':42, 'c':1},
 ('b', 'c'), ('y', 'x'), 3.14, 'ff0000', Point(7, 42), Point(3, 5), 'abc']:
 print('f(' + repr(x) + ') = ' + repr(f(x)))
f(42) = 'the integer 42'
f(1) = 'integer in range(1, 6)'
f([1, 2]) = 'sequence containing the elements 1 and 2'
f([7, 2]) = 'sequence of length 2, last=2, first=7'
f(range(3, 5)) = 'sequence with two values with sum 7'
f((3, (5, 7))) = 'a triplet (3, (5, 7))'
f((0, 1, 2, 3, 4, 5)) = 'sequence starting with 1 and 2, and tail [2, 3, 4, 5]'
f({'a': 7, 'b': 42, 'c': 1}) = 'dictionary "a" -> 7, "b" -> 42'
f(('b', 'c')) = 'tuple length 2, first "a" or "b", last "c" or "d"'
f(('y', 'x')) = '(fst, snd), where fst=y, snd=x'
f(3.14) = 'a float 3.14'
f('ff0000') = 'the color red'
f(Point(7, 42)) = 'a Point object with x=7, and y=42'
f(Point(3, 5)) = 'a point Point(3, 5)'
f('abc') = "cannot match 'abc'"
```

# 3 ways to read lines from a file

## Steps

1. Open file using `open`
2. Read lines from file using
  - a) `filehandler.readline`
  - b) `filehandler.readlines`
  - c) `for line in filehandler:`
3. Close file using `close`

```
open ('filename.txt') assumes the file to be in the same
folder as your Python program, but you can also provide a full path
open ('c:/Users/gerth/Documents/filename.txt')
```

try to open file for reading filename

filehandle

```
reading-file1.py
```

f = open('reading-file1.py')  
for line in f:  
 print('>', line[:-1])  
f.close()

iterate over lines in file

close file when done

read all lines into a list of strings

```
reading-file2.py
```

f = open('reading-file2.py')  
lines = f.readlines()  
f.close()  
for line in lines:  
 print('>', line[:-1])

read single line (terminated by '\n')

```
reading-file3.py
```

f = open('reading-file3.py')  
line = f.readline()  
while line != '':  
 print('>', line[:-1])  
 line = f.readline()  
f.close()

# 3 ways to write lines to a file

- Opening file:

```
open(filename, mode)
```

where *mode* is a string, either '*w*' for opening a new (or truncating an existing file) and '*a*' for appending to an existing file

- Write single string:

```
filehandle.write(string)
```


Returns the number of characters written

- Write list of strings:

```
filehandle.writelines(list)
```

- Newlines ('*\n*') must be written explicitly

- *print* can take an optional *file* argument

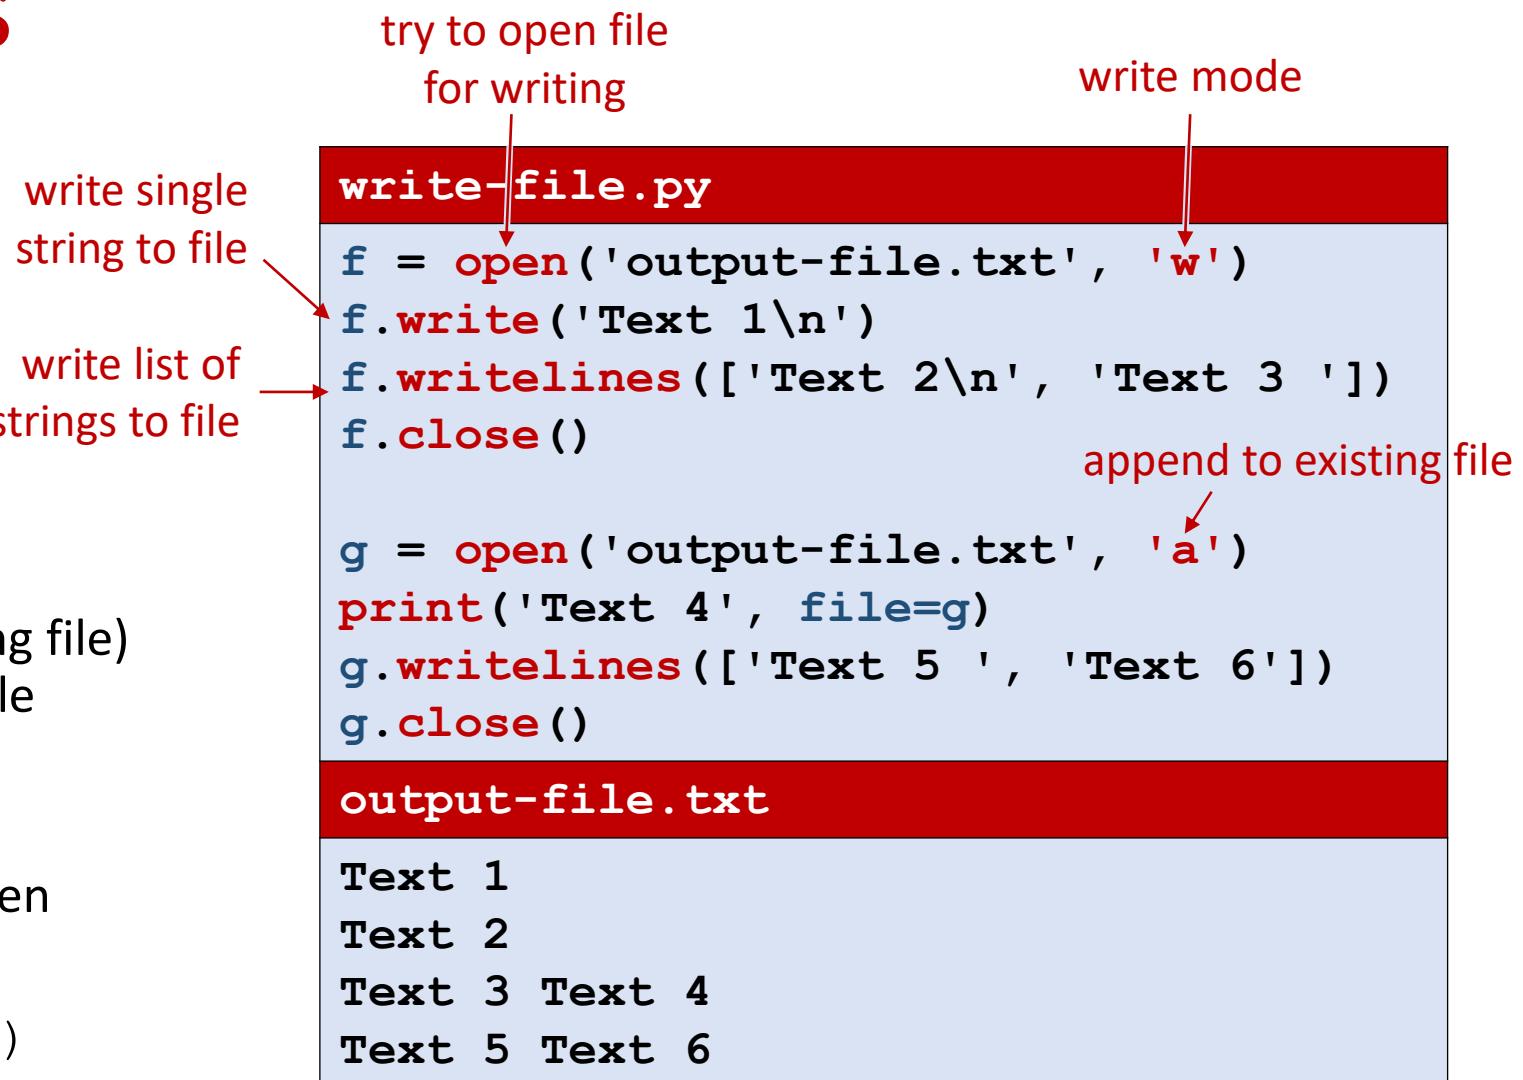

# Exceptions while dealing with files

- When dealing with files one should be prepared to handle errors / raised exceptions, e.g. FileNotFoundError

reading-file4.py

```
try:
 f = open('reading-file4.py')
except FileNotFoundError:
 print('Could not open file')
else:
 try:
 for line in f:
 print('> ', line[:-1])
 finally:
 f.close()
```

# Opening files using `with`

- The Python keyword `with` allows to create a *context manager* for handling files
- Filehandle will automatically be closed, also when exceptions occur*
- Under the hood: filehandles returned by `open()` support `__enter__()` and `__exit__()` methods

`f = result of calling __enter__()  
on result of open expression,  
which is the file handle`

```
reading-file5.py
with open('reading-file5.py') as f:
 for line in f:
 print('> ', line[:-1])
```

# Does a file exist?

- Module `os.path` contains a method `isfile` to check if a file exists

`checking-files.py`

```
import os.path

filename = input('Filename: ')
if os.path.isfile(filename):
 print('file exists')
else:
 print('file does not exist')
```

# module sys

- Module sys contains the three standard file handles

sys.stdin (used by the input function)

sys.stdout (used by the print function)

sys.stderr (error output from the Python interpreter)

sys-test.py

```
import sys
sys.stdout.write('Input an integer: ')
x = int(sys.stdin.readline())
sys.stdout.write('%s square is %s' % (x, x**2))
```

Python shell

```
| Input an integer: 10
| 10 square is 100
```

# `print(..., file=output file)`

`sys-print-file.py`

```
import sys

def complicated_function(file):
 print('Hello world', file=file) # print to file or STDOUT

while True:
 file_name = input('Output file (empty for STDOUT): ')

 if file_name == '':
 file = sys.stdout
 break
 else:
 try:
 file = open(file_name, 'w')
 break
 except Exception:
 pass

complicated_function(file)

if file != sys.stdout:
 file.close()
```

# PEP8 on exceptions

- For all try/except clauses, limit the try clause to the absolute minimum amount of code necessary.
- The class naming convention applies (**CapWords**)
- Use the **suffix "Error"** on your exception names (if the exception actually is an error)
- A bare **except:** clause will catch **SystemExit** and **KeyboardInterrupt** exceptions, making it harder to interrupt a program with Control-C, and can disguise other problems.  
If you want to catch all exceptions that signal program errors, use **except Exception:**

# Performance of scanning a file

- Python can efficiently scan through quite big files

| File                       | Size     | Time      |
|----------------------------|----------|-----------|
| <u>Atom_chem_shift.csv</u> | ≈ 750 MB | ≈ 8 sec   |
| <u>cano.txt</u>            | ≈ 3.7 MB | ≈ 0.1 sec |

The first search finds all lines related to ThrB12-DKP-insulin (Entry ID 6203) in a chemical database available from [www.bmrb.wisc.edu](http://www.bmrb.wisc.edu)

The second search finds all occurrences of “Germany” in Conan Doyle's complete Sherlock Holmes available at [sherlock-holm.es](http://sherlock-holm.es)

## file-scanning.py

```
from time import time

for filename, query in [
 ('Atom_chem_shift.csv', '6203'),
 ('cano.txt', 'Germany')
]:
 count = 0
 matches = []
 start = time()
 with open(filename) as f:
 for i, line in enumerate(f, start=1):
 count += 1
 if query in line:
 matches.append((i, line))
 end = time()

 for i, line in matches:
 print(i, ':', line, end='')

print('Duration:', end - start)
print(len(matches), 'of', count, 'lines match')
```

## Python shell

```
...
3057752 : 195,,2,2,30,30,THR,HB,H,1,4.22,0.02,,1,,,.228896,6203,2
3057753 : 196,,2,2,30,30,THR,HG21,H,1,1.18,0.02,,1,,,.228896,6203,2
3057754 : 197,,2,2,30,30,THR,HG22,H,1,1.18,0.02,,1,,,.228896,6203,2
3057755 : 198,,2,2,30,30,THR,HG23,H,1,1.18,0.02,,1,,,.228896,6203,2
Duration: 7.760039329528809
329 of 9758361 lines match
57557 : "Well, then, to the West, or to England, or to Germany, where father
66515 : kind master. He wanted me to go with his wife to Germany yesterday,
66642 : of business in Germany in the past and my name is probably familiar
73273 : associates with Germany. This he placed in his instrument cupboard.
Duration: 0.07700657844543457
4 of 76764 lines match
```

## sudoku.py

```
class Sudoku:
 def __init__(self, puzzle):
 self.puzzle = puzzle

 def solve(self):
 def find_free():
 for i in range(9):
 for j in range(9):
 if self.puzzle[i][j] == 0:
 return (i, j)
 return None

 def unused(i, j):
 i_, j_ = i // 3 * 3, j // 3 * 3
 cells = {(i, k) for k in range(9)}
 cells |= {(k, j) for k in range(9)}
 cells |= {(i, j) for i in range(i_, i_ + 3)
 for j in range(j_, j_ + 3)}
 return set(range(1, 10)) - {self.puzzle[i][j] for i, j in cells}

 class SolutionFound(Exception):
 pass

 def recursive_solve():
 cell = find_free()
 if not cell:
 raise SolutionFound
 i, j = cell
 for value in unused(i, j):
 self.puzzle[i][j] = value
 recursive_solve()
 self.puzzle[i][j] = 0

 try:
 recursive_solve()
 except SolutionFound:
 pass
```

## sudoku.py (continued)

```
def print(self):
 for i, row in enumerate(self.puzzle):
 cells = [' %s ' % c if c else ' . ' for c in row]
 print(''.join([''.join(cells[j:j+3]) for j in (0,3,6)]))
 if i in (2,5):
 print('-----+-----+-----')

with open('sudoku.txt') as f:
 A = Sudoku([[int(x) for x in line.strip()] for line in f])

A.solve()
A.print()
```

## sudoku.txt

```
517600034
289004000
346205090
602000010
038006047
000000000
090000078
703400560
000000000
```


## Python shell

|                   |   |   |  |   |   |   |  |   |   |   |
|-------------------|---|---|--|---|---|---|--|---|---|---|
| 5                 | 1 | 7 |  | 6 | 9 | 8 |  | 2 | 3 | 4 |
| 2                 | 8 | 9 |  | 1 | 3 | 4 |  | 7 | 5 | 6 |
| 3                 | 4 | 6 |  | 2 | 7 | 5 |  | 8 | 9 | 1 |
| -----+-----+----- |   |   |  |   |   |   |  |   |   |   |
| 6                 | 7 | 2 |  | 8 | 4 | 9 |  | 3 | 1 | 5 |
| 1                 | 3 | 8 |  | 5 | 2 | 6 |  | 9 | 4 | 7 |
| 9                 | 5 | 4 |  | 7 | 1 | 3 |  | 6 | 8 | 2 |
| -----+-----+----- |   |   |  |   |   |   |  |   |   |   |
| 4                 | 9 | 5 |  | 3 | 6 | 2 |  | 1 | 7 | 8 |
| 7                 | 2 | 3 |  | 4 | 8 | 1 |  | 5 | 6 | 9 |
| 8                 | 6 | 1 |  | 9 | 5 | 7 |  | 4 | 2 | 3 |

# Documentation, testing and debugging

- docstring
- defensive programming
- assert
- test driven development
- assertions
- testing
- unittest
- debugger
- coverage
- static type checking (mypy)

# Ensuring good quality code ?

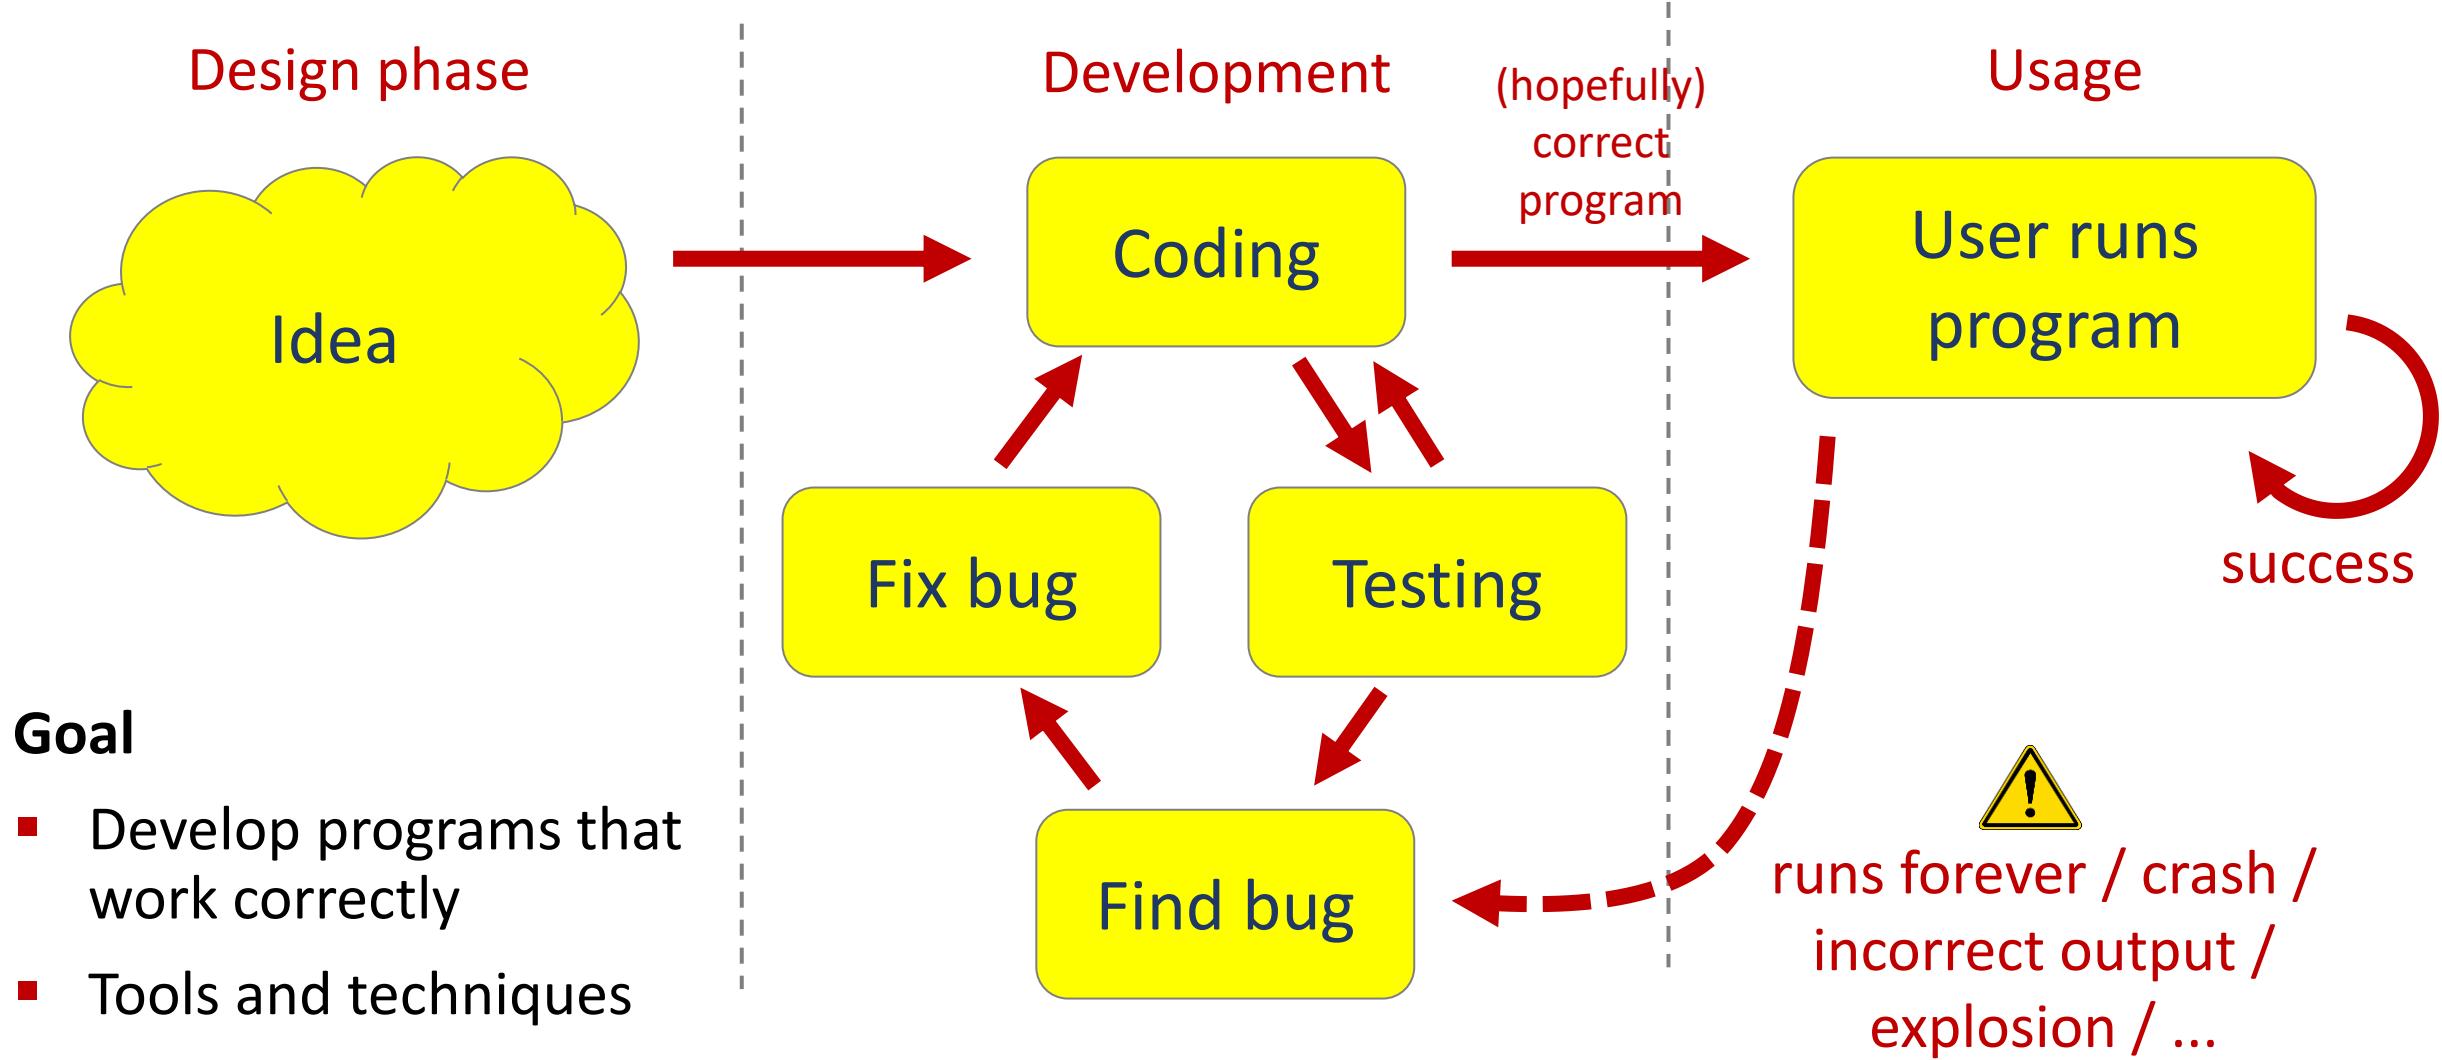

# What is good code ?

- Readability
  - well-structured
  - documentation
  - comments
  - follow some standard structure (easy to recognize, follow [PEP8 Style Guide](#))
- Correctness
  - outputs the correct answer on valid input
  - eventually stops with an answer on valid input (should not go in infinite loop)
- Reusable...

# Why ?

## Documentation

- *specification of functionality*
- docstring
  - *for users of the code*
  - modules
  - methods
  - classes
- comments
  - *for readers of the code*

## Testing

- Correct implementation ?
- Try to predict behavior on unknown input ?
- Performance guarantees ?

## Debugging

- *Where is the #!¤\$ bug ?*

"Program testing can be used to show the presence of bugs, but never to show their absence" – Edsger W. Dijkstra

# Built-in exceptions (class hierarchy)

```
BaseException
+-- SystemExit
+-- KeyboardInterrupt
+-- GeneratorExit
+-- Exception
 +-- StopIteration
 +-- StopAsyncIteration
 +-- ArithmeticError
 | +-- FloatingPointError
 | +-- OverflowError
 | +-- ZeroDivisionError
 +-- AssertionError
 +-- AttributeError
 +-- BufferError
 +-- EOFError
 +-- ImportError
 | +-- ModuleNotFoundError
 +-- LookupError
 | +-- IndexError
 | +-- KeyError
 +-- MemoryError
 +-- NameError
 | +-- UnboundLocalError
 +-- TypeError
 +-- ValueError
 | +-- UnicodeError
 +-- UnicodeDecodeError
 +-- UnicodeEncodeError
 +-- UnicodeTranslateError
```

```
+-- OSError
| +-- BlockingIOError
| +-- ChildProcessError
| +-- ConnectionError
| | +-- BrokenPipeError
| | +-- ConnectionAbortedError
| | +-- ConnectionRefusedError
| | +-- ConnectionResetError
| +-- FileExistsError
| +-- FileNotFoundError
| +-- InterruptedError
| +-- IsADirectoryError
| +-- NotADirectoryError
| +-- PermissionError
| +-- ProcessLookupError
| +-- TimeoutError
+-- ReferenceError
+-- RuntimeError
| +-- NotImplementedError
| +-- RecursionError
+-- SyntaxError
| +-- IndentationError
| +-- TabError
+-- SystemError
+-- Warning
 +-- DeprecationWarning
 +-- PendingDeprecationWarning
 +-- RuntimeWarning
 +-- SyntaxWarning
 +-- UserWarning
 +-- FutureWarning
 +-- ImportWarning
 +-- UnicodeWarning
 +-- BytesWarning
 +-- ResourceWarning
```

# Testing for unexpected behaviour ?

infinite-recursion1.py

```
def f(depth):
 f(depth + 1) # infinite recursion
```

Python shell

```
| RecursionError: maximum recursion depth exceeded
```



infinite-recursion2.py

```
def f(depth):
 if depth > 100:
 print("runaway recursion??")
 raise SystemExit # raise built-in exception
 f(depth + 1)
```

f(0)

Python shell

```
| runaway recursion???
```

infinite-recursion3.py

```
import sys

def f(depth):
 if depth > 100:
 print("runaway recursion??")
 sys.exit() # system function
 f(depth + 1)
```

raises SystemExit

f(0)

Python shell

```
| runaway recursion???
```

- let the program eventually fail
- check and raise exceptions
- check and call `sys.exit`

# Catching unexpected behaviour – assert

infinite-recursion4.py

```
def f(depth):
 assert depth <= 100 # raise exception if False
 f(depth + 1)

f(0)
```

Python shell

```
| File "...\\infinite-recursion4.py", line 2, in f
| assert depth <= 100
| Assertion
```

infinite-recursion5.py

```
def f(depth):
 assert depth <= 100, "runaway recursion???"
 f(depth + 1)

f(0)
```

Python shell

```
| File "...\\infinite-recursion5.py", line 2, in f
| assert depth <= 100, "runaway recursion???"
| Assertion
```

- keyword **assert** checks if boolean expression is true, if not, raises exception **AssertionError**
- optional second parameter passed to the constructor of the exception

infinite-recursion6.py

```
def f(depth):
 if not depth <= 100:
 raise AssertionError("runaway recursion??")
 f(depth + 1)

f(0)
```

Python shell

```
| File "...\\infinite-recursion6.py", line 3, in f
| raise AssertionError("runaway recursion??")
| Assertion
```

# Disabling assert statements



```
Command Prompt
C:\Users\au121\Desktop>python -O infinite-recursion5.py
Traceback (most recent call last):
 File "infinite-recursion5.py", line 5, in <module>
 f(0)
 File "infinite-recursion5.py", line 3, in f
 f(depth + 1)
 File "infinite-recursion5.py", line 3, in f
 f(depth + 1)
 File "infinite-recursion5.py", line 3, in f
 f(depth + 1)
 [Previous line repeated 995 more times]
RecursionError: maximum recursion depth exceeded
C:\Users\au121\Desktop>
```

- **assert** statements are good to help check correctness of program – but can **slow down** program
- invoking Python with option **-O** disables all assertions (by setting `__debug__` to False)

# Example

$\sqrt{x}$

# First try... (seriously, the bugs were not on purpose)

```
intsqrt_buggy.py
```

```
def int_sqrt(x):
 low = 0
 high = x
 while low < high - 1:
 mid = (low + high) / 2
 if mid ** 2 <= x:
 low = mid
 else:
 high = mid
 return low
```

```
Python shell
```

```
> int_sqrt(10)
| 3.125 # 3.125 ** 2 = 9.765625
> int_sqrt(-10)
| 0 # what should the answer be ?
```

# Let us add a specification...

intsqrt.py

```
def int_sqrt(x):
 """Compute the integer square root of an integer x.

 Assumes that x is an integer and x >= 0
 Returns integer floor(sqrt(x))"""
 ...
 ...
```

docstring {

    Assumes that x is an integer and x >= 0 ← input requirements

    Returns integer floor(sqrt(x))" " " ← output guarantees

Python shell

```
> help(int_sqrt)
Help on function int_sqrt in module __main__:

int_sqrt(x)
 Compute the integer square root of an integer x.
 Assumes that x is an integer and x >= 0
 Returns integer floor(sqrt(x))
```

- all methods, classes, and modules can have a **docstring** (ideally have) as a **specification**
- for methods: summarize purpose in first line, followed by input requirements and ouput guarantees
- the docstring is assigned to the object's `__doc__` attribute

PEP 257 -- Docstring Conventions

[www.python.org/dev/peps/pep-0257/](http://www.python.org/dev/peps/pep-0257/)

# Let us check input requirements...

intsqrt.py

```
def int_sqrt(x):
 """Compute the integer square root of an integer x.

 Assumes that x is an integer and x >= 0
 Returns integer floor(sqrt(x))"""

 assert isinstance(x, int)
 assert 0 <= x
 ...
}
```

check input requirements

Python shell

```
> int_sqrt(-10)
| File "...\\int_sqrt.py", line 7, in int_sqrt
| assert 0 <= x
| AssertionError
```

- doing explicit checks for valid input arguments is part of **defensive programming** and helps spotting errors early

(instead of continuing using likely wrong values... resulting in a final meaningless error)

# Let us check if output correct...

intsqrt.py

```
def int_sqrt(x):
 """Compute the integer square root of an integer x.

 Assumes that x is an integer and x >= 0
 Returns integer floor(sqrt(x))"""

 assert isinstance(x, int)
 assert 0 <= x

 ...
 assert isinstance(result, int) } check
 assert result ** 2 <= x < (result + 1) ** 2 } output
 return result
```

Python shell

```
> int_sqrt(10)
| File "...\\int_sqrt.py", line 20, in int_sqrt
| assert isinstance(result, int)
|
|AssertionError
```

- output check identifies the error  
mid = (low + high) / 2
- should have been  
mid = (low + high) // 2
- The output check helps us to ensure that function specifications are satisfied in applications

# Let us test some input values...

intsqrt.py

```
def int_sqrt(x):
 ...

assert int_sqrt(0) == 0
assert int_sqrt(1) == 1
assert int_sqrt(2) == 1
assert int_sqrt(3) == 1
assert int_sqrt(4) == 2
assert int_sqrt(5) == 2
assert int_sqrt(200) == 14
```

Python shell

```
| Traceback (most recent call last):
| File "...\\int_sqrt.py", line 28, in <module>
| assert int_sqrt(1) == 1
| File "...\\int_sqrt.py", line 21, in int_sqrt
| assert result ** 2 <= x < (result + 1) ** 2
|
AssertionError
```

- test identifies wrong output for  $x = 1$

# Let us check progress of algorithm...

intsqrt.py

```
...
low, high = 0, x
while low < high - 1: # low <= floor(sqrt(x)) < high
 assert low ** 2 <= x < high ** 2 } check invariant
 mid = (low + high) // 2
 if mid ** 2 <= x:
 low = mid
 else:
 high = mid
result = low
...
```

Python shell

```
| Traceback (most recent call last):
| File "...\\int_sqrt.py", line 28, in <module>
| assert int_sqrt(1) == 1
| File "...\\int_sqrt.py", line 21, in int_sqrt
| assert result ** 2 <= x < (result + 1) ** 2
|
AssertionError
```

- test identifies wrong output for  $x = 1$
- but invariant apparently correct ???
- problem
  - $low == result == 0$
  - $high == 1$implies loop never entered
- output check identifies the error

$high = x$

- should have been
  - $high = x + 1$

# Final program

We have used **assertions** to:

- Test if **input** arguments / usage is valid (defensive programming)
- Test if computed **result** is correct
- Test if an internal **invariant** in the computation is satisfied
- Perform a **final test** for a set of test cases (should be run whenever we change anything in the implementation)

intsqrt.py

```
def int_sqrt(x):
 """Compute the integer square root of an integer x.

 Assumes that x is an integer and x >= 0
 Returns the integer floor(sqrt(x))"""

 assert isinstance(x, int)
 assert 0 <= x

 low, high = 0, x + 1
 while low < high - 1: # low <= floor(sqrt(x)) < high
 assert low ** 2 <= x < high ** 2
 mid = (low + high) // 2
 if mid ** 2 <= x:
 low = mid
 else:
 high = mid
 result = low

 assert isinstance(result, int)
 assert result ** 2 <= x < (result + 1) ** 2

 return result

assert int_sqrt(0) == 0
assert int_sqrt(1) == 1
assert int_sqrt(2) == 1
assert int_sqrt(3) == 1
assert int_sqrt(4) == 2
assert int_sqrt(5) == 2
assert int_sqrt(200) == 14
```

# Which checks would you add to the below code?

`binary-search.py`

```
def binary_search(x, L):
 """Binary search for x in sorted list L

 Assumes x is an integer, and L a non-decreasing list of integers

 Returns index i, -1 <= i < len(L), where L[i] <= x < L[i+1],
 assuming L[-1] = -infty and L[len(L)] = +infty"""

 low, high = -1, len(L)
 while low + 1 < high:
 mid = (low + high) // 2
 if x < L[mid]:
 high = mid
 else:
 low = mid
 result = low
 return result
```

## binary-search-assertions.py

```
def binary_search(x, L):
 """Binary search for x in sorted list L
 Assumes x is an integer, and L a non-decreasing list of integers
 Returns index i, -1 <= i < len(L), where L[i] <= x < L[i+1],
 assuming L[-1] = -infty and L[len(L)] = +infty"""

 assert isinstance(x, int)
 assert isinstance(L, list)
 assert all([isinstance(e, int) for e in L])
 assert all([L[i] <= L[i + 1] for i in range(len(L) - 1)]) } ① inefficient !

input loop
{
 low, high = -1, len(L)
 while low + 1 < high: # L[low] <= x < L[high]
 assert (low == -1 or L[low] <= x) and (high == len(L) or x < L[high])
 mid = (low + high) // 2
 assert isinstance(L[mid], int)
 assert (low == -1 or L[low] <= L[mid]) and (high == len(L) or L[mid] <= L[high]) } ②
 {
 if x < L[mid]:
 high = mid
 else:
 low = mid
 result = low

output
{
 assert (isinstance(result, int) and -1 <= result < len(L) and
 ((result == -1 and (len(L) == 0 or x < L[0])) or
 (result == len(L) - 1 and x >= L[-1])) or
 (0 <= result < len(L) - 1 and L[result] <= x < L[result + 1])))
 return result


assert binary_search(42, []) == -1
assert binary_search(42, [7]) == 0
assert binary_search(7, [42]) == -1
assert binary_search(7, [42, 42, 42]) == -1
assert binary_search(42, [7, 7, 7]) == 2
assert binary_search(42, [7, 7, 7, 56, 81]) == 2
assert binary_search(8, [1, 3, 5, 7, 9]) == 3 } test cases
```

- ① Verifying if L is a sorted list of integers can slow down the program significantly
- ② Alternative is to only verify if the part of L visited is a sorted subsequence


# Testing – how ?

- Run set of test cases
  - test all cases in input/output specification (**black box testing**)
  - test all special cases (**black box testing**)
  - set of tests should force all lines of code to be tested (**glass box testing**)
- Visual test
- Automatic testing
  - Systematically / randomly generate input instances
  - Create function to **validate** if output is correct  
(hopefully easier than finding the solution)
- Formal verification
  - Use computer programs to do formal proofs of correctness, like using [Coq](#)

# Visual testing – Convex hull computation

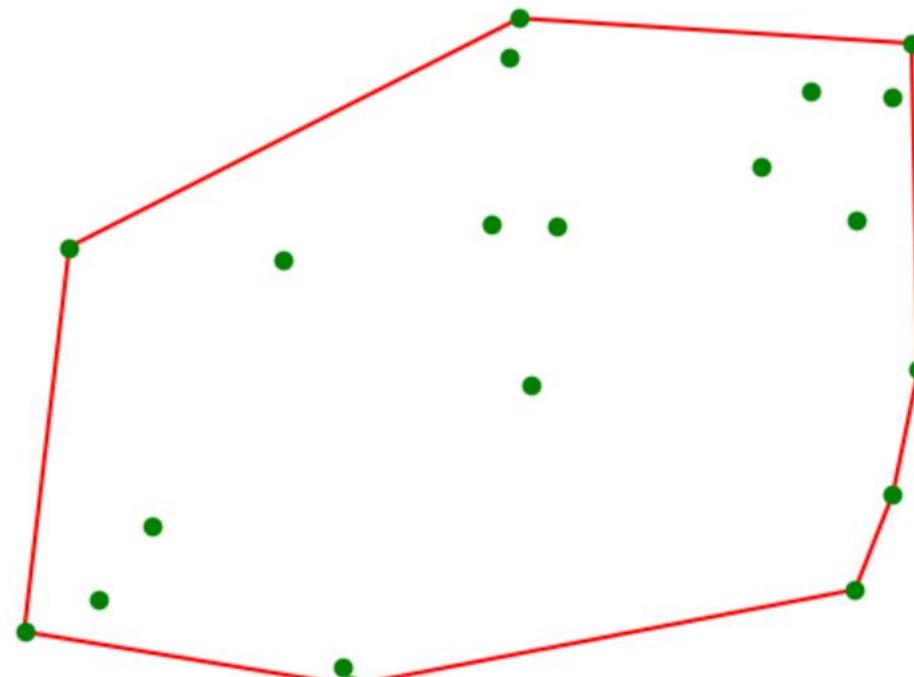

Correct

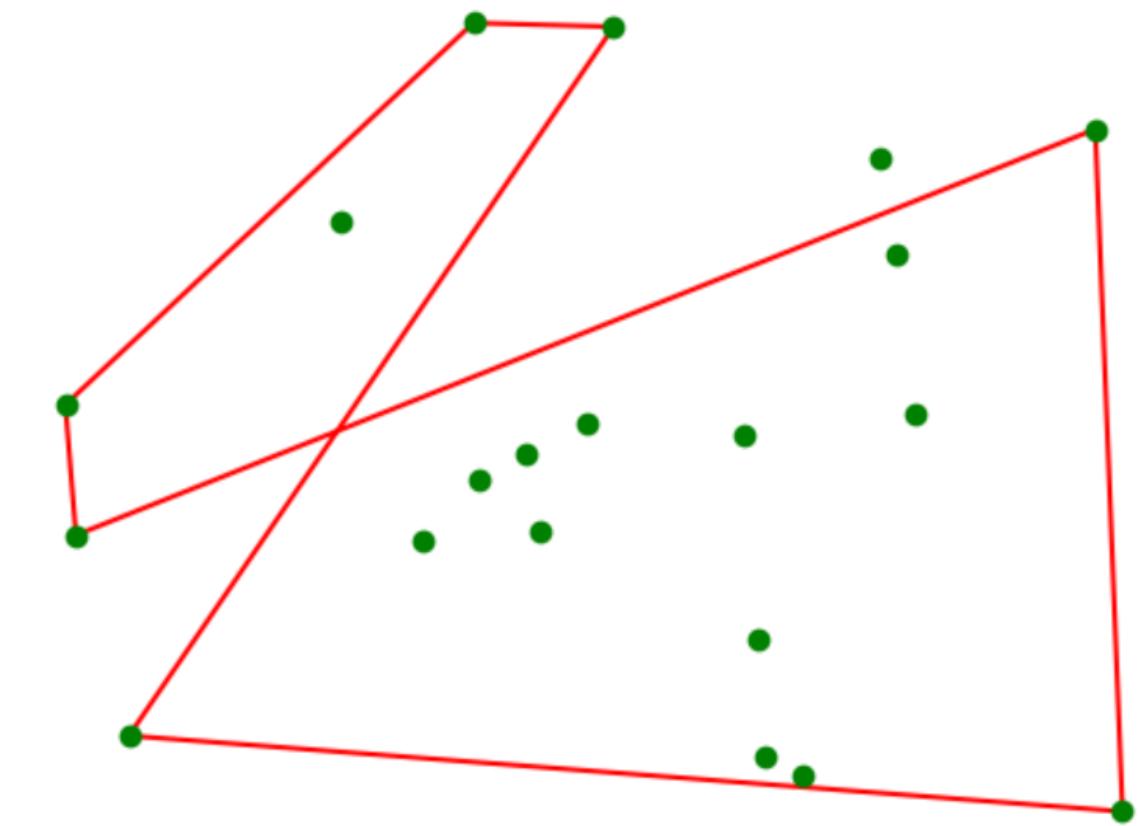

Bug !  
(not convex)

# doctest

- Python module
- Test instances (pairs of input and corresponding output) are written in the doc strings, formatted as in an interactive Python session

## binary-search-doctest.py

```
def binary_search(x, L):
 """Binary search for x in sorted list L

 Examples:
 >>> binary_search(42, [])
 -1
 >>> binary_search(42, [7])
 0
 >>> binary_search(42, [7,7,7,56,81])
 2
 >>> binary_search(8, [1,3,5,7,9])
 3
 """

 low, high = -1, len(L)
 while low + 1 < high:
 mid = (low + high) // 2
 if x < L[mid]:
 high = mid
 else:
 low = mid
 return low

import doctest
doctest.testmod(verbose=True)
```

## Python shell

```
Trying:
 binary_search(42, [])
Expecting:
 -1
ok
Trying:
 binary_search(42, [7])
Expecting:
 0
ok
Trying:
 binary_search(42, [7,7,7,56,81])
Expecting:
 2
ok
Trying:
 binary_search(8, [1,3,5,7,9])
Expecting:
 3
ok
1 items had no tests:
 __main__
1 items passed all tests:
 4 tests in __main__.binary_search
4 tests in 2 items.
4 passed and 0 failed.
Test passed.
```

# pytest

- Run all tests stored in functions prefixed by `test` or `test` prefixed test methods inside `Test` prefixed test classes
- pip install pytest
- Run the `pytest` program from a shell

## binary-search-pytest.py

```
def binary_search(x, L):
 """Binary search for x in sorted list L"""

 low, high = -1, len(L)
 while low + 1 < high:
 mid = (low + high) // 2
 if x < L[mid]:
 high = mid
 else:
 low = mid
 return low

def test_binary_search():
 assert binary_search(42, []) == -1
 assert binary_search(42, [7]) == 0
 assert binary_search(42, [7,7,7,56,81]) == 2
 assert binary_search(8, [1,3,5,7,9]) == 3

import pytest

def test_types():
 with pytest.raises(TypeError):
 _ = binary_search(5, ['a', 'b', 'c'])
```

## Shell

```
> pytest binary-search-pytest.py
=====
| ===== test session starts =====
| platform win32 -- Python 3.7.2, pytest-4.3.1, ... 0.9.0
| collected 2 items
| binary-search-pytest.py .. [100%]
| ===== 2 passed in 0.06 seconds =====
```

# unittest

- Python module
- A comprehensive **object-oriented test framework**, inspired by the corresponding JUnit test framework for Java

```
binary-search-unittest.py

def binary_search(x, L):
 """Binary search for x in sorted list L"""

 low, high = -1, len(L)
 while low + 1 < high:
 mid = (low + high) // 2
 if x < L[mid]:
 high = mid
 else:
 low = mid
 return low

import unittest

class TestBinarySearch(unittest.TestCase):
 def test_search(self):
 self.assertEqual(binary_search(42, []), -1)
 self.assertEqual(binary_search(42, [7]), 0)
 self.assertEqual(binary_search(42, [7,7,7,56,81]), 2)
 self.assertEqual(binary_search(8, [1,3,5,7,9]), 3)

 def test_types(self):
 self.assertRaises(TypeError, binary_search, 5, ['a', 'b', 'c'])

unittest.main(verbosity=2)
```

## Python shell

```
| test_search (__main__.TestBinarySearch) ... ok
test_types (__main__.TestBinarySearch) ... ok
Ran 2 tests in 0.051s
OK
```

# Debugger (IDLE)

- When an exception has stopped the program, you can examine the state of the variables using **Debug > Stack Viewer** in the Python shell

Python 3.6.4 Shell

File Edit Shell Debug Options Window Help

Go to File/Line .4:d48eceb, Dec 19 2017, 06:04:45) [MSC v.1900 32 bit (Intel)]

Debugger

Stack Viewer


Auto-open Stack Viewer

'credits' or "license()" for more information.

C:\Users\au121\Desktop\ipsa18\code\slides\14\_testing\intsqrt\_buggy.py


```
>>> int_sqrt(10)
Traceback (most recent call last):
 File "<pyshell#0>", line 1, in <module>
 int_sqrt(10)
 File "C:\Users\au121\Desktop\ipsa18\code\slides\14_testing\intsqrt_buggy.py",
line 10, in int_sqrt
 assert isinstance(low, int)
AssertionError
>>>
```

Ln: 12 Col: 4

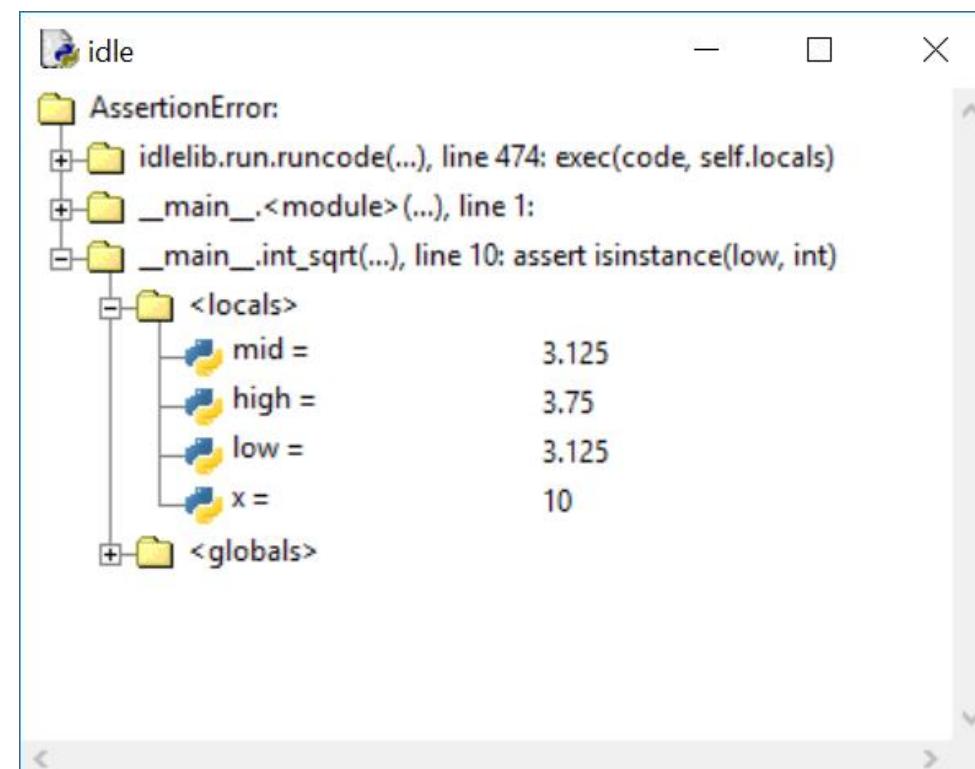


# Stepping through a program (IDLE debugger)


- **Debug > Debugger** in the Python shell opens Debug Control window
- **Right click** on a code line in editor to set a “breakpoint” in your code
- **Debug Control:** Go → run until next breakpoint is encountered;  
Step → execute one line of code; Over → run function call without details;  
Out → finish current function call; Quit → Stop program;

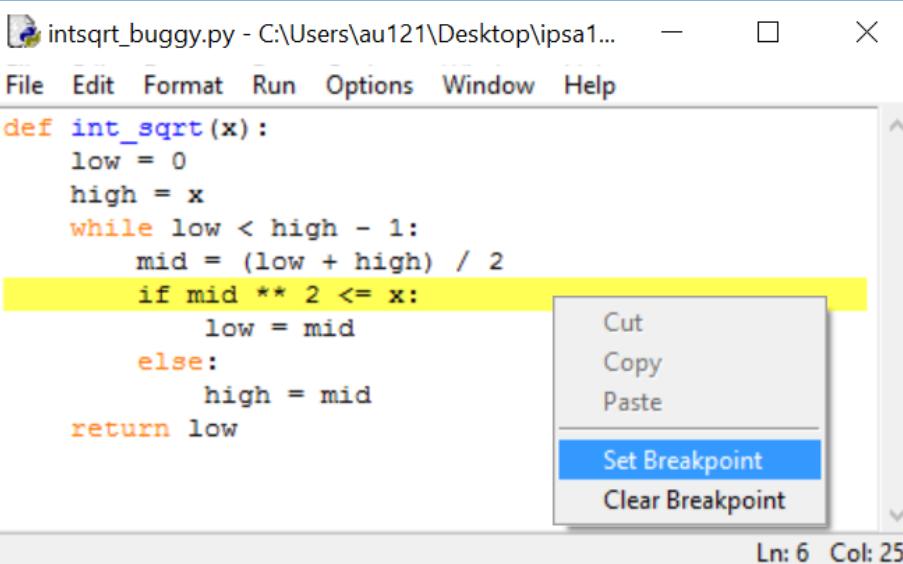

```
intsqrt_buggy.py - C:\Users\au121\Desktop\ipsa1...
File Edit Format Run Options Window Help
def int_sqrt(x):
 low = 0
 high = x
 while low < high - 1:
 mid = (low + high) / 2
 if mid ** 2 <= x:
 low = mid
 else:
 high = mid
 return low
Ln: 6 Col: 25
```

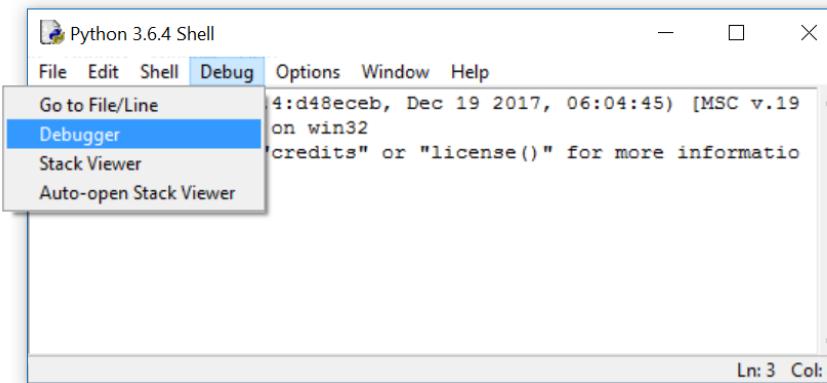

```
Python 3.6.4 Shell
File Edit Shell Debug Options Window Help
Go to File/Line
Debugger
Stack Viewer
Auto-open Stack Viewer
4:d48eceb, Dec 19 2017, 06:04:45) [MSC v.19
on win32
credits" or "license()" for more information
Ln: 3 Col: 4
```

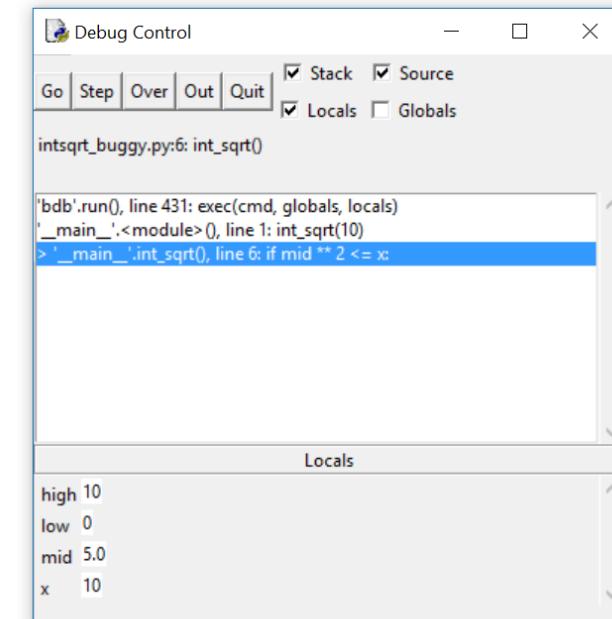

```
Debug Control
File Edit Format Run Options Window Help
Go Step Over Out Quit
Locals Globals
intsqrt_buggy.py:6: int_sqrt()
'bdb'.run(), line 431: exec(cmd, globals, locals)
'_main_'.<module>(), line 1: int_sqrt(10)
> '_main_.int_sqrt(), line 6: if mid ** 2 <= x:
Ln: 3 Col: 4
```

| Locals  |
|---------|
| high 10 |
| low 0   |
| mid 5.0 |
| x 10    |

# Coverage

- Ensure that your tests cover the whole code and all possible branches are taken
- The module coverage can monitor running your code and report which lines and branches were not executed
- pip install coverage
- **Note** 100% coverage does not guarantee that there are no errors... just fewer

## goldbach.py

```
1 def odd(x):
2 return x % 2 == 1
3
4 def sum_of_three_primes(n):
5 assert odd(n) and n > 5
6 primes = (set(range(2, n + 1)) -
7 set(x for f in range(2, n + 1)
8 for x in range(2 * f, n + 1, f)))
9 for x in primes:
10 for y in primes:
11 for z in primes:
12 if n == x + y + z:
13 print(n, 'is the sum of three primes', x, y, z)
14 print(n, 'is not the sum of three primes')
15 for n in range(7, 1000, 2):
16 sum_of_three_primes(n)
```

## Shell

```
> coverage run --branch goldbach.py
| 7 is the sum of three primes 2 2 3
| 9 is the sum of three primes 2 2 5
|
| ...
| 999 is the sum of three primes 3 5 991
> coverage report -m goldbach.py
Name Stmts Miss Branch BrPart Cover Missing

goldbach.py 14 1 12 1 92% 14

TOTAL 14 1 12 1 92%
```

[pypi.org/project/coverage](https://pypi.org/project/coverage)

[en.wikipedia.org/wiki/Goldbach's\\_weak\\_conjecture](https://en.wikipedia.org/wiki/Goldbach's_weak_conjecture)

# coverage html

Coverage for **goldbach.py**: 92%

14 statements 13 run 1 missing 0 excluded 1 partial

« prev ^ index » next coverage.py v6.5.0, created at 2022-10-05 17:23 +0200

```
1 def odd(x):
2 return x % 2 == 1
3 def sum_of_three_primes(n):
4 assert odd(n) and n > 5
5 primes = (set(range(2, n + 1)) -
6 set(x for f in range(2, n + 1)
7 for x in range(2 * f, n + 1, f)))
8 for x in primes:
9 for y in primes:
10 for z in primes:
11 if n == x + y + z:
12 print(n, 'is the sum of three primes', x, y, z)
13 return
14 print(n, 'is not the sum of three primes')
15 for n in range(7, 1001, 2):
16 sum_of_three_primes(n)
```

8 ↳ 14

line 8 didn't jump to line 14, because the loop on line 8 didn't complete

# Concluding remarks

- Simple debugging: add print statements
- **Test driven development** → Strategy for code development, where tests are written before the code
- **Defensive programming** → add tests (assertions) to check if input/arguments are valid according to specification
- When designing tests, ensure **coverage**  
(the set of test cases should make sure all code lines get executed)
- **Python testing frameworks:** `doctest`, `unittest`, `pytest`, ...

# Mypy – a static type checker for Python

Experimental 

- **Static type checking** tries to analyze a program for potential type errors **without** executing the program
- Installing:  

```
pip install mypy
```
- Running Python will cause an error during execution, whereas using **mypy** the error will be found without executing the program
- Standard (and required) in statically typed languages like Java, C, C++

`mypy-simple.py`

```
print("start")
print(42 + "abc") # error
print("end")
```

`Shell`

```
> python mypy-simple.py
| start
| TypeError: unsupported operand type(s)
| for +: 'int' and 'str'
> mypy mypy-simple.py
| mypy-simple.py:2: error: Unsupported
| operand types for + ("int" and "str")
```

[mypy-lang.org](https://mypy-lang.org)

[PEP 484 - Type Hints](https://peps.python.org/pep-0484/)

# Type hints (PEP 484)

- Python allows type hints in programs
- They are **ignored** at run-time by Python, but useful for static type analysis (mypy)
- Syntax

*variable* : *type*

*variable* : *type* = *value*

## mypy-basic-types.py

```
x : int # type hint
x = 42
x = "abc" # type error
y : int = 42 # type hint
y = "abc" # type error
z = 42
z = "abc" # type changed from int to str
print(x, y, z)
```

## Shell

```
> python mypy-basic-types.py
| abc abc abc
> mypy mypy-basic-types.py
| mypy-basic-types.py:3: error: Incompatible
| types in assignment (expression has type
| "str", variable has type "int")
| mypy-basic-types.py:5: error: ...
| mypy-basic-types.py:7: error: ...
```

# Type hints – functions

```
def name(variable : type, ...) -> return type:
```

| mypy-function.py                                                                                                                                                                                                                                               | Shell                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>def f(x: int, units: str) -&gt; str:     return str(x) + " " + units def g(x, units: str) -&gt; str:     return str(x) + " " + units print(f(3, "cm")) print(f("one", "meter")) print(g(3, "cm")) print(g("one", "meter")) print(f.__annotations__)</pre> | <pre>&gt; python mypy-function.py 3 cm <b>one meter</b> 3 cm <b>one meter</b> {'x': &lt;class 'int'&gt;, 'units': &lt;class 'str'&gt;,  'return': &lt;class 'str'&gt;} &gt; mypy mypy-function.py mypy-function.py:8: error: Argument 1 to "f" has incompatible type "str"; expected "int"</pre> |

- Note: for functions and methods *function.\_\_annotations\_\_* is a dictionary with the annotation

# Type hints – objects

mypy-classes.py

```
class A:
 pass

class B(A):
 pass

class C:
 pass

a : A
b : B
c : C

a = A()
a = B() # valid, B subclass of A
a = C() # error
b = A() # error
b = B()
b = C() # error
c = A() # error
c = B() # error
c = C()
```

Shell

```
> mypy mypy-classes.py
mypy-classes.py:15: error: Incompatible types in assignment (expression has type "C", variable has type "A")
mypy-classes.py:16: error: Incompatible types in assignment (expression has type "A", variable has type "B")
mypy-classes.py:18: error: Incompatible types in assignment (expression has type "C", variable has type "B")
mypy-classes.py:19: error: Incompatible types in assignment (expression has type "A", variable has type "C")
mypy-classes.py:20: error: Incompatible types in assignment (expression has type "B", variable has type "C")
```

# More type hints... see PEP 484 for even more...

mypy-typing.py

```
from typing import Mapping, Set, List, Tuple, Union, Optional

S : Set = {} # error {} dictionary
S2 : Set[int] = {1, 2, "abc"} # error "abc" is not int
D : Mapping[int, int] = {1: 42, 'a': 1} # error 'a' is not int
T : Tuple[int, str] = (42, 7) # error 7 is not str
L : List[Union[int, str]] = [42, 'a', None] # list can only contain int and str
L2 : List[Optional[str]] = ['abc', None, 42] # list can only contain str or None
```

Shell

```
> mypy mypy-typing.py
|mypy-typing.py:3: error: Incompatible types in assignment (expression has type "Dict[<nothing>, <nothing>]", variable has type "Set[Any]")
|mypy-typing.py:4: error: Argument 3 to <set> has incompatible type "str"; expected "int"
|mypy-typing.py:5: error: Dict entry 1 has incompatible type "str": "int"; expected "int": "int"
|mypy-typing.py:6: error: Incompatible types in assignment (expression has type "Tuple[int, int]", variable has type "Tuple[int, str]")
|mypy-typing.py:7: error: List item 2 has incompatible type "None"; expected "Union[int, str]"
|mypy-typing.py:8: error: List item 2 has incompatible type "int"; expected "Optional[str]"
```

# ... the same in Python 3.10

mypy-typing-new.py

```
deprecated: from typing import Mapping, Set, List, Tuple, Union, Optional

S : set = {}
S2 : set[int] = {1, 2, "abc"} # error {} dictionary
D : dict[int, int] = {1: 42, 'a': 1} # error "abc" is not int
T : tuple[int, str] = (42, 7) # error 'a' is not int
L : list[int | str] = [42, 'a', None] # error 7 is not str
L2 : list[str | None] = ['abc', None, 42] # list can only contain int and str
 # list can only contain str og None
```

Shell

```
> mypy mypy-typing-new.py
mypy-typing-new.py:3: error: Incompatible types in assignment (expression has type "Dict[<nothing>, <nothing>]", variable has type "Set[Any]")
mypy-typing-new.py:4: error: Argument 3 to <set> has incompatible type "str"; expected "int"
mypy-typing-new.py:5: error: Dict entry 1 has incompatible type "str": "int"; expected "int": "int"
mypy-typing-new.py:6: error: Incompatible types in assignment (expression has type "Tuple[int, int]", variable has type "Tuple[int, str]")
mypy-typing-new.py:7: error: List item 2 has incompatible type "None"; expected "Union[int, str]"
mypy-typing-new.py:8: error: List item 2 has incompatible type "int"; expected "Optional[str]"
```

# Decorators

- @

# Course overview

Basic programming  
Advanced / specific python  
Libraries & applications

|                            |                                    |                                     |
|----------------------------|------------------------------------|-------------------------------------|
| 1. Introduction to Python  | 10. Functions as objects           | 19. Linear programming              |
| 2. Python basics / if      | 11. Object oriented programming    | 20. Generators, iterators, with     |
| 3. Basic operations        | 12. Class hierarchies              | 21. Modules and packages            |
| 4. Lists / while / for     | 13. Exceptions and files           | 22. Working with text               |
| 5. Tuples / comprehensions | 14. Doc, testing, debugging        | 23. Relational data                 |
| 6. Dictionaries and sets   | 15. Decorators                     | 24. Clustering                      |
| 7. Functions               | 16. Dynamic programming            | 25. Graphical user interfaces (GUI) |
| 8. Recursion               | 17. Visualization and optimization | 26. Java vs Python                  |
| 9. Recursion and Iteration | 18. Multi-dimensional data         | 27. Final lecture                   |

10 handins  
1 final project (last 1 month)

# Python decorators are just syntactic sugar

Python

```
@dec2
@dec1
def func(arg1, arg2, ...):
 pass
```



Python

```
def func(arg1, arg2, ...):
 pass


func = dec2(dec1(func))
```

'pie-decorator' syntax

dec1, dec2, ... are functions (decorators) taking a *function as an argument* and *returning a new function*

Note: decorators are listed bottom up in order of execution

# Recap functions

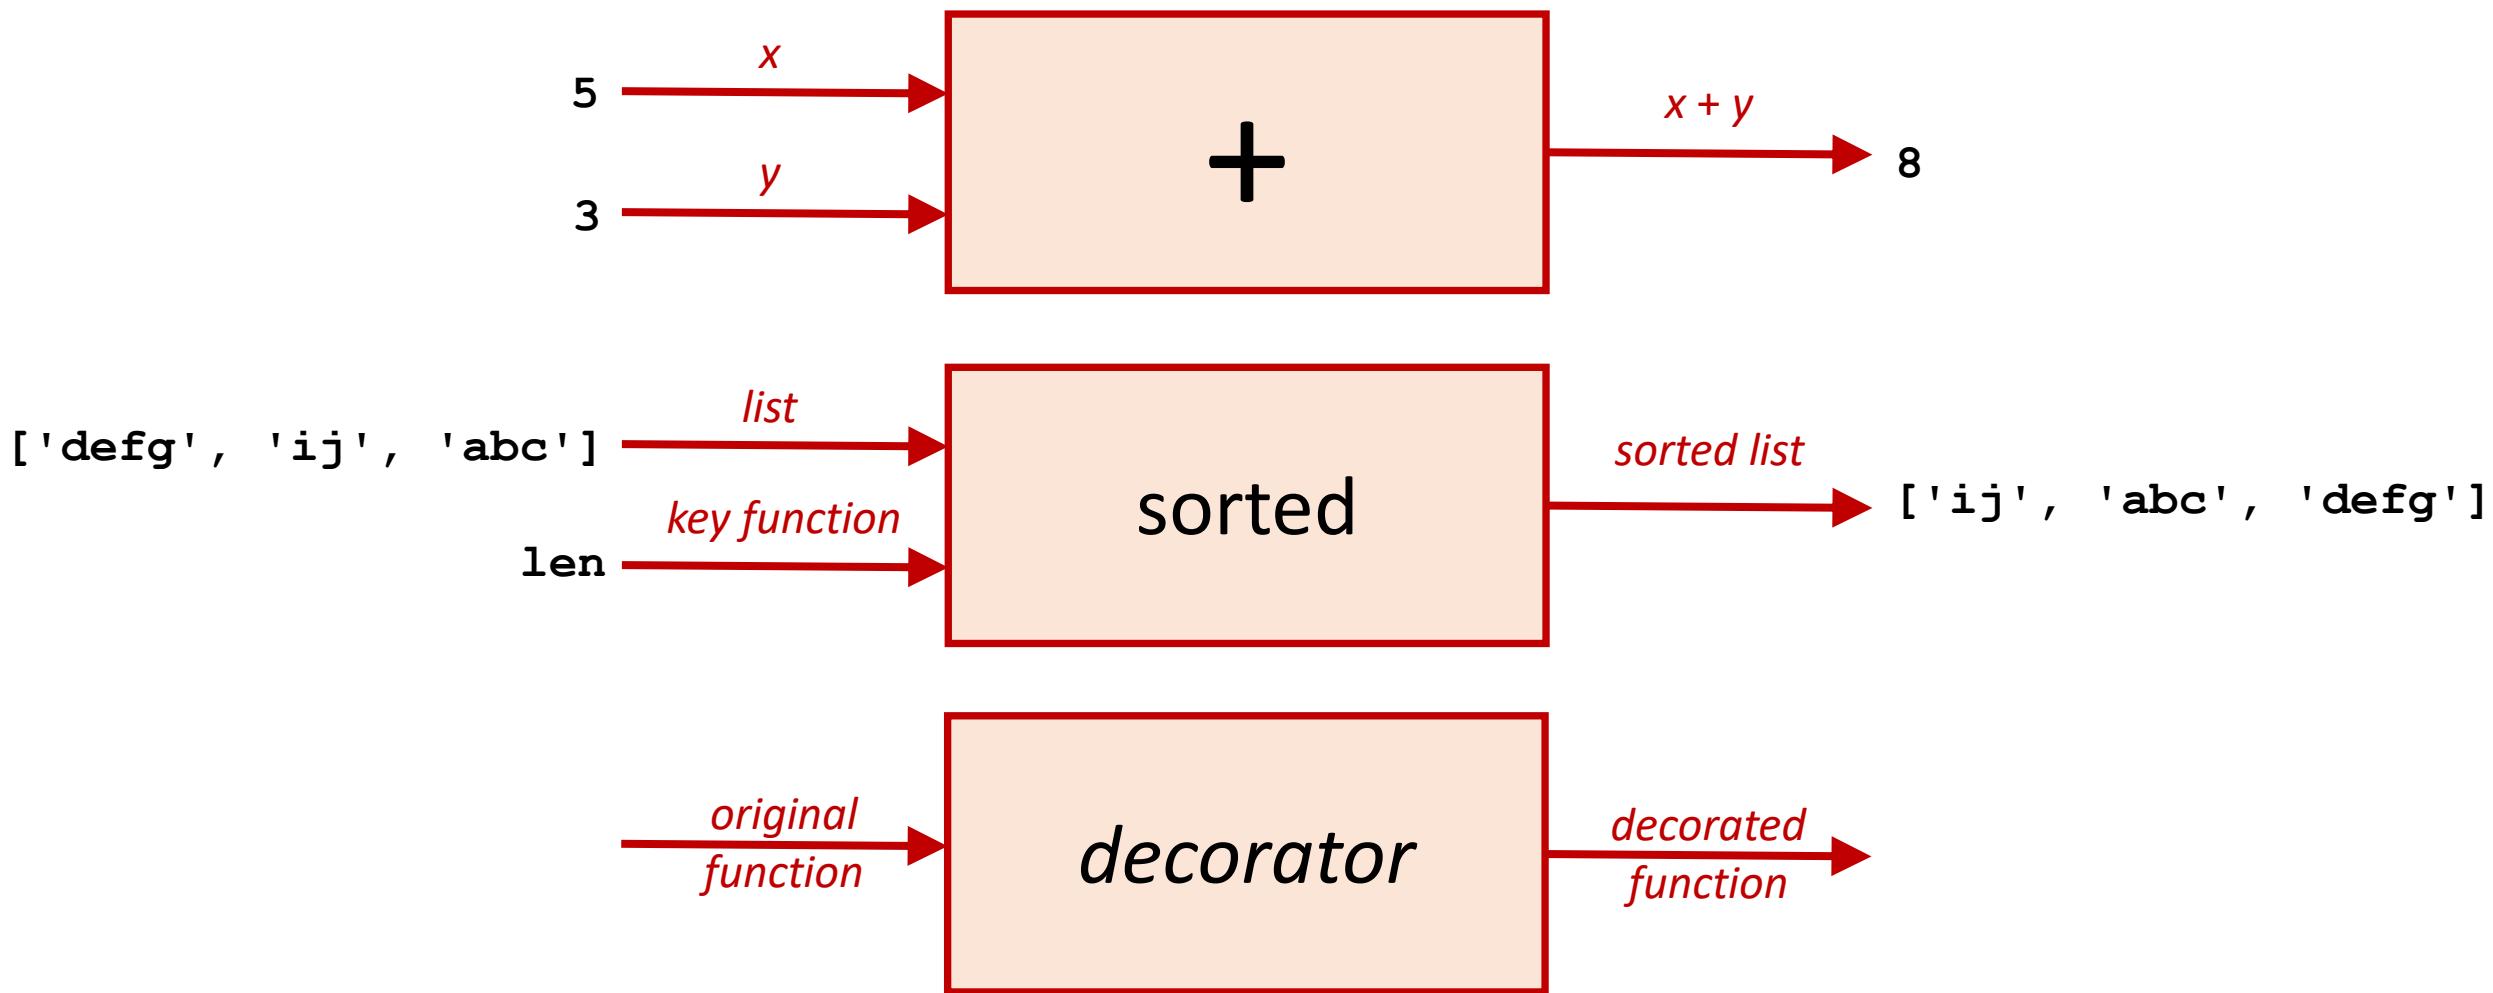

# Contrived example : Plus one (I-II)

plus\_one1.py

```
def plus_one(x):
 return x + 1

def square(x):
 return x ** 2

def cube(x):
 return x ** 3

print(plus_one(square(5)))
print(plus_one(cube(5)))
```

Python shell

```
| 26
| 126
```

Assume we *always* need to call `plus_one` on the result of `square` and `cube` (don't ask why!)

plus\_one2.py

```
def plus_one(x):
 return x + 1

def square(x):
 return plus_one(x ** 2)

def cube(x):
 return plus_one(x ** 3)

print(square(5))
print(cube(5))
```

Python shell

```
| 26
| 126
```

We could call `plus_one` inside functions  
(but could be more `return` statements in functions)

# Contrived example : Plus one (III-IV)

plus\_one3.py

```
def plus_one(x):
 return x + 1

def square(x):
 return x ** 2

def cube(x):
 return x ** 3

square_original = square
cube_original = cube

square = lambda x: plus_one(square_original(x))
cube = lambda x: plus_one(cube_original(x))

print(square(5))
print(cube(5))
```

Python shell

```
| 26
| 126
```

Overwrite square and cube with decorated versions

plus\_one4.py

```
def plus_one(x):
 return x + 1

def plus_one_decorator(f):
 return lambda x: plus_one(f(x))

def square(x):
 return x ** 2

def cube(x):
 return x ** 3

square = plus_one_decorator(square)
cube = plus_one_decorator(cube)

print(square(5))
print(cube(5))
```

Python shell

```
| 26
| 126
```

Create a **decorator function** plus\_one\_decorator

# Contrived example : Plus one (V-VI)

plus\_one5.py

```
def plus_one(x):
 return x + 1

def plus_one_decorator(f):
 return lambda x: plus_one(f(x))

@plus_one_decorator
def square(x):
 return x ** 2

@plus_one_decorator
def cube(x):
 return x ** 3

print(square(5))
print(cube(5))
```

Python shell

```
| 26
| 126
```

Use Python **decorator syntax**

plus\_one6.py

```
def plus_one_decorator(f):
 def plus_one(x):
 return f(x) + 1
 return plus_one

@plus_one_decorator
def square(x):
 return x ** 2

@plus_one_decorator
def cube(x):
 return x ** 3

print(square(5))
print(cube(5))
```

Python shell

```
| 26
| 126
```

Create **local function** instead of using **lambda**

# Contrived example : Plus one (VII)

plus\_one7.py

```
def plus_one_decorator(f):
 def plus_one(x):
 return f(x) + 1
 return plus_one

@plus_one_decorator
@plus_one_decorator
def square(x):
 return x ** 2

@plus_one_decorator
@plus_one_decorator
@plus_one_decorator
def cube(x):
 return x ** 3

print(square(5))
print(cube(5))
```

Python shell

| 27

| 128

- A function can have an arbitrary number of decorators (also the same repeated)
- Decorators are listed bottom up in order of execution

# Handling arguments

run\_twice1.py

```
def run_twice(f):
 def wrapper():
 f()
 f()

 return wrapper

@run_twice
def hello_world():
 print("Hello world")

hello_world()
```

Python shell

```
| Hello world
| Hello world
```

“wrapper” is a common name for the function returned by a decorator

run\_twice2.py

```
def run_twice(f):
 def wrapper(*args):
 f(*args)
 f(*args)

 return wrapper

@run_twice
def hello_world():
 print("Hello world")

@run_twice
def hello(txt):
 print("Hello", txt)

hello_world()
hello("Mars")
```

Python shell

```
| Hello world
| Hello world
| Hello Mars
| Hello Mars
```

args holds the arguments in a tuple given to the function to be decorated

# Question – What does the decorated program print ?

decorator\_quizz.py

```
def double(f):
 def wrapper(*args):
 return 2 * f(*args)
 return wrapper

def add_three(f):
 def wrapper(*args):
 return 3 + f(*args)
 return wrapper

@double
@add_three
def seven():
 return 7

print(seven())
```



- 7
- 10
- 14
- 17
- 20
- Don't know

# Example: Enforcing argument types

- Defining decorators can be (slightly) complicated
- Using decorators is easy

integer\_sum1.py

```
def integer_sum(*args):
 assert all([isinstance(x, int) for x in args]), \
 "all arguments must be int"
 return sum(args)
```

Python shell

```
> integer_sum(1, 2, 3, 4)
| 10
> integer_sum(1, 2, 3.2, 4)
| AssertionError: all arguments must be int
```

integer\_sum2.py

```
def enforce_integer(f): # decorator function
 def wrapper(*args):
 assert all([isinstance(x, int) for x in args]), \
 "all arguments must be int"
 return f(*args)
 return wrapper

@enforce_integer
def integer_sum(*args):
 return sum(args)
```

Python shell

```
> integer_sum(1, 2, 3, 4)
| 10
> integer_sum(1, 2, 3.2, 4)
| AssertionError: all arguments must be int
```

# Decorators can take arguments

Python

```
@dec(argA, argB, ...)
def func(arg1, arg2, ...):
 pass
```

≡

Python

```
def func(arg1, arg2, ...):
 pass
func = dec(argA, argB, ...)(func)
```

dec is a function (decorator) that takes a *list of arguments* and *returns a function* (to decorate func) that takes a *function as an argument* and *returns a new function*

# Example: Generic type enforcing

print\_repeated.py

```
def enforce_types(*decorator_args):
 def decorator(f):
 def wrapper(*args):
 assert len(args) == len(decorator_args), \
 ("got %s arguments, expected %s" % (len(args), len(decorator_args)))
 assert all([isinstance(x, t) for x, t in zip(args, decorator_args)]), \
 "unexpected types"
 return f(*args)
 return wrapper
 return decorator

@enforce_types(str, int) # decorator with arguments
def print_repeated(txt, n):
 print(txt * n)

print_repeated("Hello ", 3)
print_repeated("Hello ", "world")
```

Python shell

```
| Hello Hello Hello
| AssertionError: unexpected types
```

Python

```
@dec(argA, argB, ...)
def func(arg1, arg2, ...):
 pass
```

≡

Python

```
def func(arg1, arg2, ...):
 pass
func = dec(argA, argB, ...)(func)
```

# Example: A timer decorator

time\_it.py

```
import time

def time_it(f):
 def wrapper(*args, **kwargs):
 t_start = time.time()
 result = f(*args, **kwargs)
 t_end = time.time()
 t = t_end - t_start
 print("%s took %.2f sec" % (f.__name__, t))
 return result

 return wrapper

@time_it
def slow_function(n):
 sum_ = 0
 for x in range(n):
 sum_ += x
 print("The sum is:", sum_)

for i in range(6):
 slow_function(1_000_000 * 2 ** i)
```

Python shell

```
| The sum is: 499999500000
| slow_function took 0.27 sec
| The sum is: 1999999000000
| slow_function took 0.23 sec
| The sum is: 7999998000000
| slow_function took 0.41 sec
| The sum is: 31999996000000
| slow_function took 0.81 sec
| The sum is: 127999992000000
| slow_function took 1.52 sec
| The sum is: 511999984000000
| slow_function took 3.12 sec
```

# Built-in @property

- decorator specific for class methods
- allows accessing `x.attribute()` as `x.attribute`,  
convenient if attribute does not take any arguments (also readonly)

`rectangle1.py`

```
class Rectangle:
 def __init__(self, width, height):
 self.width = width
 self.height = height

 # @property
 def area(self):
 return self.width * self.height
```

`Python shell`

```
> r = Rectangle(3, 4)
> print(r.area())
| 12
```

`rectangle2.py`

```
class Rectangle:
 def __init__(self, width, height):
 self.width = width
 self.height = height

 @property
 def area(self):
 return self.width * self.height
```

`Python shell`

```
> r = Rectangle(3, 4)
> print(r.area)
| 12
```

# Class decorators

Python

```
@dec2
@dec1
class A:
 pass
```



Python

```
class A:
 pass

A = dec2(dec1(A))
```

# Module `dataclasses` (Since Python 3.7)

- New (and more configurable) alternative to `namedtuple`

Python shell

```
> from dataclasses import dataclass
> @dataclass # uses a decorator to add methods to the class
 class Person:
 name: str # uses type annotation to define fields
 appeared: int
 height: str = 'unknown height' # field with default value
> person = Person('Donald Duck', 1934, '3 feet')
> person
| Person(name='Donald Duck', appeared=1934, height='3 feet')
> person.name
| 'Donald Duck'
> Person('Mickey Mouse', 1928)
| Person(name='Mickey Mouse', appeared=1928, height='unknown height')
```

[docs.python.org/3/library/dataclasses.html#module-dataclasses](https://docs.python.org/3/library/dataclasses.html#module-dataclasses)

Raymond Hettinger - Dataclasses: The code generator to end all code generators - PyCon 2018

# @functools.total\_ordering (class decorator)

student.py

```
import functools

@functools.total_ordering
class Student():
 def __init__(self, name, student_id):
 self.name = name
 self.id = student_id

 def __eq__(self, other):
 return (self.name == other.name
 and self.id == other.id)

 def __lt__(self, other):
 my_name = ', '.join(reversed(self.name.split()))
 other_name = ', '.join(reversed(other.name.split()))
 return (my_name < other_name
 or (my_name == other_name and self.id < other.id))

donald = Student('Donald Duck', 7)
gladstone = Student('Gladstone Gander', 42)
grandma = Student('Grandma Duck', 1)
```

Automatically creates  
<, <=, >, >= if at least  
one of the functions  
is implemented and  
== is implemented

Python shell

```
> donald < grandma
| True
> grandma >= gladstone
| False
> grandma <= gladstone
| True
> donald > gladstone
| False
```

## class\_decorator.py

```
def add_lessequal(cls):
 '''Class decorator to add __le__ given __eq__ and __lt__.'''
 cls.__le__ = lambda self, other : self == other or self < other
 return cls # the original class cls with attribute __le__ added

def add_lessequal(cls): # alternative
 class sub_cls(cls):
 def __le__(self, other):
 return self == other or self < other
 return sub_cls # new subclass of class cls

@add_lessequal # Vector = add_lessequal(Vector)
class Vector:
 def __init__(self, x, y):
 self.x = x
 self.y = y

 def _length_squared(self):
 return self.x ** 2 + self.y ** 2

 def __eq__(self, other):
 # Required, otherwise Vector(1, 2) == Vector(1, 2) is False
 return self._length_squared() == other._length_squared()

 def __lt__(self, other):
 return self._length_squared() < other._length_squared()

 # def __le__(self, other):
 # return self._length_squared() <= other._length_squared()
 #
 # def __ge__(self, other):
 # return self == other or self < other
```

## Python shell

```
> u = Vector(3, 4)
> v = Vector(2, 5)
> u.__eq__(v)
| False
> u.__ne__(v)
| True # not u.__eq__(v)
> u.__lt__(v)
| True
> u.__gt__(v)
| NotImplemented # special value
> u.__le__(v)
| True # added by @add_lessequal
> u.__ge__(v)
| NotImplemented # special value
> u == v
| False
> u != v
| True
> u < v
| True
> u > v # v < u
| False
> u <= v
| True
> u >= v # v <= u
| False
```

# Summary

- `@decorator_name`
- Python decorators are just syntactic sugar
- Adds functionality to a function without having to augment each call to the function or each return statement in the function
- There are decorators for functions, class methods, and classes
- There are many decorators in the Python Standard Library
- Decorators are easy to use
- ...and (slightly) harder to write

# Dynamic programming

- memoization
- decorator memoized
- systematic subproblem computation

```
--(7, 5)
|--(6, 5)
| |--(5, 5)
| | |--(5, 4)
| | | |--(4, 4)
| | | | |--(4, 3)
| | | | | |--(3, 3)
| | | | | | |--(3, 2)
| | | | | | | |--(2, 2)
| | | | | | | | |--(2, 1)
| | | | | | | | | |--(1, 1)
| | | | | | | | | | |--(1, 0)
|
| | | | | | | | | | | |--(6, 4)
| | | | | | | | | | | | |--(5, 4)
| | | | | | | | | | | | | |--(4, 4)
| | | | | | | | | | | | | | |--(4, 3)
| | | | | | | | | | | | | | | |--(3, 3)
| | | | | | | | | | | | | | | | |--(3, 2)
| | | | | | | | | | | | | | | | | |--(2, 2)
| | | | | | | | | | | | | | | | | | |--(2, 1)
| | | | | | | | | | | | | | | | | | | |--(1, 1)
| | | | | | | | | | | | | | | | | | | | |--(1, 0)
|
| | | | | | | | | | | | | | | | | |--(5, 3)
| | | | | | | | | | | | | | | | | | |--(4, 3)
| | | | | | | | | | | | | | | | | | | |--(3, 3)
| | | | | | | | | | | | | | | | | | | | |--(3, 2)
| | | | | | | | | | | | | | | | | | | | | |--(2, 2)
| | | | | | | | | | | | | | | | | | | | | | |--(2, 1)
| | | | | | | | | | | | | | | | | | | | | | | |--(1, 1)
| | | | | | | | | | | | | | | | | | | | | | | | |--(1, 0)
|
| | | | | | | | | | | | | | | | | | | |--(4, 2)
| | | | | | | | | | | | | | | | | | | | |--(3, 2)
| | | | | | | | | | | | | | | | | | | | | |--(2, 2)
| | | | | | | | | | | | | | | | | | | | | | |--(2, 1)
| | | | | | | | | | | | | | | | | | | | | | | |--(1, 1)
| | | | | | | | | | | | | | | | | | | | | | | | |--(1, 0)
|
| | | | | | | | | | | | | | | | | | | |--(3, 1)
| | | | | | | | | | | | | | | | | | | | |--(2, 1)
| | | | | | | | | | | | | | | | | | | | | |--(1, 1)
| | | | | | | | | | | | | | | | | | | | | | |--(1, 0)
| | | | | | | | | | | | | | | | | | | | | | | |--(2, 0)
```

identical computations

# Binomial coefficient

$$\binom{n}{k} = \begin{cases} 1 & \text{if } k = 0 \text{ or } k = n \\ \binom{n-1}{k} + \binom{n-1}{k-1} & \text{otherwise} \end{cases}$$

## binomial\_recursive.py

```
def binomial(n, k):
 if k == 0 or k == n:
 return 1
 return binomial(n - 1, k) + binomial(n - 1, k - 1)
```

recursion tree for binomial (7, 5)

# Dynamic Programming

≡

Remember solutions already found  
(memoization)

- Technique sometimes applicable when running time otherwise becomes exponential
- Only applicable if stuff to be remembered is manageable

recursion tree for  
binomial(7, 5)

```
-- (7, 5)
| -- (6, 5)
| | -- (5, 5)
| | | -- (5, 4)
| | | | -- (4, 4)
| | | | | -- (4, 3)
| | | | | | -- (3, 3)
| | | | | | | -- (3, 2)
| | | | | | | | -- (2, 2)
| | | | | | | | | -- (2, 1)
| | | | | | | | | | -- (1, 1)
| | | | | | | | | | | -- (1, 0)

-- (6, 4)
| -- (5, 4)
| | -- (5, 3)
| | | -- (4, 3)
| | | | -- (4, 2)
| | | | | -- (3, 2)
| | | | | | -- (3, 1)
| | | | | | | -- (2, 1)
| | | | | | | | -- (2, 0)
```

# Binomial Coefficient

## Dynamic programming using a dictionary

`binomial_dictionary.py`

```
answers = {} # answers[(n, k)] = binomial(n, k)

def binomial(n, k):
 if (n, k) not in answers:
 if k == 0 or k == n:
 answer = 1
 else:
 answer = binomial(n - 1, k) + binomial(n - 1, k - 1)
 answers[(n, k)] = answer
 return answers[(n, k)]
```

`Python shell`

```
> binomial(6, 3)
| 20
> answers
| {(3, 3): 1, (2, 2): 1, (1, 1): 1, (1, 0): 1, (2, 1): 2, (3, 2): 3, (4, 3): 4, (2, 0): 1, (3, 1): 3, (4, 2): 6, (5, 3): 10, (3, 0): 1, (4, 1): 4, (5, 2): 10, (6, 3): 20}
```

- Use a dictionary `answers` to store already computed values

reuse value stored in dictionary `answers`

# Question – What is the order of the size of the dictionary answers after calling **binomial (n , k)** ?

**binomial\_dictionary.py**

```
answers = {} # answers[(n, k)] = binomial(n, k)

def binomial(n, k):
 if (n, k) not in answers:
 if k == 0 or k == n:
 answer = 1
 else:
 answer = binomial(n - 1, k) + binomial(n - 1, k - 1)
 answers[(n, k)] = answer
 return answers[(n, k)]
```

- a)  $\max(n, k)$
- b)  $n + k$
-  c)  $n * k$
- d)  $n^k$
- e)  $k^n$
- f) Don't know

# Binomial Coefficient

## Dynamic programming using decorator

- Use a decorator (@memoize) that implements the functionality of remembering the results of previous function calls

`binomial_decorator.py`

```
def memoize(f):
 # answers[args] = f(*args)
 answers = {}

 def wrapper(*args):
 if args not in answers:
 answers[args] = f(*args)
 return answers[args]

 return wrapper
```

```
@memoize
def binomial(n, k):
 if k == 0 or k == n:
 return 1
 else:
 return binomial(n - 1, k) + binomial(n - 1, k - 1)
```

### binomial\_decorator\_trace.py

```

def trace(f): # decorator to trace recursive calls
 indent = 0

 def wrapper(*args):
 nonlocal indent
 spaces = '| ' * indent
 arg_str = ', '.join(map(repr, args))
 print(spaces + f'{f.__name__}({arg_str})')
 indent += 1
 result = f(*args)
 indent -= 1
 print(spaces + f'> {result}')
 return result

 return wrapper

def memoize(f):
 answers = {}

 def wrapper(*args):
 if args not in answers:
 answers[args] = f(*args)
 return answers[args]

 wrapper.__name__ = f.__name__ + '_memoize'
 return wrapper

@trace
@memoize
def binomial(n, k):
 if k == 0 or k == n:
 return 1
 return binomial(n - 1, k) + binomial(n-1, k-1)

print(binomial(5, 2))

```

### Python shell (without @memoize)

```

binomial(5, 2)
| binomial(4, 2)
| | binomial(3, 2)
| | | binomial(2, 2)
| | | > 1
| | | binomial(2, 1)
| | | | binomial(1, 1)
| | | | > 1
| | | | binomial(1, 0)
| | | | > 1
| | | > 2
| | | > 3
| | | binomial(3, 1)
| | | | binomial(2, 1)
| | | | | binomial(1, 1)
| | | | | > 1
| | | | | binomial(1, 0)
| | | | | > 1
| | | > 2
| | | > 3
| | | binomial(2, 0)
| | | > 1
| | > 3
| > 6
binomial(4, 1)
| binomial(3, 1)
| | binomial(2, 1)
| | | binomial(1, 1)
| | | > 1
| | | binomial(1, 0)
| | | > 1
| | > 2
| | > 3
| | binomial(2, 0)
| | > 1
| > 4
> 10
10

```

### Python shell (with @memoize)

```

binomial_memoize(5, 2)
| binomial_memoize(4, 2)
| | binomial_memoize(3, 2)
| | | binomial_memoize(2, 2)
| | | > 1
| | | binomial_memoize(2, 1)
| | | | binomial_memoize(1, 1)
| | | | > 1
| | | | binomial_memoize(1, 0)
| | | > 1
| | > 2
| | > 3
| | binomial_memoize(3, 1)
| | | binomial_memoize(2, 1)
| | | > 2
| | | binomial_memoize(2, 0)
| | | > 1
| | > 3
| > 6
binomial_memoize(4, 1)
| binomial_memoize(3, 1)
| | binomial_memoize(2, 1)
| | > 3
| | binomial_memoize(2, 0)
| | > 1
| > 4
> 10
10

```

without assigning `wrapper.__name__`  
the name shown would be `wrapper`

saved recursive calls  
when using memoization

# Dynamic programming using cache decorator

```
bionomial_cache.py
```

```
from functools import cache

@cache
def binomial(n, k):
 if k == 0 or k == n:
 return 1
 else:
 return binomial(n - 1, k) + binomial(n - 1, k - 1)
```

- The decorators `@cache` (since Python 3.9) and `@lru_cache(maxsize=None)` in the standard library `functools` supports the same as the decorator `@memoize`
- By default `@lru_cache` at most remembers (caches) 128 previous function calls, always evicting Least Recently Used entries from its dictionary

# Subset sum using dynamic programming

- In the subset sum problem (Exercise 13.4) we are given a number  $x$  and a list of numbers  $L$ , and want to determine if a subset of  $L$  has sum  $x$

$$L = [3, 7, 2, 11, 13, 4, 8] \quad x = 22 = 7 + 11 + 4$$

- Let  $S(v, k)$  denote if it is possible to achieve value  $v$  with a subset of  $L[:k]$ , i.e.  $S(v, k) = \text{True}$  if and only if a subset of the first  $k$  values in  $L$  has sum  $v$
- $S(v, k)$  can be computed from the following recurrence:

$$S(v, k) = \begin{cases} \text{True} & \text{if } k = 0 \text{ and } v = 0 \\ \text{False} & \text{if } k = 0 \text{ and } v \neq 0 \\ S(v, k-1) \text{ or } S(v - L[k-1], k-1) & \text{otherwise} \end{cases}$$

# Subset sum using dynamic programming

subset\_sum\_dp.py

```
def subset_sum(x, L):
 @memoize
 def solve(value, k):
 if k == 0:
 return value == 0
 return solve(value, k - 1) or solve(value - L[k - 1], k - 1)
 return solve(x, len(L))
```

Python shell

```
> subset_sum(11, [2, 3, 8, 11, -1])
| True
> subset_sum(6, [2, 3, 8, 11, -1])
| False
```

# Question – What is a bound on the size order of the memoization table if all values are positive integers?

subset\_sum\_dp.py

```
def subset_sum(x, L):
 @memoize
 def solve(value, k):
 if k == 0:
 return value == 0
 return solve(value, k-1) or solve(value - L[k-1], k-1)
 return solve(x, len(L))
```

Python shell

```
> subset_sum(11, [2, 3, 8, 11, -1])
| True
> subset_sum(6, [2, 3, 8, 11, -1])
| False
```

a)  $\text{len}(L)$

b)  $\text{sum}(L)$

c)  $x$

 d)  $2^{\text{len}(L)}$

e)  $\text{len}(L)$

 f)  $\text{len}(L) * \text{sum}(L)$

g) Don't know

# Subset sum using dynamic programming

subset\_sum\_dp.py

```
def subset_sum_solution(x, L):
 @memoize
 def solve(value, k):
 if k == 0:
 if value == 0:
 return []
 else:
 return None
 solution = solve(value, k - 1)
 if solution != None:
 return solution
 solution = solve(value - L[k - 1], k - 1)
 if solution != None:
 return solution + [L[k - 1]]
 return None

 return solve(x, len(L))
```

Python shell

```
> subset_sum_solution(11, [2, 3, 8, 11, -1])
| [3, 8]
> subset_sum_solution(6, [2, 3, 8, 11, -1])
| None
```

# Knapsack problem

- Given a **knapsack** with volume **capacity C**, and set of **objects** with different **volumes and value**.
- Objective:** Find a subset of the objects that fits in the knapsack (sum of volume  $\leq$  capacity) and has maximal value.
- Example:** If  $C = 5$  and the volume and weights are given by the table, then the maximal value 15 can be achieved by the 2nd and 3rd object.
- Let  $V(c, k)$  denote the **maximum value achievable by a subset of the first k objects within capacity c**.

|   | Volume | Value |
|---|--------|-------|
| 0 | 3      | 6     |
| 1 | 3      | 7     |
| 2 | 2      | 8     |
| 3 | 5      | 9     |

$$V(c, k) = \begin{cases} 0 & \text{if } k = 0 \\ V(c, k - 1) & \text{volume}[k-1] > c \\ \max\{V(c, k - 1), \text{value}[k - 1] + V(c - \text{volume}[k - 1], k - 1)\} & \text{otherwise} \end{cases}$$

# Knapsack – maximum value

knapsack.py

```
def knapsack_value(volume, value, capacity):
 @memoize
 def solve(c, k): # solve with capacity c and objects 0..k-1
 if k == 0: # no objects to put in knapsack
 return 0
 v = solve(c, k - 1) # try without object k-1
 if volume[k - 1] <= c: # try also with object k-1 if space
 v = max(v, value[k - 1] + solve(c - volume[k - 1], k - 1))
 return v
 return solve(capacity, len(volume))
```

Python shell

```
> volumes = [3, 3, 2, 5]
> values = [6, 7, 8, 9]
> knapsack_value(volumes, values, 5)
```

# Knapsack – maximum value and objects

knapsack.py


```
def knapsack(volume, value, capacity):
 @memoize
 def solve(c, k): # solve with capacity c and objects 0..k-1
 if k == 0: # no objects to put in knapsack
 return 0, []
 v, solution = solve(c, k - 1) # try without object k-1
 if volume[k - 1] <= c: # try also with object k-1 if space
 v2, sol2 = solve(c - volume[k - 1], k - 1)
 v2 = v2 + value[k - 1]
 if v2 > v:
 v = v2
 solution = sol2 + [k - 1]
 return v, solution
 return solve(capacity, len(volume))
```

Python shell

```
> volumes = [3, 3, 2, 5]
> values = [6, 7, 8, 9]
> knapsack(volumes, values, 5)
| (15, [1, 2])
```

# Knapsack - Table

$$V(c, k) = \begin{cases} 0 & \text{if } k = 0 \\ V(c, k - 1) & \text{value}[k-1] > c \\ \max\{V(c, k - 1), \text{value}[k - 1] + V(c - \text{volume}[k - 1], k - 1)\} & \text{otherwise} \end{cases}$$

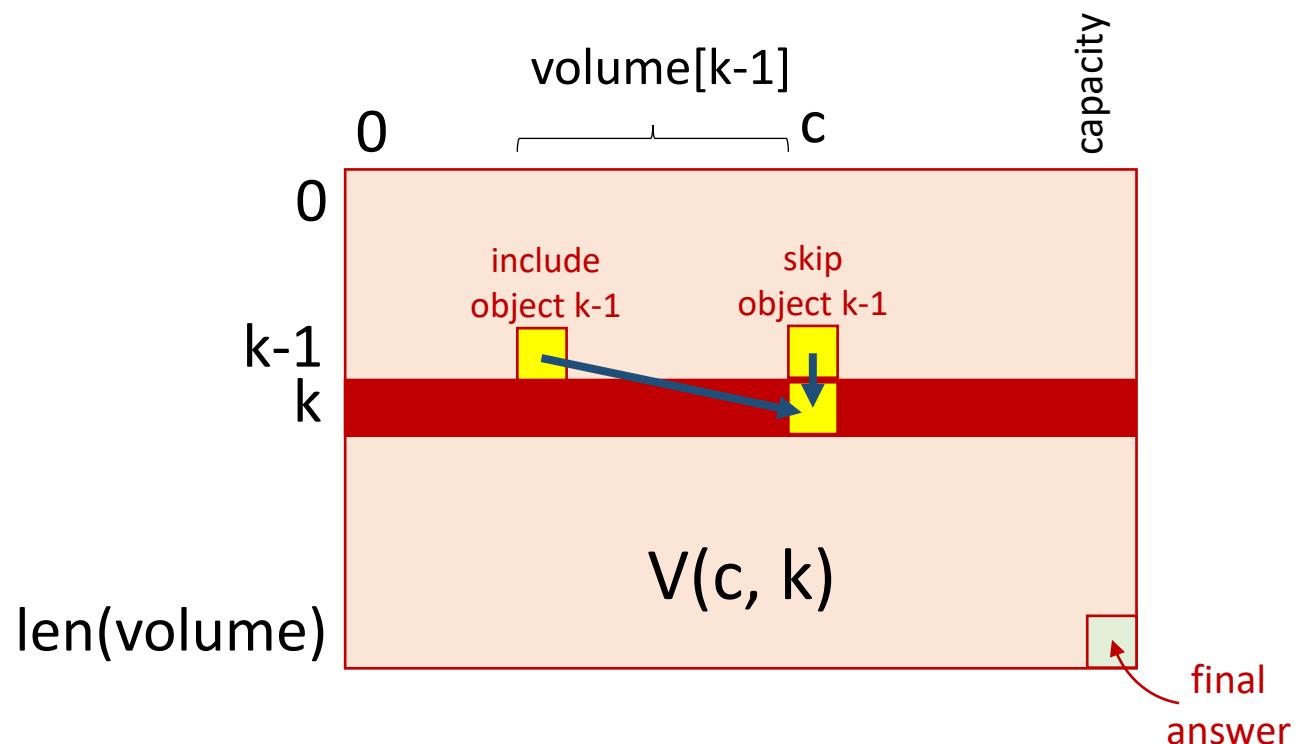

- systematic fill out table
- only need to remember two rows

# Knapsack – Systematic table fill out

knapsack\_systematic.py


```
def knapsack(volume, value, capacity):
 ① solutions = [(0, [])] * (capacity + 1)
 ② for obj in range(len(volume)):
 for c in reversed(range(volume[obj], capacity + 1)):
 ④ prev_v, prev_solution = solutions[c - volume[obj]]
 v = value[obj] + prev_v
 if solutions[c][0] < v:
 ③ solutions[c] = v, prev_solution + [obj]

 return solutions[capacity]
```

Python shell

```
> volumes = [3, 3, 2, 5]
> values = [6, 7, 8, 9]
> knapsack(volumes, values, 5)
| (15, [1, 2])
```

- ① base case  $k = 0$
- ② consider each object
- ③  $\text{solutions}[c:]$  current row
- ④  $\text{solutions}[:c]$  previous row
- ⑤ compute next row right-to-left
- ⑥  $\text{solutions}[:volume[obj]]$
- ⑦ unchanged from previous row

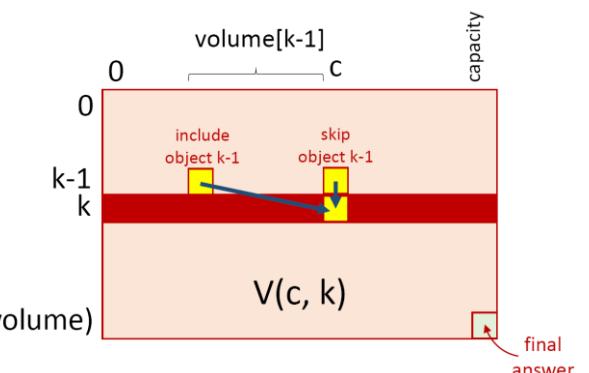

# Summary

- Dynamic programming is a general approach for recursive problems where one tries to avoid recomputing the same expressions repeatedly
- **Solution 1: Memoization**
  - add dictionary to function to remember previous results
  - decorate with a @memoize decorator
- **Solution 2: Systematic table fill out**
  - can need to compute more values than when using memoization
  - can discard results not needed any longer (reduced memory usage)

# Coding competitions and online judges

If you like to practice your coding skills, there are many online “judges” with numerous exercises and where you can upload and test your solutions.

- [Project Euler](#)
- [Kattis](#)
- [Google Code Jam](#)
- [CodeForces](#)
- [Topcoder](#)

# Google Code Jam

[codingcompetitions.withgoogle.com/codejam](https://codingcompetitions.withgoogle.com/codejam)

# code jam

print "hello, world!"


- Coding competition
- Qualification round 2022 (April 2, 01:00 – April 3, 04:00)
- In 2021 there was 37.000 participants for the qualification round

| Rank | Contestant    | Score | Penalty  | A. Oversized Pancake Flipper |         | B. Tidy Numbers        |         | C. Bathroom Stalls   |         |         | D. Fashion Show           |                   |
|------|---------------|-------|----------|------------------------------|---------|------------------------|---------|----------------------|---------|---------|---------------------------|-------------------|
|      |               |       |          | 5pt                          | 10pt    | 5pt                    | 15pt    | 5pt                  | 10pt    | 15pt    | 10pt                      | 25pt              |
| 1    | FatalEagle    | 100   | 55:12    | 4:02                         | 4:29    | 9:02                   | 9:25    | 22:30                | 22:50   | 23:13   | 54:48                     | 55:12             |
| 2    | ACMonster     | 100   | 57:32    | 3:41                         | 4:02    | 11:37                  | 11:58   | 25:03                | 25:27   | 26:01   | 57:08                     | 57:32             |
| 3    | y0105w49      | 100   | 58:00    | 8:28                         | 8:58    | 16:20                  | 16:47   | 31:34<br>1 wrong try | 32:03   | 32:36   | 53:27                     | 54:00             |
| 621  | MathCrusader  | 75    | 11:52:45 | 1:52:49                      | 1:53:20 | 2:11:37<br>1 wrong try | 2:12:05 | 2:18:48              | 2:19:18 | 2:19:48 | 11:24:45<br>6 wrong tries | --<br>1 wrong try |
| 622  | Siddhant22    | 75    | 12:07:37 | 2:15:58<br>1 wrong try       | 2:18:01 | 3:05:10                | 3:06:39 | 4:42:18              | 4:43:32 | 4:46:14 | 11:59:37<br>1 wrong try   | Time expired      |
| 623  | daimi89<br>Me | 75    | 12:18:31 | 6:21:53                      | 6:22:58 | 7:15:07                | 7:15:54 | 7:52:33              | 7:53:13 | 7:54:04 | 12:14:31<br>1 wrong try   | --                |
| 624  | plamenko      | 75    | 12:19:28 | 11:20                        | 11:56   | 27:38                  | 28:23   | 42:34                | 43:17   | 43:55   | 12:11:28<br>2 wrong tries | --<br>1 wrong try |

# Google Code Jam - Qualification Round 2017

## Problem A: Oversized Pancake Flipper (description)

- N pancakes each with exactly one happy chocolate side
- K-flipper that can flip K consecutive pancakes
- Problem: Find minimum number of flips to make all pancakes happy, if possible

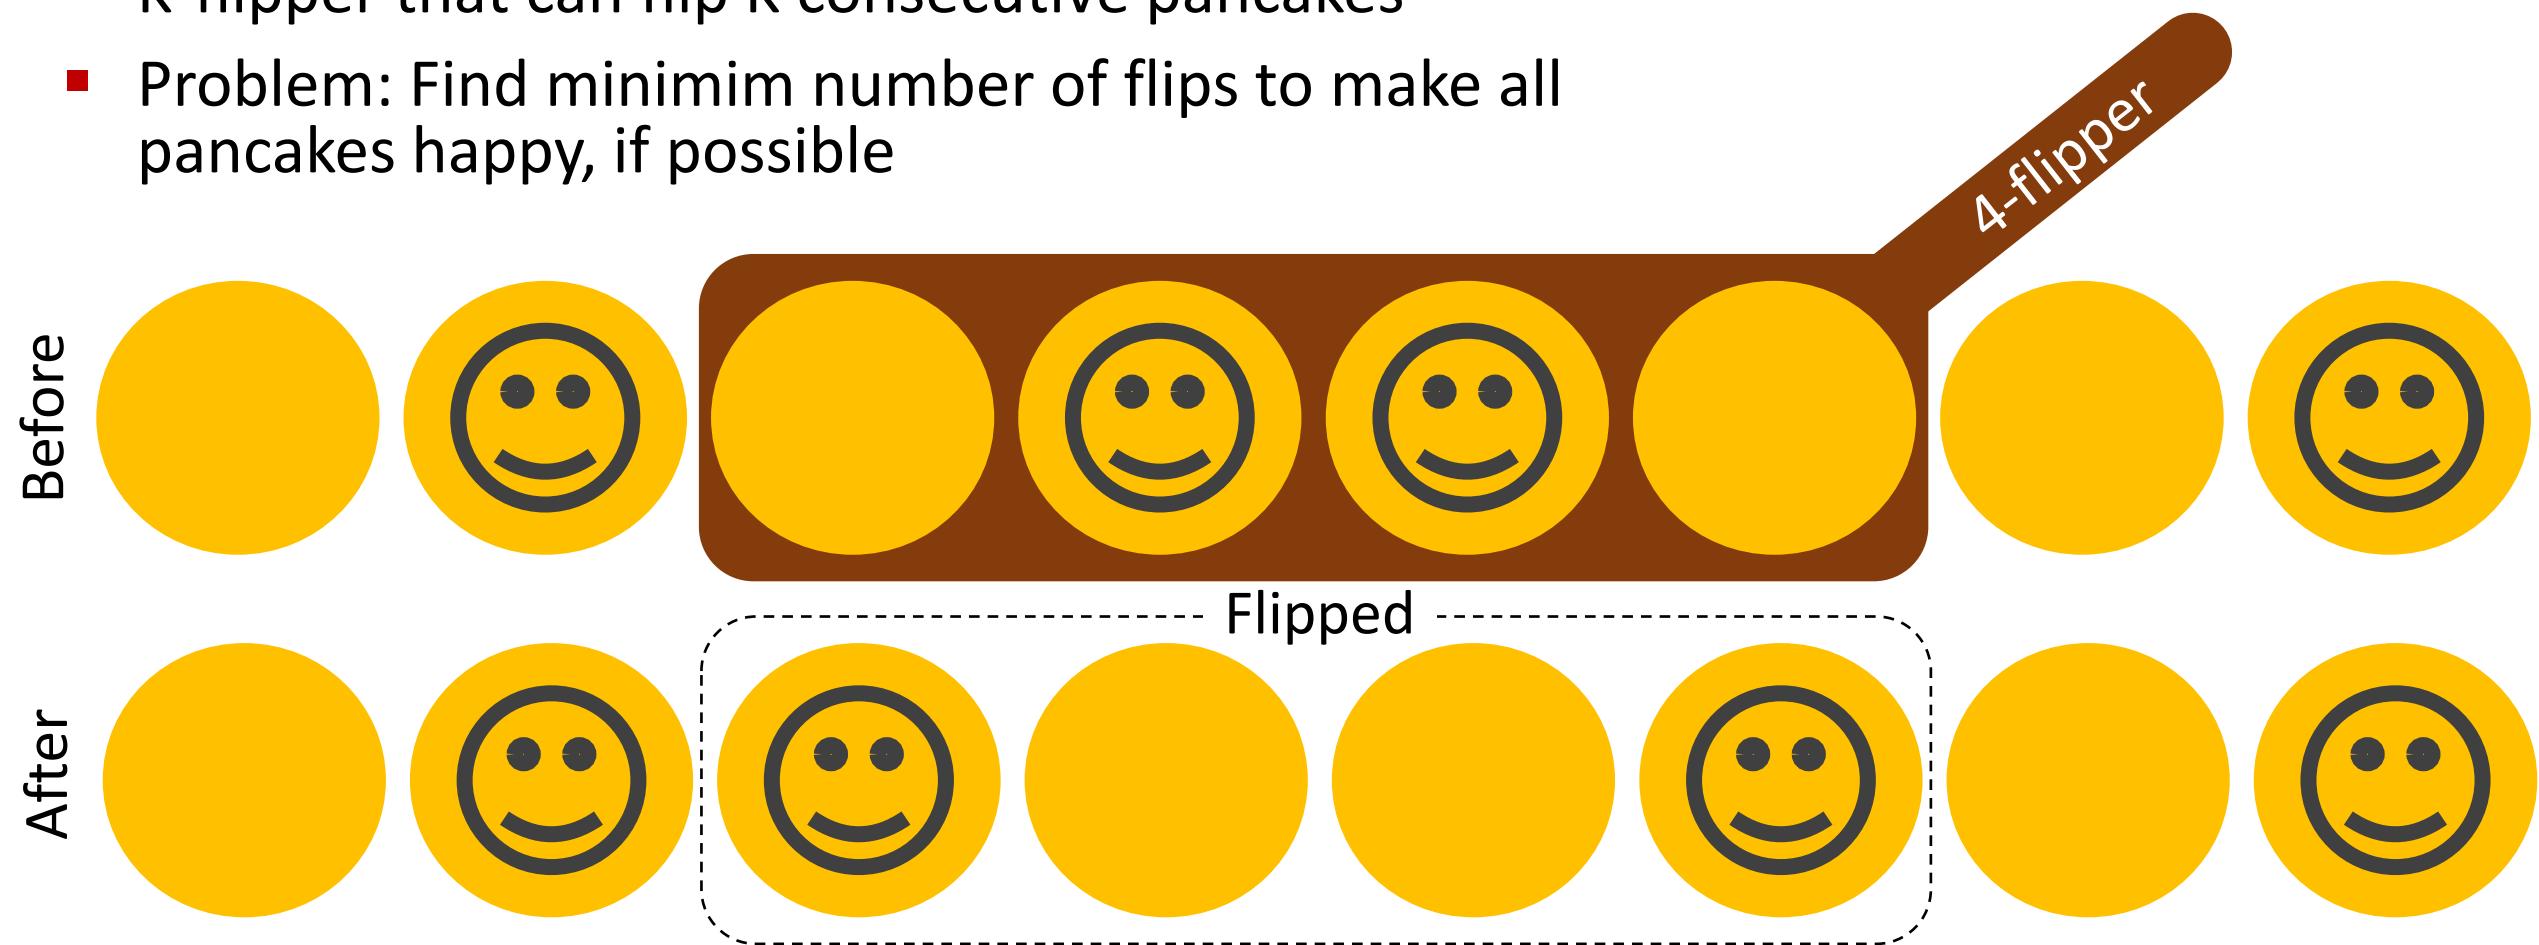

# Visualization and optimization

- Matplotlib
- Jupyter
- `scipy.optimize.minimize`



*Matplotlib is a Python 2D plotting library which produces publication quality figures in a variety of hardcopy formats and interactive environments across platforms. Matplotlib can be used in Python scripts, the Python and IPython shells, the Jupyter notebook, web application servers, and four graphical user interface toolkits.*

*Matplotlib tries to make easy things easy and hard things possible. You can generate plots, histograms, power spectra, bar charts, errorcharts, scatterplots, etc., with just a few lines of code. For simple plotting the pyplot module provides a MATLAB-like interface, particularly when combined with IPython. For the power user, you have full control of line styles, font properties, axes properties, etc, via an object oriented interface or via a set of functions familiar to MATLAB users.*

# Plot


pyplot module ≈ MATLAB-like plotting framework

```
matplotlib-simple.py
import matplotlib.pyplot as plt

plt.plot([1, 2, 3], [5, 2, 7], 'bo:')
plt.show()

add plot to figure
x coordinates
y coordinates
format string
figure is first shown when show is called
```

| Colors | Line styles | Marker styles |
|--------|-------------|---------------|
| b      | - —         | .             |
| g      | --          | ,             |
| r      | -. -.       | o •           |
| c      | :           | v ▼           |
| m      |             | ^ ▲           |
| y      |             | < ▹           |
| k      |             | > ▸           |
| w      |             | 1 ▽           |

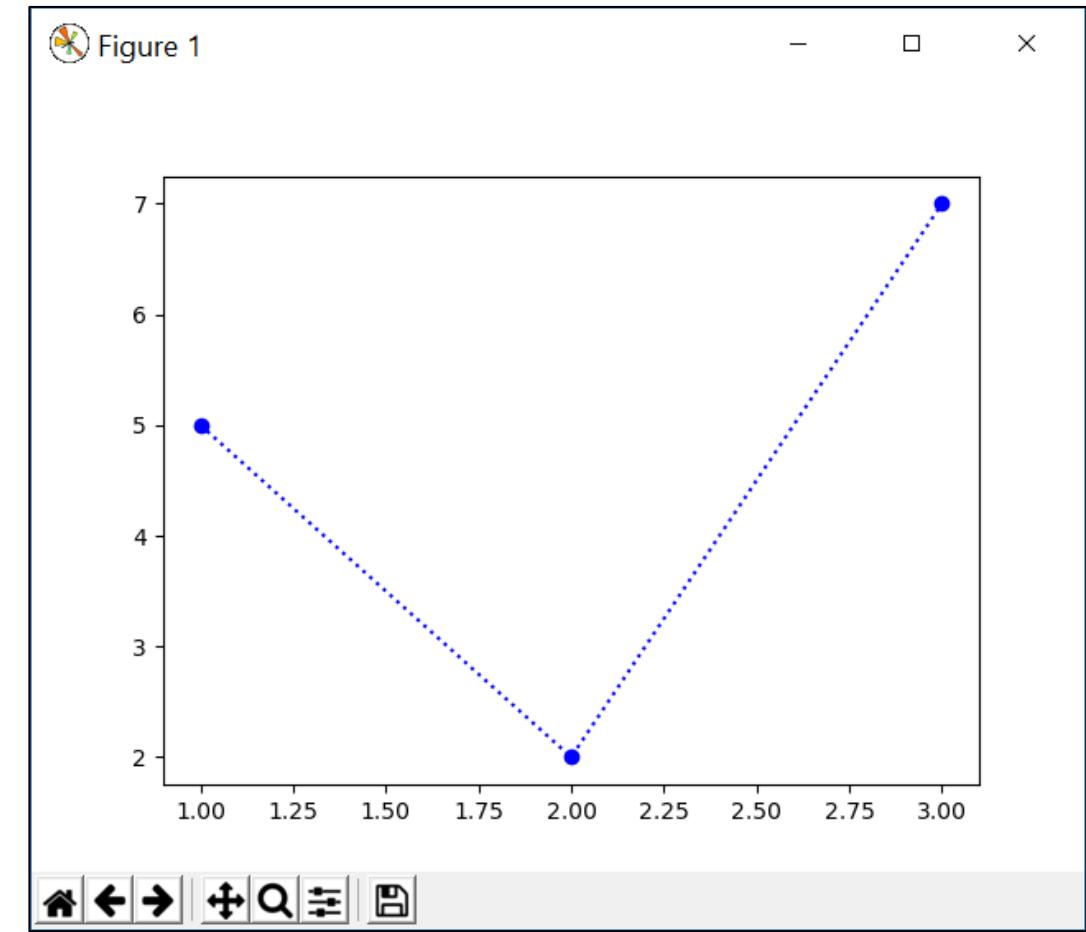

- save current view as picture
- adjust margins
- zoom rectangle
- pan and zoom
- navigate view history
- reset view

# Plot – some keyword arguments

matplotlib-plot.py

```
import matplotlib.pyplot as plt

X = range(-10, 11)
Y1 = [x ** 2 for x in X]
Y2 = [x ** 3 / 10 + x ** 2 / 2 for x in X]


plt.plot(X, Y1, color='red', label='x^2',
 linestyle='-', linewidth=2,
 marker='o', markersize=4,
 markeredgewidth=1,
 markeredgecolor='black',
 markerfacecolor='yellow')

plt.plot(X, Y2, '*', dashes=(2, 0.5, 2, 1.5),
 label=r'$\frac{1}{10}x^3+\frac{1}{2}x^2$')

plt.xlim(-15, 15)
plt.ylim(-75, 125)
plt.title('Some polynomials\n(degree 2 and 3)')

plt.xlabel('The x-axis')
plt.ylabel('The y-axis')
plt.legend(title='Curves')

plt.show() # finally show figure
```

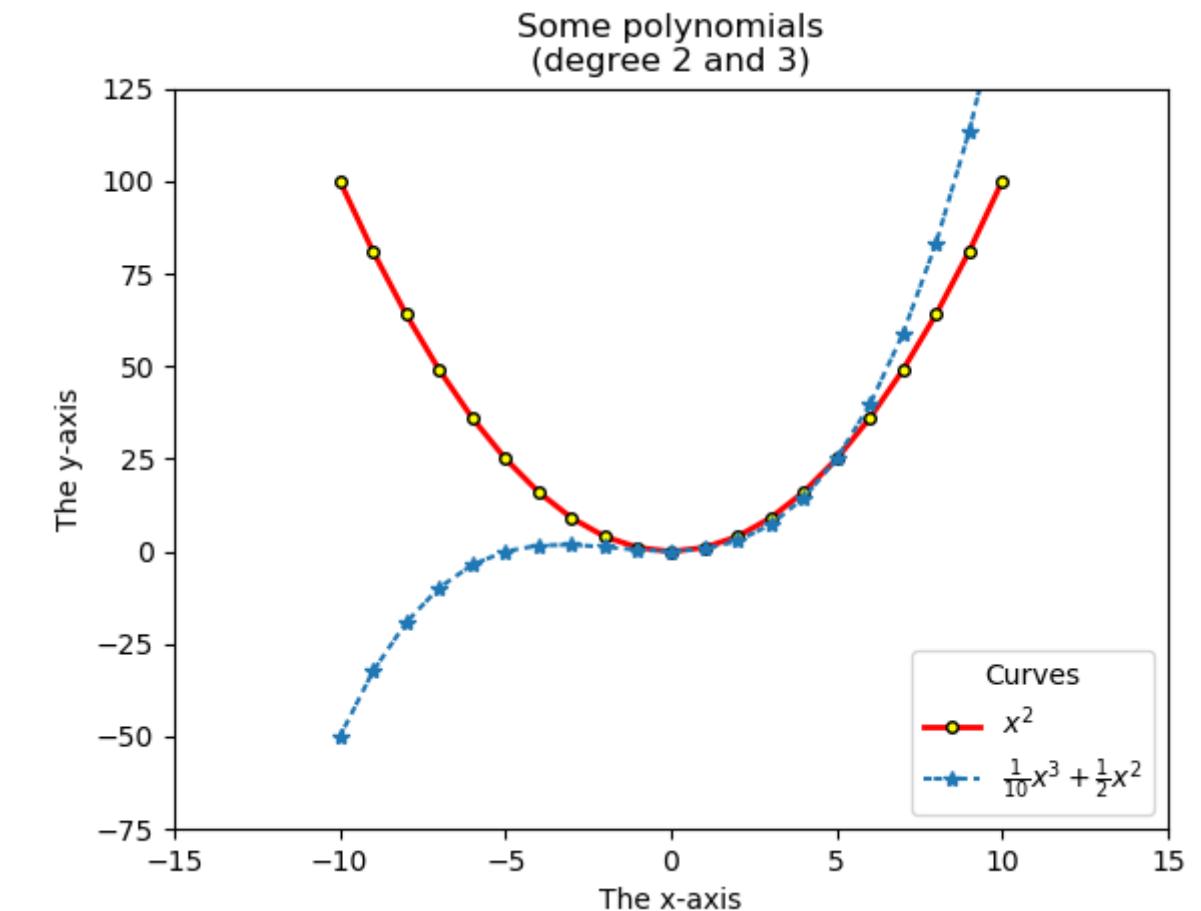

[matplotlib.org/api/\\_as\\_gen/matplotlib.pyplot.plot.html](http://matplotlib.org/api/_as_gen/matplotlib.pyplot.plot.html)  
Colors: [matplotlib.org/gallery/color/named\\_colors.html](http://matplotlib.org/gallery/color/named_colors.html)

# Scatter (points with individual size and color)

matplotlib-scatter.py


```
import matplotlib.pyplot as plt

n = 13
X = range(n)
S = [x ** 2 for x in X]
E = [2 ** x for x in X]

plt.scatter(X, [4] * n, s=E, label='s = 2^x', alpha=.2)
plt.scatter(X, [3] * n, s=S, label='s = x^2')
plt.scatter(X, [2] * n, s=X, label='s = x')
plt.scatter(X, [1] * n, s=S, c=X, cmap='plasma',
 label='s = x^2, c = x',
 edgecolors='gray', linewidth=0.5)
plt.colorbar()

plt.ylim(0.5, 5.5)
plt.xlim(0.5, 13.5)
plt.title('A scatter plot')
plt.legend(loc='upper center', frameon=False, ncol=4,
 handletextpad=0)
plt.show()
```

transparency

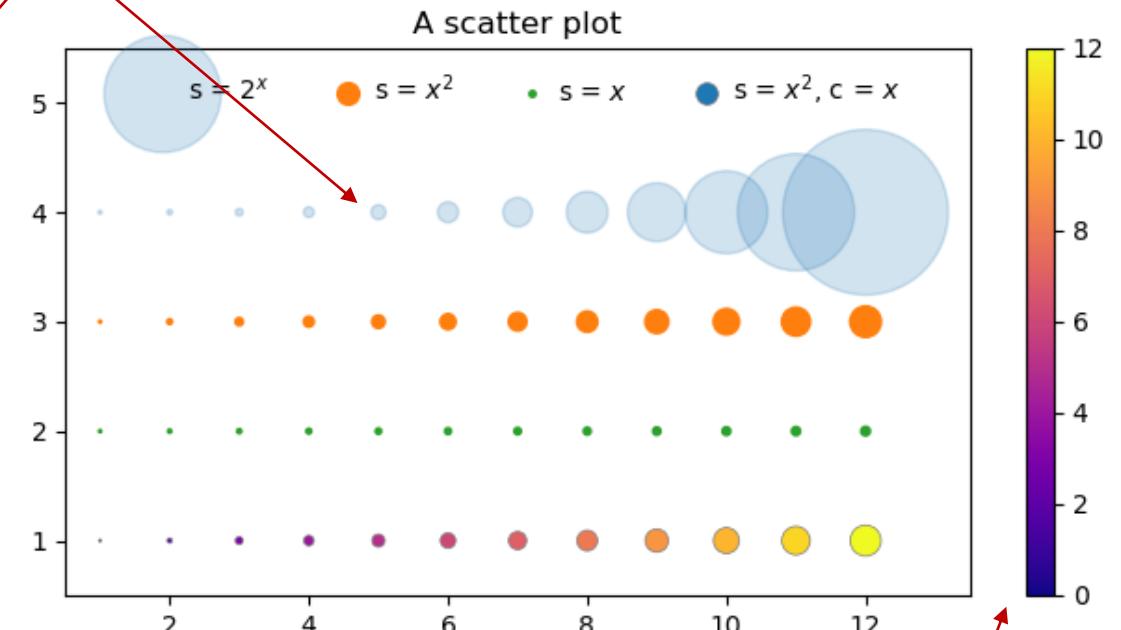

colorbar

(of most recently used colormap)

manual placement of legend box (default automatic); remove frame; place legends in 4 columns (default 1); reduce space between marks and label

[matplotlib.org/api/\\_as\\_gen/matplotlib.pyplot.scatter.html](http://matplotlib.org/api/_as_gen/matplotlib.pyplot.scatter.html)  
[matplotlib.org/tutorials/colors/colormaps.html](http://matplotlib.org/tutorials/colors/colormaps.html)

# Bars

matplotlib-bars.py


```
import matplotlib.pyplot as plt

x = [1, 2, 3]
y = [7, 5, 10]

plt.bar(x, y,
 color='lightblue', # bar background color
 linewidth=1, # bar boundary width
 edgecolor='gray', # bar boundary color
 tick_label=x, # ticks on x-axis
 width=0.7, # width, default 0.8
 yerr=0.25, # Error bar: y length
 xerr=0.5, # x length
 capsizes=3, # capsizes in points
 ecolor='darkblue', # error bar color
 log=True) # y-axis log scale

plt.bar(x, [v**2 for v in x],
 color='pink',
 linewidth=1,
 edgecolor='gray')

plt.show()
```

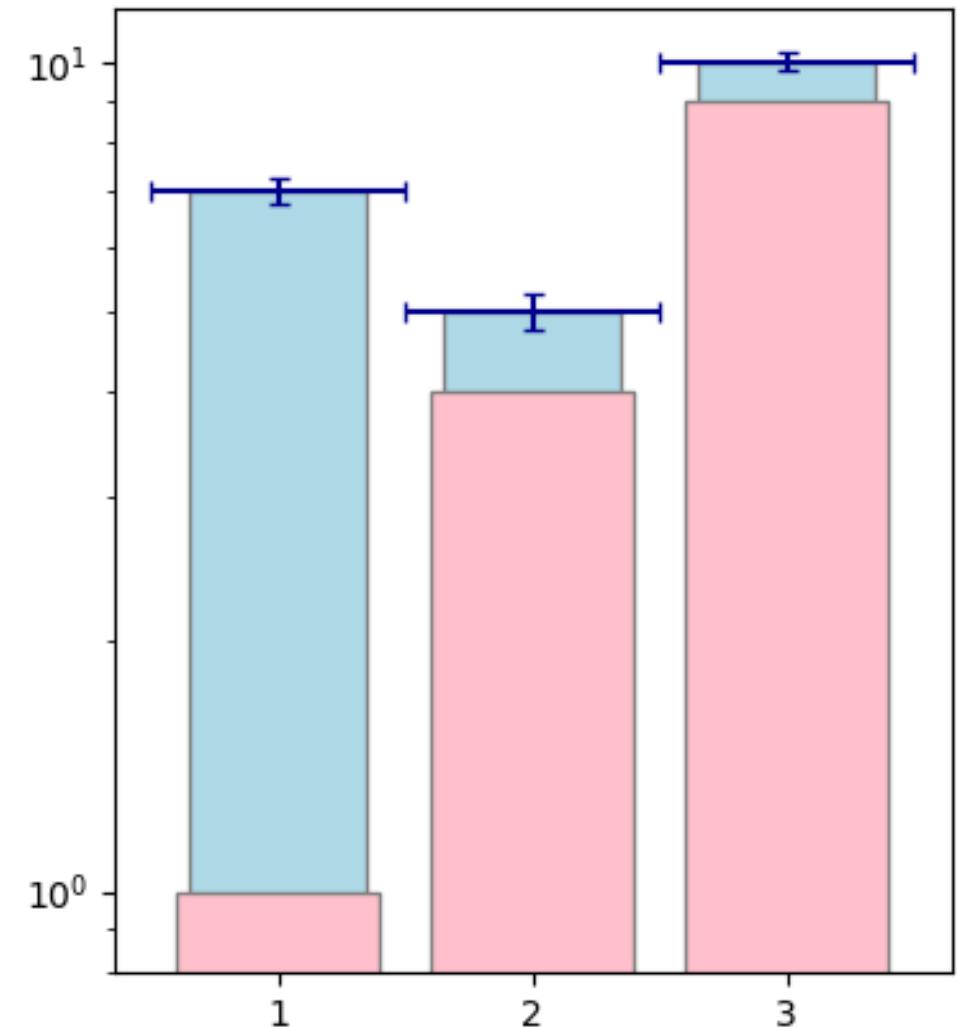

[matplotlib.org/api/ as gen/matplotlib.pyplot.bar.html](http://matplotlib.org/api/ as gen/matplotlib.pyplot.bar.html)

# Histogram


matplotlib-histogram.py

```
import matplotlib.pyplot as plt
from random import random

values1 = [random()**2 for _ in range(1000)]
values2 = [random()**3 for _ in range(100)]
bins = [0.0, 0.25, 0.5, 0.75, 1.0]

for i, ht in enumerate([
 'bar', 'barstacked', 'step', 'stepfilled'],
 start=1):
 plt.subplot(2, 2, i) # start new plot
 plt.hist([values1, values2], # data sets
 bins, # bucket boundaries
 histtype=ht, # default ht='bar'
 rwidth=0.7, # fraction of bucket width
 label=['x^2', 'x^3'], # labels
 density=True) # norm. prob. density
 plt.title(ht) # plot title
 plt.xticks(bins) # ticks on x-axis
 plt.legend()

plt.suptitle('Histogram') # figure title
plt.show()
```

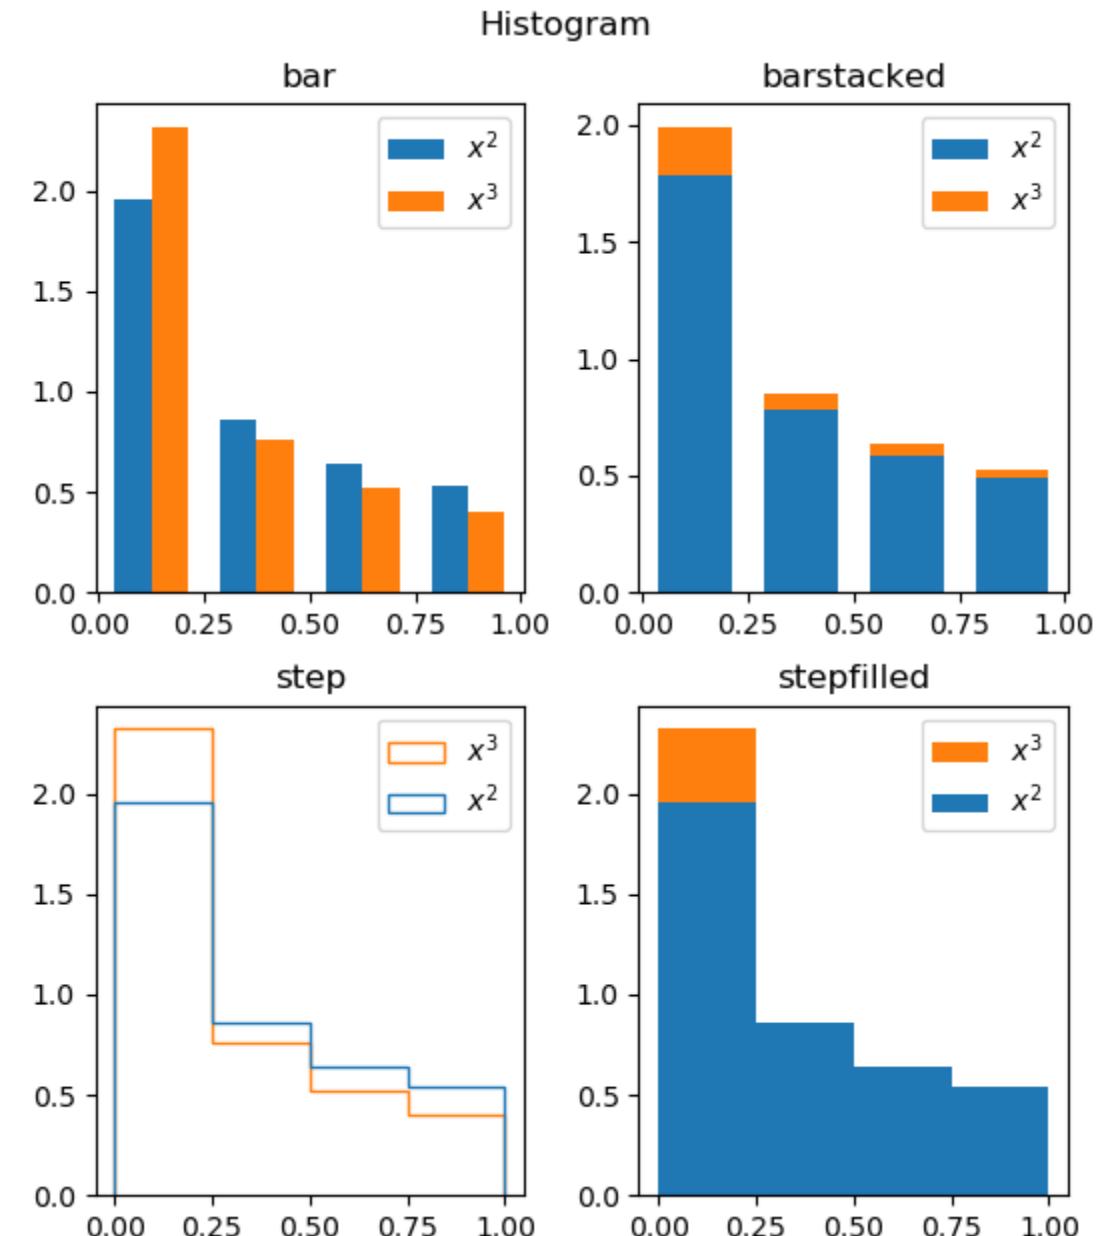


# Pie

matplotlib-pie.py

```
import matplotlib.pyplot as plt

plt.title('My Pie')
plt.pie([2, 3, 2, 7], # relative wedge sizes
 labels=['A','B','C','D'],
 colors=['r', 'b', 'y', 'm'],
 explode=(0, 0.1, 0.3, 0), # radius fraction
 startangle=5, # angle above horizontal
 counterclock=True, # default True
 rotatelabels=False, # default False
 shadow=True, # default False
 textprops=dict(# text properties, dict
 color='black', # text color
 style='italic'), # text style
 wedgeprops=dict(# wedge properties, dict
 width=0.8, # width (missing center)
 linewidth=1, # wedge boundary width
 edgecolor='black'), # boundary color
 autopct='%.1f %%') # percent formatting

plt.show()
```

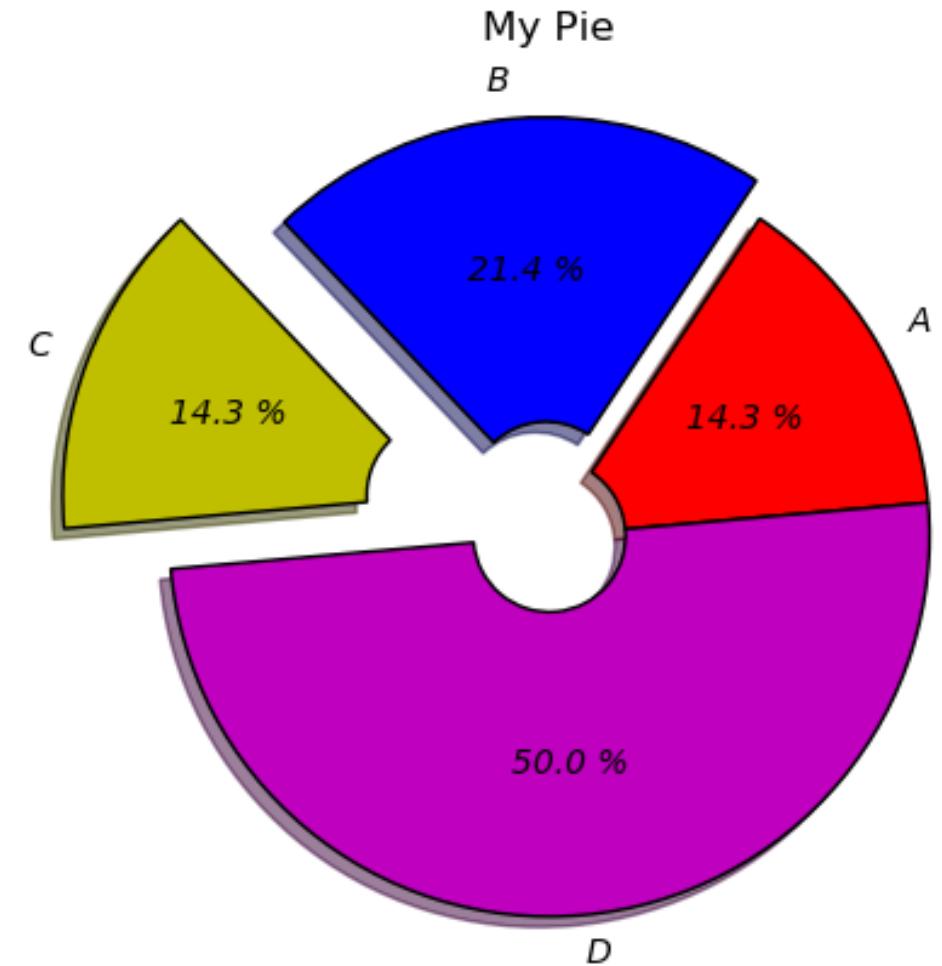

# Stackplot

matplotlib-stackplot.py

```
import matplotlib.pyplot as plt

x = [1, 2, 3, 4]

y1 = [1, 2, 3, 4]
y2 = [2, 3, 1, 4]
y3 = [2, 4, 1, 3]


plt.style.use('dark_background')
for i, base in enumerate([
 'zero', 'sym', 'wiggle', 'weighted_wiggle'],
 start=1):
 plt.subplot(4, 1, i)
 plt.stackplot(x, y1, y2, y3,
 colors=['r', 'g', 'b'],
 labels=['Red', 'Green', 'Blue'],
 baseline=base)
 plt.grid(axis='both', # 'x', 'y', or 'both'
 linewidth=0.5, linestyle='-', alpha=0.5)
 plt.legend(title=base, loc='upper left')
 plt.xticks(x) # a tick for each value in x

plt.suptitle('Stackplot')
plt.show()
```

To list all available styles:

```
print(plt.style.available)
```

Stacked Graphs – Geometry & Aesthetics  
Lee Byron & Martin Wattenberg, 2008

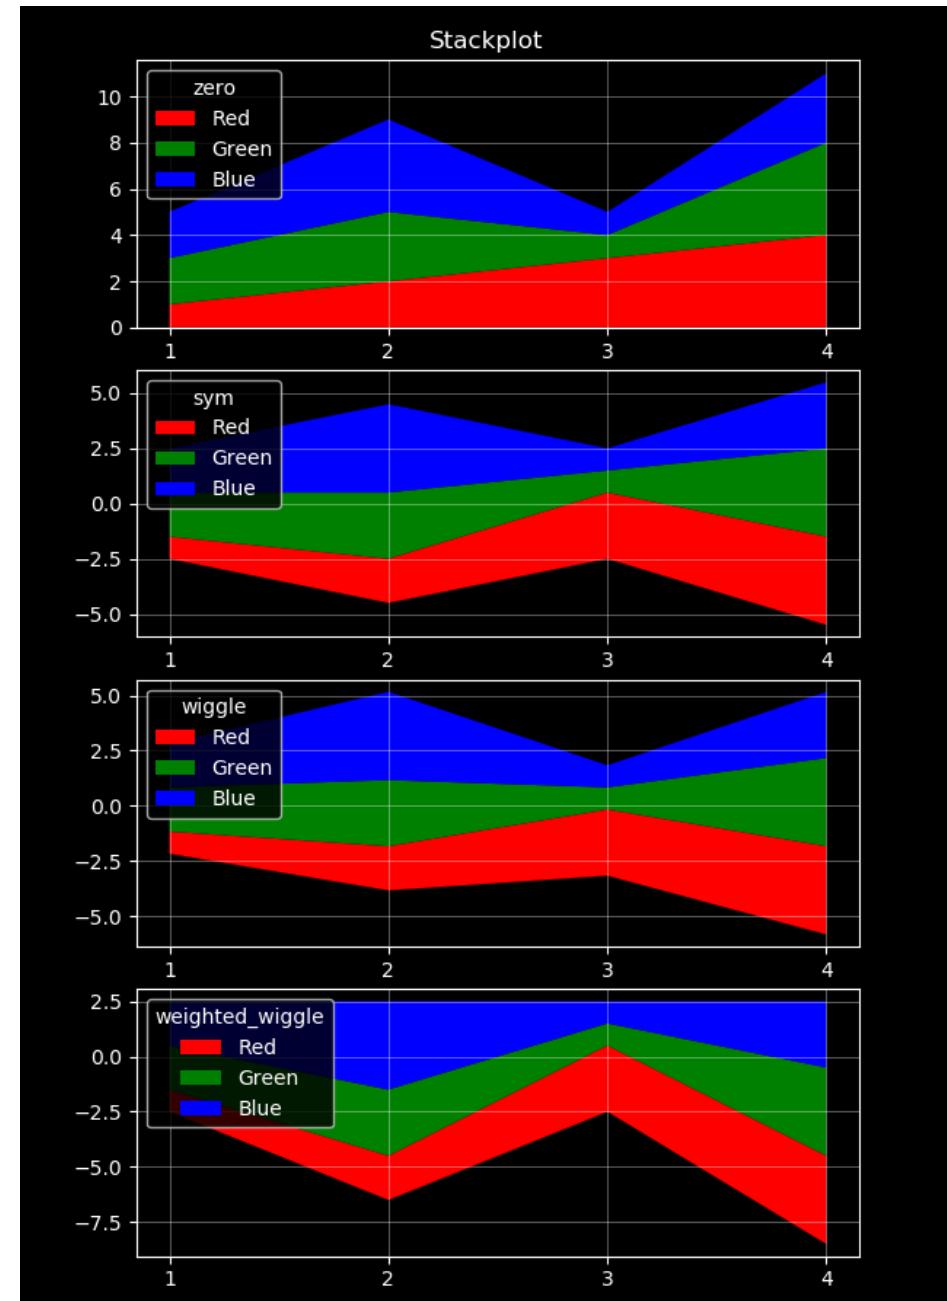

[matplotlib.org/api/\\_as\\_gen/matplotlib.pyplot.stackplot.html](http://matplotlib.org/api/_as_gen/matplotlib.pyplot.stackplot.html)

## matplotlib-subplot.py

```
import matplotlib.pyplot as plt
from math import pi, sin

x_min, x_max, n = 0, 2 * pi, 100
x = [x_min + (x_max - x_min) * i / n for i in range(n + 1)]
y = [sin(v) for v in x]

ax1 = plt.subplot(2, 3, 1) # 2 rows, 3 columns
ax1.label_outer() # removes x-axis labels
plt.xlim(-pi, 3 * pi) # increase x-axis range
plt.plot(x, y, 'r-')
plt.title('Plot A')

ax2 = plt.subplot(2, 3, 2)
ax2.label_outer() # removes x- and y-axis labels
plt.xlim(-2 * pi, 4 * pi) # increase x-axis range
plt.plot(x, y, 'g,')
plt.title('Plot B')

ax3 = plt.subplot(2, 3, 3, frameon=False) # remove frame
ax3.set_xticks([])
remove x-axis ticks & labels
ax3.set_yticks([])
remove y-axis ticks & labels
plt.plot(x, y, 'b--')
plt.title('No frame')

ax4 = plt.subplot(2, 3, 4, sharex=ax1) # share x-axis range
plt.ylim(-2, 2) # increase y-axis range
plt.plot(x, y, 'm:')
plt.title('Plot C')


ax5 = plt.subplot(2, 3, 5, sharex=ax2, sharey=ax4) # share ranges
ax5.set_xticks(range(-5, 15, 5)) # specific x-ticks & x-labels
ax5.label_outer() # removes y-axis labels
plt.plot(x, y, 'k-.')
plt.title('Plot D')

ax6 = plt.subplot(2, 3, 6, projection='polar') # polar projection
ax6.set_yticks([-1, 0, 1]) # y-labels
ax6.tick_params(axis='y', labelcolor='red') # color of y-labels
plt.plot(x, y, 'r')
plt.title('Polar projection\n') # \n to avoid overlap with 90°

plt.suptitle('2 x 3 subplots', fontsize=16)

plt.show()
```

# Subplot (2 rows, 3 columns)

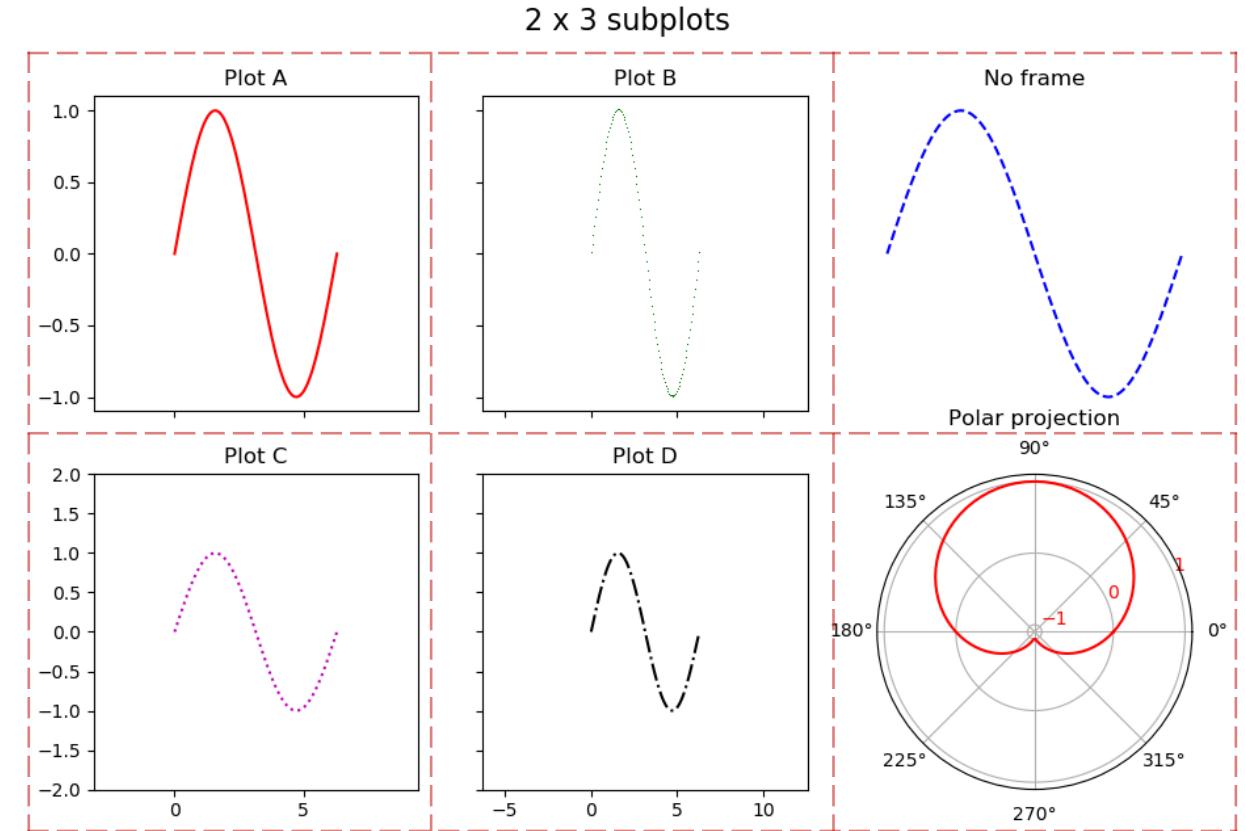

- Subplots are numbered 1..6 row-by-row, starting top-left
- subplot returns an **axes** to access the plot in the figure

# Subplots

matplotlib-subplots.py

```
import matplotlib.pyplot as plt
from math import pi, sin, cos


times = [2 * pi * t / 1000 for t in range(1001)]

fig, ((ax1, ax2), (ax3, ax4), (ax5, ax6)) = \
 plt.subplots(3, 2, sharex=True, sharey=True)

for i, ax in enumerate([ax1, ax2, ax3, ax4, ax5, ax6],
 start=1):
 x = [i * sin(i * t) for t in times]
 y = [i * cos(3 * t) for t in times]
 ax.plot(x, y, label=f'i = {i}') # plot to axes
 ax.legend(loc='upper right') # axes legend
fig.suptitle('subplots', fontsize=16) # figure title
plt.show()
```

create 6 axes in 3 rows with 2 columns  
share the x- and y-axis ranges (automatically  
applies label\_outer to created axes)  
returns a pair (figure, axes)

subplots

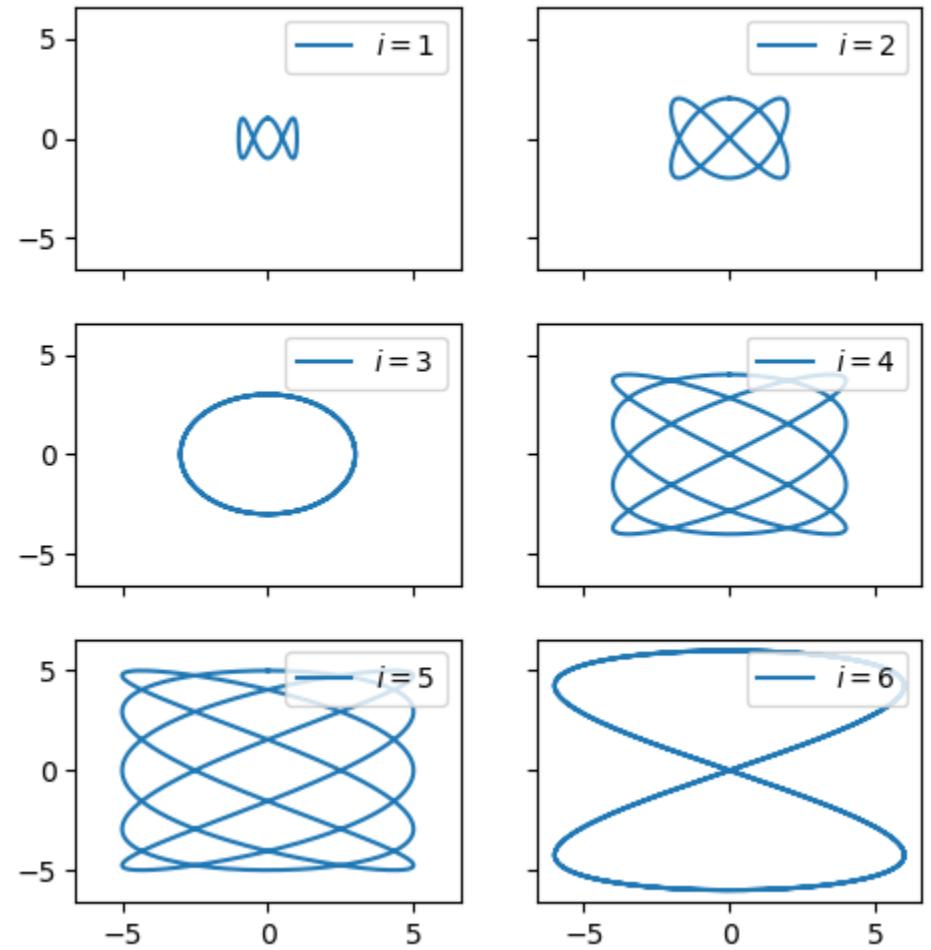

[matplotlib.org/api/\\_as\\_gen/matplotlib.pyplot.subplots.html](https://matplotlib.org/api/_as_gen/matplotlib.pyplot.subplots.html)

## matplotlib-subplot2grid.py

```
import matplotlib.pyplot as plt
import math

x_min, x_max, n = 0, 2 * math.pi, 20

x = [x_min + (x_max - x_min) * i / n
 for i in range(n + 1)]
y = [math.sin(v) for v in x]

plt.subplot2grid((5, 5), (0, 0),
 rowspan=3, colspan=3)
plt.fill_between(x, 0.0, y,
 alpha=0.25, color='r')
plt.plot(x, y, 'r-')
plt.title('Plot A')

plt.subplot2grid((5, 5), (0, 3),
 rowspan=2, colspan=2)
plt.plot(x, y, 'g.')
plt.title('Plot B')


plt.subplot2grid((5, 5), (2, 3),
 rowspan=1, colspan=2)
plt.plot(x, y, 'b--')
plt.title('Plot C')

plt.subplot2grid((5, 5), (3, 0),
 rowspan=2, colspan=5)
plt.plot(x, y, 'mx:')
plt.title('Plot D')

plt.tight_layout() # adjust padding
plt.show()
```

# subplot2grid (5 x 5)

upper left corner (row, column)

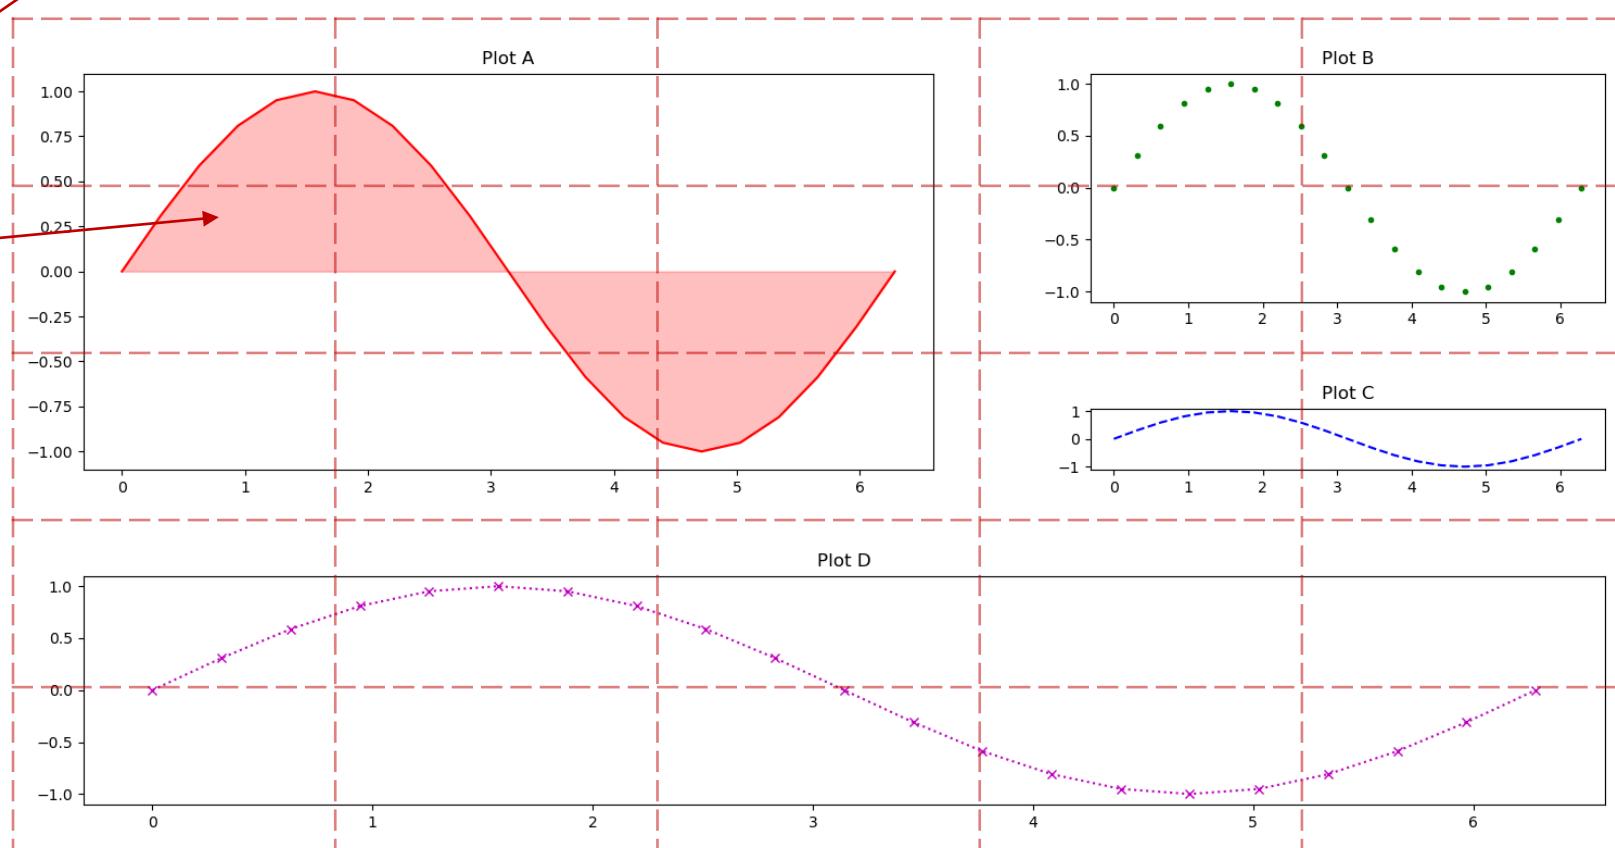

## matplotlib-log.py

```
import matplotlib.pyplot as plt


x = [i / 10 for i in range(1, 101)]

y1 = [i ** 2 for i in x]
y2 = [i ** 3 for i in x]
y3 = [3 ** i for i in x]

for i in range(1, 7):
 ax = plt.subplot(3, 2, i)
 plt.plot(x, y3, label=' 3^x ')
 plt.plot(x, y2, label=' x^3 ')
 plt.plot(x, y1, label=' x^2 ')
 if i == 1:
 plt.ylim(0, 2000)
 plt.xscale('linear') # default
 plt.yscale('linear') # default
 plt.legend()
 plt.title('linear')
 if i == 2:
 plt.yscale('log')
 plt.title('ax.yscale')
 if i == 3:
 ax.set_xscale('log')
 ax.set_yscale('log')
 plt.title('ax.set_xscale & ax.set_yscale')
 if i == 4:
 plt.loglog()
 plt.title('plt.loglog')
 if i == 5:
 plt.ylim(0, 2000)
 plt.semilogx()
 plt.title('plt.semilogx')
 if i == 6:
 plt.semilogy()
 plt.title('semilogy')

plt.show()
```

# log scales

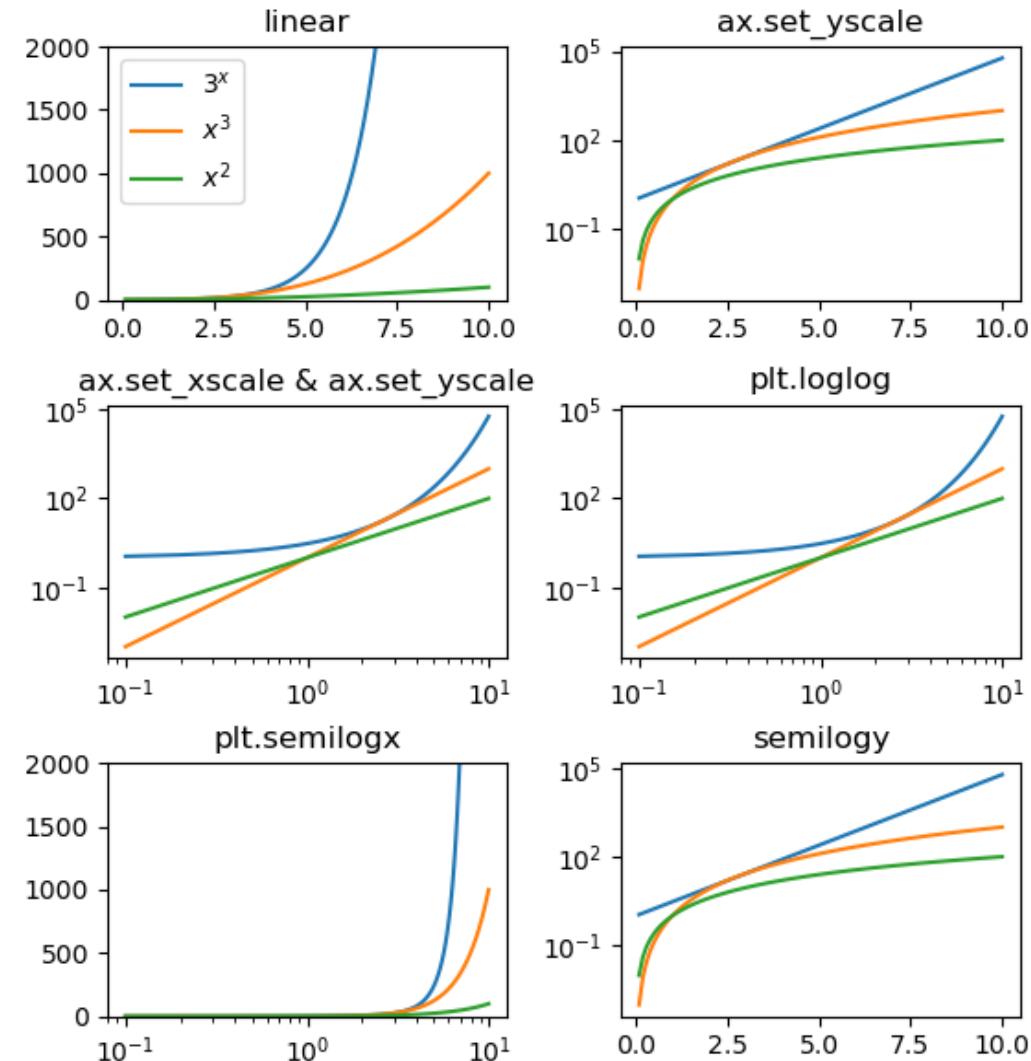

- There are many ways to make the x- and/or y-axis logarithmic with pyplot

# Saving figures

matplotlib-savefig.py

```
import matplotlib.pyplot as plt
from math import pi, sin, cos


n = 1000
points = [(cos(2 * pi * i / n),
 sin(4 * pi * i / n)) for i in range(n)]
x, y = zip(*points)
plt.plot(x, y, 'k-', linewidth=5)

plt.savefig('butterfly.png') # save plot as PNG


plt.savefig('butterfly-grey.png',
 dpi=100, # dots per inch
 bbox_inches='tight', # crop to bounding box
 pad_inches=0.1, # space around figure
 facecolor='lightgrey', # background color
 format='png')

plt.savefig('butterfly.pdf') # save plot as PDF

plt.show() # interactive viewer
```

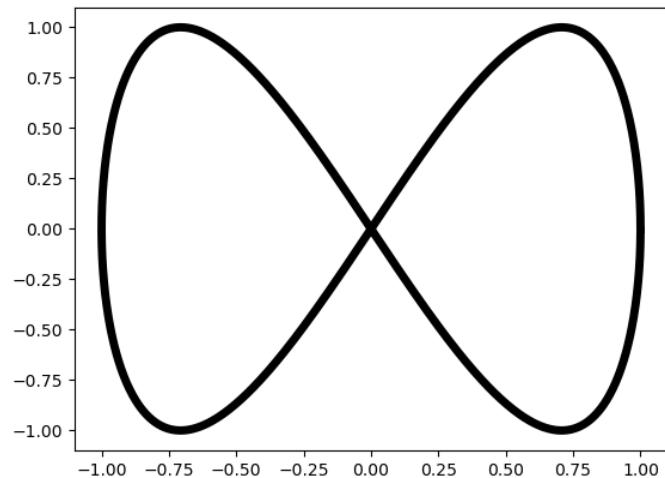

butterfly.png

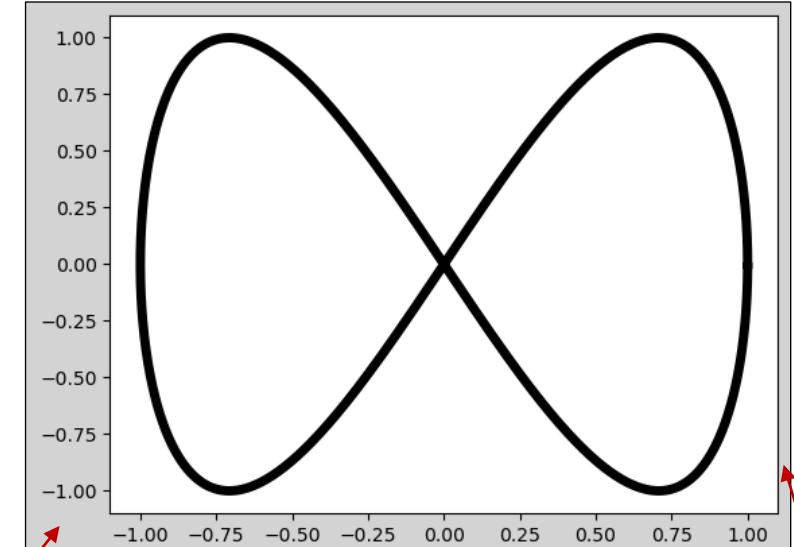

butterfly-grey.png

facecolor

pad\_inches


# A crude animation

clock.py

```
import matplotlib.pyplot as plt
from math import pi, sin, cos
import datetime

def plot_clock(hour, minute, second):
 plt.axis('off') # hide x and y axes
 plt.gca().set_aspect('equal') # don't squeeze circle
 for i in range(60): # show second marks
 angle = 2 * pi * i / 60
 x, y = cos(angle), sin(angle)
 start = 0.98 if i % 5 else .94 # every 5'th mark should be longer
 plt.plot([start * x, x], [start * y, y], c='black') # mark
 for angle, length, style in [
 (second / 60, .90, dict(c='red', lw=2, solid_capstyle='round')),
 (minute / 60, .85, dict(c='black', lw=3, solid_capstyle='round')),
 (hour / 12, .50, dict(c='black', lw=8, solid_capstyle='round'))
]:
 angle = 2 * pi * (0.25 - angle)
 x, y = length * cos(angle), length * sin(angle)
 plt.plot([0, x], [0, y], **style) # clock arm
 plt.plot(0, 0, 'o', ms=10, c='black') # center dot

while True:
 now = datetime.datetime.now() # UTZ
 plot_clock(now.hour, now.minute, now.second)
 plt.pause(1) # show figure and pause 1 second
 plt.clf() # clear figure
```

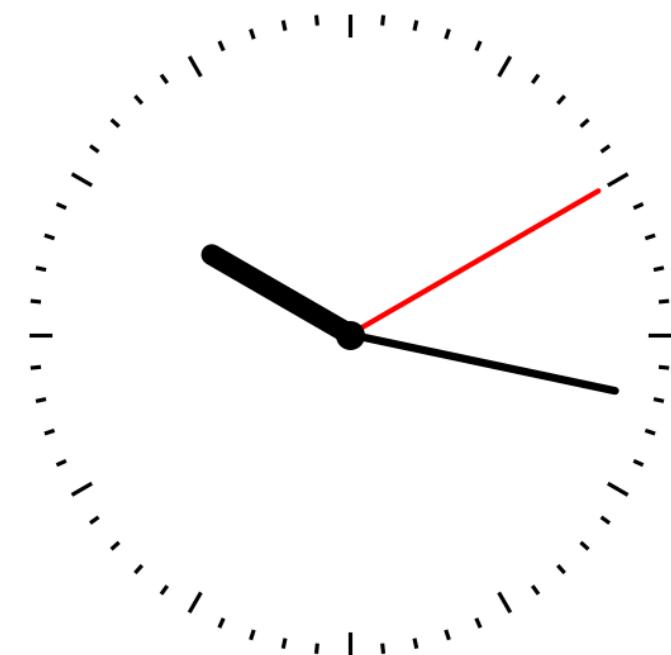

## matplotlib-animation.py

```
import matplotlib.pyplot as plt
from matplotlib.animation import FuncAnimation
from math import pi, cos, sin

n, tail_length = 200, 75
points = [] # tail_length recent points

def point(i):
 t = 2 * pi * i / n
 return (cos(3 * t), sin(2 * t))

fig = plt.figure() # new figure
ax = plt.gca() # get current axes
ax.set_facecolor('black') # set background color
plt.xlim(-1.1, 1.1) # set x-axis range
plt.ylim(-1.1, 1.1) # set y-axis range
plt.xticks([]) # remove x-ticks & labels
plt.yticks([]) # remove y-ticks & labels
plt.title('Moving point') # plot title


x, y = point(0)
plt.plot(x, y, 'w.') # start point
plt.text(x - 0.025, y, 'start', color='w', # text label
 ha='right', va='center') # alignment
tail, = plt.plot([], [], 'w-', alpha=0.5) # init. tail
head, = plt.plot([], [], 'ro') # init. current point

def move(frame): # frame = value from frames
 points.append(point(frame))
 del points[:-tail_length] # limit tail
 tail.set_data(*zip(*points)) # update tail points
 head.set_data(*points[-1]) # update head point

animation = FuncAnimation(fig, # figure to animate
 func=move,
 frames=range(n), # array like to iterate over
 interval=25, # milliseconds between frames
 repeat=True, # repeat frames when done
 repeat_delay=0) # wait milliseconds before repeat

plt.show()
```

# matplotlib.animation.FuncAnimation

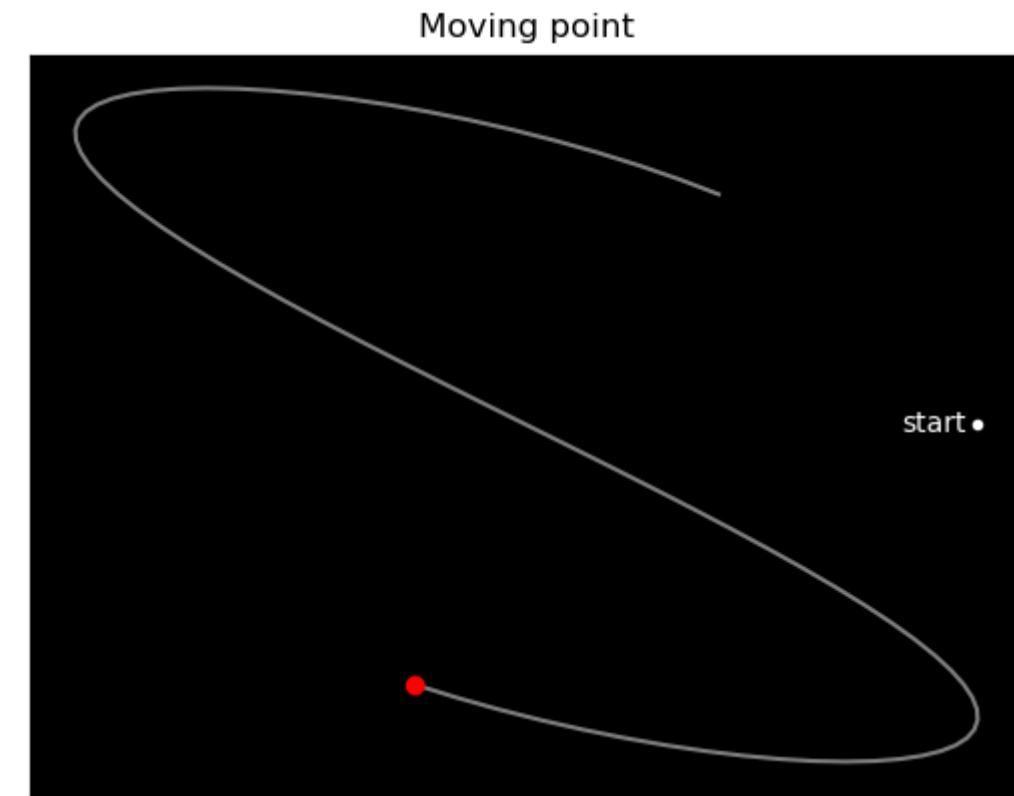

- plot returns "Line2D" objects representing the plotted data  
"Line2D" objects can be updated using `set_data`
- To make an animation you need to repeatedly update the "line2D" objects  
`FuncAnimation` repeatedly calls `func` in regular intervals `interval`, each time with the next value from `frames` (if frames is None, then the frame values provided to func will be the infinite sequence 0,1,2,3,...)




## ***The Jupyter Notebook***

*The Jupyter Notebook is an open-source web application that allows you to create and share documents that contain live code, equations, visualizations and narrative text. Uses include: data cleaning and transformation, numerical simulation, statistical modeling, data visualization, machine learning, and much more.*



IP[y]:  
IPython

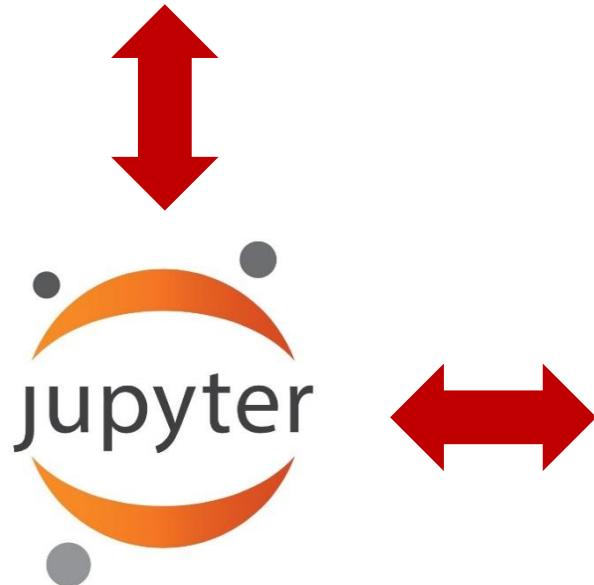

Jupyter Server  
(e.g. running on  
local machine)

Prime Number Theorem

$\pi(n)$  = the number of prime numbers  $\leq n$ . The Prime Number Theorem states that  $\pi(n) \approx \frac{n}{\ln(n)}$ .

In the following we consider all primes  $\leq 1.000.000$ . First we computer a set 'composite' of all composite numbers in the range 2..n.

```
In [1]: n = 1_000_000
composite = {p for f in range(2, n + 1) for p in range(f * f, n + 1, f)}
```

We next compute select all the prime numbers in the range 2..n, i.e. the non-composite numbers.


```
In [2]: primes = [p for p in range(2, n + 1) if p not in composite]
```

```
In [3]: primes[:10]
Out[3]: [2, 3, 5, 7, 11, 13, 17, 19, 23, 29]
```

```
In [4]: import matplotlib.pyplot as plt
import math

X = range(2, n + 1, 25000)
Y = [len([p for p in primes if p <= x]) for x in X] # slow
plt.plot(X, Y, '.g')
plt.plot(X, [x / math.log(x) for x,y in zip(X, Y)], 'r-')
plt.show()
```

Web Browser

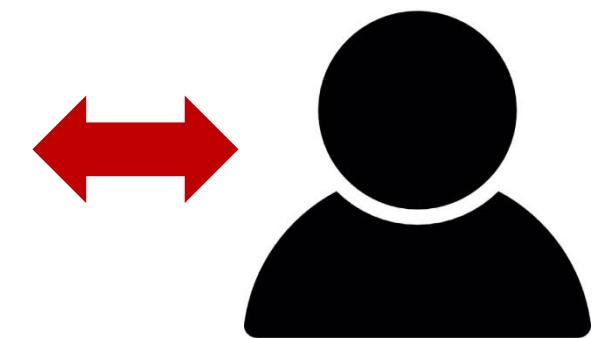

User

# cells

python code

Prime Number Theorem

$\pi(n)$  = the number of prime numbers  $\leq n$ . The Prime Number Theorem states that  $\pi(n) \approx \frac{n}{\ln(n)}$ .

In the following we consider all primes  $\leq 1.000.000$ . First we computer a set 'composite' of all composite numbers in the range 2..n.

In [1]:

```
n = 1_000_000
composite = {p for f in range(2, n + 1) for p in range(f * f, n + 1, f)}
```

We next compute select all the prime numbers in the range 2..n, i.e. the non-composite numbers.

In [2]:

```
primes = [p for p in range(2, n + 1) if p not in composite]
```

In [3]:

```
primes[:10]
```

Out[3]:

```
[2, 3, 5, 7, 11, 13, 17, 19, 23, 29]
```

In [4]:

```
import matplotlib.pyplot as plt
import math

X = range(2, n + 1, 25000)
Y = [len([p for p in primes if p <= x]) for x in X] # slow
plt.plot(X, Y, 'g')
plt.plot(X, [x / math.log(x) for x,y in zip(X, Y)], 'r-')
plt.show()
```


formatted text:  
Markdown /  
LaTeX / HTML /  
...

python shell  
output

matplotlib /  
numpy / ...  
output

# Jupyter - installing

- Open a windows shell and run: `pip install jupyter`

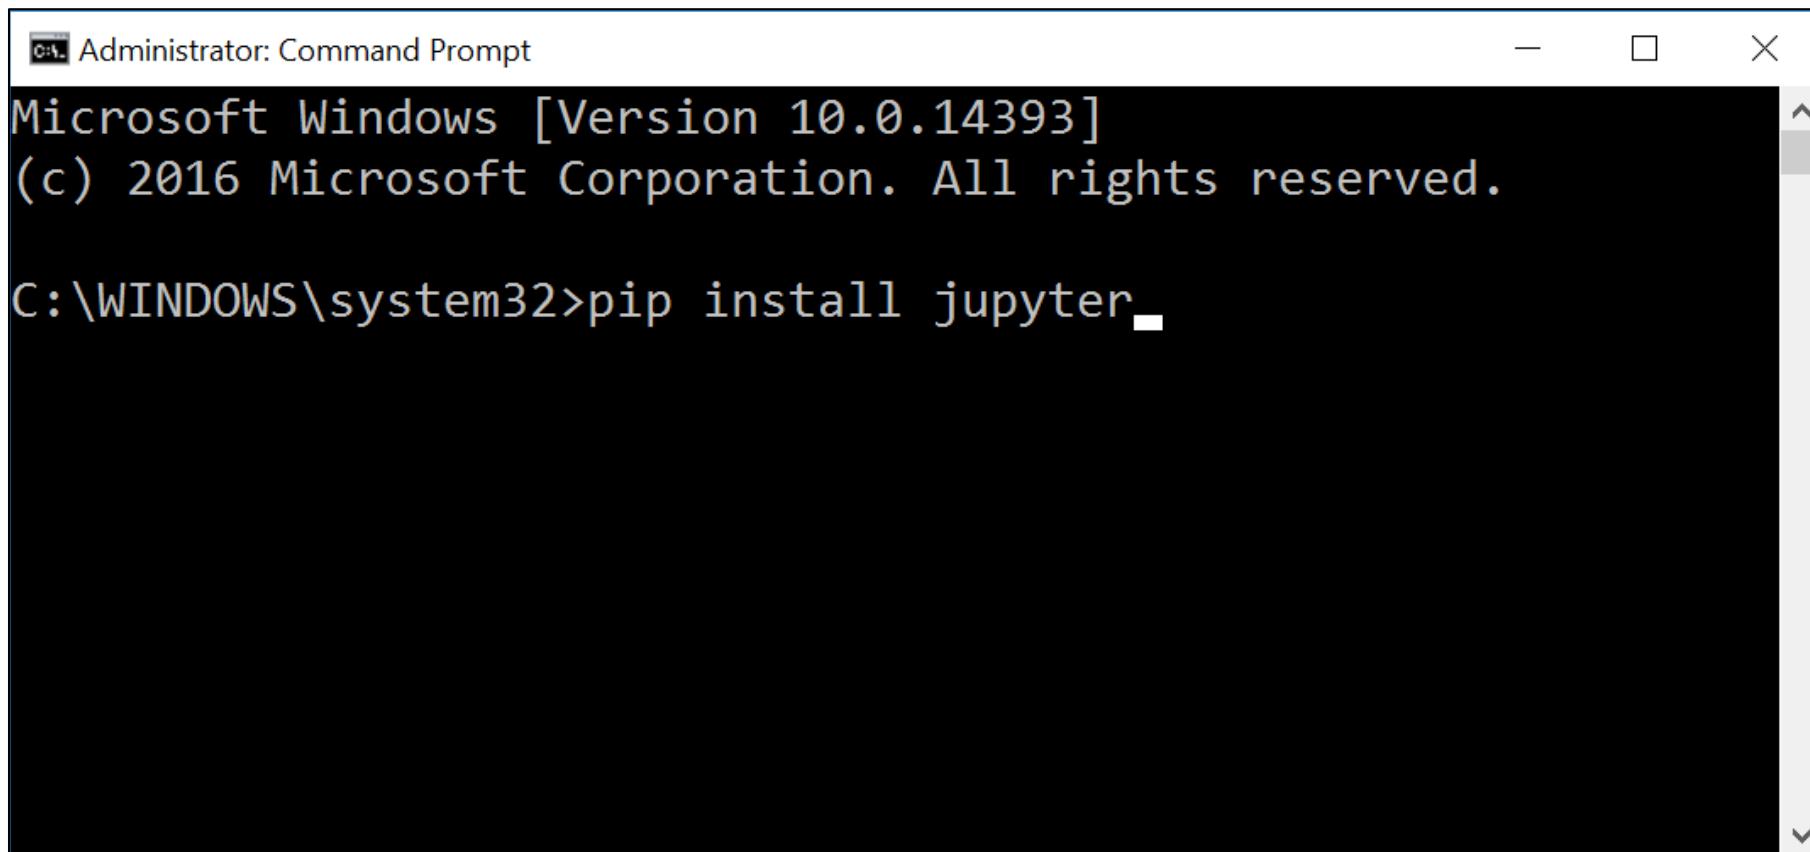

A screenshot of a Windows Command Prompt window titled "Administrator: Command Prompt". The window shows the following text:


```
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\WINDOWS\system32>pip install jupyter.
```

The command `pip install jupyter` is visible at the bottom of the window, with the cursor positioned after the period.

# Jupyter – launching the jupyter server

- Open a windows shell and run: `jupyter notebook`

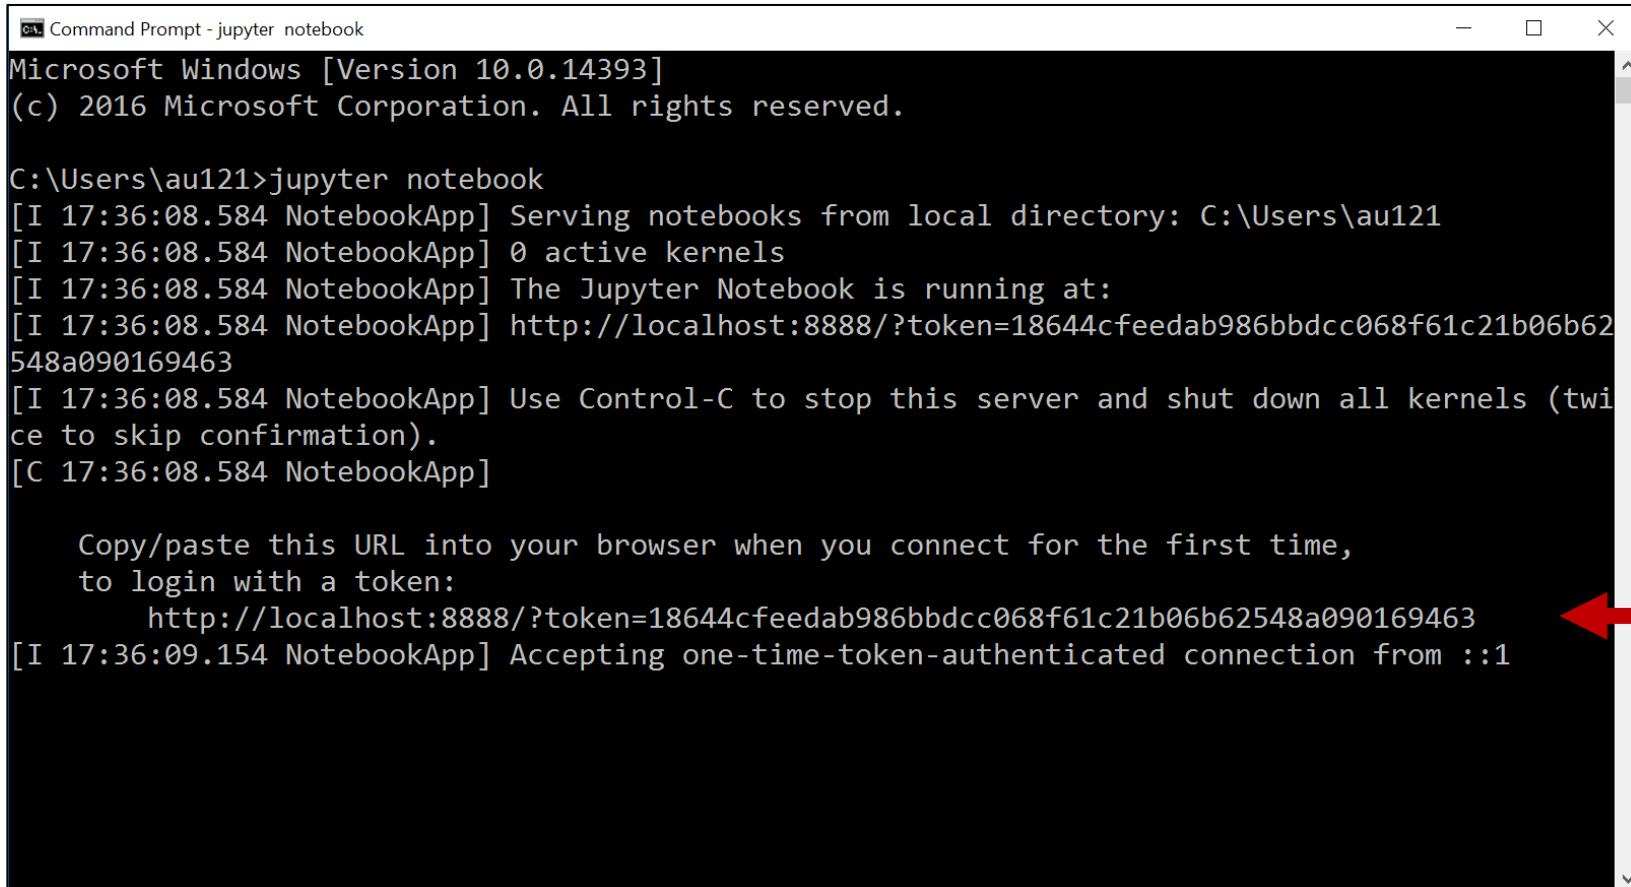



```
Command Prompt - jupyter notebook
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\au121>jupyter notebook
[I 17:36:08.584 NotebookApp] Serving notebooks from local directory: C:\Users\au121
[I 17:36:08.584 NotebookApp] 0 active kernels
[I 17:36:08.584 NotebookApp] The Jupyter Notebook is running at:
[I 17:36:08.584 NotebookApp] http://localhost:8888/?token=18644cfeedab986bbdcc068f61c21b06b62
548a090169463
[I 17:36:08.584 NotebookApp] Use Control-C to stop this server and shut down all kernels (twice to skip confirmation).
[C 17:36:08.584 NotebookApp]

Copy/paste this URL into your browser when you connect for the first time,
to login with a token:
 http://localhost:8888/?token=18644cfeedab986bbdcc068f61c21b06b62548a090169463
[I 17:36:09.154 NotebookApp] Accepting one-time-token-authenticated connection from ::1
```


- If this does not work, then try `python -m notebook`

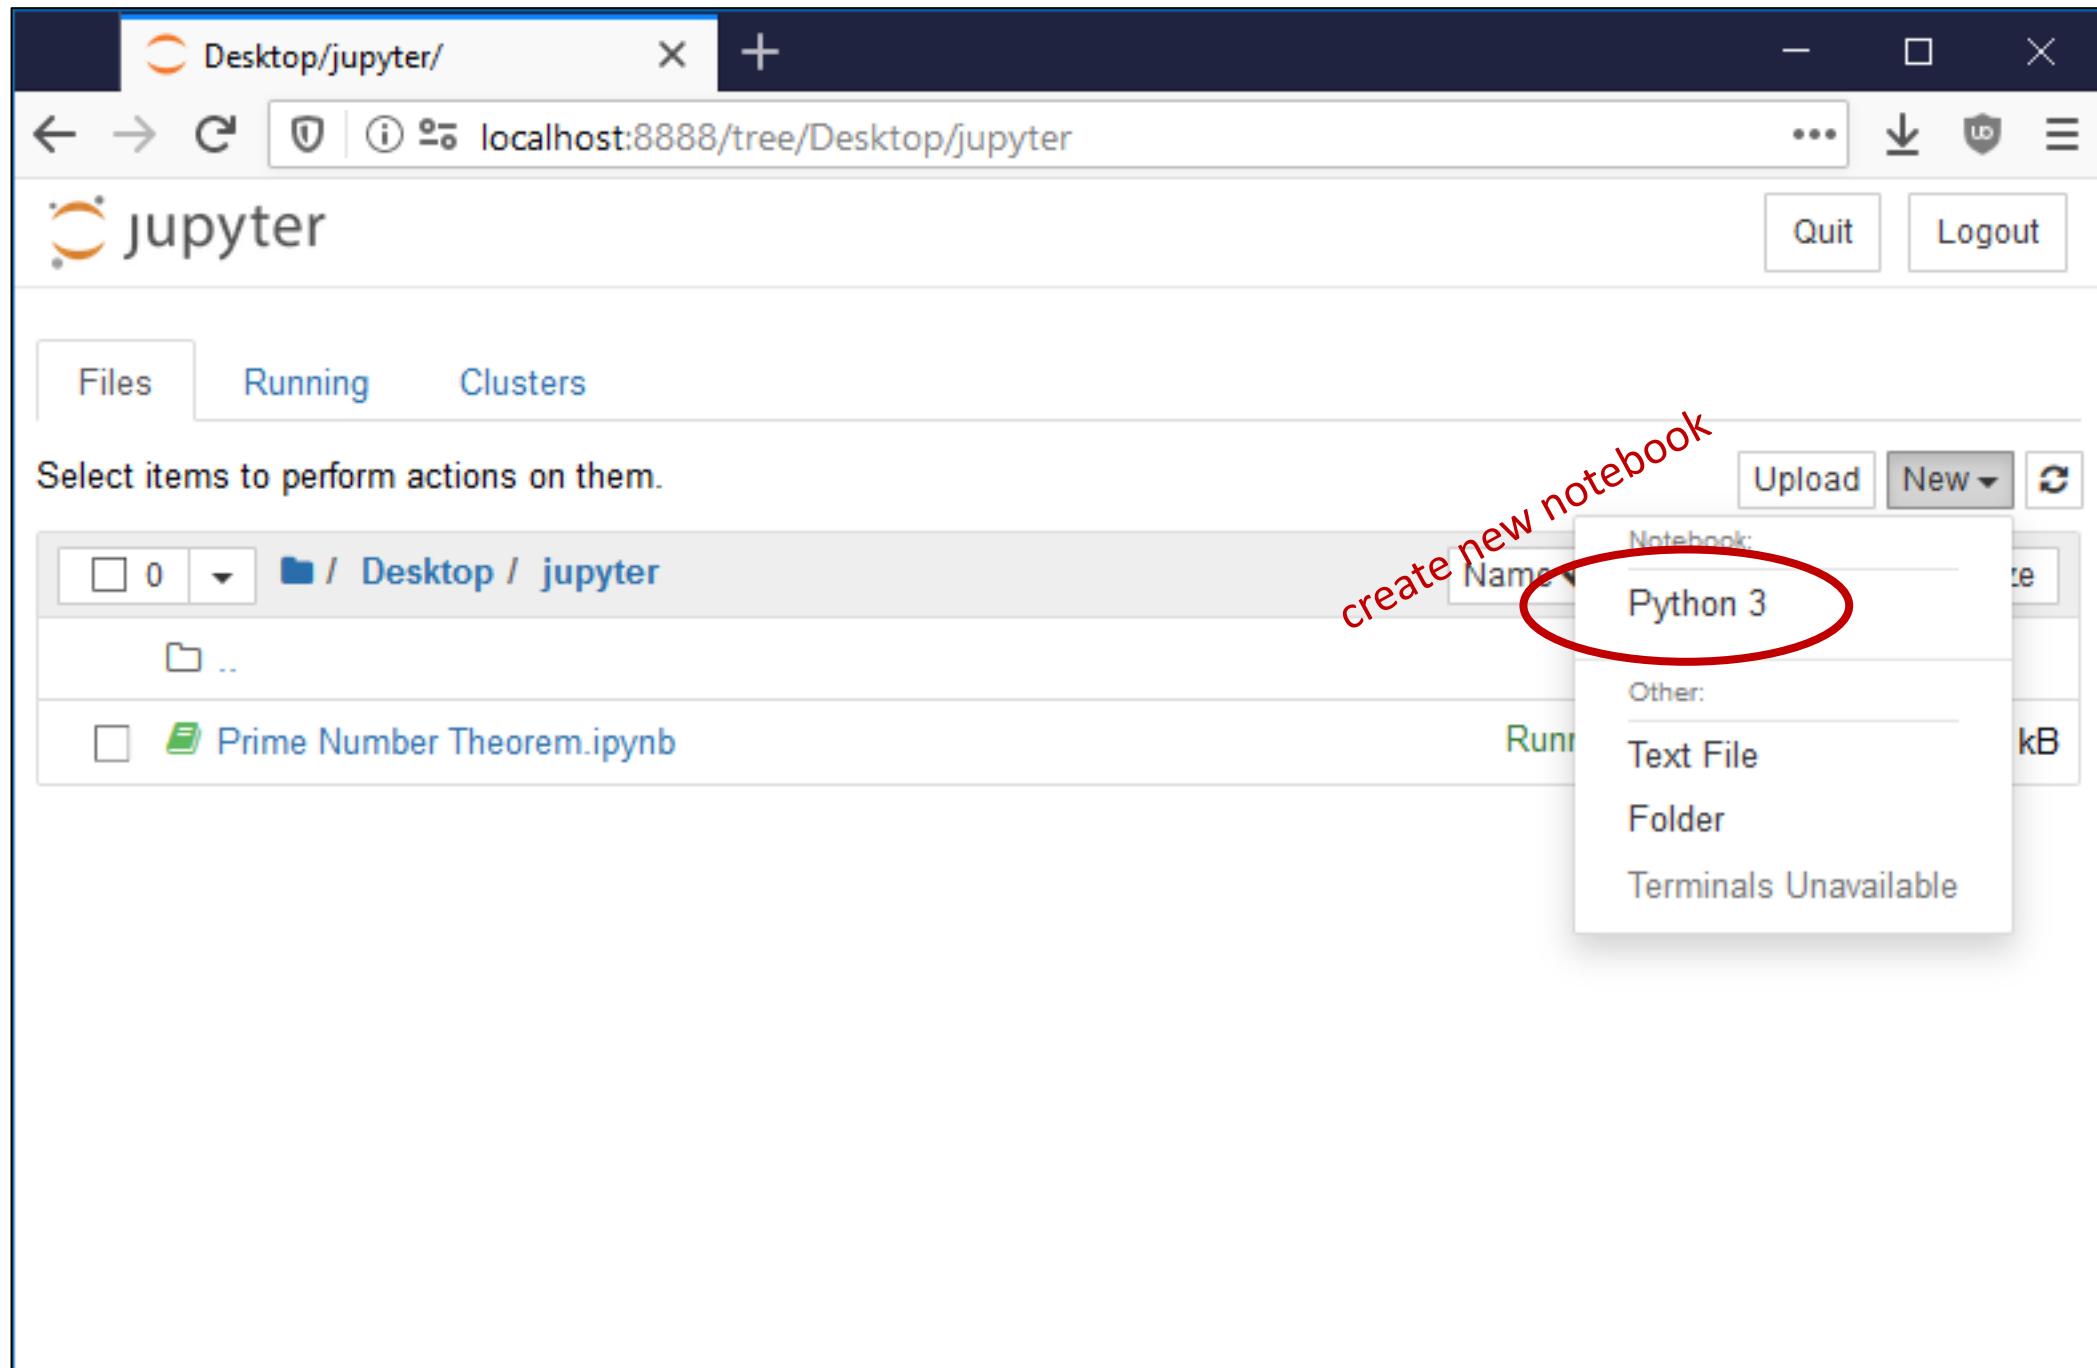

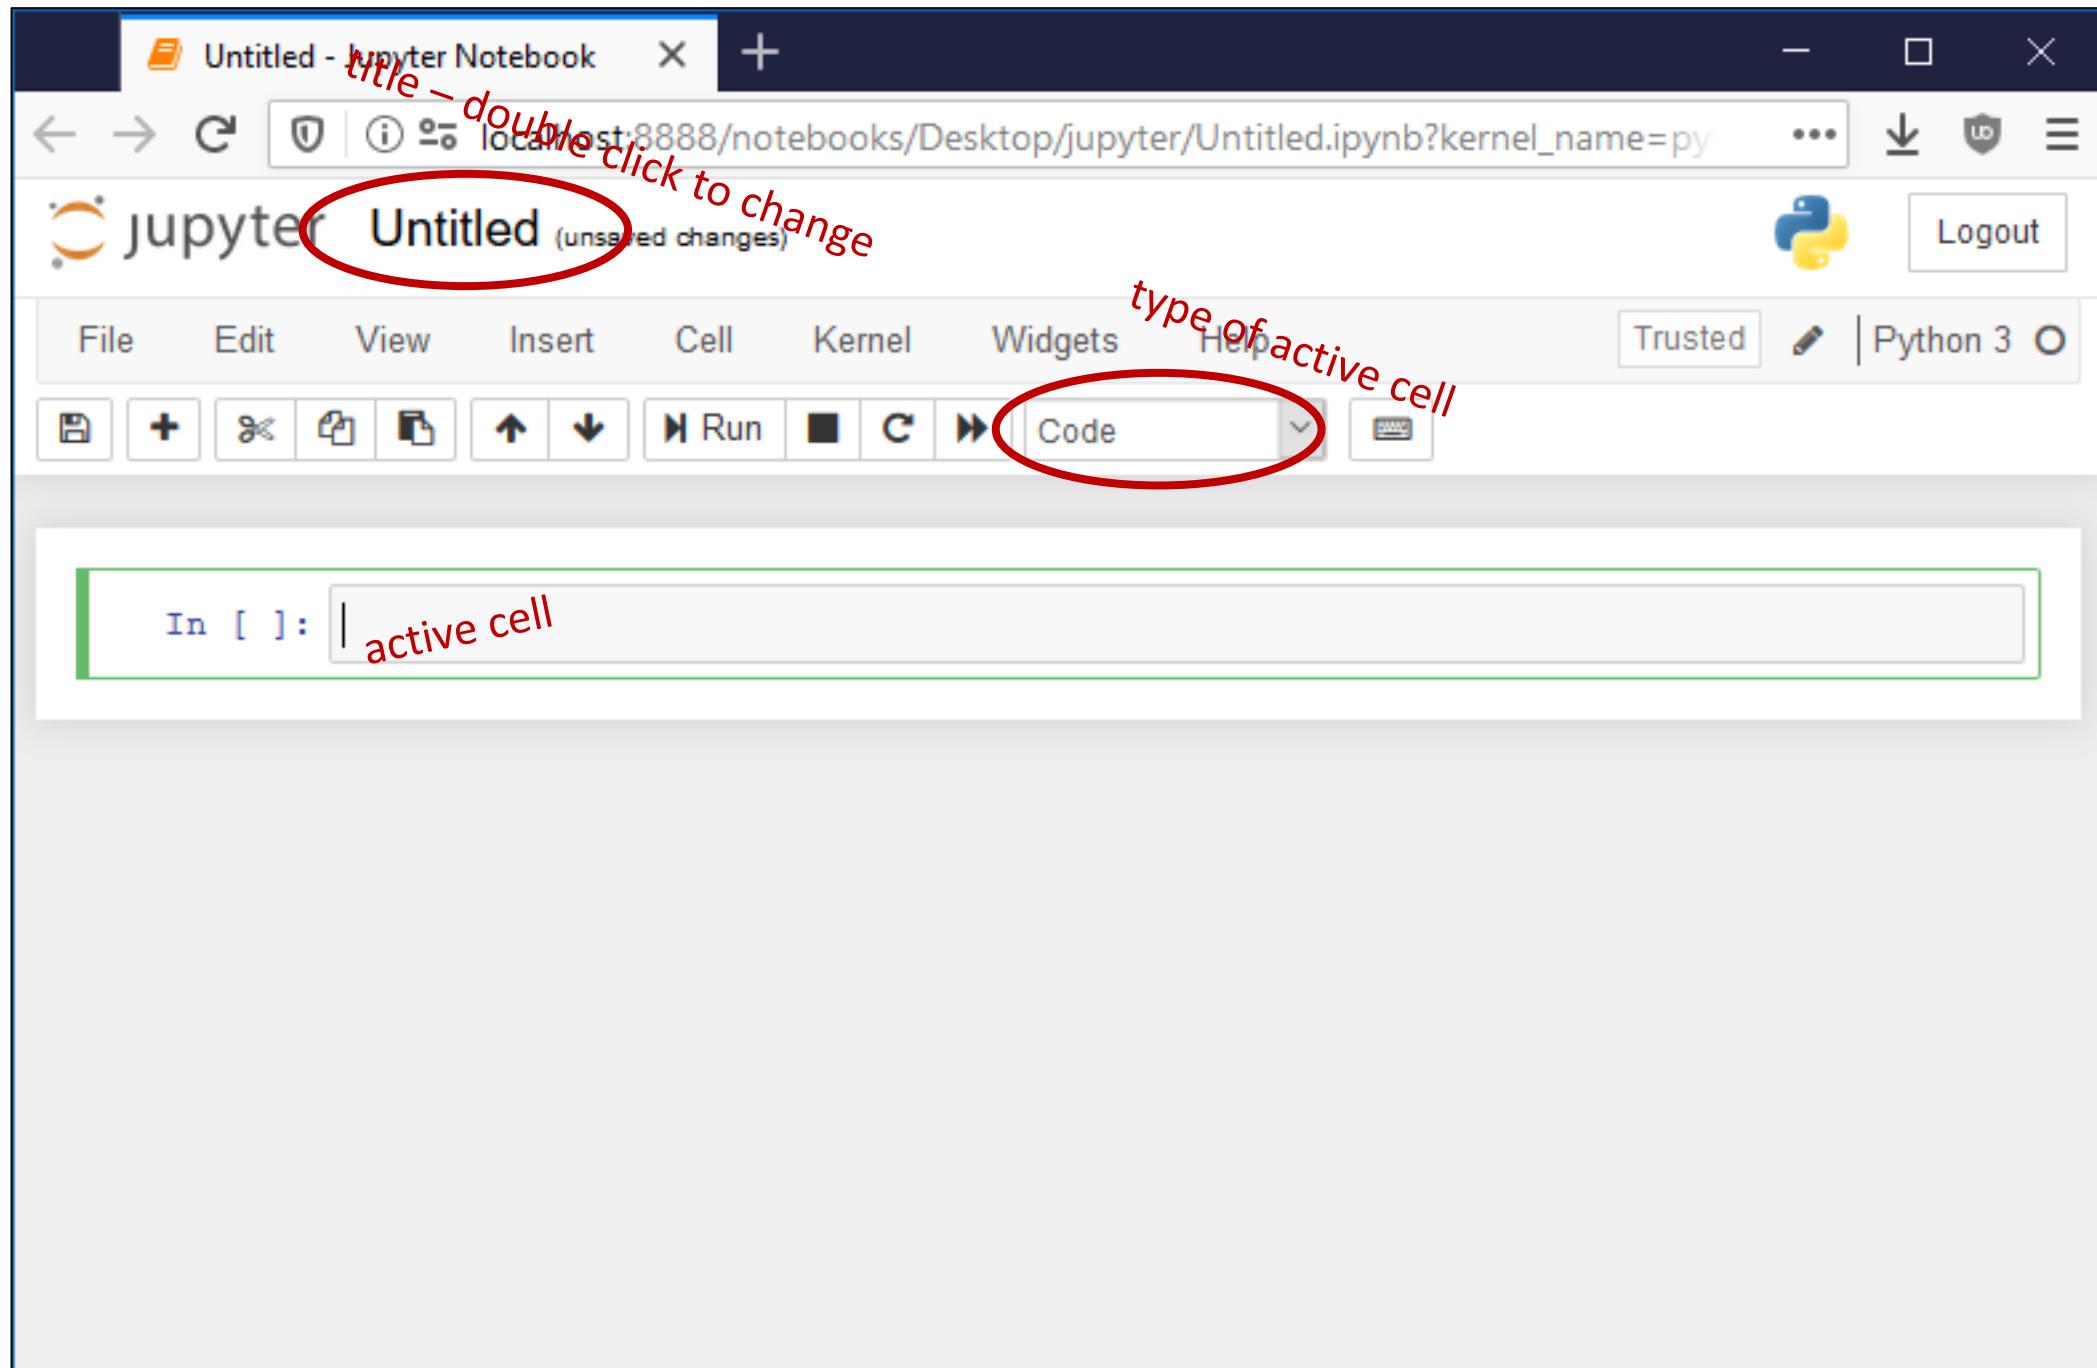




Try:  
Help > User Interface Tour  
Help > Markdown

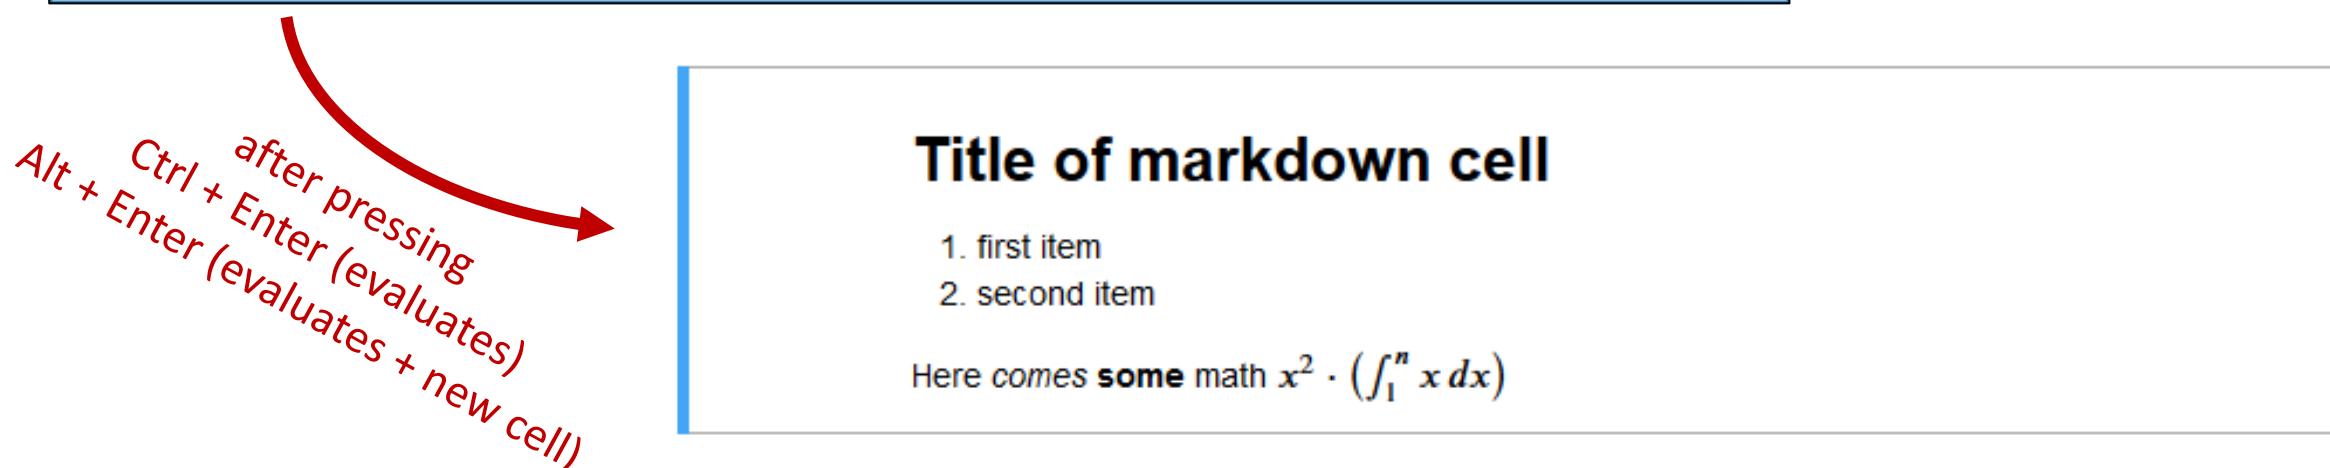

# Command Mode

- Used to navigate between cells
- Current cell is marked with blue bar
- Keyboard shortcuts

|                     |                                                  |
|---------------------|--------------------------------------------------|
| h                   | show keyboard shortcuts                          |
| enter               | enter Edit Mode on current cell                  |
| shift-enter         | run cell + select below                          |
| ctrl-enter          | run selected cells                               |
| alt-enter           | run cell and insert below                        |
| Y M R               | change cell type (code, markdown, raw text)      |
| 1 2 3 4 5 6         | change heading level                             |
| ctrl-A              | select all cells                                 |
| down up             | move to next/previous cell                       |
| space shift-space   | scroll down/up                                   |
| shift-up shift-down | extend selected cells                            |
| A B                 | insert cell above/below                          |
| X C V shift-V Z DD  | cut, copy, paste below/above, undo, delete cells |
| shift-L             | toggle line numbers in cells                     |
| shift-M             | merge selected cells (or with cell below)        |
| O                   | toggle output of selected cells                  |
| shift-O             | toggle scrollbar on selected cells (long output) |

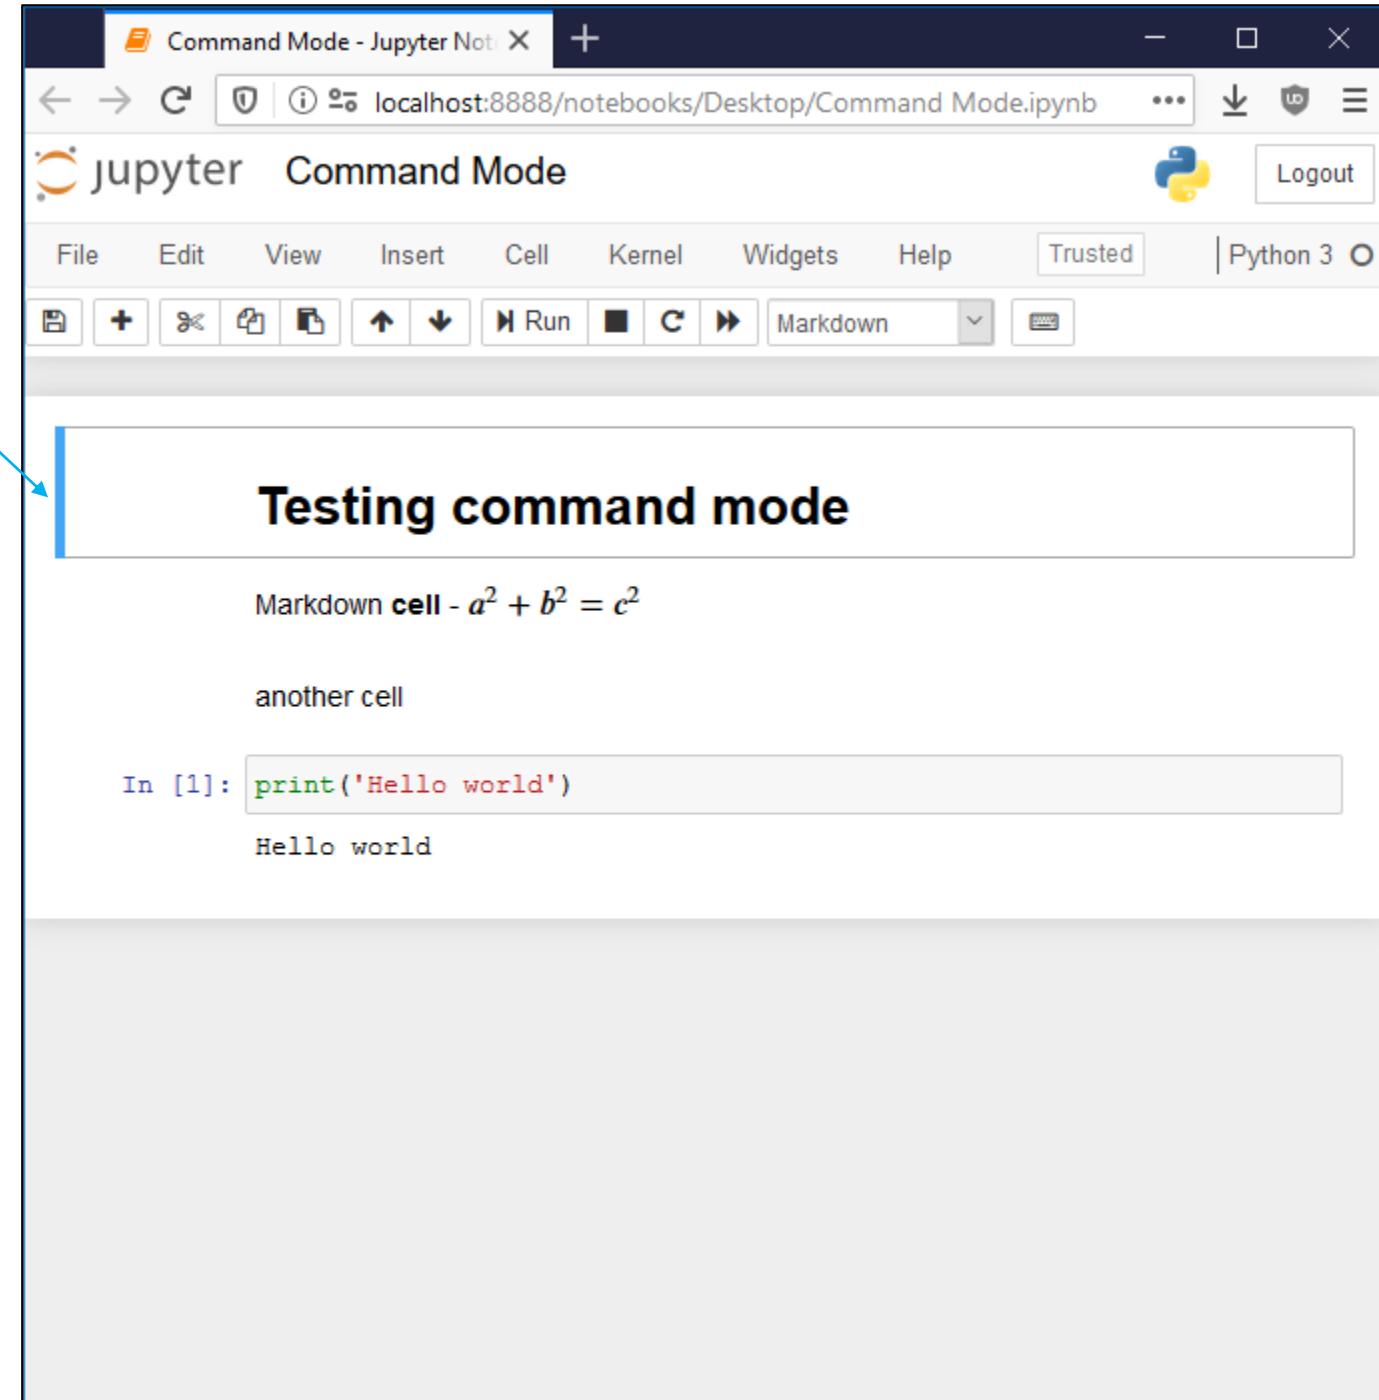

The screenshot shows a Jupyter Notebook interface in Command Mode. The top navigation bar includes 'File', 'Edit', 'View', 'Insert', 'Cell', 'Kernel', 'Widgets', 'Help', 'Trusted' (which is selected), and 'Python 3'. Below the menu is a toolbar with icons for file operations like new, open, save, and run, along with cell selection and execution buttons. The main area displays a cell titled 'Testing command mode' containing a Markdown cell with the equation  $a^2 + b^2 = c^2$ , another cell placeholder, and an In [1]: print('Hello world') cell which has output 'Hello world'.

# Edit Mode

- Used to edit current cell
- Current cell is marked with green bar
- Keyboard shortcuts

|                       |                                          |
|-----------------------|------------------------------------------|
| esc                   | enter Command Mode                       |
| shift-enter           | run cell + select below                  |
| ctrl-enter            | run selected cells                       |
| alt-enter             | run cell and insert below                |
| ctrl-shift--          | split cell at cursor                     |
| ctrl-shift-f          | command palette                          |
| tab                   | indent or code completion                |
| shift-tab             | show docstring                           |
| ctrl-a -x -c -v -z -y | select all, cut, copy, paste, undo, redo |
| ctrl-d                | delete line                              |

Edit Mode - Jupyter Notebook

jupyter Edit Mode

File Edit View Insert Cell Kernel Widgets Help Trusted Python 3

## Testing edit mode

Here we compute  $7 \cdot 6$ ,  $2^8$  and 'Hello world'

```
In [1]: print(7 * 6)
42
```

```
In [2]: 2 ** 8
Out[2]: 256
```

```
In []: print('Hello world')
```

Docstring:

```
print(value, ..., sep=' ', end='\n', file=sys.stdout, flush=False)
```

# Evaluating cells

- To evaluate cell  
ctrl-enter, alt-enter, shift-enter
- Output from program shown below cell
- Result of last evaluated line
- Order of code cells evaluated  
Note "x \*\* 2" computed after "x = 4"
- [\*] are cells being evaluated / waiting
- [ ] not yet evaluated
- Recompute all cells top-down  
▶ or Kernel > Restart & Run all

The screenshot shows a Jupyter Notebook interface with the title bar "Evaluation - Jupyter Notebook". The URL in the address bar is "localhost:8888/notebooks/Desktop/Evaluation.ipynb". The toolbar includes File, Edit, View, Insert, Cell, Kernel, Widgets, Help, Trusted, and Python 3. Below the toolbar, there are buttons for cell operations like Run, Cell, and Kernel, along with a Code dropdown menu.

The notebook content displays the following cells:

- In [1]: `print(42)` → 42
- In [2]: `x = 3`
- In [5]: `x ** 2` → Out[5]: 16
- In [4]: `x = 4`
- In [\*]: `while True:  
 pass`
- In [ ]: `print('Hello world')`

Red arrows point from the numbered list items to the corresponding parts of the notebook interface. Arrows point from "Result of last evaluated line" to the output of In [1], from "Order of code cells evaluated" to the sequence of cells, and from "[ ] not yet evaluated" to the empty cell In [ ].

# Magic lines

- Jupyter code cells support *magic commands* (actually it is IPython)
- % is a *line magic*
- %% is a *cell magic*

|                            |                                          |
|----------------------------|------------------------------------------|
| %lsmagic                   | list magic commands                      |
| %quickref                  | quick reference sheet to IPython         |
| %pwd                       | print working directory (current folder) |
| %cd <i>directory</i>       | change directory (absolut or relative)   |
| %ls                        | list content of current directory        |
| %pip or %conda             | run pip or conda from jupyter            |
| %load script               | insert external script into cell         |
| %run <i>program</i>        | run external program and show output     |
| %automagic                 | toggle if %-prefix is required           |
| %matplotlib inline         | no zoom & resize, allows multiple plots  |
| %matplotlib notebook       | a single plot can be zoomed & resized    |
| %%writefile <i>file</i>    | write content of cell to a file          |
| %%time                     | measure time for cell execution          |
| %%timeit <i>expression</i> | time for simple expression               |

The screenshot shows a Jupyter Notebook interface with the title "Magic lines - Jupyter Notebook". The browser address bar indicates the URL is "localhost:8888/notebooks/Desktop/Magic lines.ipynb". The notebook menu bar includes File, Edit, View, Insert, Cell, Kernel, Widgets, Help, Trusted, and Python 3.

The notebook content displays the following code cells and their outputs:

- In [1]: %pwd  
Out[1]: 'C:\\\\Users\\\\au121\\\\Desktop'
- In [2]: %cd my\_folder  
C:\\Users\\au121\\Desktop\\my\_folder
- In [3]: %ls  
Volume in drive C is OSDisk  
Volume Serial Number is 3CDB-90D8  
Directory of C:\\Users\\au121\\Desktop\\my\_folder  
26-03-2020 14:11 <DIR> .  
26-03-2020 14:11 <DIR> ..  
25-03-2020 14:57 24 my\_document.txt  
1 File(s) 24 bytes  
2 Dir(s) 382.033.829.888 bytes free
- In [4]: open('my\_document.txt').readlines()  
Out[4]: ['Document INSIDE folder\\n']
- In [5]: %%time  
s = 0  
for x in range(1000000):  
 s += x \*\* 2  
Wall time: 492 ms


Red arrows point from the table entries for %pwd, %cd, %ls, and %%time to their corresponding usage examples in the Jupyter notebook.

# Jupyter and matplotlib

- `%matplotlib inline`  
pyplot figures are shown *without* interactive zoom and pan (default)
- Consider changing default figure size  
`plt.rcParams['figure.figsize']`
- Start each figure with `plt.figure`
- Final call to `show` can be omitted

In [5]:

```
%matplotlib inline
import matplotlib.pyplot as plt
plt.rcParams['figure.figsize'] = (5, 3) # inches
x = [0.05 * i for i in range(-100, 101)]
plt.figure()
plt.plot(x, [10 * i**2 for i in x])
plt.figure()
plt.plot(x, [i**3 + 1 * (i - 2.5)**2 for i in x])
plt.show()
```

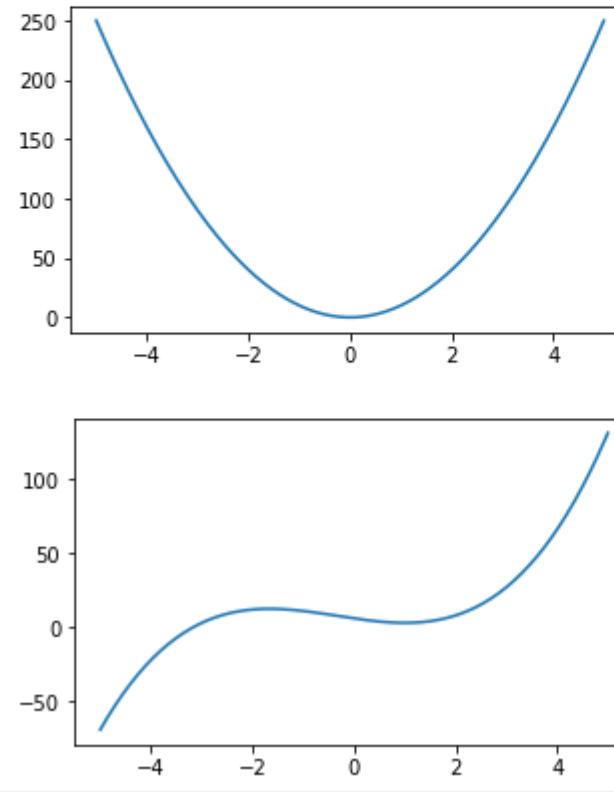

# Jupyter and matplotlib

- `%matplotlib notebook`  
pyplot figures are shown *with*  
interactive zoom and pan
- Start each figure with `plt.figure`  
(also allows setting figure size)
- Final call to `show` can be omitted

```
In [1]: %matplotlib notebook
import matplotlib.pyplot as plt
x = [0.05 * i for i in range(-100, 101)]
plt.figure(figsize=(5, 2)) # inches
plt.plot(x, [10 * i**2 for i in x])
plt.figure(figsize=(5, 2)) # inches
plt.plot(x, [i**3 + 1 * (i - 2.5)**2 for i in x])
plt.show()
```

Figure 1

Figure 2

end interaction

resize button

Stop Interaction



- Widespread tool used for data science applications
  - Documentation, code for data analysis, and resulting visualizations are stored in one common format
  - Easy to update visualizations
  - Works with about 100 different programming languages (not only Python 3), many special features, ....
  - Easy to share data analysis
- 
- *Many online tutorials and examples are available*

[https://www.youtube.com/results?search\\_query=jupyter+python](https://www.youtube.com/results?search_query=jupyter+python)

# JupyterLab: A Next-Generation Notebook Interface

The screenshot displays the JupyterLab interface, a modern web-based notebook environment. The top navigation bar includes File, Edit, View, Run, Kernel, Tabs, Settings, and Help. The left sidebar features a file browser with a search bar, showing files like audio, images, Cpp.ipynb, Data.ipynb, Fasta.ipynb, Julia.ipynb, Lorenz.ipynb (selected), lorenz.py, and R.ipynb. The main area contains several tabs: Lorenz.ipynb (active), Terminal 1, Console 1, Data.ipynb, and README.md. The Lorenz.ipynb tab shows a Markdown cell with text about the Lorenz system and three differential equations:

$$\begin{aligned}\dot{x} &= \sigma(y - x) \\ \dot{y} &= \rho x - y - xz \\ \dot{z} &= -\beta z + xy\end{aligned}$$


Below this is another Markdown cell with text: "Let's change  $(\sigma, \beta, \rho)$  with ipywidgets and examine the trajectories." A code cell [2] contains:

```
from lorenz import solve_lorenz
interactive(solve_lorenz, sigma=(0.0,50.0), rho=(0.0,50.0))
```

To the right, there are two panes: "Output View" showing sliders for sigma (10.00), beta (2.67), and rho (28.00), and "lorenz.py" showing the corresponding Python code for generating the Lorenz attractor plot. At the bottom, the status bar indicates "Simple" mode, "Python 3 (ipykernel) | Idle", "Mode: Command", "Ln 1, Col 1", and the file name "Lorenz.ipynb".

# scipy.optimize.minimize

- Find point  $p$  minimizing function  $f$
- Supports 13 algorithms – but no guarantee that result is correct
- Knowledge about optimization will help you know what optimization algorithm to select and what parameters to provide for better results
-  **WARNING**   
Many solvers return the wrong value when used as a black box

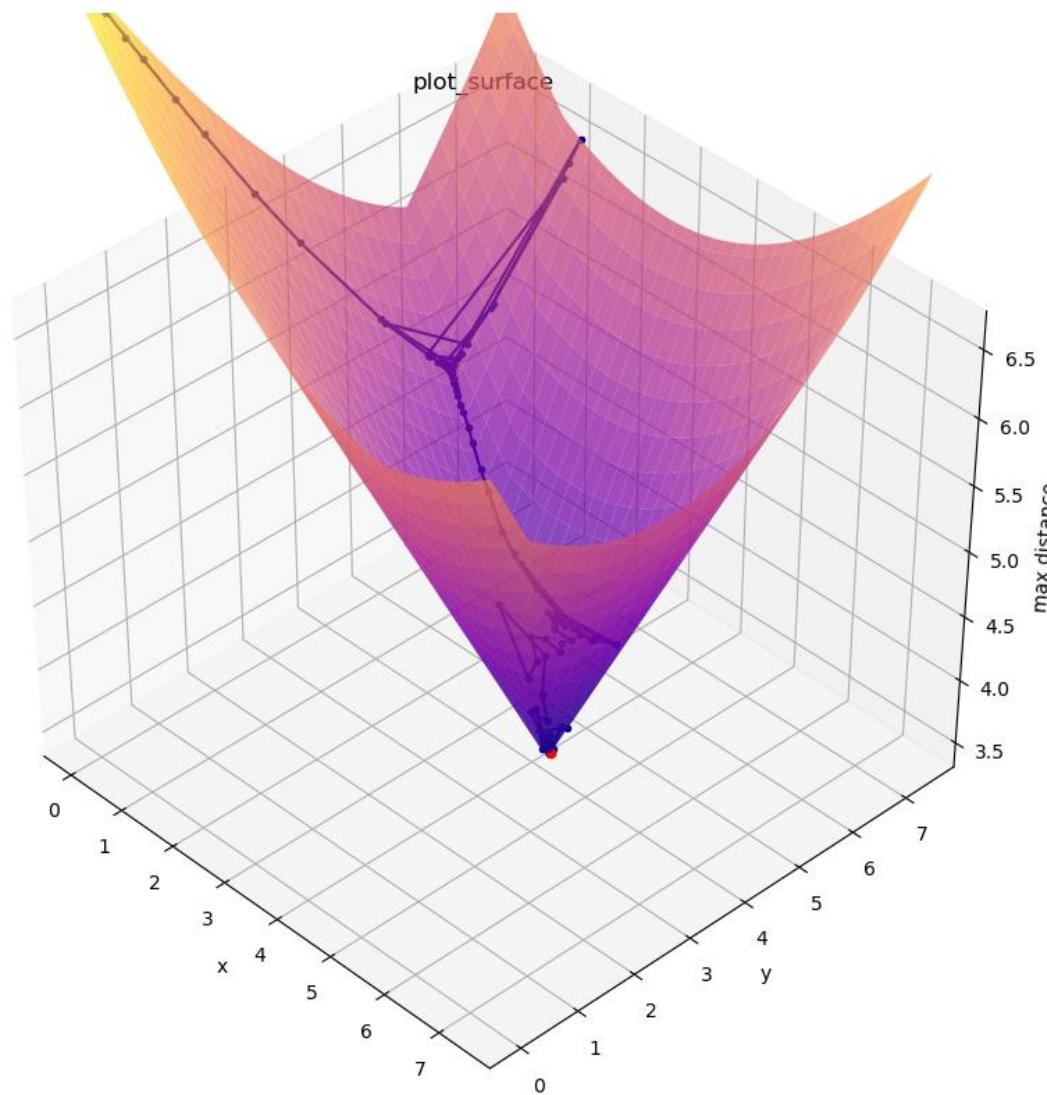

## minimize.py

```
from math import sin
import matplotlib.pyplot as plt
from scipy.optimize import minimize

trace = [] # remember calls to f

def f(x):
 value = x ** 2 + 10 * sin(x)
 trace.append((x, value))
 return value

X = [-8 + 18 * i / 9999 for i in range(1000)]
Y = [f(x) for x in X]


plt.style.use('dark_background')
plt.plot(X, Y, 'w-')
for start, color in [(8, 'red'), (-6, 'yellow')]:
 trace = []
 solution = minimize(f, [start], method='nelder-mead')

 x, y = solution.x[0], solution.fun
 plt.plot(*zip(*trace), '.-', c=color, label=f'start {start:.1f}') # trace
 plt.plot(*trace[0], 'o', c=color) # first trace point
 plt.text(x, -23, f'{x:.3f}', c=color, ha='center') # show minimum x
 plt.plot([x, x], [-18, y], '--', c=color) # dash to minimum

plt.xticks(range(-5, 15, 5))
plt.yticks(range(-25, 100, 25))
plt.minorticks_on()
plt.legend()
plt.show()
```


## Python shell

```
> print(solution)
final_simplex: (array([[-1.3064209 ,
 -1.30649414]]), array([-7.94582337, -7.94582336]))
 fun: -7.94582337348758
message: 'Optimization terminated successfully.'
 nfev: 38
 nit: 19
 status: 0
 success: True
 x: array([-1.3064209])
```

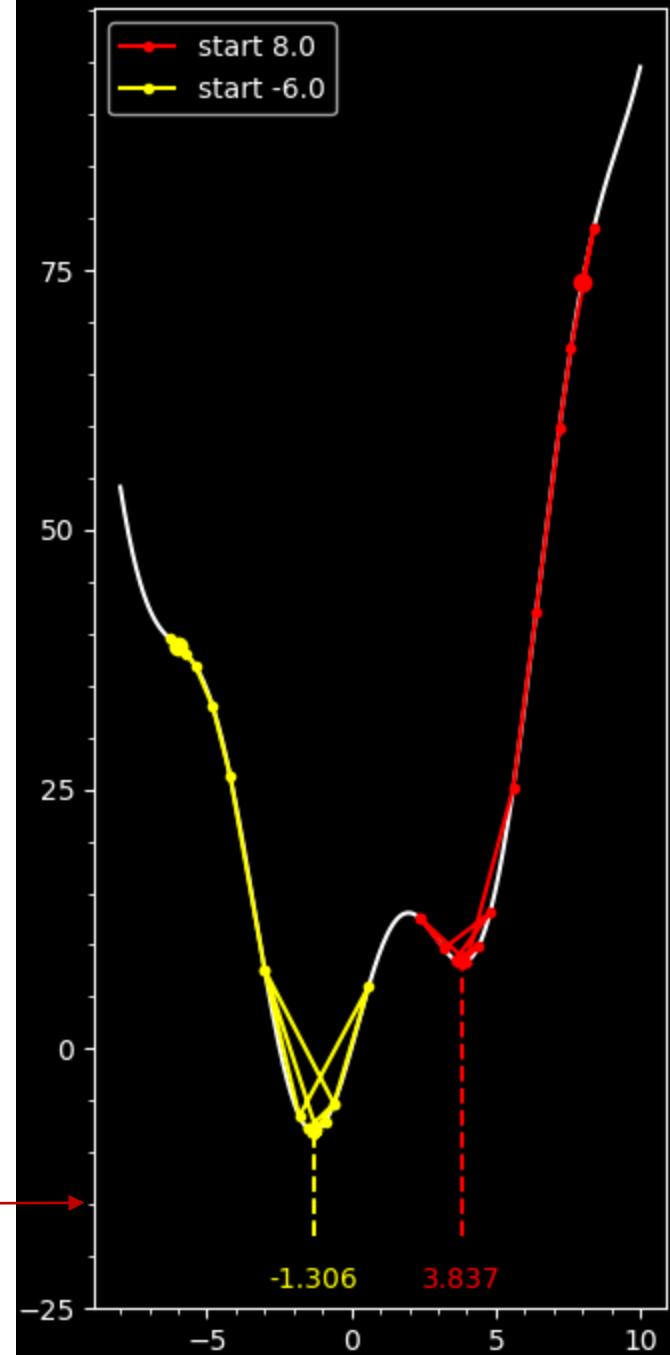

`minimize` tries to find a local minimum for `f` by repeatedly evaluating `f` for different `x` values

# Example: Minimum enclosing circle

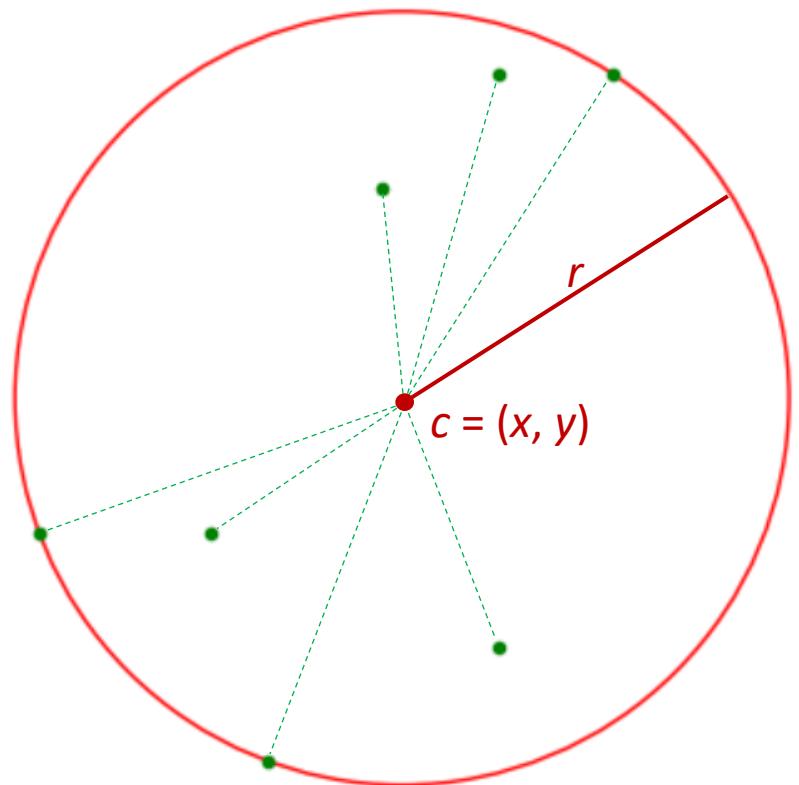


- Find  $c$  such that  $r = \max_p |p - c|$  is minimized
- A solution is characterized by either
  - 1) three points on circle, where the triangle contains the circle center
  - 2) two opposite points on diagonal
- Try a standard numeric minimization solver
- ! Computation involves  $\max$  and  $\sqrt{x}$ , which can be hard for numeric optimization solvers

# Python/scipy vs MATLAB

## Some basic differences

- “**end**” closes a MATLAB block
- “;” at end of command avoids command output
- a(i) instead a[i]
- 1<sup>st</sup> element of a list a(1)
- a(i:j) includes both a(i) and a(j)

like R, Mathematica, Julia, AWK, Smalltalk, ...

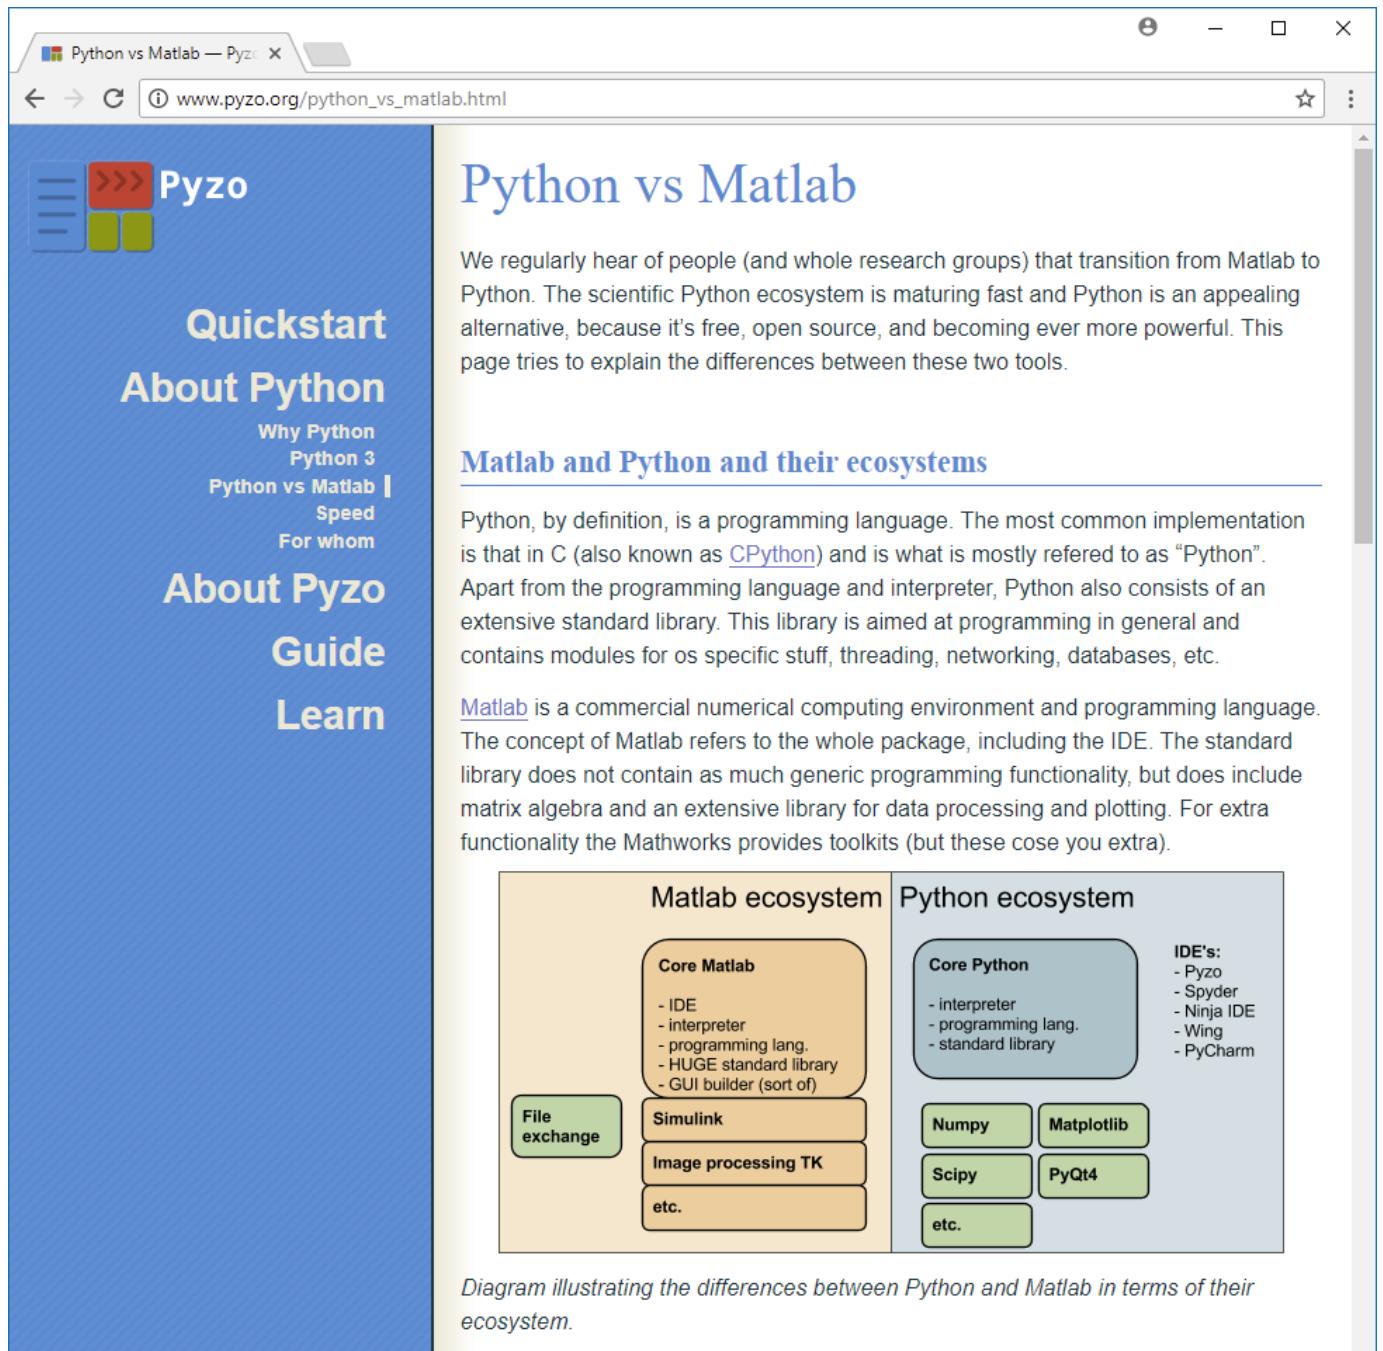


# Minimum enclosing circle in MATLAB

enclosing\_circle.m

```
% Minimum enclosing circle of a point set
% fminsearch uses the Nelder-Mead algorithm

global x y
x = [1.0, 3.0, 2.5, 4.0, 5.0, 6.0, 5.0];
y = [3.0, 1.0, 3.0, 6.0, 7.0, 7.0, 2.0];
c = fminsearch(@(x) max_distance(x), [0,0]);
plot(x, y, "o");
viscircles(c, max_distance(c));

function dist = max_distance(p)
 global x y
 dist = 0.0;
 for i=1:length(x)
 dist = max(dist, pdist([p; x(i), y(i)] ,
 'euclidean'));
 end
end
```

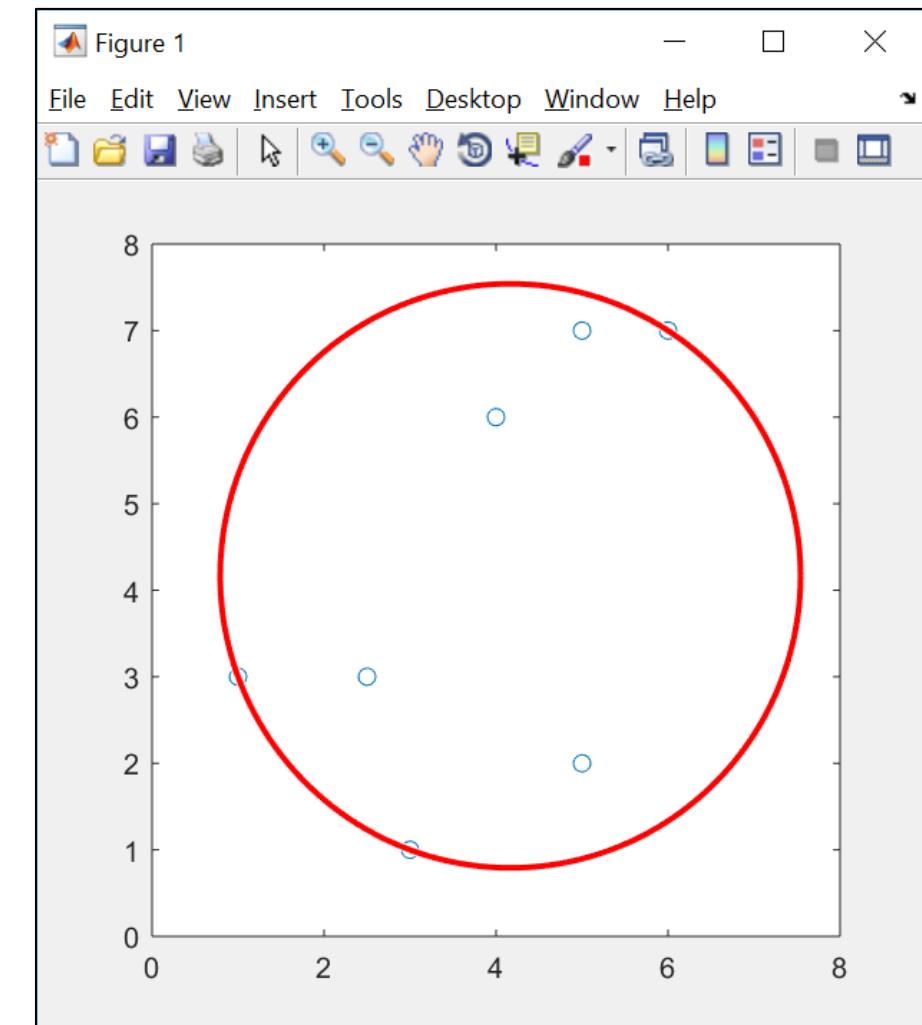

# Minimum enclosing circle in MATLAB (trace)

enclosing\_circle\_trace.m

```
global x y trace_x trace_y


x = [1.0, 3.0, 2.5, 4.0, 5.0, 6.0, 5.0];
y = [3.0, 1.0, 3.0, 6.0, 7.0, 7.0, 2.0];
trace_x = [];
trace_y = [];

c = fminsearch(@(x) max_distance(x), [0,0]);

hold on
plot(x, y, "o", 'color', 'b', 'MarkerFaceColor', 'b');
plot(trace_x, trace_y, "*-", "color", "g");
plot(c(1), c(2), "o", 'color', 'r', 'MarkerFaceColor', 'r');
viscircles(c, max_distance(c), "color", "red");

function dist = max_distance(p)
 global x y trace_x trace_y
 trace_x = [trace_x, p(1)];
 trace_y = [trace_y, p(2)];

 dist = 0.0;
 for i=1:length(x)
 dist = max(dist, pdist([p; x(i), y(i)], 'euclidean'));
 end
end
```

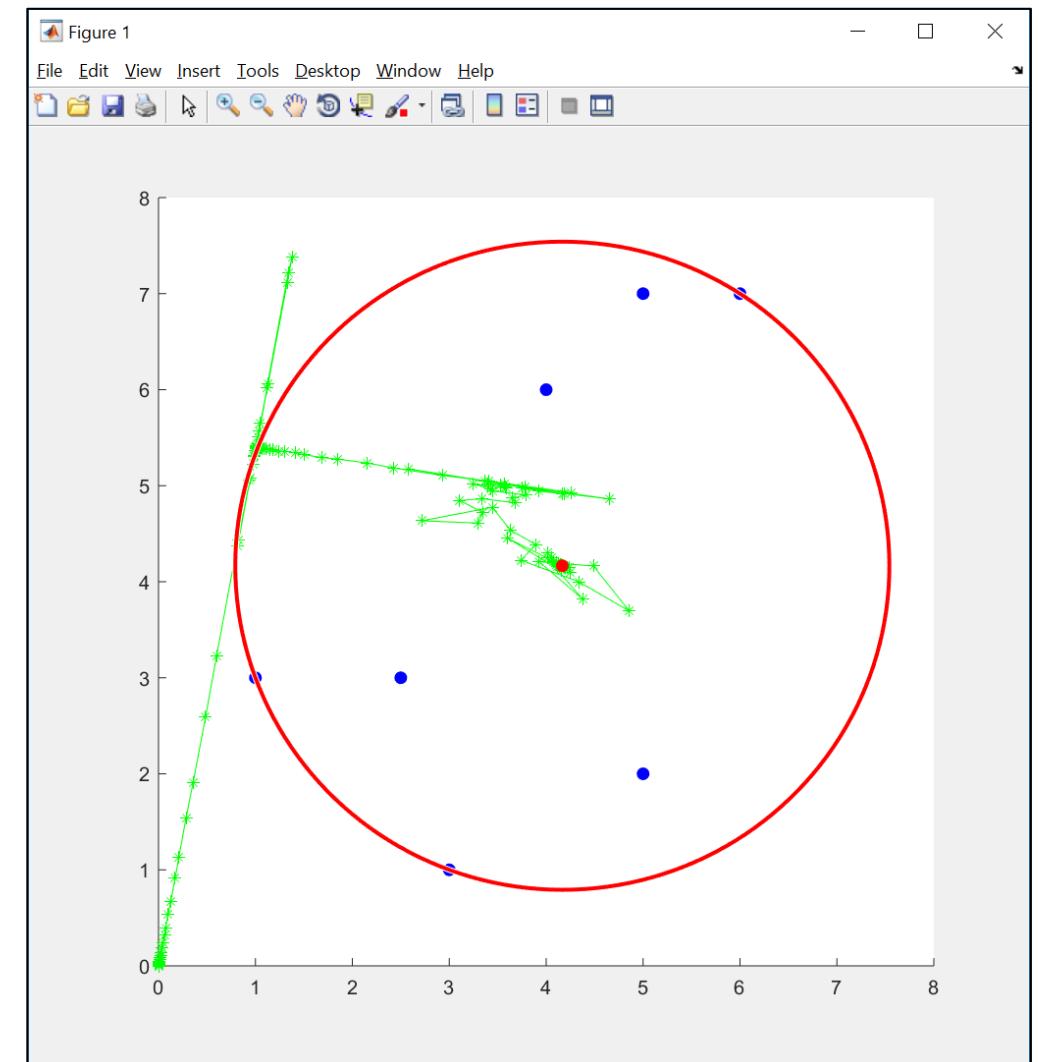

# Minimum enclosing circle in Python


enclosing\_circle.py

```
from scipy.optimize import minimize } import modules
import matplotlib.pyplot as plt

x = [1.0, 3.0, 2.5, 4.0, 5.0, 6.0, 5.0]
y = [3.0, 1.0, 3.0, 6.0, 7.0, 7.0, 2.0]

def dist(p, q):
 return ((p[0] - q[0]) ** 2 + (p[1] - q[1]) ** 2)) ** 0.5
def max_distance(c):
 return max(dist(p, c) for p in zip(x, y))

c = minimize(max_distance, [0.0, 0.0], method="nelder-mead").x
ax = plt.gca()
ax.set_xlim((0, 8))
ax.set_ylim((0, 8)} manually set axis (force circle inside plot)
ax.set_aspect("equal")
plt.plot(x, y, "g.")
ax.add_artist(plt.Circle(c, max_distance(c),
 color="r", fill=False))
plt.show()
```

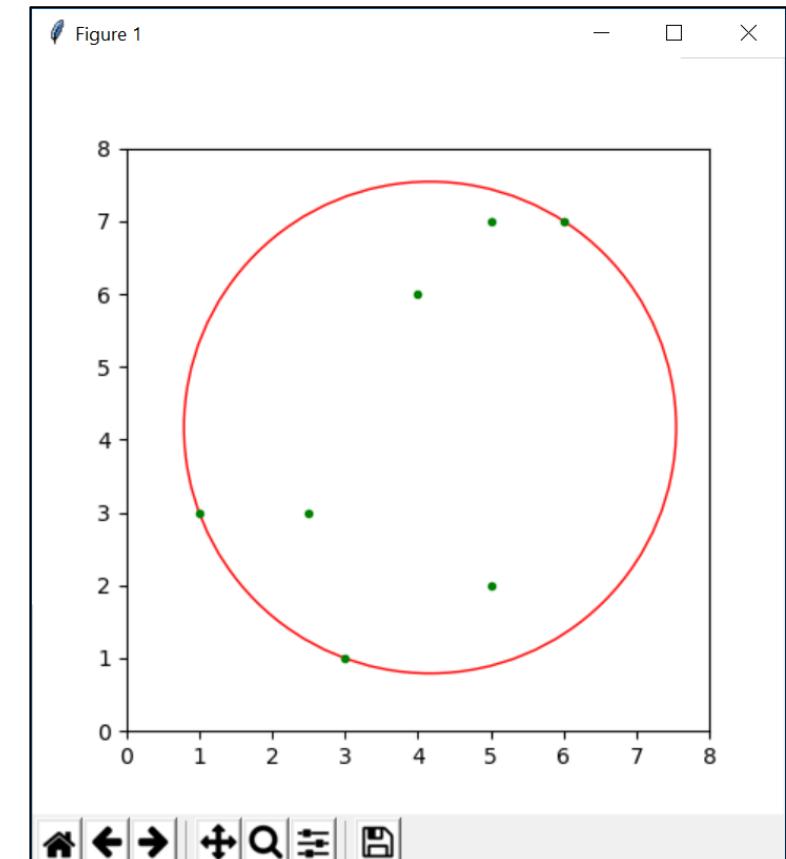

# Minimum enclosing circle in Python (trace)

enclosing\_circle\_trace.py

```
from scipy.optimize import minimize
import matplotlib.pyplot as plt

x = [1.0, 3.0, 2.5, 4.0, 5.0, 6.0, 5.0]
y = [3.0, 1.0, 3.0, 6.0, 7.0, 7.0, 2.0]
trace = []


def dist(p, q):
 return ((p[0] - q[0]) ** 2 + (p[1] - q[1]) ** 2) ** 0.5

def max_distance(c):
 trace.append(c)
 return max([dist(p, c) for p in zip(x, y)])



c = minimize(max_distance, [0.0, 0.0],
 method="nelder-mead").x

ax = plt.gca()
ax.set_xlim((0, 8))
ax.set_ylim((0, 8))
ax.set_aspect("equal")
plt.plot(x, y, "g.")
plt.plot(*zip(*trace), "b.-")
ax.add_artist(plt.Circle(c, max_distance(c),
 color="r", fill=False))

plt.show()
```

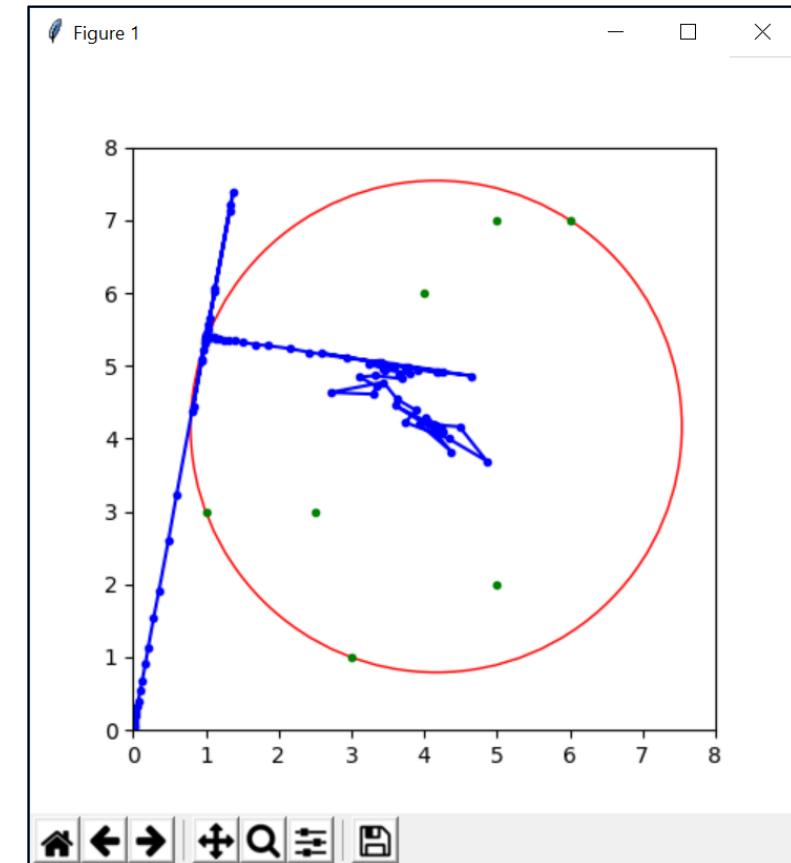

# Minimum enclosing circle – search space

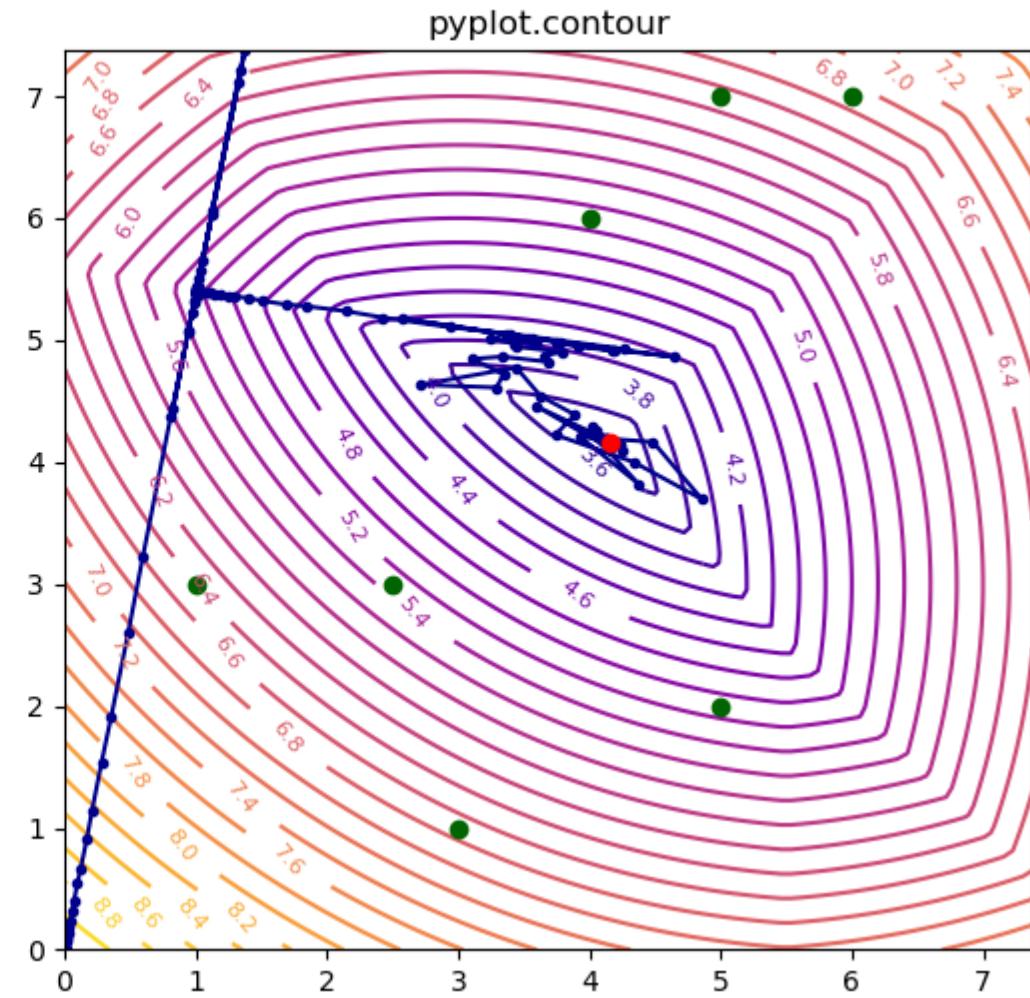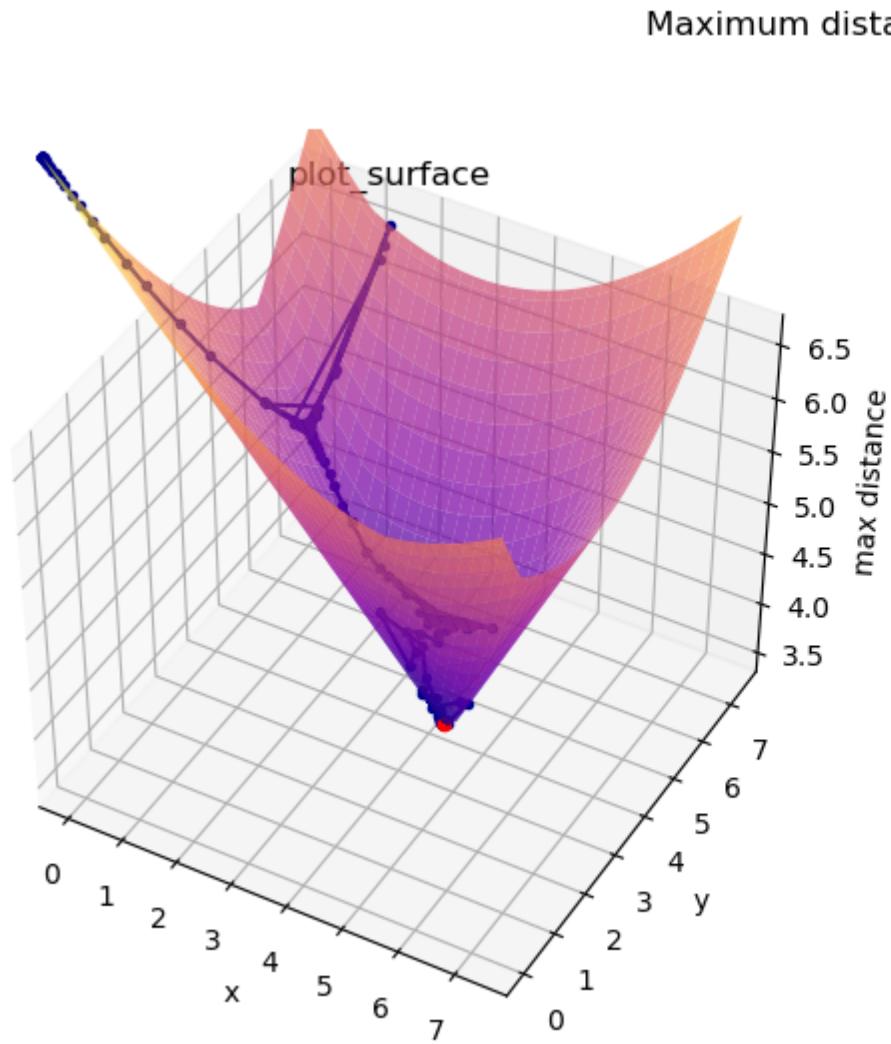


## enclosing\_circle\_search\_space.py (previous slide)

```
from scipy.optimize import minimize
import matplotlib.pyplot as plt
import numpy as np
from mpl_toolkits.mplot3d import Axes3D
points = [(1.0, 3.0), (3.0, 1.0), (2.5, 3.0),
 (4.0, 6.0), (5.0, 7.0), (6.0, 7.0), (5.0, 2.0)]
Minimum enclosing circle solver
trace = []
def distance(p, q):
 return ((p[0]-q[0])**2 + (p[1]-q[1])**2)**0.5
def distance_max(q):
 dist = max(distance(p, q) for p in points)
 trace.append((*q, dist))
 return dist
solution = minimize(distance_max, [0.0, 0.0],
 method='nelder-mead')
center = solution.x
radius = solution.fun
unzip point coordinates
points_x, points_y = zip(*points)
trace_x, trace_y, trace_z = zip(*trace)
Bounding box [x_min, x_max] x [y_min, y_max]
xs, ys = points_x + trace_x, points_y + trace_y
x_min, x_max = min(xs), max(xs)
y_min, y_max = min(ys), max(ys)
enforce aspect ratio
x_max = max(x_max, x_min + y_max - y_min)
y_max = max(y_max, y_min + x_max - x_min)
```

```
Minimum enclosing circle - 3D surface plot
(plot_surface requires X, Y, Z are 2D numpy.arrays)
X, Y = np.meshgrid(np.linspace(x_min, x_max, 100),
 np.linspace(y_min, y_max, 100))
Z = np.zeros(X.shape)
for px, py in points:
 Z = np.maximum(Z, (X - px)**2 + (Y - py)**2)
Z = np.sqrt(Z)
ax = plt.subplot(1, 2, 1, projection='3d')
ax.plot_surface(X, Y, Z, cmap='plasma', alpha=0.7)
ax.plot(trace_x, trace_y, trace_z, '.-', c='darkblue')
ax.scatter(*center, radius, 'o', c='red')
ax.set_xlabel('x')
ax.set_ylabel('y')
ax.set_zlabel('max distance')
ax.set_title('plot_surface')
Minimum enclosing circle - contour plot
plt.subplot(1, 2, 2)
plt.title('pyplot.contour')
plt.plot(trace_x, trace_y, '.-', color='darkblue')
plt.plot(points_x, points_y, 'o', color='darkgreen')
plt.plot(*center, 'o', c='red')
qcs = plt.contour(X, Y, Z, levels=30, cmap='plasma')
plt.clabel(qcs, inline=1, fontsize=8, fmt='%.1f')
plt.suptitle('Maximum distance to an input point')
plt.tight_layout()
plt.show()
```


numpy arrays

$$\text{scipy.optimize.minimize } f(c) = \max_p |p - c|$$

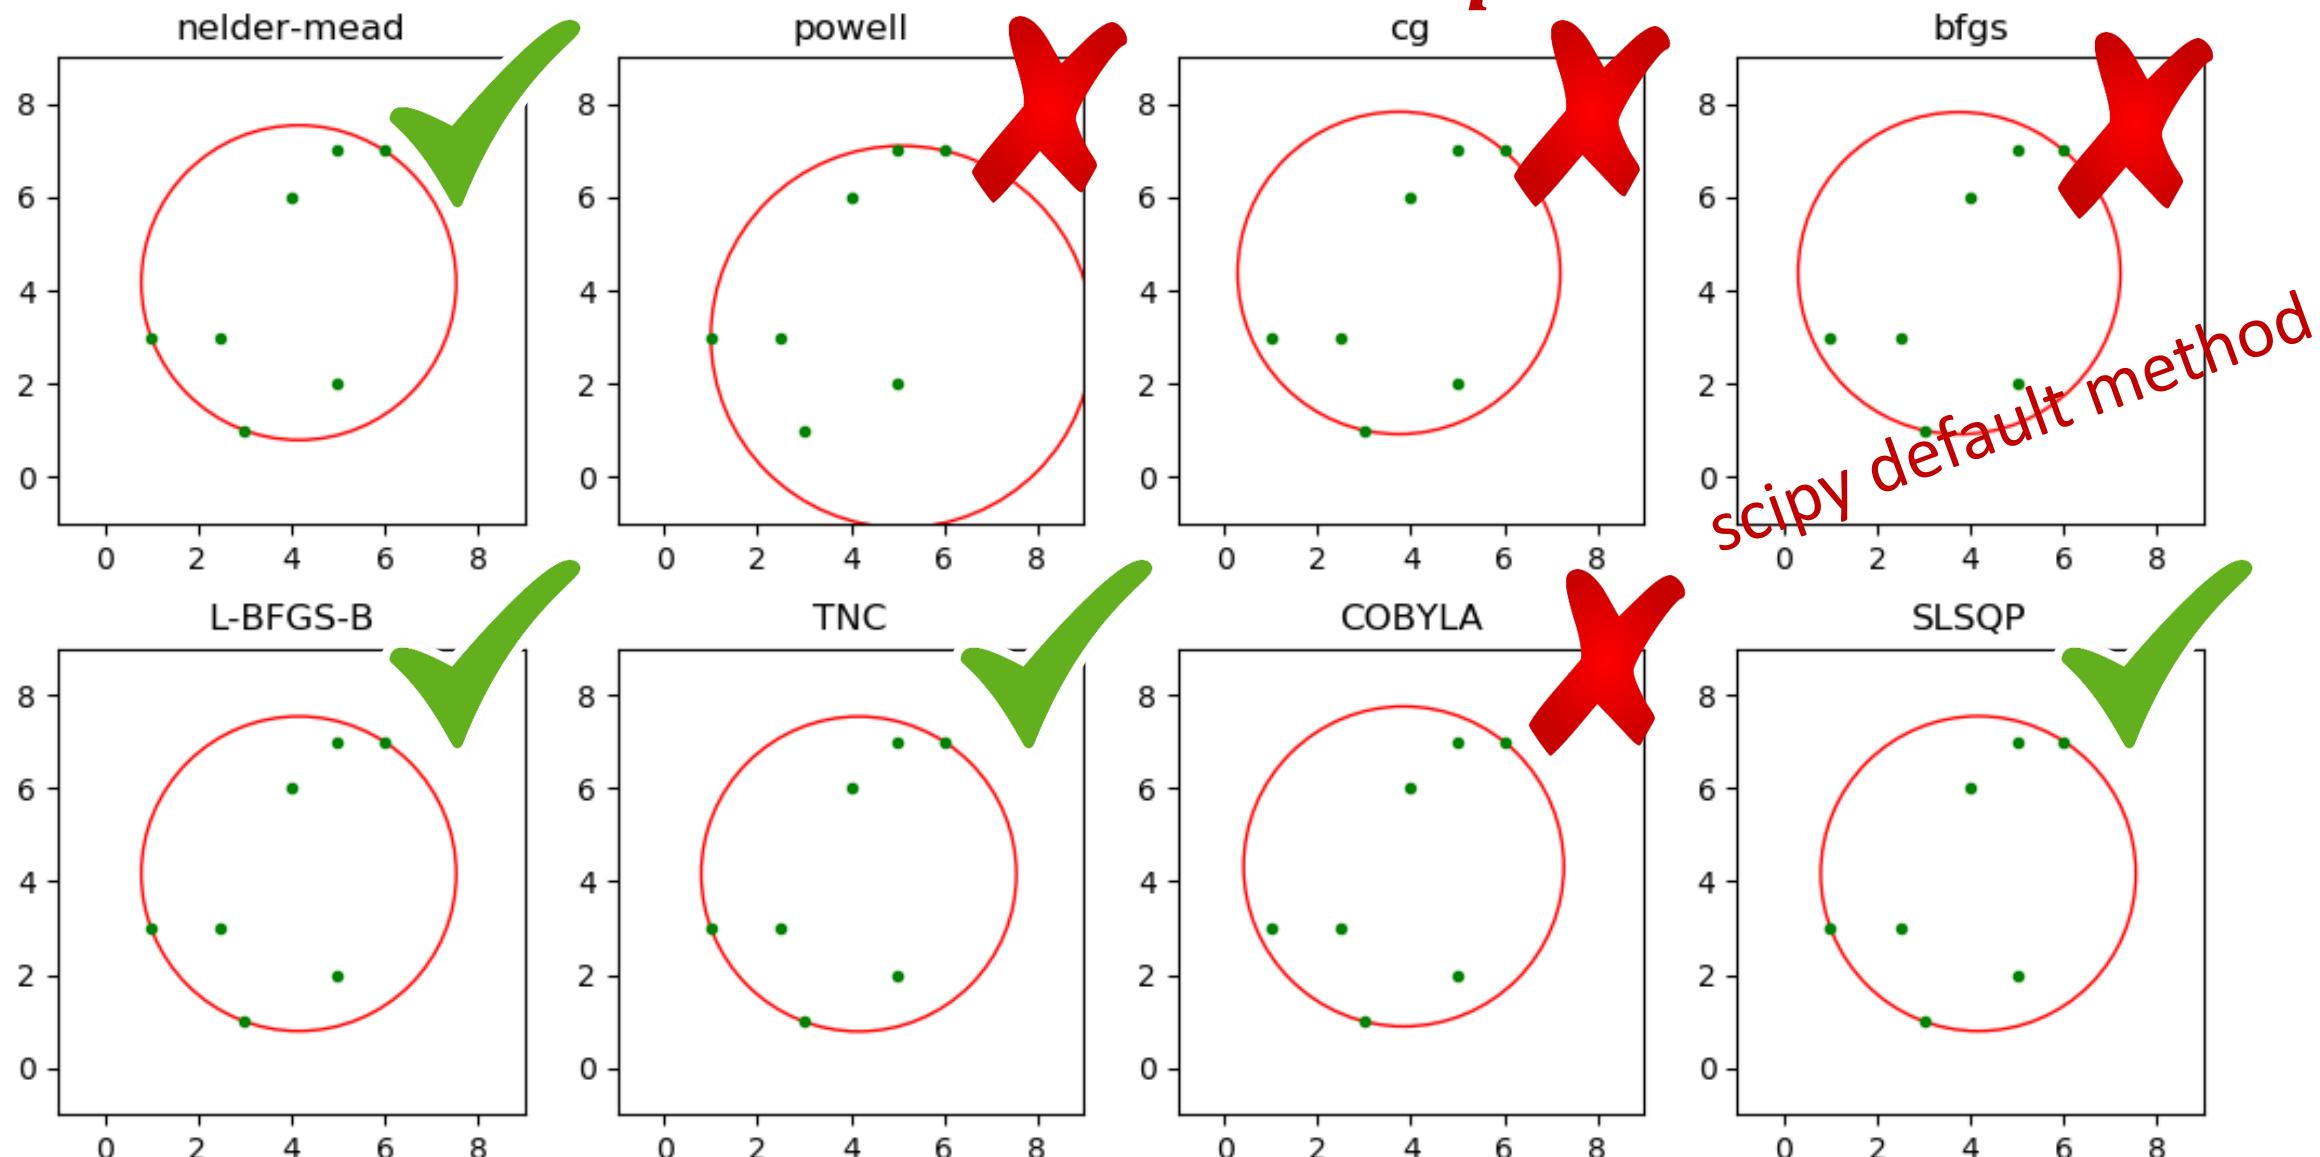

scipy.optimize  $f(c) = \max_p |p - c|^2$

avoids  $\sqrt{ }$

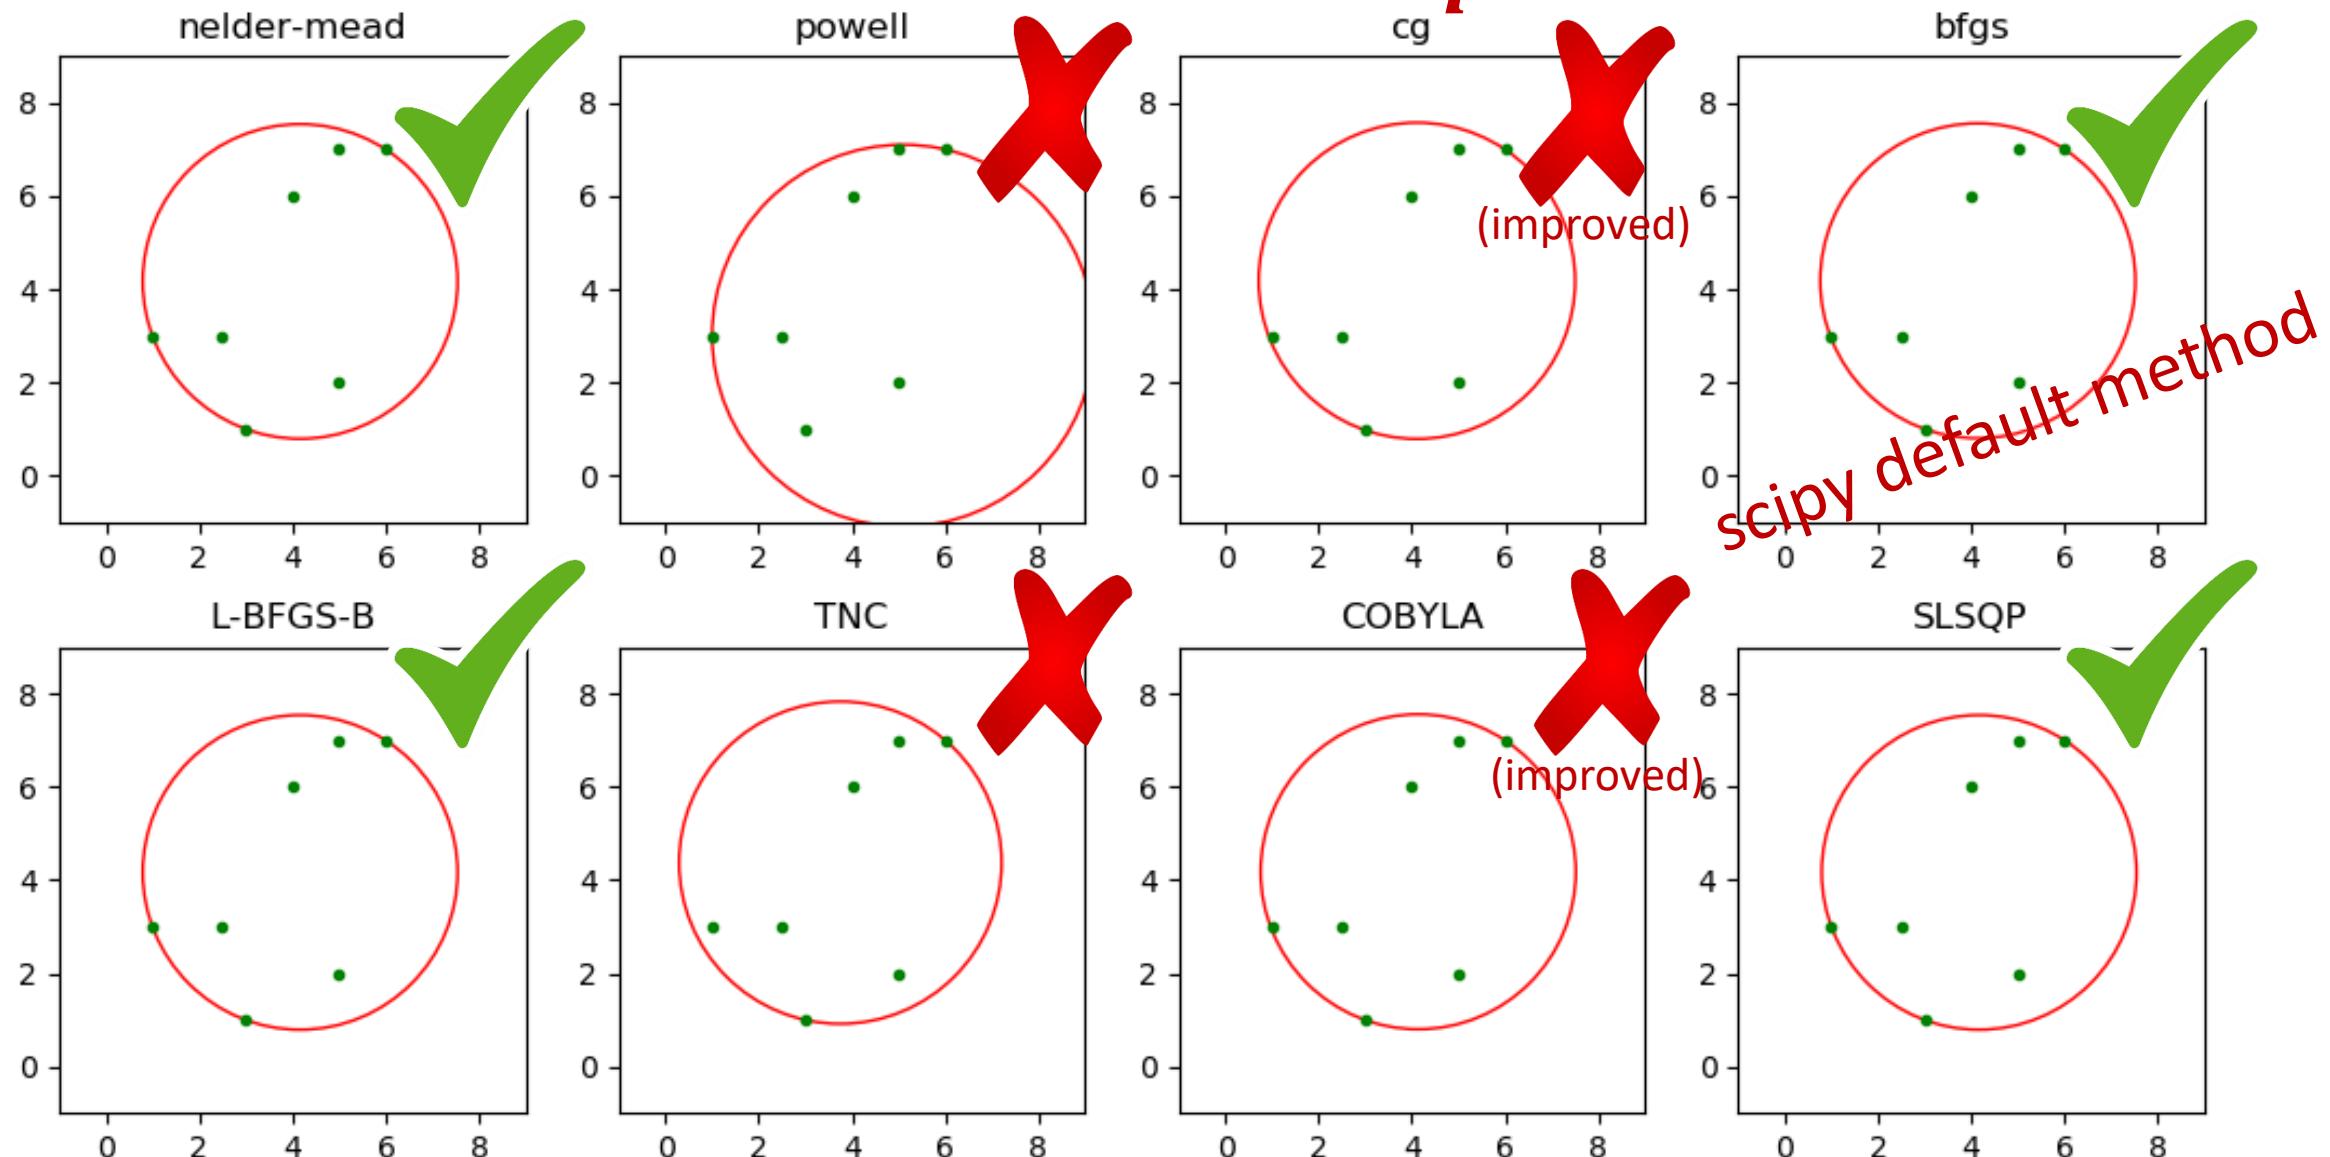

# Multi-dimensional data


- NumPy
- matrix multiplication, @
- `numpy.linalg.solve`, `numpy.polyfit`

*Array programming with NumPy*

Harris et al.

Nature, volume 585, pages 357–362, 2020

DOI [10.1038/s41586-020-2649-2](https://doi.org/10.1038/s41586-020-2649-2)

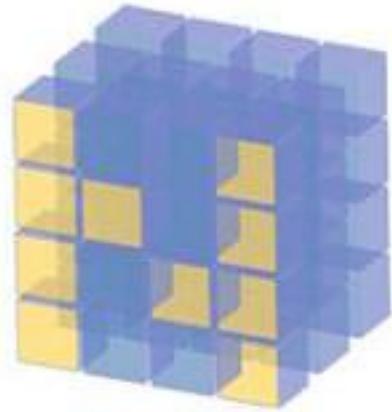

# NumPy

- NumPy is a Python package for dealing with multi-dimensional data

[www.numpy.org](http://www.numpy.org)

[docs.scipy.org/doc/numpy/user/quickstart.html](http://docs.scipy.org/doc/numpy/user/quickstart.html)

# pylab ?

- Guttag [2<sup>nd</sup> edition] uses pylab in the examples, but...

*“pylab is a convenience module that bulk imports matplotlib.pyplot (for plotting) and numpy (for mathematics and working with arrays) in a single name space. Although many examples use pylab, it is no longer recommended.”*

# NumPy arrays (example)

Python shell

```
> range(0, 1, .3)
| TypeError: 'float' object cannot be
| interpreted as an integer
> [1 + i / 4 for i in range(5)]
| [1.0, 1.25, 1.5, 1.75, 2.0]
```

} python only supports ranges of int

} generate 5 uniform values in range [1,2]

Python shell

```
> import numpy as np
> np.arange(0, 1, 0.3)
| array([0. , 0.3, 0.6, 0.9])
> type(np.arange(0, 1, 0.3))
| <class 'numpy.ndarray'>
> help(numpy.ndarray)
| +2000 lines of text
> np.linspace(1, 2, 5)
| array([1. , 1.25, 1.5 , 1.75, 2.])
```

} numpy can generate ranges with float

} returns a "NumPy array" (not a list)  
"arange" ≡ "array range" and generates the array explicitly

} generate n uniformly spaced values


# Plotting a function (example)

sin.py

```
import matplotlib.pyplot as plt
import math
n = 25
x = [2 * math.pi * i / (n - 1) for i in range(n)]
y = [math.sin(v) for v in x]
plt.plot(x, y, '.')
plt.show()
```

sin\_numpy.py

```
import matplotlib.pyplot as plt
import numpy as np
x = np.linspace(0, 2 * np.pi, 25)
y = np.sin(x)
plt.plot(x, y, '.')
plt.show()
```

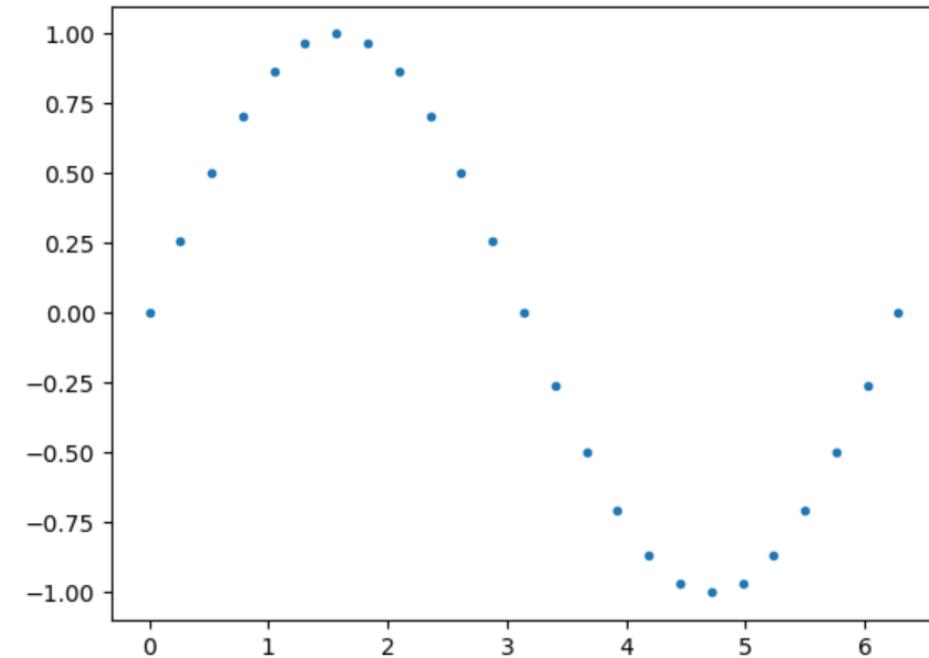

- `np.sin` applies the `sin` function *to each element of x*
- `pyplot` accepts NumPy arrays
- `math.pi == np.pi ≈  $\frac{22}{7}$`


# A circle

circle.py

```
import matplotlib.pyplot as plt
import numpy as np

a = np.linspace(0, 2 * np.pi, 100)
x = np.sin(a)
y = np.cos(a)

plt.plot(x, y, 'r.-')
plt.plot(x[0], y[0], 'bo')
plt.show()
```

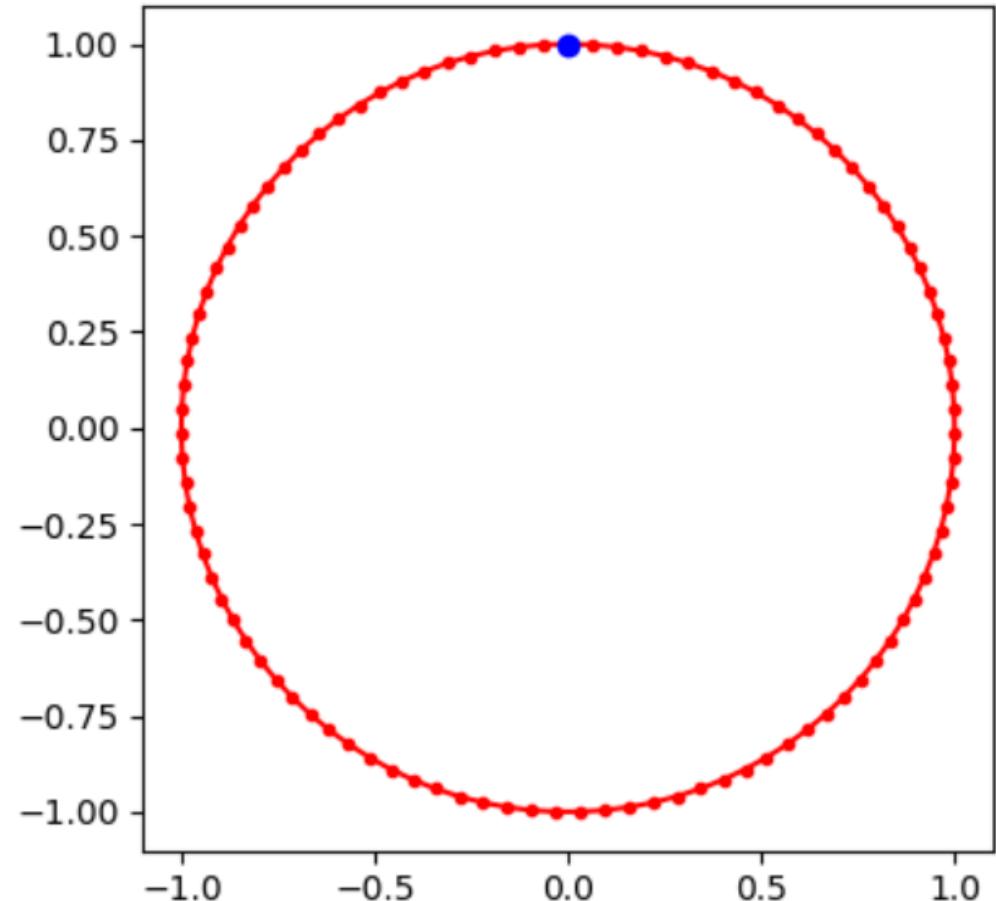


# Two half circles

half\_circles.py

```
import matplotlib.pyplot as plt
import numpy as np

x = np.linspace(-1, 1, 100)
plt.plot(x, np.sqrt(1 - x ** 2), 'r.-')
plt.plot(x, -np.sqrt(1 - x ** 2), 'b.-')
plt.show()
```

- `x` is a NumPy array
- `**` NumPy method `__pow__` squaring each element in `x`
- `binary -` NumPy method `__rsub__` that for each element `e` in `x` computes `1 - e`
- `np.sqrt` NumPy method computing the square root of each element in `x`
- `unary -` NumPy method `__neg__` that negates each element in `x`

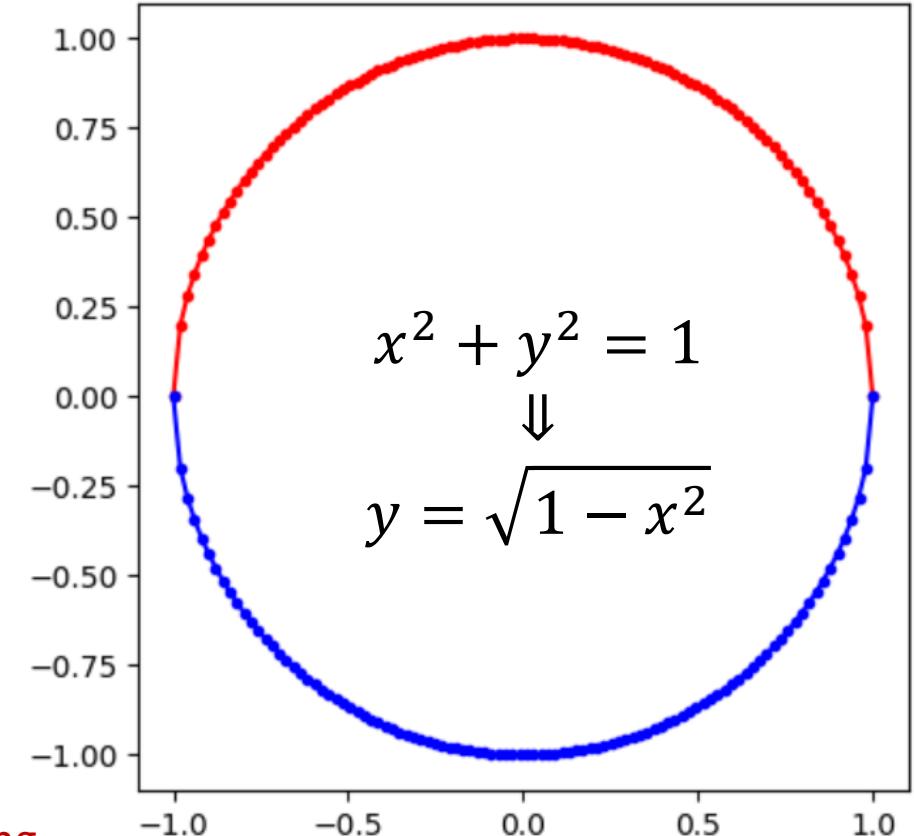

# Creating one-dimensional NumPy arrays

## Python shell

```
> np.array([1, 2, 3])
| array([1, 2, 3])
> np.array((1, 2, 3))
| array([1, 2, 3])
> np.array(range(1, 4))
| array([1, 2, 3])
> np.arange(1., 4., 1.)
| array([1., 2., 3.])
> np.linspace(1, 3, 3)
| array([1., 2., 3.])
> np.zeros(3)
| array([0., 0., 0.])
> np.ones(3)
| array([1., 1., 1.])
> np.full(3, 7)
| array([7, 7, 7])
> np.random.random(3)
| array([0.73761651,
 0.60607355, 0.3614118])
```

```
> np.array([1, 2, 3]).dtype # type of all values
| dtype('int32')
> np.arange(3, dtype='float')
| array([0., 1., 2.])
> np.arange(3, dtype='int16') # 16 bit integers
| array([0, 1, 2], dtype=int16)
> np.arange(3, dtype='int32') # 32 bit integers
| array([0, 1, 2])
> 1000 ** np.arange(5)
| array([1, 1000, 1000000, 1000000000,
 -727379968], dtype=int32) # OOPS.. overflow !
> 1000 ** np.arange(5, dtype='O')
| array([1, 1000, 1000000, 1000000000,
 100000000000], dtype=object) # Python integer
> np.arange(3, dtype='complex')
| array([0.+0.j, 1.+0.j, 2.+0.j])
```

 Elements of a NumPy array are not arbitrary precision integers by default – you can select between +25 number representations

# Mantissa size in various numpy floats

Python shell

```
> for data_type in ['half', 'float', 'single', 'double', 'longdouble', 'float32', 'float64']:
 x = np.array([1], dtype=data_type)
 for i in range(100):
 if x == x + (x / 2) ** i:
 break
 print(data_type, i - 1, 'bits mantissa')
half 10 bits mantissa
float 52 bits mantissa
single 23 bits mantissa
double 52 bits mantissa
longdouble 52 bits mantissa
float32 23 bits mantissa # platform independent
float64 52 bits mantissa # platform independent
```

mantissa  
 $1.\underbrace{00001}_{i}0000_2$

# Creating multi-dimensional NumPy arrays

## Python shell

```
> np.array([[1, 2, 3], [4, 5, 6]])
| array([[1, 2, 3],
| [4, 5, 6]])
> np.arange(1, 7).reshape(2, 3)
| array([[1, 2, 3],
| [4, 5, 6]])
> x = np.arange(12).reshape(2, 2, 3)
> x
| array([[[0, 1, 2],
| [3, 4, 5]],
| [[6, 7, 8],
| [9, 10, 11]]])
> numpy.zeros((2, 5), dtype='int32')
| array([[0, 0, 0, 0, 0],
| [0, 0, 0, 0, 0]])
> x.size
| 12
> x.ndim
| 3
> x.shape
| (2, 2, 3)
> x.dtype
| dtype('int32')
> x.flatten()
| array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11])
> list(x.flat) # flat is an iterator
| [0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11]
> np.eye(3) # diagonal 2D array
| array([[1., 0., 0.],
| [0., 1., 0.],
| [0., 0., 1.]])
```

# View vs Copy

- Numpy is optimized to handle big multi-dimensional arrays
- To *avoid copying data*, **views** allows one to look at the underlying data in different ways (data can be shared by multiple views)
- `reshape`, `ravel` and `slicing` are examples creating views
- `flatten` and `ravel` both turn multiple dimensional arrays into one dimensional arrays but `flatten` creates an explicit copy whereas `ravel` creates a space efficient view

## Python shell

```
> x = np.arange(6)
> y = x.reshape(2, 3) # view
> y[0][0] = 42 # updates x
> x
| array([42, 1, 2, 3, 4, 5])
> y
| array([[42, 1, 2],
| [3, 4, 5]])
> z = y.flatten() # copy
> z[5] = 0
> z
| array([42, 1, 2, 3, 4, 0])
> x
| array([42, 1, 2, 3, 4, 5])
> w = y.ravel() # view
> w[5] = -1
> w
| array([42, 1, 2, 3, 4, -1])
> x
| array([42, 1, 2, 3, 4, -1])
```

# NumPy operations

## Python shell

```
> x = numpy.arange(3)
> x
| array([0, 1, 2])
> x + x # elementwise addition
| array([0, 2, 4])
> 1 + x # add integer to each element
| array([1, 2, 3])
> x * x # elementwise multiplication
| array([0, 1, 4])
> np.dot(x, x) # dot product
| 5
> np.cross([1, 2, 3], [3, 2, 1]) # cross product
| array([-4, 8, -4])
```

```
> a = np.arange(6).reshape(2,3)
> a
| array([[0, 1, 2],
| [3, 4, 5]])
> a.T # matrix transposition, view
| array([[0, 3],
| [1, 4],
| [2, 5]])
> a @ a.T # matrix multiplication
| array([[5, 14],
| [14, 50]])
> a += 1
> a
| array([[1, 2, 3],
| [4, 5, 6]])
```

# Universal functions (apply to each entry)

Python shell

```
> x = np.array([[1, 2], [3, 4]])
> np.sin(x) # also: cos, exp, sqrt, log, ceil, floor, abs
| array([[0.84147098, 0.90929743],
| [0.14112001, -0.7568025]])
> np.sign(np.sin(x))
| array([[1., 1.],
| [1., -1.]])
> np.mod(np.arange(10), 3) # same as: np.arange(10) % 3
| array([0, 1, 2, 0, 1, 2, 0, 1, 2, 0], dtype=int32)
```

# Axis

## Python shell

```
> x = np.arange(1, 7).reshape(2, 3)
> x
| array([[1, 2, 3],
| [4, 5, 6]])
> x.sum() # = x.sum(axis=(0, 1))
| 21
> x.sum(axis=0)
| array([5, 7, 9])
> x.sum(axis=1)
| array([6, 15])
> x.min() # = x.min(axis=(0, 1))
| 1
```

## Python shell

```
> x.min(axis=0)
| array([1, 2, 3])
> x.min(axis=1)
| array([1, 4])
> x.cumsum()
| array([1, 3, 6, 10, 15, 21], dtype=int32)
> x.cumsum(axis=0)
| array([[1, 2, 3],
| [5, 7, 9]], dtype=int32)
> x.cumsum(axis=1)
| array([[1, 3, 6],
| [4, 9, 15]], dtype=int32)
```

# Slicing

## Python shell

```
> x = numpy.arange(20).reshape(4,5)
> x
| array([[0, 1, 2, 3, 4],
| [5, 6, 7, 8, 9],
| [10, 11, 12, 13, 14],
| [15, 16, 17, 18, 19]])
> x[2, 3] # = x[(2, 3)]
| 13
> x[1:4:2, 2:4:1] # rows 1 and 3, and columns 2 and 3, view
| array([[7, 8],
| [17, 18]])
> x[:, 3]
| array([3, 8, 13, 18])
> x[..., 3] # ... is placeholder for ':' for all missing dimensions
| array([3, 8, 13, 18])
> type(...)
| <class 'ellipsis'>
```

# Broadcasting (stretching arrays to get same size)

- Numpy tries to apply *broadcasting*, if array shapes do not match, i.e. adds missing leading dimensions and repeats a dimension with only one element:

```
[[1], [2]] + [10,20] column + row vector
≡ [[1], [2]] + [[10,20]] both ndim = 2
≡ [[1,1], [2,2]] + [[10,20]]
≡ [[1,1], [2,2]] + [[10,20], [10,20]]
≡ [[11,21], [12,22]]
```

- To prevent unexpected broadcasting, add an assertion to your program:



```
assert x.shape == y.shape
```

## Python shell

```
> x = np.array([[1, 2, 3], [4, 5, 6]])
> y = np.array([1, 2, 3]) # one row
> z = np.array([[1], [2]]) # one column
> x + 3 # add 3 to each entry
| array([[4, 5, 6],
| [7, 8, 9]])
> x + y # add y to each row
| array([[2, 4, 6],
| [5, 7, 9]])
> x + z # add z to each column
| array([[2, 3, 4],
| [6, 7, 8]])
> y + z # 2 rows with y + 3 columns with z
| array([[2, 3, 4],
| [3, 4, 5]])
> z == z.T # [[1,1],[2,2]] == [[1,2],[1,2]]
| array([[True, False],
| [False, True]])
```

# Masking

Python shell

```
> x = np.arange(1, 11).reshape(2, 5)
> x
| array([[1, 2, 3, 4, 5],
| [6, 7, 8, 9, 10]])
> x % 3
| array([[1, 2, 0, 1, 2],
| [0, 1, 2, 0, 1]], dtype=int32)
> x % 3 == 0
| array([[False, False, True, False, False],
| [True, False, False, True, False]])
> x[x % 3 == 0] # use Boolean matrix to select entries
| array([3, 6, 9])
> x[:, x.sum(axis=0) % 3 == 0] # columns with sum divisible by 3
| array([[2, 5],
| [7, 10]])
```

# Numpy is fast... but be aware of dtype



## Python shell

```
> sum([x**2 for x in range(1000000)])
| 333332833333500000
> (np.arange(1000000)**2).sum()
| 584144992 # wrong since overflow when default dtype='int32'
> (np.arange(1000000, dtype="int64")**2).sum()
| 333332833333500000 # 64 bit integers do not overflow

> import timeit
> timeit('sum([x**2 for x in range(1000000)])', number=1)
| 0.5614346340007614

> timeit('(np.arange(1000000)**2).sum()', setup='import numpy as np', number=1)
| 0.014362967000124627 # ridiculous fast but also wrong result...
> timeit('(np.arange(1000000, dtype="int64")**2).sum()',
| setup='import numpy as np', number=1)
| 0.048017077999247704 # fast and correct

> np.iinfo(np.int32).min
| -2147483648
> np.iinfo(np.int32).max
| 2147483647
```



# numpy.int32 – 32 bit signed two's-complement integers

32 bits  $b_{31}b_{30}b_{29}b_{28}\dots b_2b_1b_0$

represent the value

$$-b_{31} \cdot 2^{31} + \sum_{i=0}^{30} b_i \cdot 2^i$$

|                                  |             |
|----------------------------------|-------------|
| 10000000000000000000000000000000 | -2147483648 |
| 10000000000000000000000000000001 | -2147483647 |
| ⋮                                |             |
| 11111111111111111111111111111110 | -2          |
| 11111111111111111111111111111111 | -1          |
| 00000000000000000000000000000000 | 0           |
| 00000000000000000000000000000001 | 1           |
| ⋮                                |             |
| 01111111111111111111111111111110 | 2147483646  |
| 01111111111111111111111111111111 | 2147483647  |

Note: There is one more negative number than positive



## Python shell

```
> np.int32(- 2 ** 31)
| -2147483648
> np.int32(- 2 ** 31) + 1
| -2147483647
> np.int32(- 2 ** 31) - 1
| 2147483647
> np.int32(2 ** 31)
| OverflowError: Python int too
| large to convert to C long
> np.int32(2 ** 31 - 1)
| 2147483647
> np.int32(2 ** 31 - 1) + 1
| -2147483648
> abs(np.int32(-2147483647))
| 2147483647
> abs(np.int32(-2147483648))
| -2147483648
```

# Linear algebra

## Python shell

```
> x = np.arange(1, 5, dtype=float).reshape(2, 2)
> x
array([[1., 2.],
 [3., 4.]])
> x.T # matrix transpose
array([[1., 3.],
 [2., 4.]])
> np.linalg.det(x) # matrix determinant
-2.000000000000004
> np.linalg.inv(x) # matrix inverse
array([[-2. , 1.],
 [1.5, -0.5]])
> np.linalg.eig(x) # eigenvalues and eigenvectors
(array([-0.37228132, 5.37228132]),
 array([[-0.82456484, -0.41597356], [0.56576746, -0.90937671]]))
> y = np.array([[5.], [7.]])
> np.linalg.solve(x, y) # solve linear matrix equations
array([[-3.], # z1
 [4.]]) # z2
```




### numpy.matrix

*"It is no longer recommended to use this class, even for linear algebra. Instead use regular arrays. The class may be removed in the future."*

$$\begin{pmatrix} 1 & 2 \\ 3 & 4 \end{pmatrix} \begin{pmatrix} z_1 \\ z_2 \end{pmatrix} = \begin{pmatrix} 5 \\ 7 \end{pmatrix}$$

# Singular value decomposition, np.linalg.svd

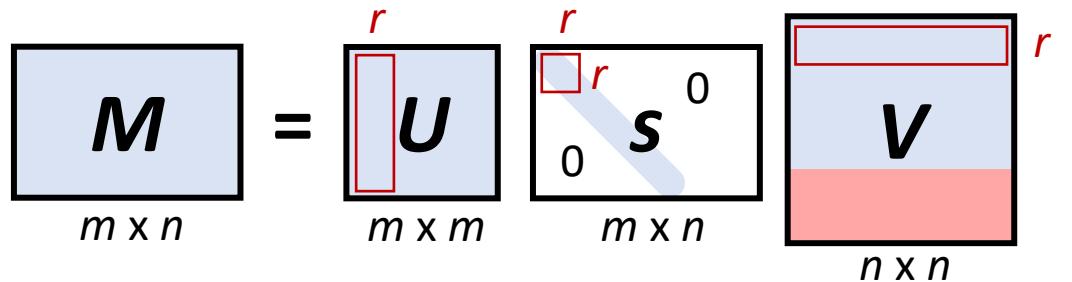

- $U$  and  $V$  unitary matrix ( $UU^T = I$ )
- $S$  diagonal matrix, decreasing singular values


```
image-reconstruction.py

import numpy as np
import cv2 # Computer Vision, opencv.org
import matplotlib.pyplot as plt

color = cv2.imread('university.jpg')
gray = cv2.cvtColor(color, cv2.COLOR_BGR2GRAY) # color image
 # convert to gray

u, s, v = np.linalg.svd(gray) # Calculating the SVD

for i, r in enumerate([1, 5, 10, 15, 20, 50, 100, 150], start=1):
 rank_r = u[:, :r] @ np.diag(s[:r]) @ v[:r, :]
 plt.subplot(3, 3, i)
 plt.imshow(rank_r, cmap='gray', vmin=0, vmax=255)
 plt.title(f'{r} components')
 plt.axis('off')
plt.subplot(3, 3, 9)
plt.imshow(gray, cmap='gray')
plt.title(f'Original image {gray.shape[0]} x {gray.shape[1]}')
plt.show()
```

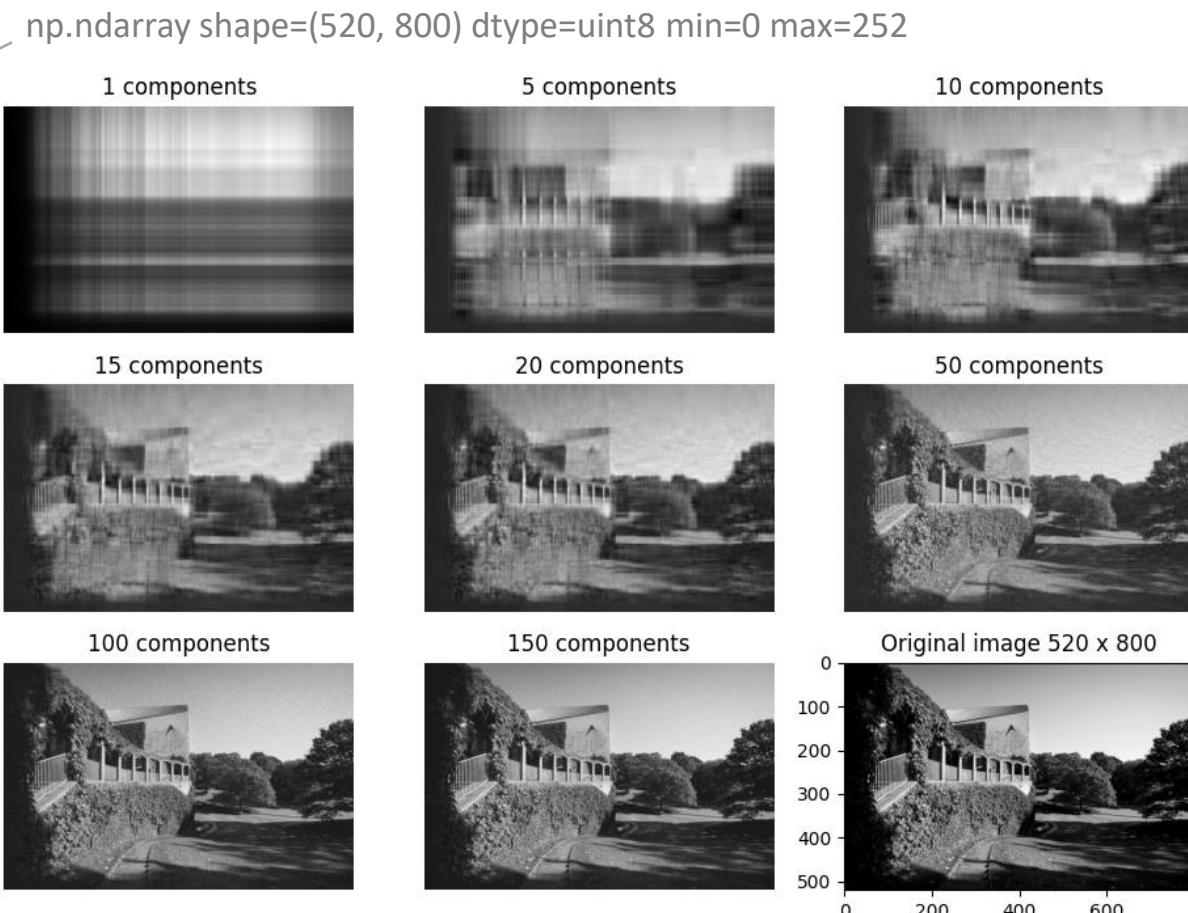

# ... and in color

image-reconstruction-color.py

```
import numpy as np
import matplotlib.pyplot as plt
from matplotlib.image import imread

color = imread('university.jpg') shape=(520, 800, 3)
color = color / 255 # convert integers 0..255 to floats 0..1

plt.subplot(4, 2, 8)
plt.imshow(color)
plt.axis('off')
plt.title(f'Original')

height, width, colors = color.shape

u, s, v = np.linalg.svd(color.reshape((height, width * colors)),
 full_matrices=False)


for i, r in enumerate([1, 2, 5, 10, 25, 50, 125], start=1):
 rank_r = u[:, :r] @ np.diag(s[:r]) @ v[:r, :]
 plt.subplot(4, 2, i)
 plt.imshow(rank_r.reshape((height, width, colors)))
 plt.title(f'{r} components')
 plt.axis('off')

plt.show()
```


shape=(520, 2400)

v shape=(520, 2400) instead of (2400, 2400)


1 components

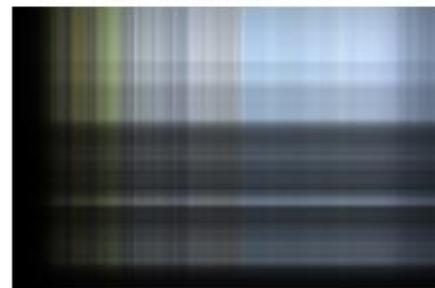

2 components

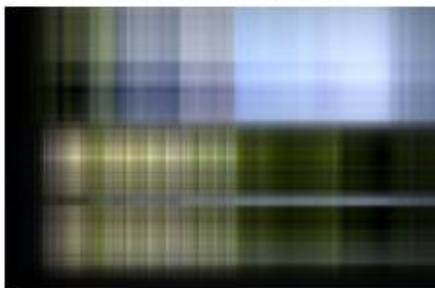

5 components

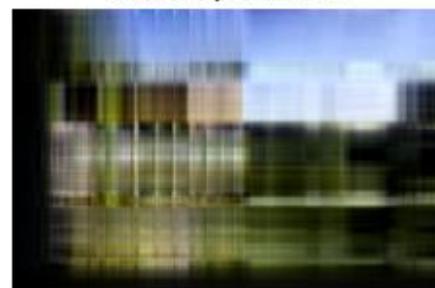

10 components



25 components



50 components



125 components



Original



# ... and in color (stacked)

image-reconstruction-color-stacked.py

```
import numpy as np
import matplotlib.pyplot as plt
from matplotlib.image import imread

color = imread('university.jpg') shape = (520, 800, 3)
color = color / 255 # convert integers 0..255 to floats 0..1

plt.subplot(4, 2, 8)
plt.imshow(color)
plt.axis('off')
plt.title(f'Original')

u, s, v = np.linalg.svd(color.transpose(2, 0, 1), full_matrices=False)

print(f'{u.shape=} {s.shape=} {v.shape=}')

for i, r in enumerate([1, 2, 5, 10, 25, 50, 125], start=1):
 rank_r = (u[:, :, :r] * s[:, None, :r]) @ v[:, :, :r] shape = (3, 520, 800)
 plt.subplot(4, 2, i)
 plt.imshow(rank_r.transpose(1, 2, 0))
 plt.title(f'{r} components')
 plt.axis('off')
plt.show() element-wise
 multiplication (*),
 broadcasting (None),
 stacked for each color (:)
```

Python shell

```
| u.shape=(3, 520, 520) s.shape=(3, 520) v.shape=(3, 520, 800)
```

1 components



2 components



5 components



10 components



25 components



50 components



125 components



Original



matplotlib.image.imread



cv2.imread



cv2.imread corrected



### color-image.py

```
import matplotlib.pyplot as plt
import matplotlib.image
import cv2

img1 = matplotlib.image.imread('university.jpg')
img2 = cv2.imread('university.jpg') # cv2 uses BGR instead of RGB
img3 = img2[:, :, ::-1] # change color order BGR to RGB

Images = [(img1, 'matplotlib.image.imread'), (img2, 'cv2.imread'), (img3, 'cv2.imread corrected')]

for i, (img, title) in enumerate(images, start=1):
 plt.subplot(1, 3, i)
 plt.imshow(img)
 plt.axis('off')
 plt.title(title)


plt.show()
```



# numpy.polyfit

- Given  $n$  points with  $(x_0, y_0), \dots, (x_{n-1}, y_{n-1})$
- Find polynomial  $p$  of degree  $d$  that minimizes

$$\sum_{i=0}^{n-1} (y_i - p(x_i))^2$$

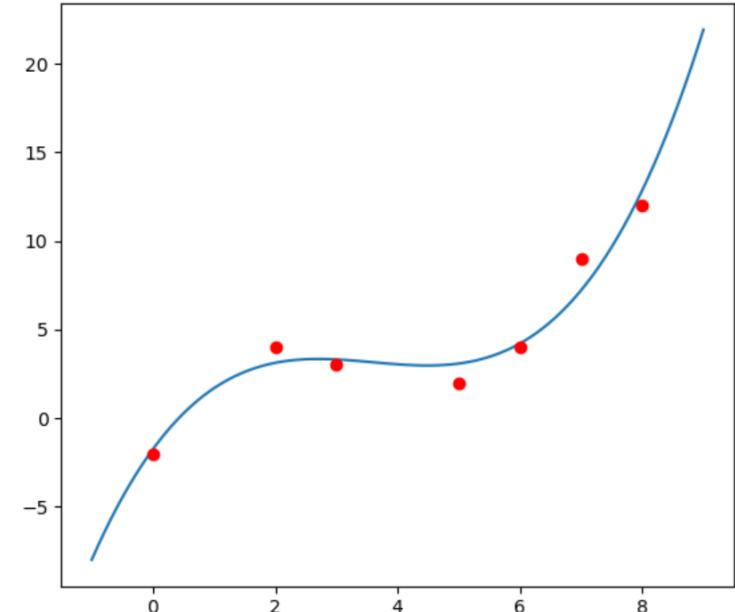

- known as least squares fit / linear regression / polynomial regression

## fit.py

```
import matplotlib.pyplot as plt
import numpy as np


x = [0, 2, 3, 5, 6, 7, 8]
y = [-2, 4, 3, 2, 4, 9, 12]

coefficients = np.polyfit(x, y, 3) degree
 ↓


fx = np.linspace(-1, 9, 100)
fy = np.polyval(coefficients, fx)

plt.plot(fx, fy, '-')
plt.plot(x, y, 'ro')

plt.show()
```

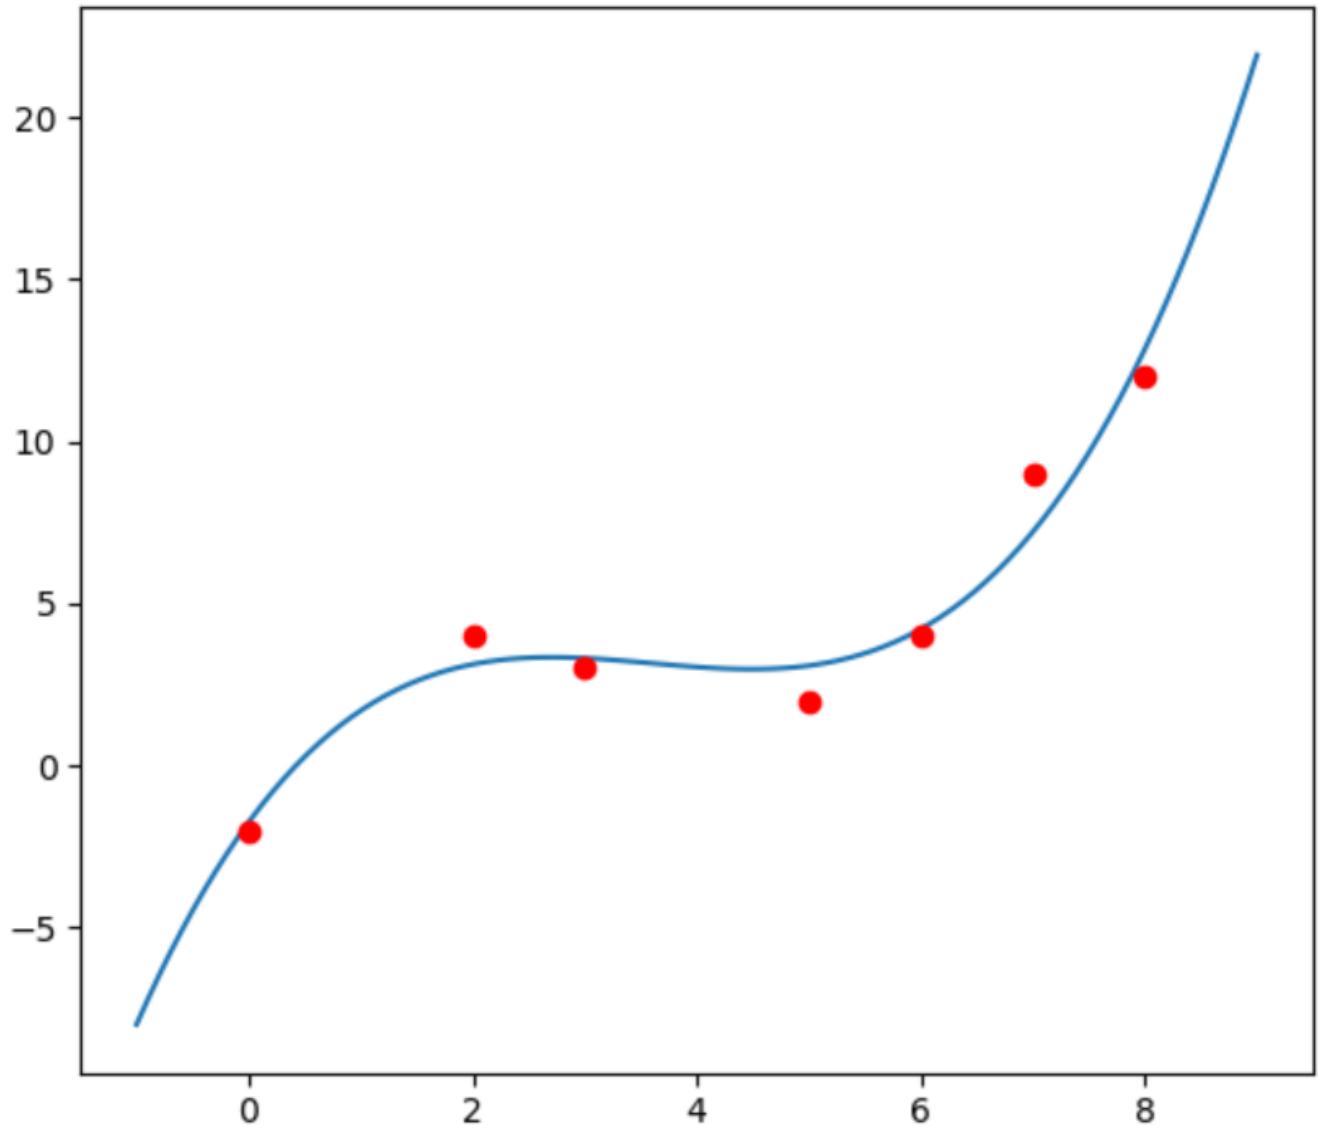

### Least squares polynomial fit

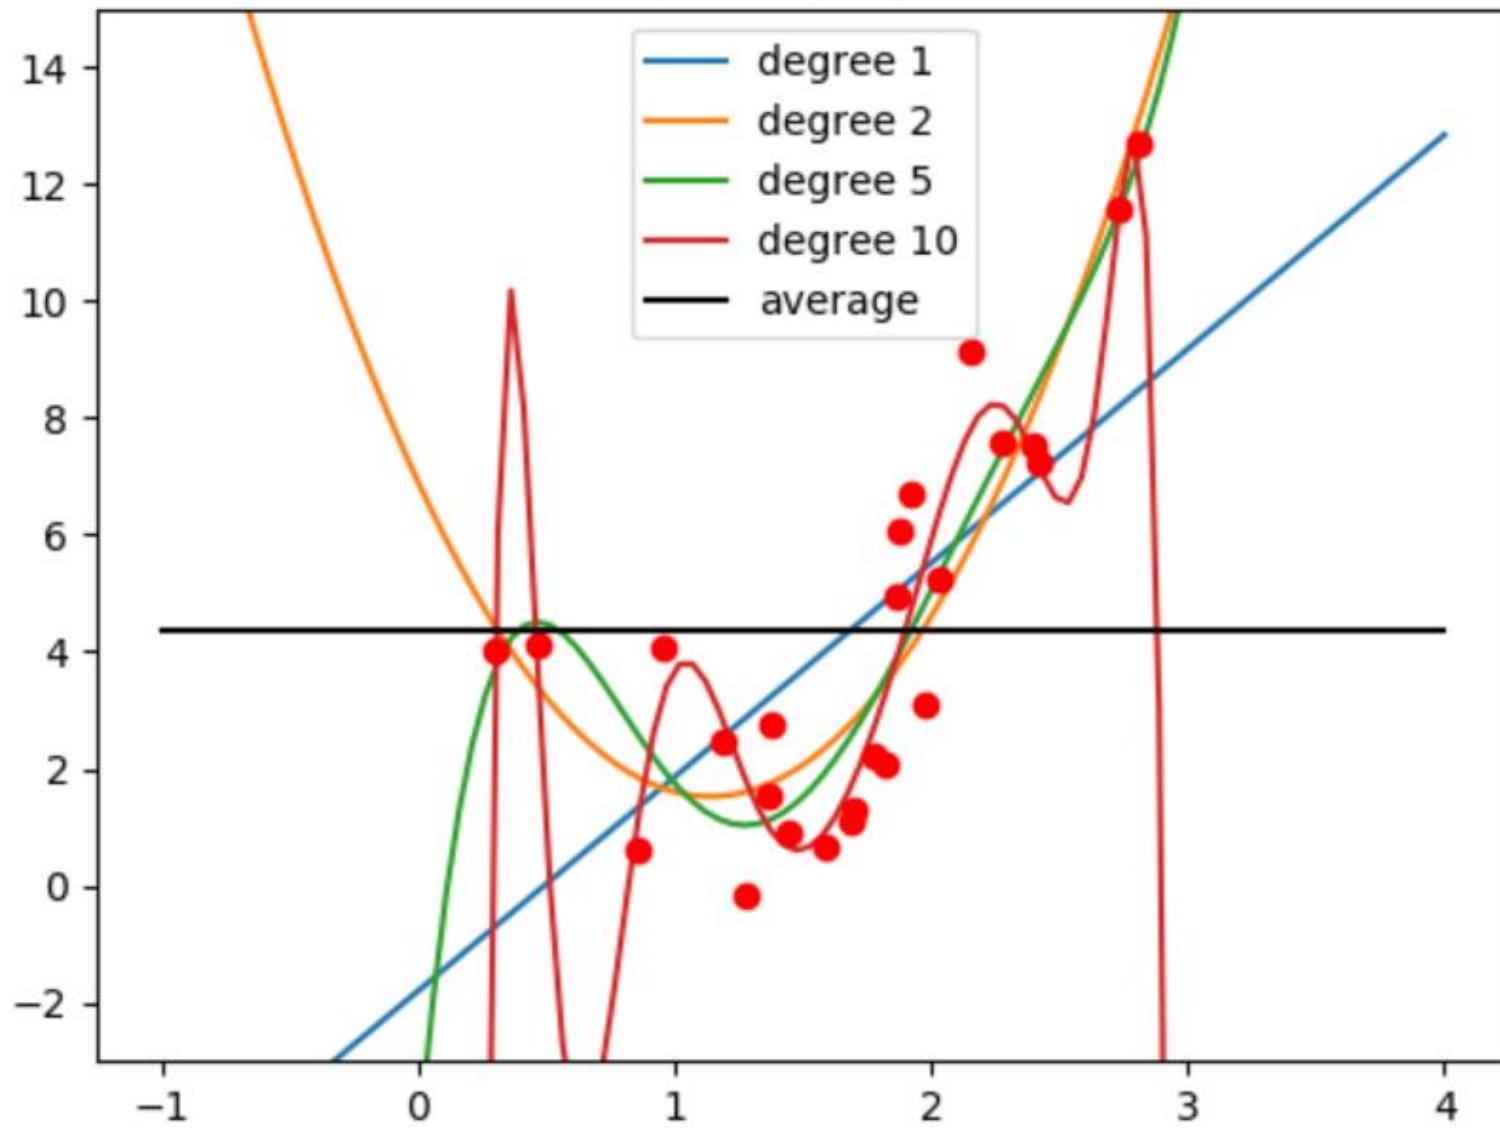


## polyfit.py

```
import matplotlib.pyplot as plt
import numpy as np

x = 3 * np.random.random(25)
noise = np.random.random(x.size) ** 2
y = 5 * x ** 2 - 12 * x + 7 + 5 * noise


for degree in [1, 2, 5, 10]:
 coefficients = np.polyfit(x, y, degree)
 fx = np.linspace(-1, 4, 100)
 fy = np.polyval(coefficients, fx)
 plt.plot(fx, fy, '-.', label="degree %s" % degree)

avg = np.average(y)
plt.plot(x, y, 'ro')
plt.plot([-1, 4], [avg, avg], 'k-', label="average")
plt.ylim(-3, 15)
plt.title('Least squares polynomial fit')
plt.legend()
plt.show()
```

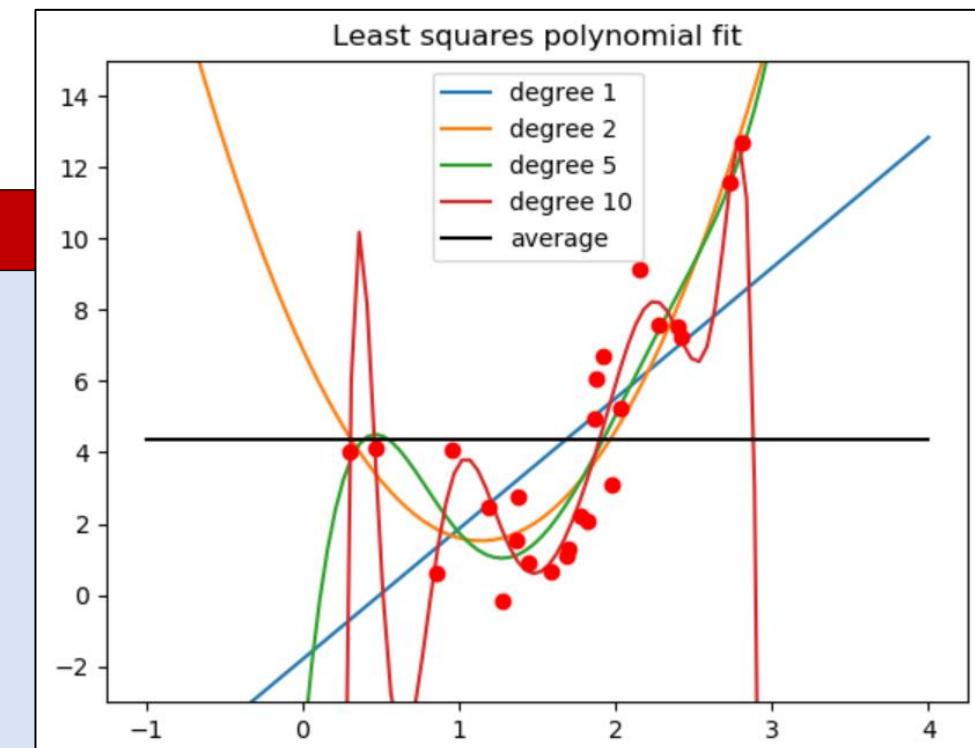

# Animating bouncing balls

- matplotlib figures can be animated using `matplotlib.animation.FuncAnimation` that as arguments takes the figure to be updated/redrawn, a function to call for each update, and an interval in milliseconds between updates

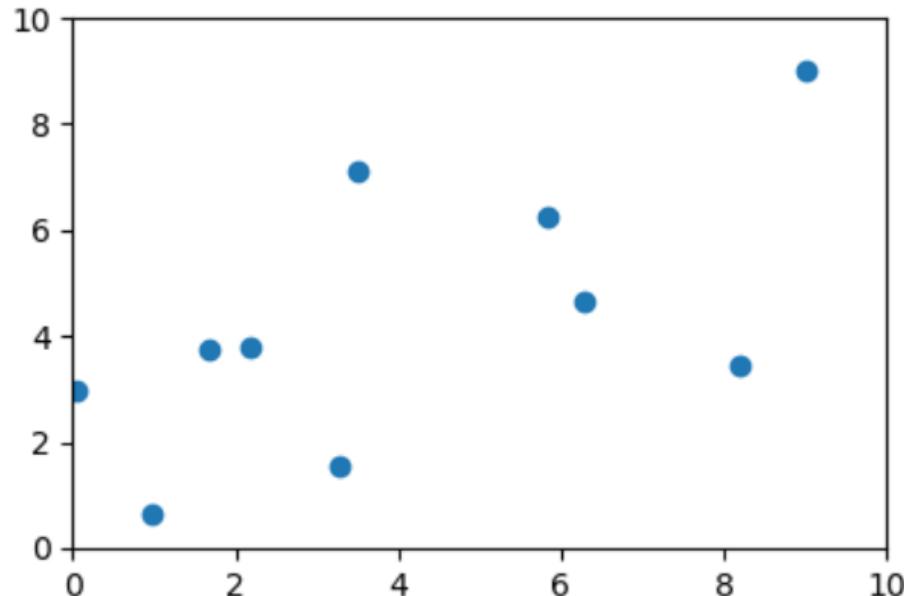

`balls.py`

```
import matplotlib.pyplot as plt
from matplotlib.animation import FuncAnimation
from numpy import zeros, maximum, minimum
from numpy.random import random

g = 0.01
N = 10
x, y = 10.0 * random(N), 1.0 + 9.0 * random(N)
dx, dy = random(N) / 5, zeros(N)

fig = plt.figure()
plt.xlim(0, 10)
plt.ylim(0, 10)
balls, = plt.plot(x, y, 'o') # returns Line2D obj


def move(frame):
 global x, y, dx, dy

 x += dx
 bounce = (x > 10.0) | (x < 0.0) # numpy mask
 dx[bounce] = -dx[bounce]
 x = minimum(10.0, maximum(0.0, x))

 y += dy
 bounce = y < 0.0 # numpy mask
 y[bounce] -= dy[bounce]
 dy[bounce] = -dy[bounce]
 dy -= g

 balls.set_data(x, y) # update positions

removing 'ani =' causes program to fail...
ani = FuncAnimation(fig, move, interval=25)
plt.show()
```

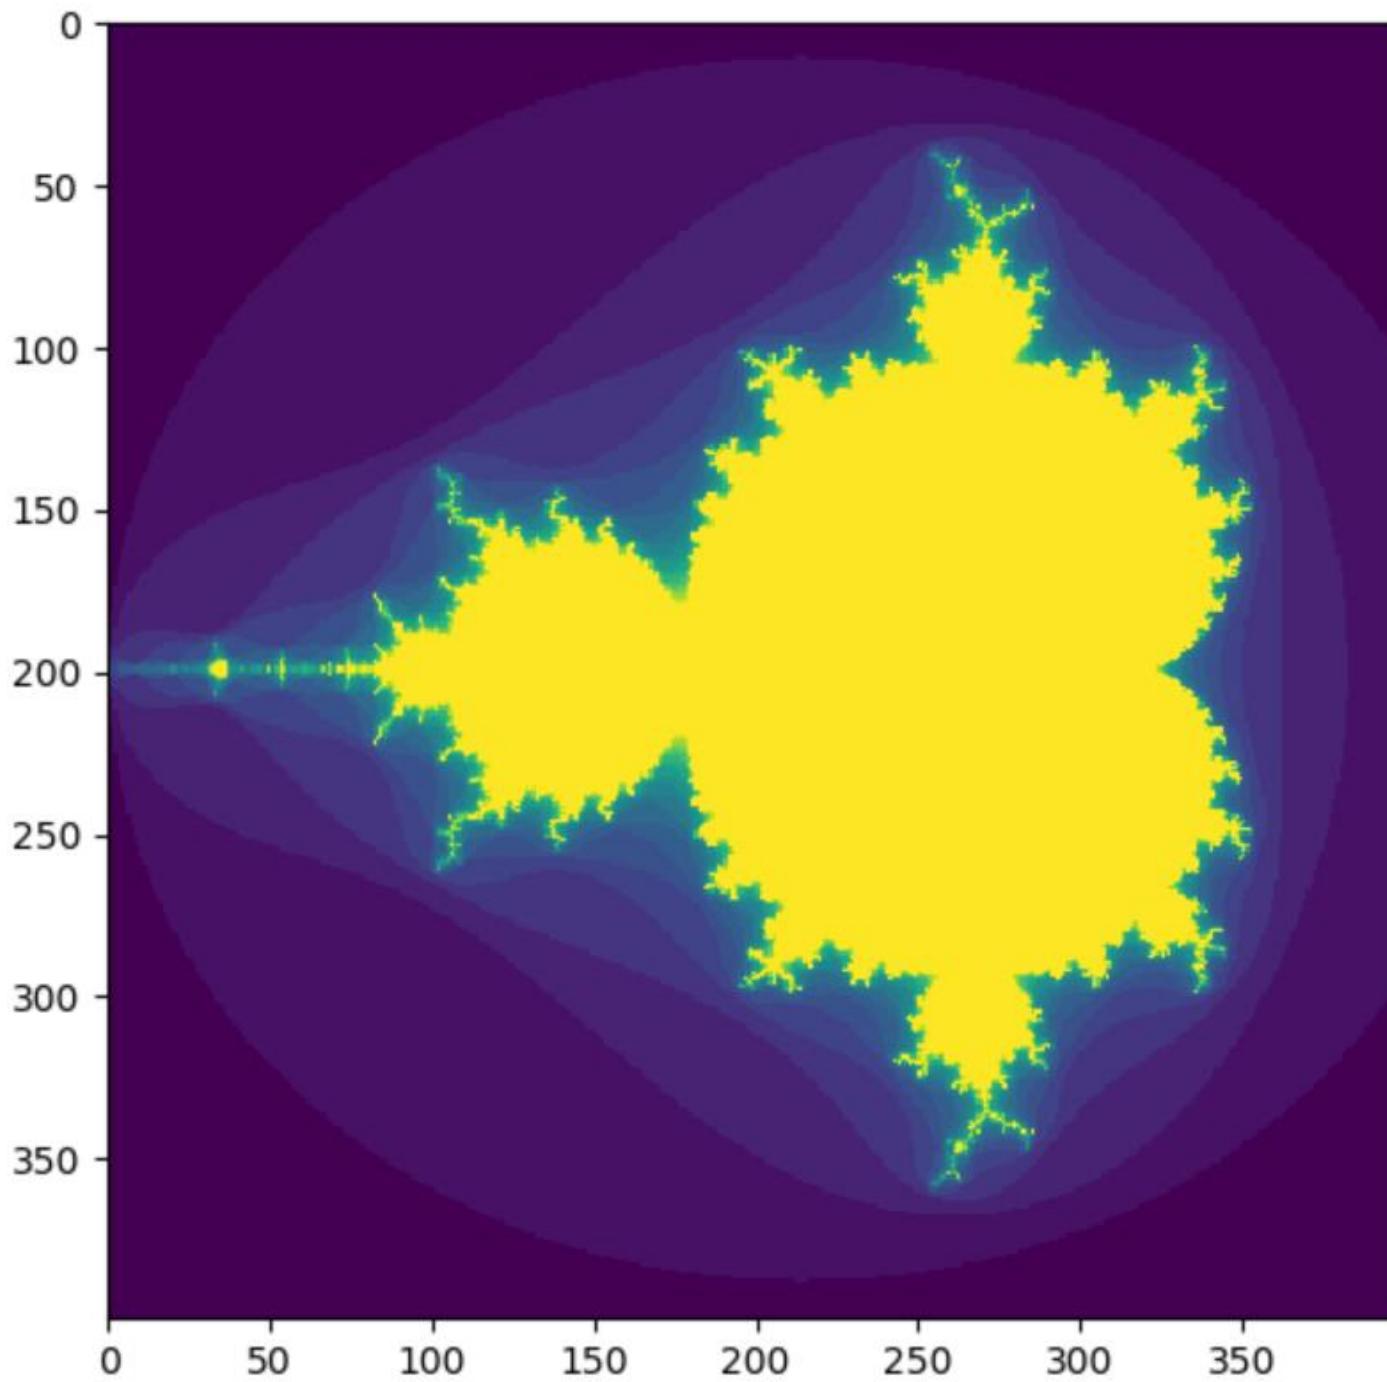

## mandelbrot.py

```
import numpy as np
import matplotlib.pyplot as plt


def mandelbrot(h, w, maxit=20):
 '''Returns an image of the Mandelbrot fractal of size (h, w).'''

 x = np.linspace(-2.0, 0.8, w).reshape(1, w) # row vector
 y = np.linspace(-1.4, 1.4, h).reshape(h, 1) # column vector
 c = x + y * 1j # broadcast & complex
 z = c

 divtime = np.full(z.shape, maxit, dtype=int) # all values = maxit

 for i in range(maxit):
 z = z * z + c # elementwise
 diverge = z * np.conj(z) > 4 # who is diverging
 div_now = diverge & (divtime == maxit) # who is diverging now
 divtime[div_now] = i # note when
 z[diverge] = 0 # limit divergence
 # (avoids overflows)

 plt.imshow(mandelbrot(400, 400))
 plt.show()
```

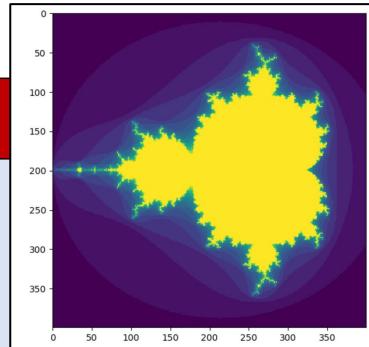

# Linear programming

- Example Numpy: PageRank
- `scipy.optimize.linprog`
- Example linear programming: Maximum flow

# PageRank


# PageRank - A NumPy / Jupyter / matplotlib example

- Google's original search engine ranked webpages using **PageRank**
- View the internet as a graph where **nodes** correspond to webpages and **directed edges** to links from one webpage to another webpage
- Google's PageRank algorithm was described in ([ilpubs.stanford.edu:8090/361/](http://ilpubs.stanford.edu:8090/361/), 1998)

## The Anatomy of a Large-Scale Hypertextual Web Search Engine


Sergey Brin and Lawrence Page

*Computer Science Department,  
Stanford University, Stanford, CA 94305, USA  
sergey@cs.stanford.edu and page@cs.stanford.edu*

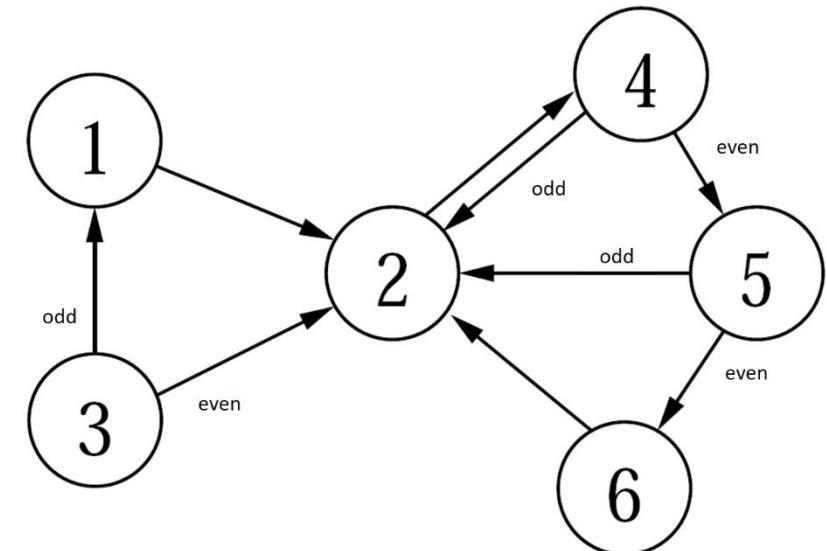

# Five different ways to compute PageRank probabilities


- 1) Simulate random process manually by rolling dices
- 2) Simulate random process in Python
- 3) Computing probabilities using matrix multiplication
- 4) Repeated matrix squaring
- 5) Eigenvector for  $\lambda = 1$

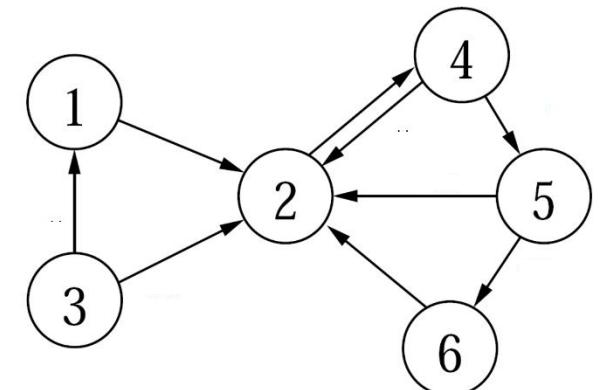

# Random surfer model (simplified)

The PageRank of a node (web page) is the fraction of the time one visits a node by performing an *infinite random traversal* of the graph starting at node 1, and in each step

- with **probability 1/6** jumps to a **random page** (probability 1/6 for each node)
- with **probability 5/6** follows an **outgoing edge** to an adjacent node (selected uniformly)

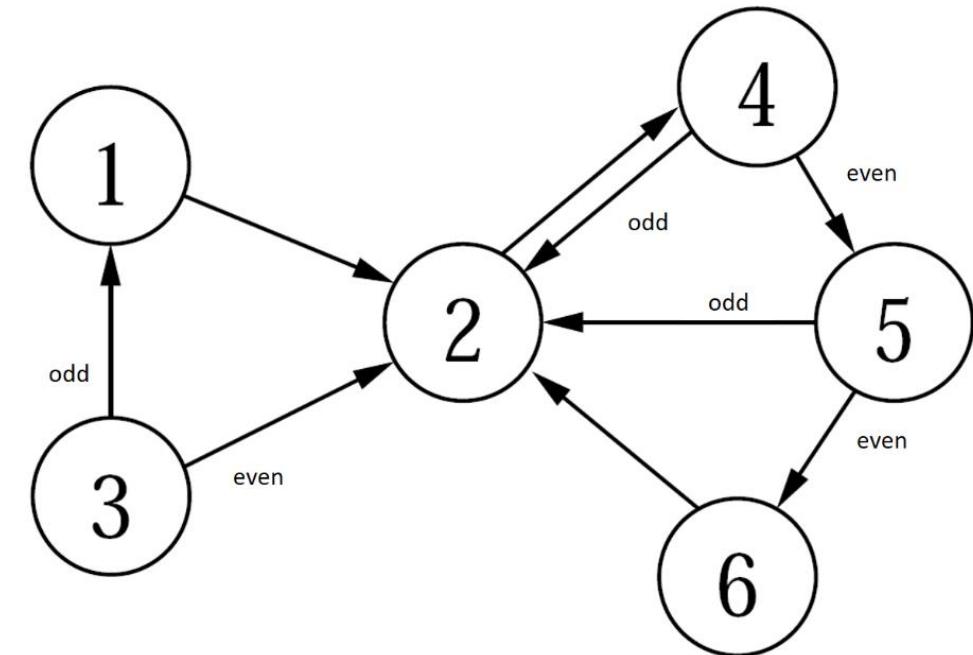

The above can be simulated by using a dice: Roll a *dice*. If it shows 6, jump to a random page by rolling the dice again to figure out which node to jump to. If the dice shows 1-5, follow an outgoing edge - if two outgoing edges roll the dice again and go to the lower number neighbor if it is odd.

# Adjacency matrix and degree vector

pagerank.ipynb

```
import numpy as np


Adjacency matrix of the directed graph in the figure
(note that the rows/columns are 0-indexed, whereas in the figure the nodes are 1-indexed)

G = np.array([[0, 1, 0, 0, 0, 0],
 [0, 0, 0, 1, 0, 0],
 [1, 1, 0, 0, 0, 0],
 [0, 1, 0, 0, 1, 0],
 [0, 1, 0, 0, 0, 1],
 [0, 1, 0, 0, 0, 0]])

n = G.shape[0] # number of rows in G
degree = np.sum(G, axis=1, keepdims=True) # column vector with row sums = out-degrees

The below code handles sinks, i.e. nodes with outdegree zero (no effect on the graph above)

G = G + (degree == 0) # add edges from sinks to all nodes
degree = np.sum(G, axis=1, keepdims=True)
```

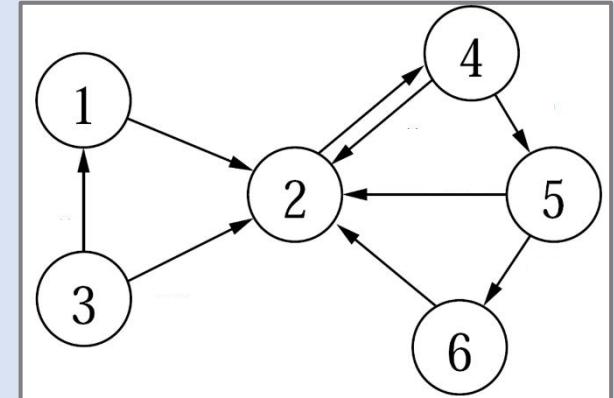


# Simulate random walk (random surfer model)

pagerank.ipynb

```
from random import randint
STEPS = 1000000
adjacency_list[i] is a list of all j where (i, j) is an edge of the graph.
adjacency_list = [[j for j, e in enumerate(row) if e] for row in G]
count = np.zeros(n) # histogram over number of node visits
state = 0 # start at node with index 0
for _ in range(STEPS):
 count[state] += 1 # increment count for state
 if randint(1, 6) == 6: # original paper uses 15% instead of 1/6
 state = randint(0, 5)
 else:
 state = adjacency_list[state][randint(0, degree[state] - 1)]
print(adjacency_list, count / STEPS, sep='\n')
```

Python shell



```
| [[1, 3], [0, 1], [1, 4], [1, 5], [1]]
| [0.039365 0.353211 0.02751 0.322593 0.1623 0.095021]
```

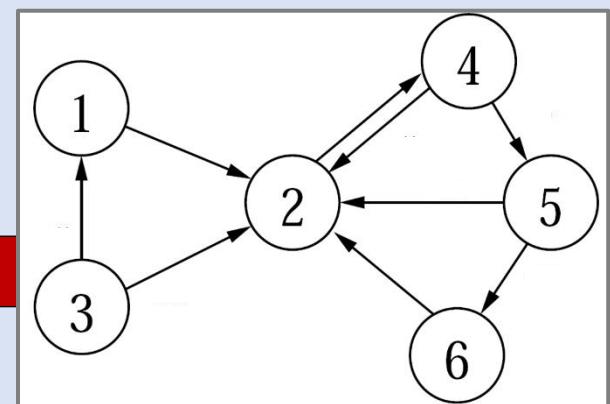

# Simulate random walk (random surfer model)

pagerank.ipynb

```
import matplotlib.pyplot as plt
plt.bar(range(6), count)
plt.title("Random Walk")
plt.xlabel("node")
plt.ylabel("number of visits")
plt.show()
```

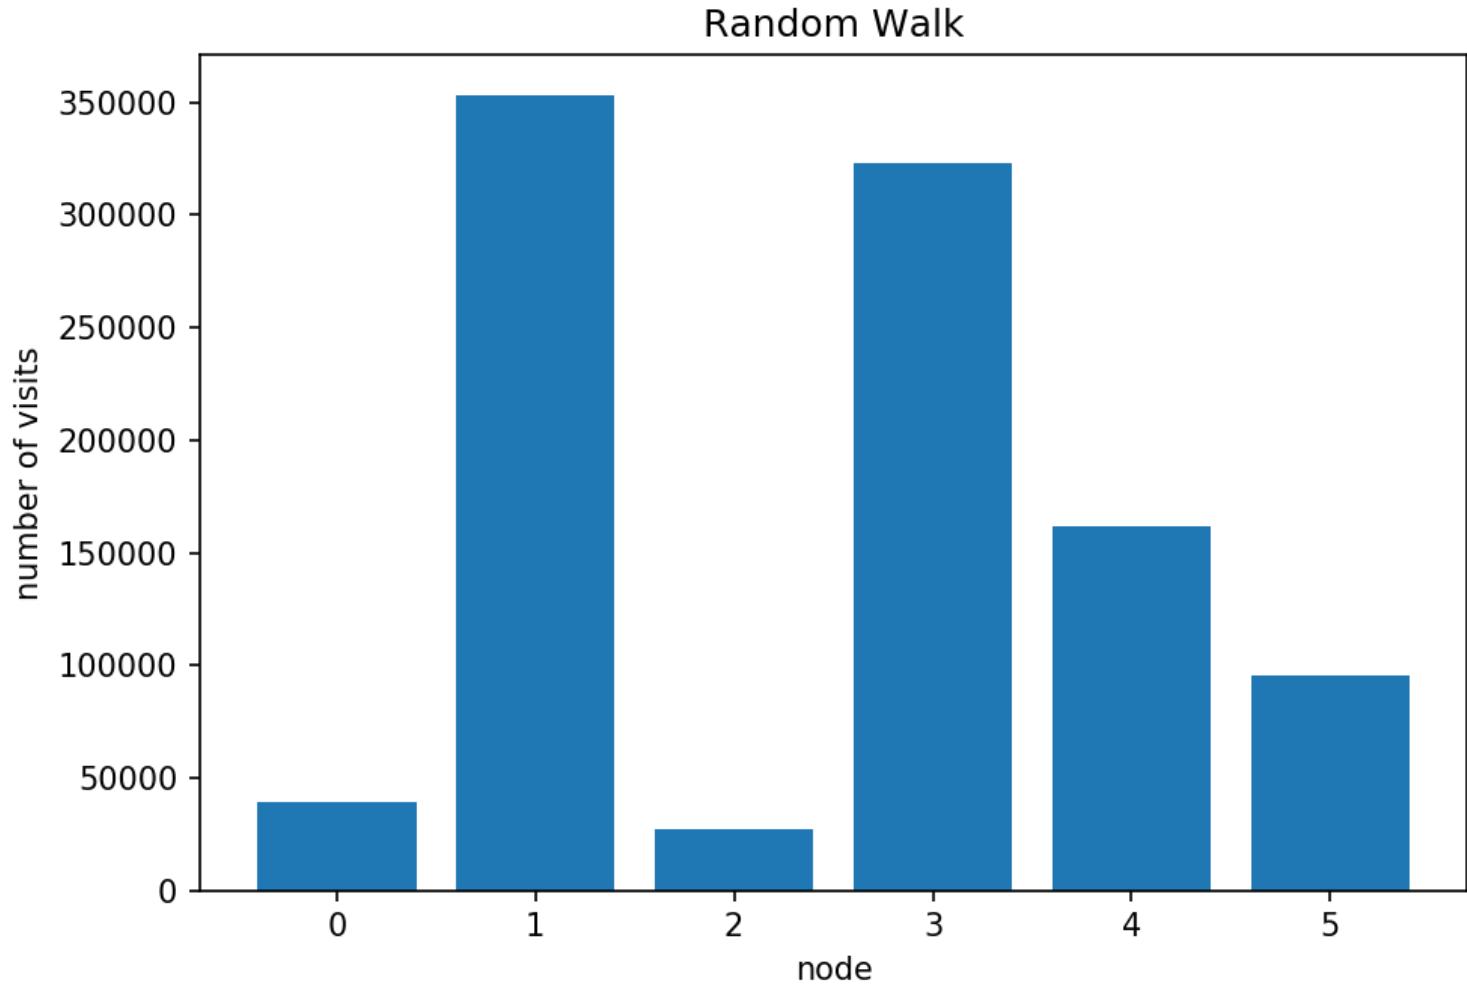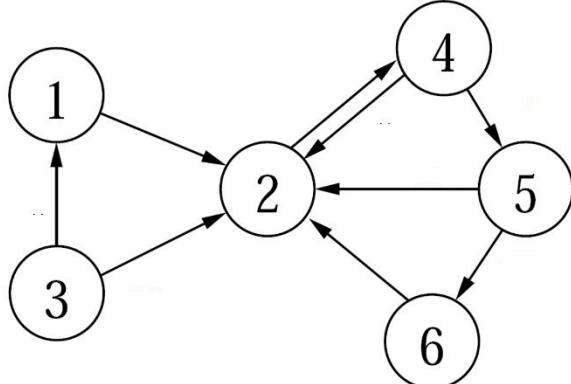


# Transition matrix A

pagerank.ipynb

```
A = G / degree # Normalize row sums to one. Note that 'degree'
is an n x 1 matrix, whereas G is an n x n matrix.
The elementwise division is repeated for each column of G
print(A)
```

Python shell

```
| [[0. 1. 0. 0. 0. 0.]
| [0. 0. 0. 1. 0. 0.]
| [0.5 0.5 0. 0. 0. 0.]
| [0. 0.5 0. 0. 0.5 0.]
| [0. 0.5 0. 0. 0. 0.5]
| [0. 1. 0. 0. 0. 0.]]
```

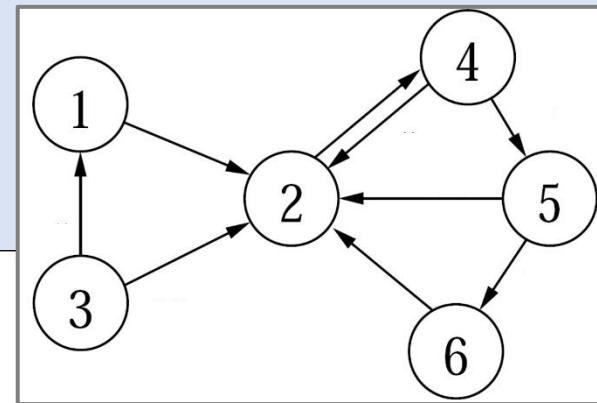

# Repeated matrix multiplication

We now want to compute the probability  $p_j^{(i)}$  to be in vertex  $j$  after  $i$  steps. Let  $p^{(i)} = (p_0^{(i)}, \dots, p_{n-1}^{(i)})$ .

Initially we have  $p^{(0)} = (1, 0, \dots, 0)$ .

We compute a matrix  $M$ , such that  $p^{(i)} = M^i \cdot p^{(0)}$  (assuming  $p^{(0)}$  is a column vector).

If we let  $\mathbf{1}_n$  denote the  $n \times n$  matrix with 1 in each entry, then  $M$  can be computed as:

$$p_j^{(i+1)} = \frac{1}{6} \cdot \frac{1}{n} + \frac{5}{6} \sum_k p_k^{(i)} \cdot A_{k,j}$$

$$p^{(i+1)} = \left( \underbrace{\frac{1}{6} \cdot \frac{1}{n} \mathbf{1}_n + \frac{5}{6} A^T}_{M} \right) \cdot p^{(i)}$$

pagerank.ipynb


```
ITERATIONS = 20
p_0 = np.zeros((n, 1))
p_0[0, 0] = 1.0

M = 1 / (6 * n) + 5 / 6 * A.T

p = p_0
prob = p # 'prob' will contain each
 # computed 'p' as a new column
for _ in range(ITERATIONS):
 p = M @ p
 prob = np.append(prob, p, axis=1)
print(p)
```


Python shell

```
| [[0.03935185]
| [0.35326184]
| [0.02777778]
| [0.32230071]
| [0.16198059]
| [0.09532722]]
```

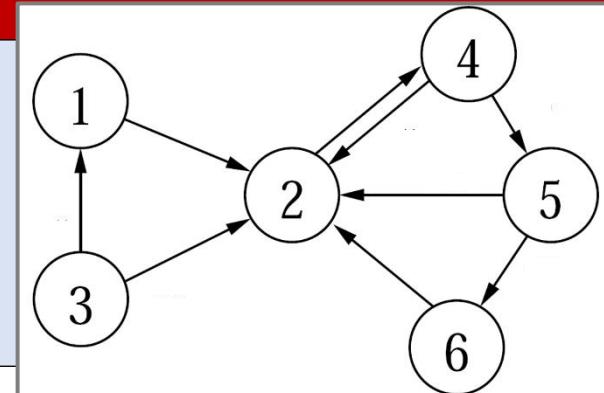

# Rate of convergence


Random Surfer Probabilities

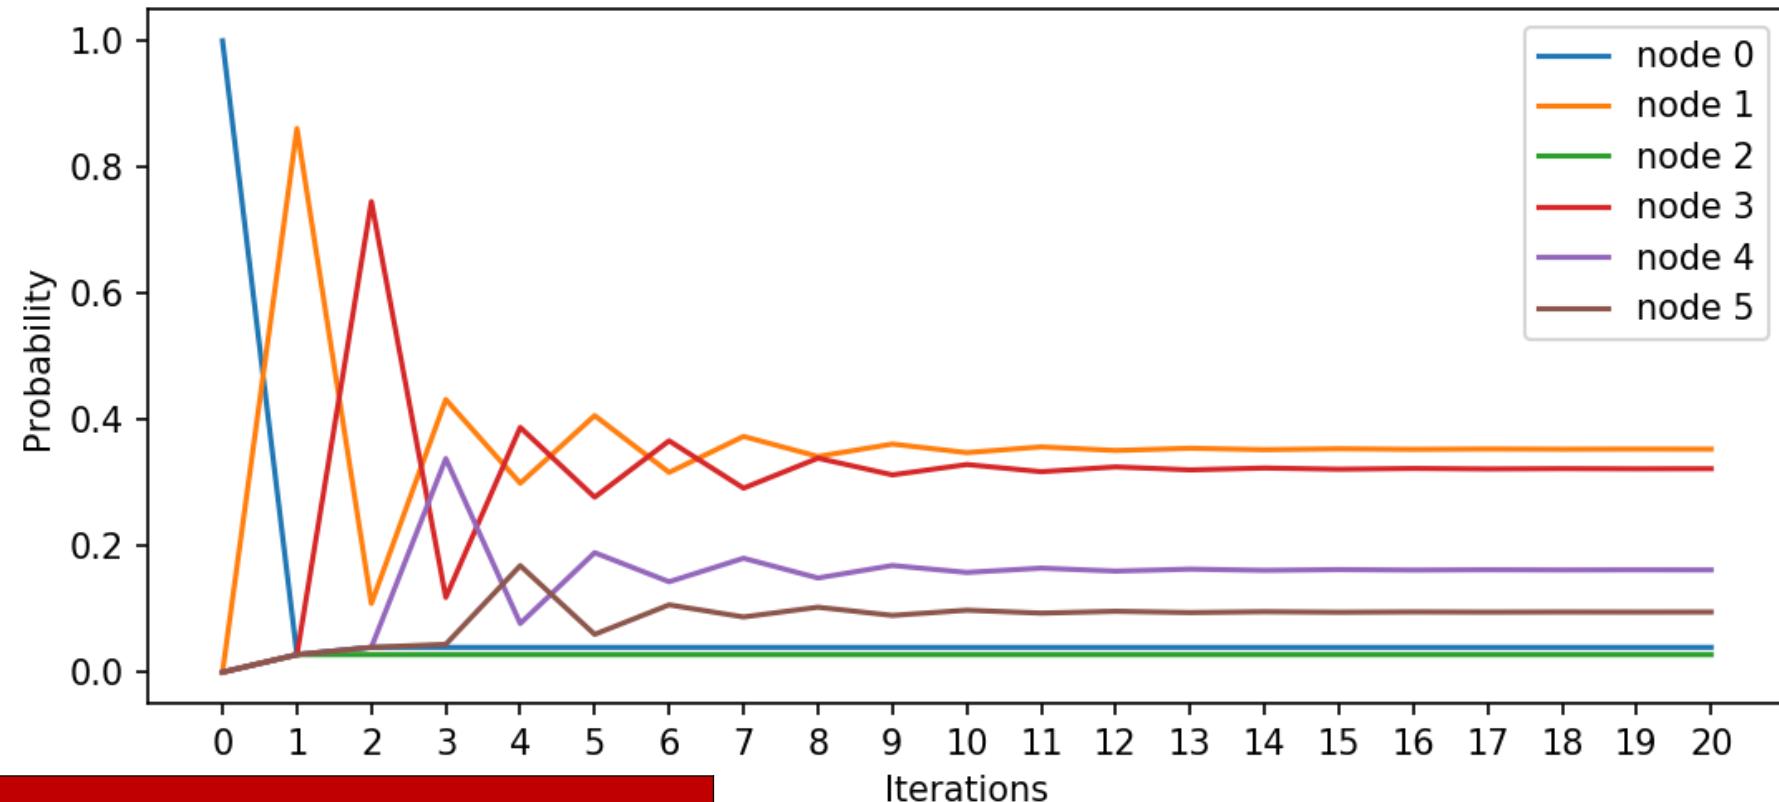

pagerank.ipynb

```
x = range(ITERATIONS + 1)
for node in range(n):
 plt.plot(x, prob[node], label="node %s" % node)

plt.xticks(x)
plt.title("Random Surfer Probabilities")
plt.xlabel("Iterations")
plt.ylabel("Probability")
plt.legend()
plt.show()
```

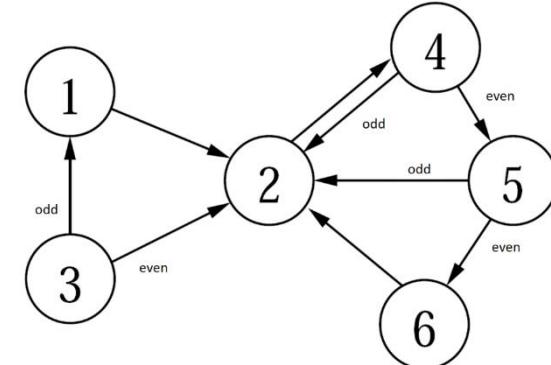

# Repeated squaring

$$\underbrace{M \cdot (\cdots (M \cdot (M \cdot p^{(0)})) \cdots)}_{k \text{ multiplications, } k \text{ power of 2}} = M^k \cdot p^{(0)} = M^{2^{\log k}} \cdot p^{(0)} = (\cdots ((M^2)^2)^2 \cdots)^2 \cdot p^{(0)}$$

pagerank.ipynb

```
from math import log
MP = M
for _ in range(1 + int(log(ITERATIONS, 2))):
 MP = MP @ MP
p = MP @ p_0
print(p)
```

Python shell

```
| [[0.03935185]
| [0.35332637]
| [0.02777778]
| [0.32221711]
| [0.16203446]
| [0.09529243]]
```

# PageRank : Computing eigenvector for $\lambda = 1$

- We want to find a vector  $p$ , with  $|p| = 1$ , where  $Mp = p$ , i.e. an *eigenvector*  $p$  for the eigenvalue  $\lambda = 1$

pagerank.ipynb

```
eigenvalues, eigenvectors = np.linalg.eig(M)
idx = eigenvalues.argmax() # find the largest eigenvalue (= 1)
p = np.real(eigenvectors[:, idx]) # .real returns the real part of complex numbers
p /= p.sum() # normalize p to have sum 1
print(p)
```

Python shell

```
| [0.03935185 0.3533267 0.02777778 0.32221669 0.16203473 0.09529225]
```

# PageRank : Note on practicality

- In practice an explicit matrix for billions of nodes is infeasible, since the number of entries would be order of  $10^{18}$
- Instead use **sparse matrices** (in Python modul `scipy.sparse`) and stay with repeated multiplication

# Linear programming

# scipy.optimize.linprog

- scipy.optimize.linprog can solve *linear programs* of the following form, where one wants to find an  $n \times 1$  vector  $x$  satisfying:

**Minimize:**  $c^T \cdot x$

**Subject to:**  $A_{ub} \cdot x \leq b_{ub}$   
 $A_{eq} \cdot x = b_{eq}$

dimension

$c : n \times 1$

$A_{ub} : m \times n$

$A_{eq} : k \times n$

$b_{ub} : m \times 1$

$b_{eq} : k \times 1$

Some other open-source optimization libraries [PuLP](#) and [Pyomo](#)  
For industrial strength linear solvers, use solvers like [Cplex](#) or [Gurobi](#)

# Linear programming example

**Maximize**

$$3 \cdot x_1 + 2 \cdot x_2$$

**Subject to**

$$2 \cdot x_1 + 1 \cdot x_2 \leq 10$$

$$5 \cdot x_1 + 6 \cdot x_2 \geq 4$$

$$-3 \cdot x_1 + 7 \cdot x_2 = 8$$



**Minimize**


$$-(3 \cdot x_1 + 2 \cdot x_2)$$

**Subject to**

$$2 \cdot x_1 + 1 \cdot x_2 \leq 10$$

$$-5 \cdot x_1 + -6 \cdot x_2 \leq -4$$

$$-3 \cdot x_1 + 7 \cdot x_2 = 8$$

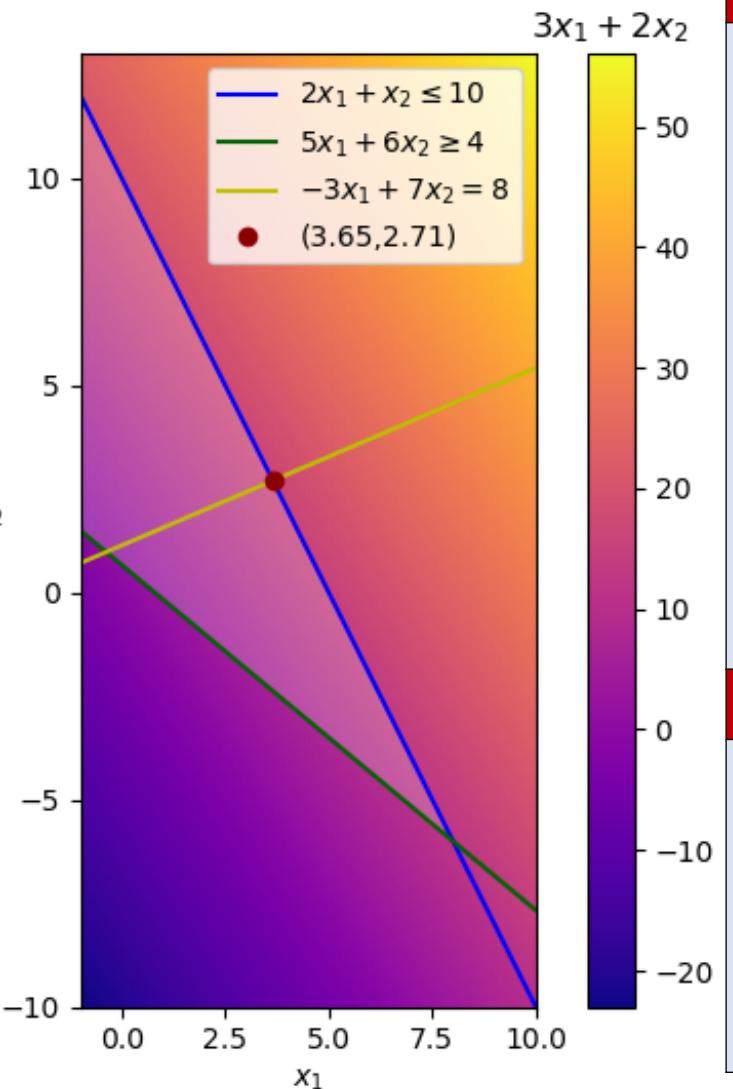

**linear\_programming.py**


```
import numpy as np
from scipy.optimize import linprog
c = np.array([3, 2])
A_ub = np.array([[2, 1],
 [-5, -6]]) # multiplied by -1
b_ub = np.array([10, -4])
A_eq = np.array([[[-3, 7]]])
b_eq = np.array([8])
res = linprog(-c, # maximize = minimize the negated
 A_ub=A_ub,
 b_ub=b_ub,
 A_eq=A_eq,
 b_eq=b_eq)
print(res) # res.x is the optimal vector
```

**Python shell**

```
| fun: -16.35294117647059
| message: 'Optimization terminated successfully.'
| nit: 3
| slack: array([0. , 30.47058824])
| status: 0
| success: True
| x: array([3.64705882, 2.70588235])
```

# Maxmium flow

# Solving maximum flow using linear programming

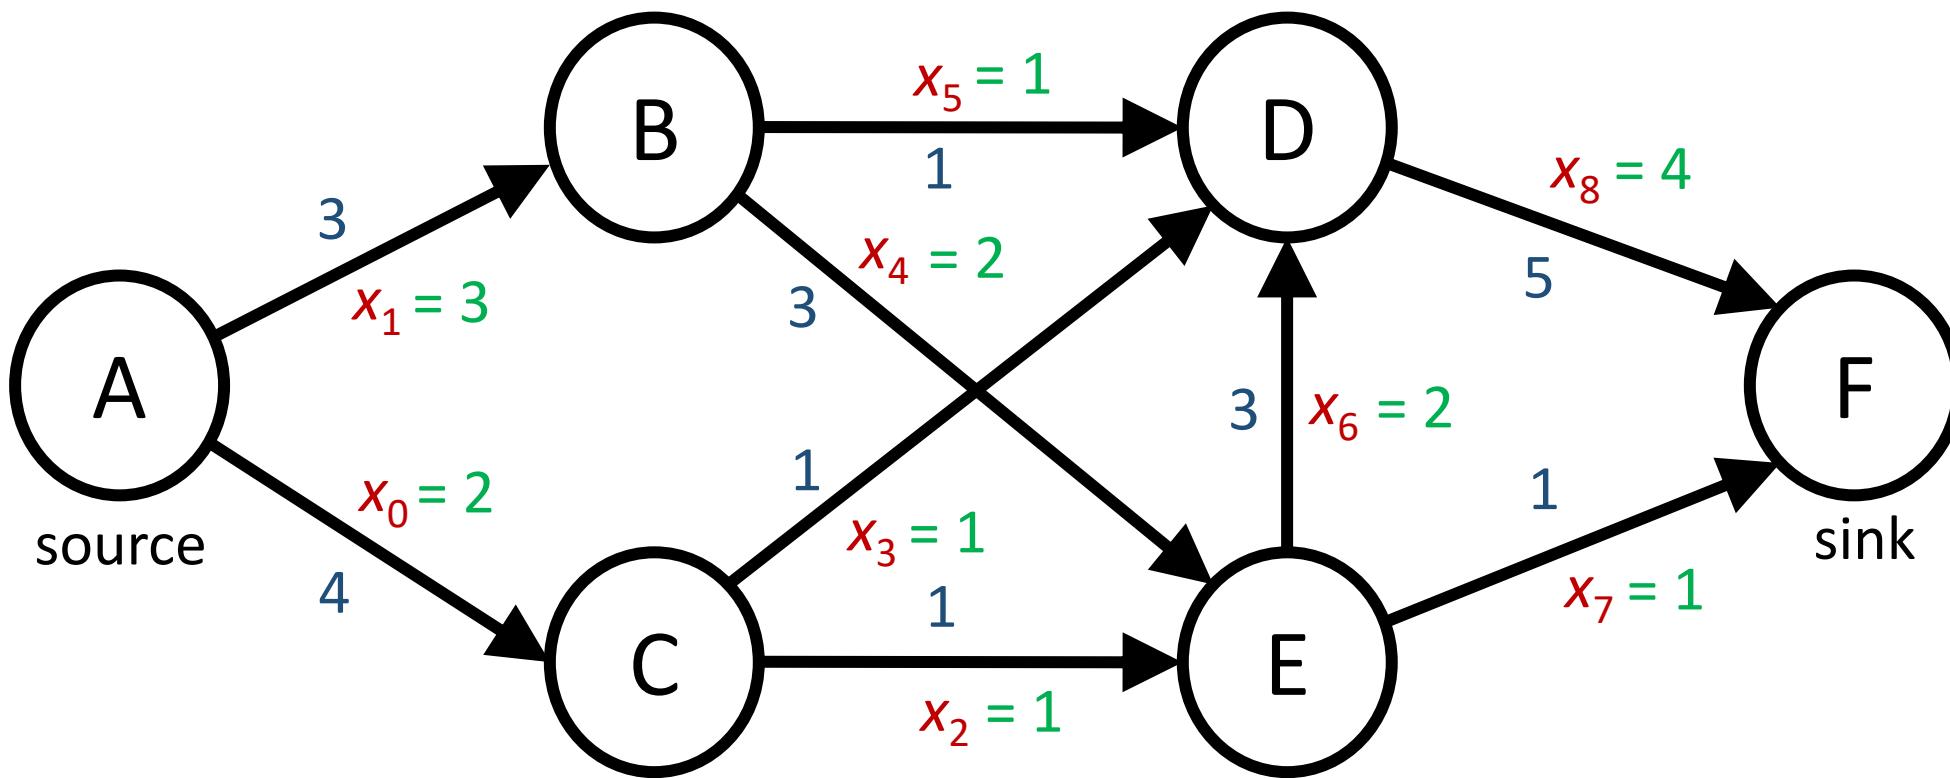


We will use the `scipy.optimize.linprog` function to solve the *maximum flow* problem on the above directed graph. We want to send as much *flow* from node A to node F. Edges are numbered 0..8 and each edge has a maximum *capacity*.

| flow value              |                      |
|-------------------------|----------------------|
| $x_7 + x_8$             | Maximize             |
| $x_0 \leq 4$            | Subject to           |
| $x_1 \leq 3$            |                      |
| $x_2 \leq 1$            |                      |
| $x_3 \leq 1$            |                      |
| $x_4 \leq 3$            |                      |
| $x_5 \leq 1$            |                      |
| $x_6 \leq 3$            |                      |
| $x_7 \leq 1$            |                      |
| $x_8 \leq 5$            |                      |
| $x_1 = x_4 + x_5$       | capacity constraints |
| $x_0 = x_2 + x_3$       |                      |
| $x_3 + x_5 + x_6 = x_8$ |                      |
| $x_2 + x_4 = x_6 + x_7$ |                      |
|                         | flow conservation    |

Note: solution not unique

# Solving maximum flow using linear programming

- $x$  is a vector describing the flow along each edge
- $c$  is a vector that adds the flow along the edges (7 and 8) to the sink (F), i.e. a function computing *the flow value*
- $A_{ub}$  and  $b_{ub}$  is a set of *capacity constraints*, for each edge flow  $\leq$  capacity
- $A_{eq}$  and  $b_{eq}$  is a set of *flow conservation* constraints, for each non-source and non-sink node (B, C, D, E), requiring that the flow into equals the flow out of a node

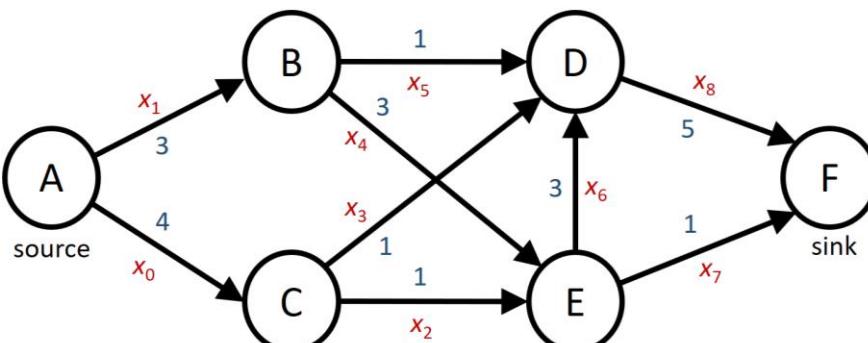

|                                                                                   |                                                                                                                                                                                                                                                                                                      |                                                                                                                                              |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| $\begin{array}{l} \text{Minimize} \\ -x_7 - x_8 \\ \text{Subject to} \end{array}$ | $c^T \cdot x$<br>$\left. \begin{array}{l} x_0 \leq 4 \\ x_1 \leq 3 \\ x_2 \leq 1 \\ x_3 \leq 1 \\ x_4 \leq 3 \\ x_5 \leq 1 \\ x_6 \leq 3 \\ x_7 \leq 1 \\ x_8 \leq 5 \end{array} \right\} \begin{array}{l} A_{ub} \cdot x \leq b_{ub} \\ \Updownarrow \\ I \cdot x \leq \text{capacity} \end{array}$ | $\left. \begin{array}{l} \\ \\ \\ \\ \\ \\ \\ \\ \\ \end{array} \right\} \begin{array}{l} \text{capacity} \\ \text{constraints} \end{array}$ |
|                                                                                   | $A_{eq} \cdot x = b_{eq}$<br>$\left. \begin{array}{l} 0 = -x_1 + x_4 + x_5 \\ 0 = -x_0 + x_2 + x_3 \\ 0 = -x_3 - x_5 - x_6 + x_8 \\ 0 = -x_2 - x_4 + x_6 + x_7 \end{array} \right\} \begin{array}{l} \\ \\ \\ \end{array}$                                                                           | $= 0$<br>$\left. \begin{array}{l} \\ \\ \\ \\ \end{array} \right\} \begin{array}{l} \text{flow} \\ \text{conservation} \end{array}$          |

## maximum-flow.py

```
import numpy as np
from scipy.optimize import linprog

conservation = np.array([[0, -1, 0, 0, 1, 1, 0, 0, 0], # B
[-1, 0, 1, 1, 0, 0, 0, 0, 0], # C
[0, 0, 0, -1, 0, -1, -1, 0, 1], # D
[0, 0, -1, 0, -1, 0, 1, 1, 0]]) # E


sinks = np.array([0, 0, 0, 0, 0, 0, 1, 1])

capacity = np.array([4, 3, 1, 1, 3, 1, 3, 1, 5])

res = linprog(-sinks,
 A_eq=conservation,
 b_eq=np.zeros(conservation.shape[0]),
 A_ub=np.eye(capacity.size),
 b_ub=capacity)

print(res)
```

the solution found varies  
with the scipy version

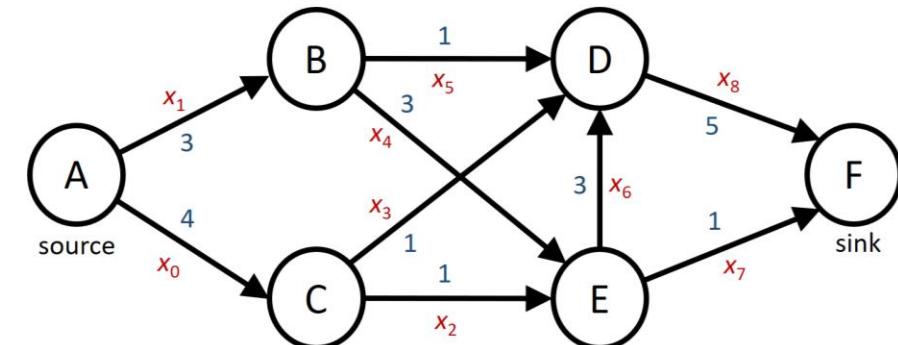

## Python shell

```
| fun: -5.0
| message: 'Optimization terminated successfully.'
| nit: 9
| slack: array([2., 0., 0., 0., 1., 0., 1., 0., 1.])
| status: 0
| success: True
| x: array([2., 3., 1., 1., 2., 1., 2., 1., 4.])
```

# Generators, iterators

- `__iter__`, `__next__`
- `yield`
- generator expression
- measuring memory usage

# Iterable & Iterator

## Python shell

```
> L = ['a', 'b', 'c']
> type(L)
| <class 'list'>
> it = L.__iter__()
> type(it)
| <class 'list_iterator'>
> it.__next__()
| 'a'
> it.__next__()
| 'b'
> it.__next__()
| 'c'
> it.__next__()
| StopIteration # Exception
```

## Python shell

```
> L = ['a', 'b', 'c']
> it = iter(L) # calls L.__iter__()
> next(it) # calls it.__next__()
| 'a'
> next(it)
| 'b'
> next(it)
| 'c'
> next(it)
| StopIteration
```

iterator ≈ pointer into list  
↓  
['a', 'b', 'c']

- Lists are **iterable** (must support `__iter__`)
- `iter` returns an **iterator** (must support `__next__`)

Some iterables in Python: string, list, set, tuple, dict, range, enumerate, zip, map, reversed

# Iterator

- `next(iterator_object)` returns the next element from the iterator, by calling the `iterator_object.__next__()`. If no more elements to report, raises exception `StopIteration`
- `next(iterator_object, default)` returns `default` when no more elements are available (no exception is raised)
- for-loops and list comprehensions require iterable objects  
`for x in range(5):` and `[2**x for x in range(5)]`
- The iterator concept is also central to Java and C++

# for loop

Python shell

```
> for x in ['a', 'b', 'c']:
| print(x)
|
| a
| b result of next
| c on iterator
```

iterable object  
(can call `iter` on it to  
generate an iterator)

=

Python shell

```
> L = ['a', 'b', 'c']
> it = iter(L)
> while True:
| try:
| x = next(it)
| except StopIteration:
| break
| print(x)
|
| a
| b
| c
```

## 8.3. The for statement

The `for` statement is used to iterate over the elements of a sequence (such as a string, tuple or list) or other iterable object:

```
for_stmt ::= "for" target_list "in" expression_list ":" suite
 ["else" ":" suite]
```

The expression list is evaluated once; it should yield an iterable object. An iterator is created for the result of the `expression_list`. The suite is then executed once for each item provided by the iterator, in the order returned by the iterator. Each item in turn is assigned to the target list using the standard rules for assignments (see [Assignment statements](#)), and then the suite is executed. When the items are exhausted (which is immediately when the sequence is empty or an iterator raises a StopIteration exception), the suite in the `else` clause, if present, is executed, and the loop terminates.

# for loop over changing iterable



Changing (extending) the list while scanning

The iterator over a list is just an index into the list

Python shell

```
> L = [1, 2]
> for x in L:
 print(x, L)
 L.append(x + 2)
```

```
1 [1, 2]
2 [1, 2, 3]
3 [1, 2, 3, 4]
4 [1, 2, 3, 4, 5]
5 [1, 2, 3, 4, 5, 6]
...
...
```

Python shell

```
> L = [1, 2]
> for x in L:
 print(x, L)
 L[:0] = [L[0] - 2, L[0] - 1]
```

```
1 [1,2]
0 [-1,0,1,2]
-1 [-3,-2,-1,0,1,2]
-2 [-5,-4,-3,-2,-1,0,1,2]
-3 [-7,-6,-5,-4,-3,-2,-1,0,1,2]
...
...
```

# range

## Python shell

```
> r = range(1, 6) # 1,2,3,4,5
> type(r)
| <class 'range'>
> it = iter(r)
> type(it)
| <class 'range_iterator'>
> next(it)
| 1
> next(it) iterable expected
| 2 but got iterator ?
> for x in it:
| print(x)
|
| 3
| 4
| 5
```

## Python shell

```
> it
| <range_iterator object at 0x03E7FFC8>
> iter(it)
| <range_iterator object at 0x03E7FFC8>
> it is iter(it)
| True
```

Calling `iter` on a `range_iterator` just returns the iterator itself, i.e. can use the iterator wherever an iterable is expected

# Creating an iterable class

names.py


```
class Names:
 def __init__(self, *arg):
 self.people = arg
 def __iter__(self):
 return Names_iterator(self)

class Names_iterator:
 def __init__(self, names):
 self.idx = 0
 self.names = names
 def __next__(self):
 if self.idx >= len(self.names.people):
 raise StopIteration
 self.idx += 1
 return self.names.people[self.idx - 1]

duckburg = Names('Donald', 'Goofy', 'Mickey', 'Minnie')
for name in duckburg:
 print(name)
```

Python shell

```
| Donald
| Goofy
| Mickey
| Minnie
```

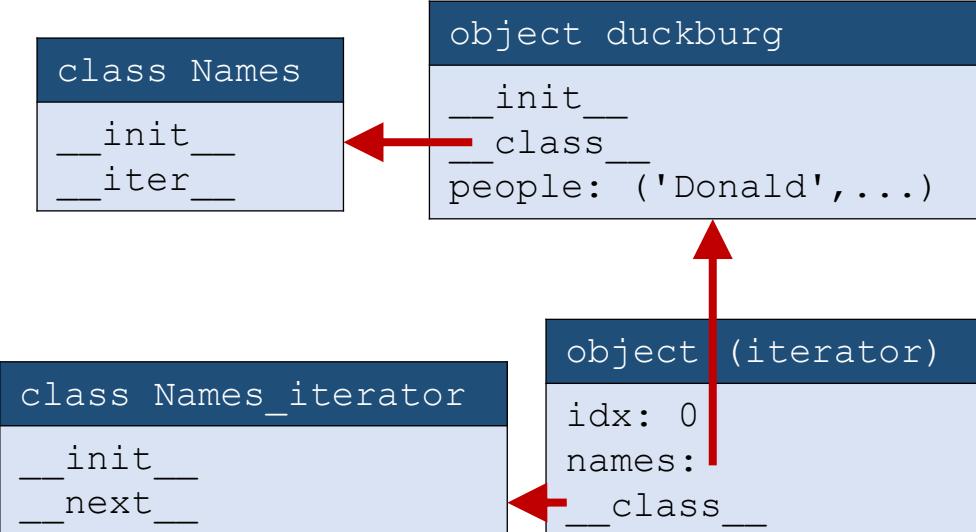

# An infinite iterable

infinite\_range.py

```
class infinite_range:
 def __init__(self, start=0, step=1):
 self.start = start
 self.step = step
 def __iter__(self):
 return infinite_range_iterator(self)

class infinite_range_iterator:
 def __init__(self, inf_range):
 self.range = inf_range
 self.current = self.range.start
 def __next__(self):
 value = self.current
 self.current += self.range.step
 return value
 def __iter__(self): # make iterator iterable
 return self
```

Python shell

```
> r = infinite_range(42, -3)
> it = iter(r)
> for idx, value in zip(range(5), it):
 print(idx, value)
| 0 42
| 1 39
| 2 36
| 3 33
| 4 30
> for idx, value in zip(range(5), it):
 print(idx, value)
| 0 27
| 1 24
| 2 21
| 3 18
| 4 15
> print(sum(r)) # don't do this
| (runs forever) !
```

sum and zip take iterables  
(zip stops when shortest iterable is exhausted)

# Creating an iterable class (iterable = iterator)

my\_range.py

```
class my_range:
 def __init__(self, start, end, step):
 self.start = start
 self.end = end
 self.step = step
 self.x = start

 def __iter__(self):
 return self # self also iterator

 def __next__(self):
 if self.x >= self.end:
 raise StopIteration
 answer = self.x
 self.x += self.step
 return answer

r = my_range(1.5, 2.0, 0.1)
```

Python shell

```
> list(r)
| [1.5, 1.6,
1.7000000000000002,
1.8000000000000003,
1.9000000000000004]
> list(r)
| []
```



- Note that objects act both as an iterable and an iterator
- This e.g. also applies to `zip` objects
- Can only iterate over a `my_range` once A yellow triangular warning sign with a black exclamation mark inside.

# itertools

## Function

count (start, step)

cycle (seq)

repeat (value[, times])

chain (seq0, ..., seqk)

starmap (func, seq)

permutations (seq)

islice (seq, start, stop, step)

...

## Description

Inifinite sequence: start, stat + step, ...

Infinite repeats of the elements from seq

Infinite repeats of value or times repeats

Concatenate sequences

func (\*seq[0]), func (\*seq[1]), ...

Genereate all possible permutations of seq

Create a slice of seq

...

# Example : Java iterators

vector-iterator.java

```
import java.util.Vector;
import java.util.Iterator;

class IteratorTest {
 public static void main(String[] args) {
 Vector<Integer> a = new Vector<Integer>();
 a.add(7);
 a.add(42);
 // "C" for-loop & get method
 for (int i=0; i<a.size(); i++)
 System.out.println(a.get(i));
 // iterator
 for (Iterator it = a.iterator(); it.hasNext();)
 System.out.println(it.next());
 // for-each loop - syntax sugar since Java 5
 for (Integer e : a)
 System.out.println(e);
 }
}
```

In Java iteration does not stop using exceptions, but instead the iterator can be tested if it is at the end of the iterable

# Example : C++ iterators

vector-iterator.cpp

```
#include <iostream>
#include <vector>
int main() {
 // Vector is part of STL (Standard Template Library)
 std::vector<int> A = {20, 23, 26};
 // "C" indexing - since C++98
 for (int i = 0; i < A.size(); i++)
 std::cout << A[i] << std::endl;
 // iterator - since C++98
 for (std::vector<int>::iterator it = A.begin(); it != A.end(); ++it)
 std::cout << *it << std::endl;
 // "auto" iterator - since C++11
 for (auto it = A.begin(); it != A.end(); ++it)
 std::cout << *it << std::endl;
 // Range-based for-loop - since C++11
 for (auto e : A)
 std::cout << e << std::endl;
}
```

In C++ iterators can be tested if they reach the end of the iterable



move iterator to next element



# Generators

# Generator expressions

## Python shell

```
> [x ** 2 for x in range(5)] # list comprehension
| [0, 1, 4, 9, 16] # list
> (x ** 2 for x in range(3)) # generator expression
| <generator object <genexpr> at 0x03D9F8A0>
> o = (x ** 2 for x in range(3))
> next(o)
| 0
> next(o)
| 1
> next(o)
| 4
> next(o)
| StopIteration
```

- A generator expression  
`(... for x in ...)` looks like a list comprehension, except square brackets are replaced by parenthesis
- Is an iterable and iterator, that uses less memory than a list comprehension
- computation is done *lazily*, i.e. first when needed

# Nested generator expressions

## Python shell

```
> squares = (x ** 2 for x in range(1, 6)) # generator expression
> ratios = (1 / y for y in squares) # generator expression
> ratios
| <generator object <genexpr> at 0x031FC230>
> next(ratios)
| 1.0
> next(ratios)
| 0.25
> print(list(ratios))
| [0.1111111111111111, 0.0625, 0.04] # remaining 3
```

- Each fraction is first computed when requested by `next(ratios)` (implicitly called repeatedly in `list(ratios)`)
- The next value of `squares` is first computed when needed by `ratios`

# Generator expressions as function arguments

## Python shell

```
> doubles = (x * 2 for x in range(1, 6))
> sum(doubles) # sum takes an iterable
| 30
> sum(x * 2 for x in range(1, 6))
| 30
> sum(x * 2 for x in range(1, 6)) # one pair of parenthesis omitted
| 30
```

- Python allows to omit a pair of parenthesis when a generator expression is the only argument to a function

$$f(\dots \text{ for } x \text{ in } \dots) \quad \equiv \quad f(\textcolor{red}{(\dots \text{ for } x \text{ in } \dots)})$$

# Generator functions

`two.py`

```
def two():
 yield 1
 yield 2
```

`Python shell`

```
> two()
| <generator object two at 0x03629510>
> t = two()
> next(t)
| 1
> next(t)
| 2
> next(t)
| StopIteration
```

- A *generator function* contains one or more `yield` statements
- Python automatically makes a call to a generator function into an iterable and iterator (provides `__iter__` and `__next__`)
- Calling a generator function returns a *generator object*
- Whenever `next` is called on a generator object, the executing of the function continues until the next `yield exp` and the value of `exp` is returned as a result of `next`
- Reaching the end of the function or a return statement, will raise `StopIteration`
- Once consumed, can't be reused

# Generator functions (II)

```
my_generator.py
```

```
def my_generator(n):
 yield 'Start'
 for i in range(n):
 yield chr(ord('A') + i)
 yield 'Done'
```

```
Python shell
```

```
> g = my_generator(3)
> print(g)
| <generator object my_generator at 0x03E2F6F0>
> print(list(g))
| ['Start', 'A', 'B', 'C', 'Done']
> print(list(g)) # generator object g exhausted
| []
> print(*my_generator(5)) # * takes an iterable (PEP 448)
| Start A B C D E Done
```

# Generator functions (III)

my\_range\_generator.py

```
def my_range(start, end, step):
 x = start
 while x < end:
 yield x
 x += step
```

Python shell

```
> list(my_range(1.5, 2.0, 0.1))
| [1.5, 1.6, 1.7000000000000002, 1.8000000000000003, 1.9000000000000004]
```

# Pipelining generators

Python shell

```
> def squares(seq): # seq should be an iterable object
 for x in seq: # use iterator to run through seq
 yield x ** 2 # generator

> list(squares(range(5)))
| [0, 1, 4, 9, 16]
> list(squares(squares(range(5)))) # pipelining generators
| [0, 1, 16, 81, 256]
> sum(squares(squares(range(100000000)))) # pipelining generators
| 1999999500000003333333333330000000
> sum((x ** 2) ** 2 for x in range(100000000)) # generator expression
| 19999995000000033333333333330000000
> sum([(x ** 2) ** 2 for x in range(100000000)]) # list comprehension
| MemoryError # when using a 32-bit version of Python, limited to 2 GB
```

# **yield** vs **yield from**

Python shell

```
> def g():
 yield 1
 yield [2, 3, 4]
 yield 5

> list(g())
| [1, [2, 3, 4], 5]
```

Python shell

```
> def g():
 yield 1
 yield from [2, 3, 4]
 yield 5


> list(g())
| [1, 2, 3, 4, 5]
```

- **yield from** available since Python 3.3
- **yield from exp** ≈ **for x in exp: yield x**

# Recursive yield from

Python shell

```
> def traverse(T): # recursive generator
 if isinstance(T, tuple):
 for child in T:
 yield from traverse(child)
 else:
 yield T
> T = (((1, 2), 3, (4, 5)), (6, (7, 9)))
> traverse(T)
| <generator object traverse at 0x03279F30>
> list(traverse(T))
| [1, 2, 3, 4, 5, 6, 7, 9]
```

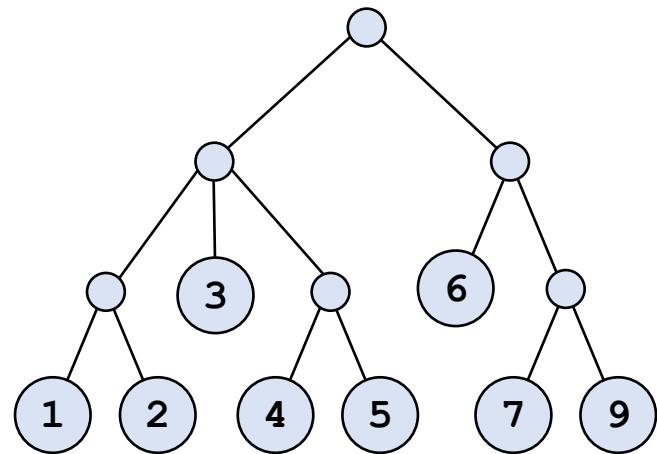

# Making objects iterable using `yield`

`vector2D.py`

```
class vector2D:
 def __init__(self, x_value, y_value):
 self.x = x_value
 self.y = y_value

 def __iter__(self): # generator
 yield self.x
 yield self.y

 def __iter__(self): # alternative generator
 yield from (self.x, self.y)

v = vector2D(5, 7)

print(list(v))
print(tuple(v))
print(set(v))
```

`Python shell`

```
| [5, 7]
| (5, 7)
| {5, 7}
```

# Generators vs iterators

- Iterators can often be reused (can copy the current state)
- Generators cannot be reused (only if a new generator is created, starting over again)
- David Beazley's tutorial on  
“*Generators: The Final Frontier*”, PyCon 2014 (3:50:54)  
Throughout advanced discussion of generators, e.g. how to use  
.send method to implement coroutines  
<https://www.youtube.com/watch?v=D1twn9kLmYg>

# Measuring memory usage

# Measuring memory usage (memory profiling)

- Macro level:

- Task Manager (Windows)  
Activity Monitor (Mac)  
top (Linux)

- Variable level:

- `getsizeof` from `sys` module

- Detailed overview:

- Module `memory_profiler`

- Allows detailed space usage of the code line-by-line (using `@profile` function decorator) or a plot of total space usage over time

- `pip install memory-profiler`

Python shell

```
> import sys
> sys.getsizeof(42)
| 14 # size of the integer 42 is 14 bytes
> sys.getsizeof(42 ** 42)
| 44 # the size increases with value
> sys.getsizeof('42')
| 27 # size of a string
> import numpy as np
> sys.getsizeof(np.array(range(100), dtype='int32'))
| 448 # also works on Numpy arrays
> squares = [x ** 2 for x in range(1000000)]
> sys.getsizeof(squares)
| 4348736
> g = (x ** 2 for x in range(1000000))
> sys.getsizeof(g)
| 64
```

# Module memory-profiler

[pypi.org/project/memory-profiler/](https://pypi.org/project/memory-profiler/)

**memory\_usage.py**

```
from memory_profiler import profile


@profile # prints new statistics for each call
def use_memory():
 s = 0
 x = list(range(20_000_000))
 s += sum(x)
 y = list(range(10_000_000))
 s += sum(x)

use_memory()
```

**Python Shell**

```
Filename: C:/.../memory_usage.py

Line # Mem usage Increment Line Contents
=====
 3 32.0 MiB 32.0 MiB @profile
 4 def use_memory():
 5 32.0 MiB 0.0 MiB s = 0
 6 415.9 MiB 383.9 MiB x = list(range(20_000_000))
 7 415.9 MiB 0.0 MiB s += sum(x)
 8 607.8 MiB 191.9 MiB y = list(range(10_000_000))
 9 607.8 MiB 0.0 MiB s += sum(x)
```

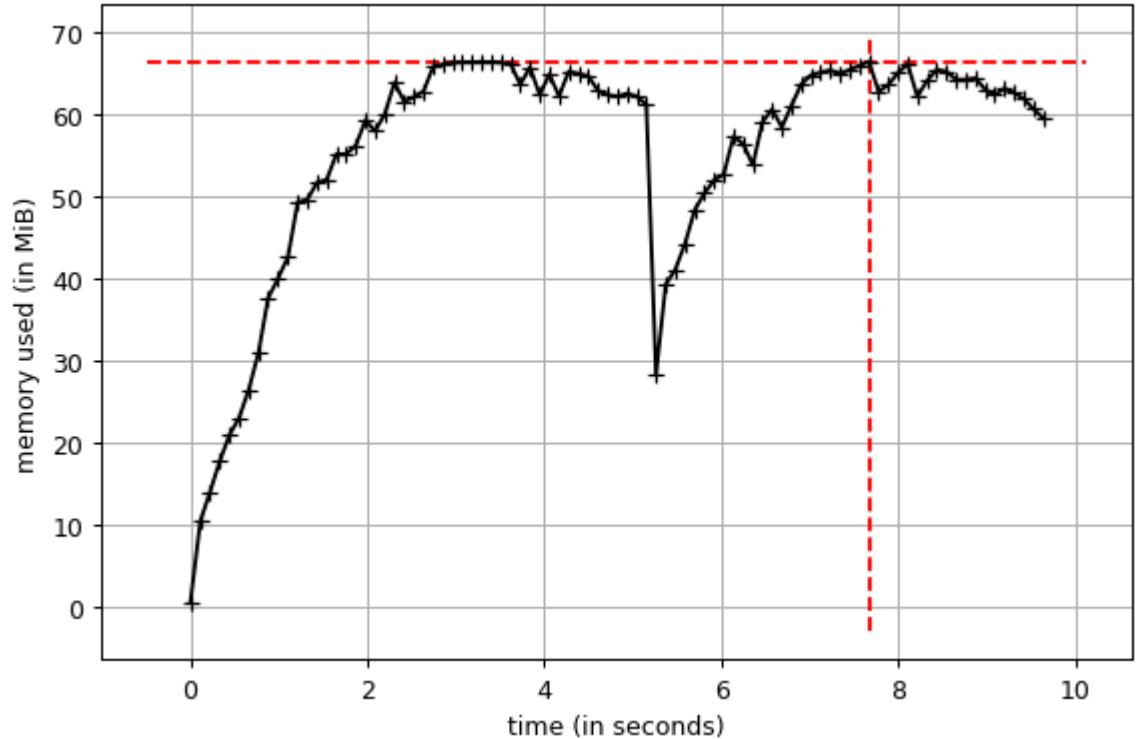


**memory\_sin\_usage.py**

```
from math import sin, pi

for a in range(1000):
 x = list(range(int(1000000 * sin(pi * a / 250))))
```

**Windows Shell**

```
> pip install memory-profiler
> mprof run memory_sin_usage.py
| mprof: Sampling memory every 0.1s
| running as a Python program...
> mprof plot
```

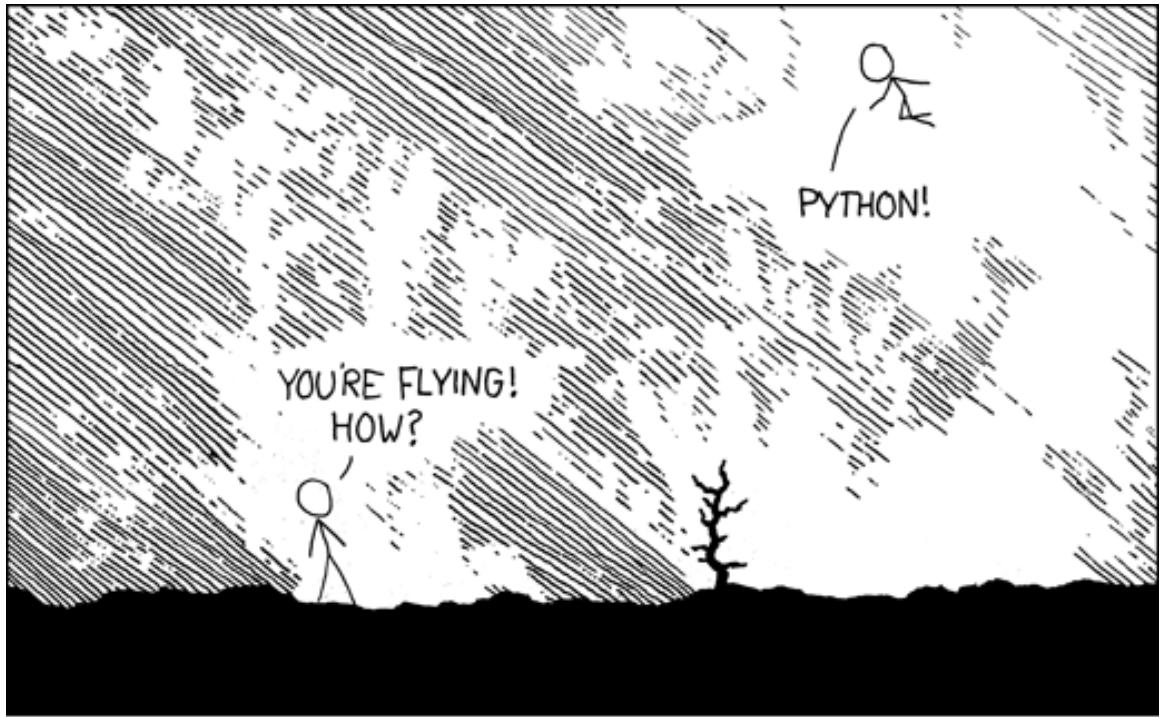

xkcd.com/353

## Modules and packages

- `import` – `from` – `as`
- `__name__`, `"__main__"`

[docs.python.org/3/tutorial/modules.html](https://docs.python.org/3/tutorial/modules.html)

# Python modules and packages

- A Python **module** is a *module\_name.py* file containing Python code
- A Python **package** is a collection of modules

## Why do you need modules ?

- A way to structure code into **smaller logical units**
- **Encapsulation** of functionality
- **Reuse** of code in different programs
- You can write your **own modules and packages** or use any of the +350.000 existing packages from [pypi.org](https://pypi.org)
- **The Python Standard Library** consists of the modules listed on [docs.python.org/3/library](https://docs.python.org/3/library)



# Defining and importing a module

mymodule.py

```
""" This is a 'print something' module """

from random import randint

print("Running my module")

def print_something(n):
 W = ['Eat', 'Sleep', 'Rave', 'Repeat']
 words = (W[randint(0, len(W) - 1)] for _ in range(n))
 print(' '.join(words))

def the_name():
 print('__name__ = "' + __name__ + '"')
```

using\_mymodule.py

```
import mymodule

mymodule.the_name()
mymodule.print_something(5)

from mymodule import print_something
print_something(5)
```

Python shell

```
| Running my module
| __name__ = "mymodule"
| Eat Sleep Sleep Sleep Rave
| Eat Sleep Rave Repeat Sleep
```

- A module is only run once when imported several times

# Some modules mentioned in the course

| Module (example functions)                 | Description                                    |
|--------------------------------------------|------------------------------------------------|
| math (pi sqrt ceil log sin)                | <i>basic math</i>                              |
| random (random randint)                    | <i>random number generator</i>                 |
| numpy (array shape)                        | <i>multi-dimensional data</i>                  |
| pandas                                     | <i>data tables</i>                             |
| SQLite                                     | <i>SQL database</i>                            |
| scipy                                      | <i>mathematical optimization</i>               |
| scipy.optimize (minimize linprog)          |                                                |
| scipy.spatial (ConvexHull)                 |                                                |
| matplotlib                                 |                                                |
| matplotlib.pyplot (plot show style)        | <i>plotting data</i>                           |
| matplotlib.backends.backend_pdf (PdfPages) | <i>print plots to PDF</i>                      |
| mpl_toolkits.mplot3d (Axes3D)              | <i>3D plot tools</i>                           |
| doctest (testmod)                          | <i>testing using doc strings</i>               |
| unittest (assertEqual assertTrue)          | <i>unit testing</i>                            |
| time (time)                                | <i>current time, conversion of time values</i> |
| datetime (date.today)                      |                                                |
| timeit (timeit)                            | <i>time execution of simple code</i>           |
| heapq                                      | <i>use a list as a heap</i>                    |

| Module (example functions)                     | Description                                    |
|------------------------------------------------|------------------------------------------------|
| functools (cache lru_cache total_ordering)     | <i>higher order functions and decorators</i>   |
| itertools (islice permutations)                | <i>Iterator tools</i>                          |
| collections (Counter deque)                    | <i>data structures for collections</i>         |
| builtins                                       | <i>module containing the Python builtins</i>   |
| os (path)                                      | <i>operating system interface</i>              |
| sys (argv path)                                | <i>system specific functions</i>               |
| Tkinter                                        | <i>graphic user interface</i>                  |
| PyQt                                           |                                                |
| xml                                            | <i>xml files (eXtensible Markup Language)</i>  |
| json                                           | <i>JSON (JavaScript Object Notation) files</i> |
| csv                                            | <i>comma separated files</i>                   |
| openpyxl                                       | <i>EXCEL files</i>                             |
| re                                             | <i>regular expression, string searching</i>    |
| string (split join lower ascii_letters digits) | <i>string functions</i>                        |

# Ways of importing modules

## import.py

```
Import a module name in the current namespace
All definitions in the module are available as <module>.<name>

import math
print(math.sqrt(2))

Import only one or more specific definitions into current namespace

from math import sqrt, log, ceil
print(ceil(log(sqrt(100), 2)))

Import specific modules/definitions from a module into current namespace under new names

from math import sqrt as kvadratrod, \ # long import line broken onto multiple lines
 log as logaritme
import matplotlib.pyplot as plt
print(logaritme(kvadratrod(100)))

Import all definitions form a module in current namespace
Deprecated, since unclear what happens to the namespace

from math import *
print(pi) # where did 'pi' come from?
```

## Python shell

```
| 1.4142135623730951
| 4
| 2.302585092994046
| 3.141592653589793
```

# \_\_all\_\_ vs import \*

- A module can control what is imported by `import *` by defining `__all__`

## Python shell

```
> min
| <built-in function min>
> sum
| <built-in function sum>
> import numpy
> numpy.min
| <function amin at 0x0000024768E69F30> # numpy.min == numpy.amin
> numpy.sum
| <function sum at 0x0000024768E69510>
> from numpy import *
> sum
| <function sum at 0x0000024768E69510> # numpy.sum
> min
| <built-in function min> # builtin min
> numpy.__all__
| [..., 'sum', ...] # 'min' is not in list
```



## all.py

```
__all__ = ['f']

def f():
 print('this is f')

def g():
 print('this is g')
```

## Python shell

```
> import all
> all.f()
| this is f
> all.g()
| this is g
> from all import *
> f()
| this is f
> g()
| NameError: name 'g' is not defined
```

# Performance of different ways of importing

```
from math import sqrt

appears to be faster than

math.sqrt
```

```
sqrt_performance.py

from time import time
import math
start = time()
x = sum(math.sqrt(x) for x in range(10000000))
end = time()
print("math.sqrt", end - start)

from math import sqrt
start = time()
x = sum(sqrt(x) for x in range(10000000))
end = time()
print("from math import sqrt", end - start)

def test(sqrt=math.sqrt): # abuse of keyword argument
 start = time()
 x = sum(sqrt(x) for x in range(10000000))
 end = time()
 print("bind sqrt to keyword argument", end - start)
test()
```

## Python shell

```
| math.sqrt 4.05187726020813
| from math import sqrt 3.5011463165283203
| bind sqrt to keyword argument 3.261594772338867
```

# Listing definitions in a module: `dir(module)`

Python shell

```
> import math
> import matplotlib.pyplot as plt
> dir(math)
|['__doc__', '__loader__', '__name__', '__package__', '__spec__', 'acos',
'acosh', 'asin', 'asinh', 'atan', 'atan2', 'atanh', 'ceil', 'copysign',
'cos', 'cosh', 'degrees', 'e', 'erf', 'erfc', 'exp', 'expm1', 'fabs',
'factorial', 'floor', 'fmod', 'frexp', 'fsum', 'gamma', 'gcd', 'hypot',
'inf', 'isclose', 'isfinite', 'isinf', 'isnan', 'ldexp', 'lgamma', 'log',
'log10', 'log1p', 'log2', 'modf', 'nan', 'pi', 'pow', 'radians', 'sin',
'sinh', 'sqrt', 'tan', 'tanh', 'tau', 'trunc']
> help(math)
| Help on built-in module math:
| NAME
| math
| DESCRIPTION
| ...
| ...
```

# name

double.py

```
""" Module double """

def f(x):
 """
 Some doc test code:

 >>> f(21)
 42
 >>> f(7)
 14
 """

 return 2 * x

print('__name__ =', __name__)
if __name__ == "__main__":
 import doctest
 doctest.testmod(verbose=True)
```

Python shell

```
| __name__ = __main__
...
2 passed and 0 failed.
Test passed.
```

using\_double.py

```
import double

print(__name__)
print(double.f(5))
```

Python shell

```
| __name__ = double
| __main__
10
```

- The variable `__name__` contains the name of the module, or '`__main__`' if the file is run as the main file by the interpreter
- Can e.g. be used to test a module if the module is run independently

# module importlib

- Implements the `import` statement (Python internal implementation details)
- `importlib.reload(module)`
  - Reloads a previously imported *module*. Relevant if you have edited the code for the module and want to load the new version in the Python interpreter, without restarting the full program from scratch.



a\_constant.py

```
the_constant = 7
```

Python shell

```
> import a_constant # import module
> a_constant.the_constant
| 7
> from a_constant import the_constant
> the_constant
| 7
Update 7 to 42 in a_constant.py
> a_constant.the_constant # new value not reflected
| 7
> import a_constant # void, module already loaded
> a_constant.the_constant
| 7 # unchanged
> import importlib
> importlib.reload(a_constant)
| <module 'a_constant' from 'C:\\...\\a_constant.py'>
> a_constant.the_constant
| 42
> the_constant
| 7 # imported attributes are not updated by reload
> from a_constant import the_constant # force update
> the_constant
| 42 # the new value
```

# Packages

- A package is a collection of modules (and subpackages) in a folder = package name
- Only folders having an `__init__.py` file are considered packages
- The `__init__.py` can be empty, or contain code that will be loaded when the package is imported, e.g. importing specific modules

```
mypackage/__init__.py
```

```
mypackage/a.py
```

```
print("Loading mypackage.a")
def f():
 print("mypackage.a.f")
```

```
using_mypackage.py
```

```
import mypackage.a
mypackage.a.f()
```

```
Python shell
```

```
| Loading mypackage.a
| mypackage.a.f
```

# A package with a subpackage

```
mypackage/__init__.py
```

```
print('loading mypackage')
```

```
mypackage/a.py
```

```
print('Loading mypackage.a')
```

```
def f():
```

```
 print('mypackage.a.f')
```

```
mypackage/mysubpackage/__init__.py
```

```
print('loading mypackage.mysubpackage')
```

```
import mypackage.mysubpackage.b
```

```
mypackage/mysubpackage/b.py
```

```
print('Loading mypackage.mysubpackage.b')
```

```
def g():
```

```
 print('mypackage.mysubpackage.b.g')
```

```
using_mysubpackage.py
```

```
import mypackage.a
```

```
mypackage.a.f()
```

```
import mypackage.mysubpackage
```

```
mypackage.mysubpackage.b.g()
```

```
from mypackage.mysubpackage.b import g
```

```
Python shell
```

```
| loading mypackage
```

```
| Loading mypackage.a
```

```
| mypackage.a.f
```

```
| loading mypackage.mysubpackage
```

```
| Loading mypackage.mysubpackage.b
```

```
| mypackage.mysubpackage.b.g
```

```
| mypackage.mysubpackage.b.g
```

# \_\_pycache\_\_ folder


- When Python loads a module the first time it is *compiled* to some intermediate code, and stored as a `.pyc` file in the `__pycache__` folder.
- If a `.pyc` file exists for a module, and the `.pyc` file is newer than the `.py` file, then `import` loads `.pyc` – **saving time** to load the module (but does not make the program itself faster).
- It is safe to delete the `__pycache__` folder – but it will be created again next time a module is loaded.

# Path to modules

Python searches the following folders for a module in the following order:

- 1) The directory containing the input script / current directory
- 2) *Environment variable* PYTHONPATH
- 3) Installation defaults

The function path in the module sys returns a list of the paths

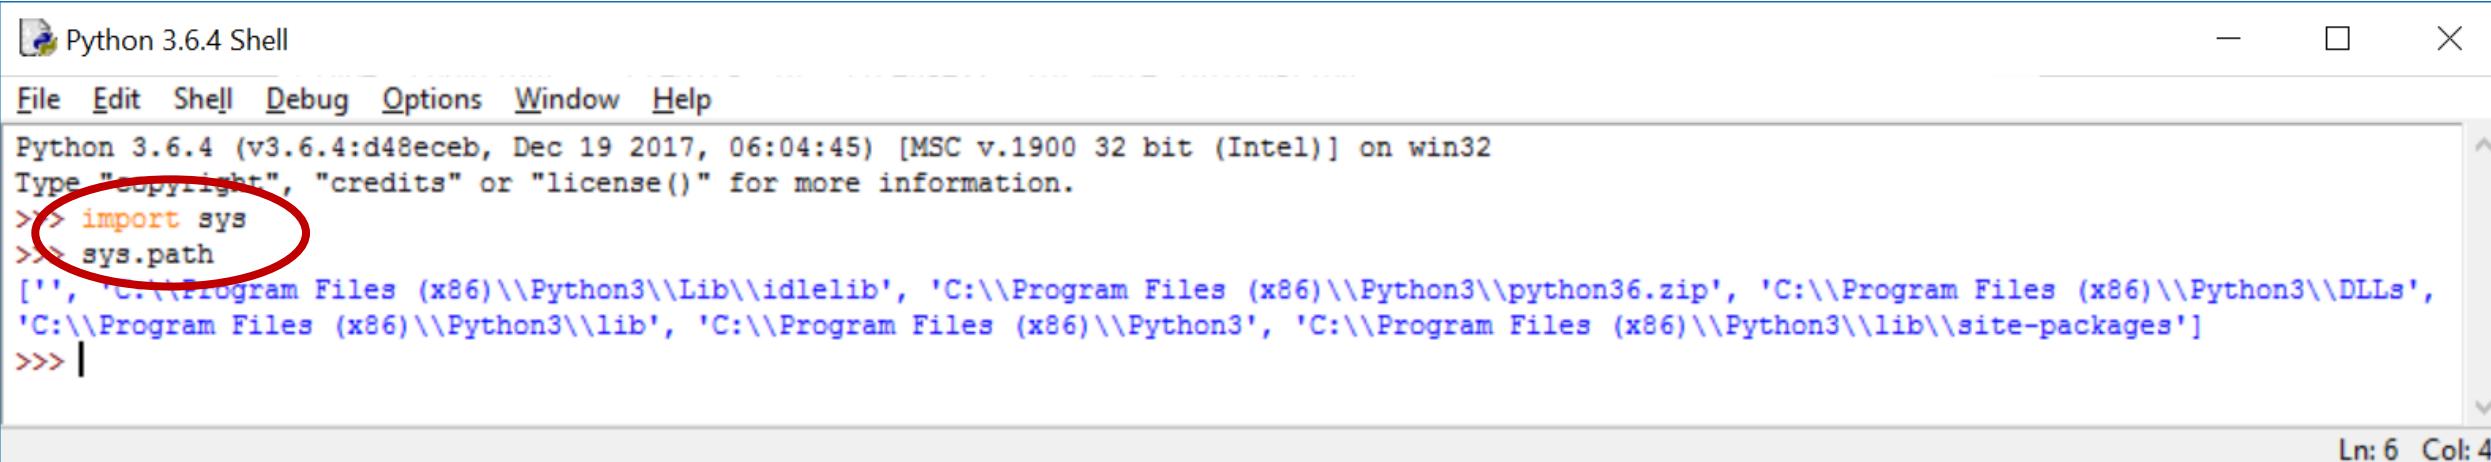

Python 3.6.4 Shell

File Edit Shell Debug Options Window Help

```
Python 3.6.4 (v3.6.4:d48eceb, Dec 19 2017, 06:04:45) [MSC v.1900 32 bit (Intel)] on win32
Type "copyright", "credits" or "license()" for more information.
>>> import sys
>>> sys.path
['', 'C:\\Program Files (x86)\\Python3\\Lib\\idlelib', 'C:\\Program Files (x86)\\Python3\\python36.zip', 'C:\\Program Files (x86)\\Python3\\DLLs',
'C:\\Program Files (x86)\\Python3\\lib', 'C:\\Program Files (x86)\\Python3', 'C:\\Program Files (x86)\\Python3\\lib\\site-packages']
>>> |
```

Ln: 6 Col: 4

# Setting PYTHONPATH from windows shell

- set PYTHONPATH=*paths separated by semicolon*  
(only valid until shell is closed)

The screenshot shows a Windows Command Prompt window titled "Select Command Prompt - python". The window displays the following text:


```
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\au121>set PYTHONPATH=C:\Users\au121\Desktop\PYLIB
C:\Users\au121>python
Python 3.6.4 (v3.6.4:d48ebeb, Dec 19 2017, 06:04:45) [MSC v.1900 32 bit (Intel)] on win32
Type "help", "copyright", "credits" or "license" for more information.
>>> import sys
>>> sys.path
['', 'C:\Users\au121\Desktop\PYLIB', 'C:\Program Files (x86)\Python3\python36.zip',
'C:\Program Files (x86)\Python3\DLLs', 'C:\Program Files (x86)\Python3\lib', 'C:\Program Files (x86)\Python3', 'C:\Program Files (x86)\Python3\lib\site-packages']
>>>
```

Two parts of the command history are circled with red ovals: the command `set PYTHONPATH=C:\Users\au121\Desktop\PYLIB` and the subsequent `import sys` and `sys.path` commands. This illustrates how the environment variable is set and how it affects the Python interpreter's search path.

# Setting PYTHONPATH from control panel

- Control panel > System > Advanced system settings > Environment Variables > User variables > Edit or New PYTHONPATH

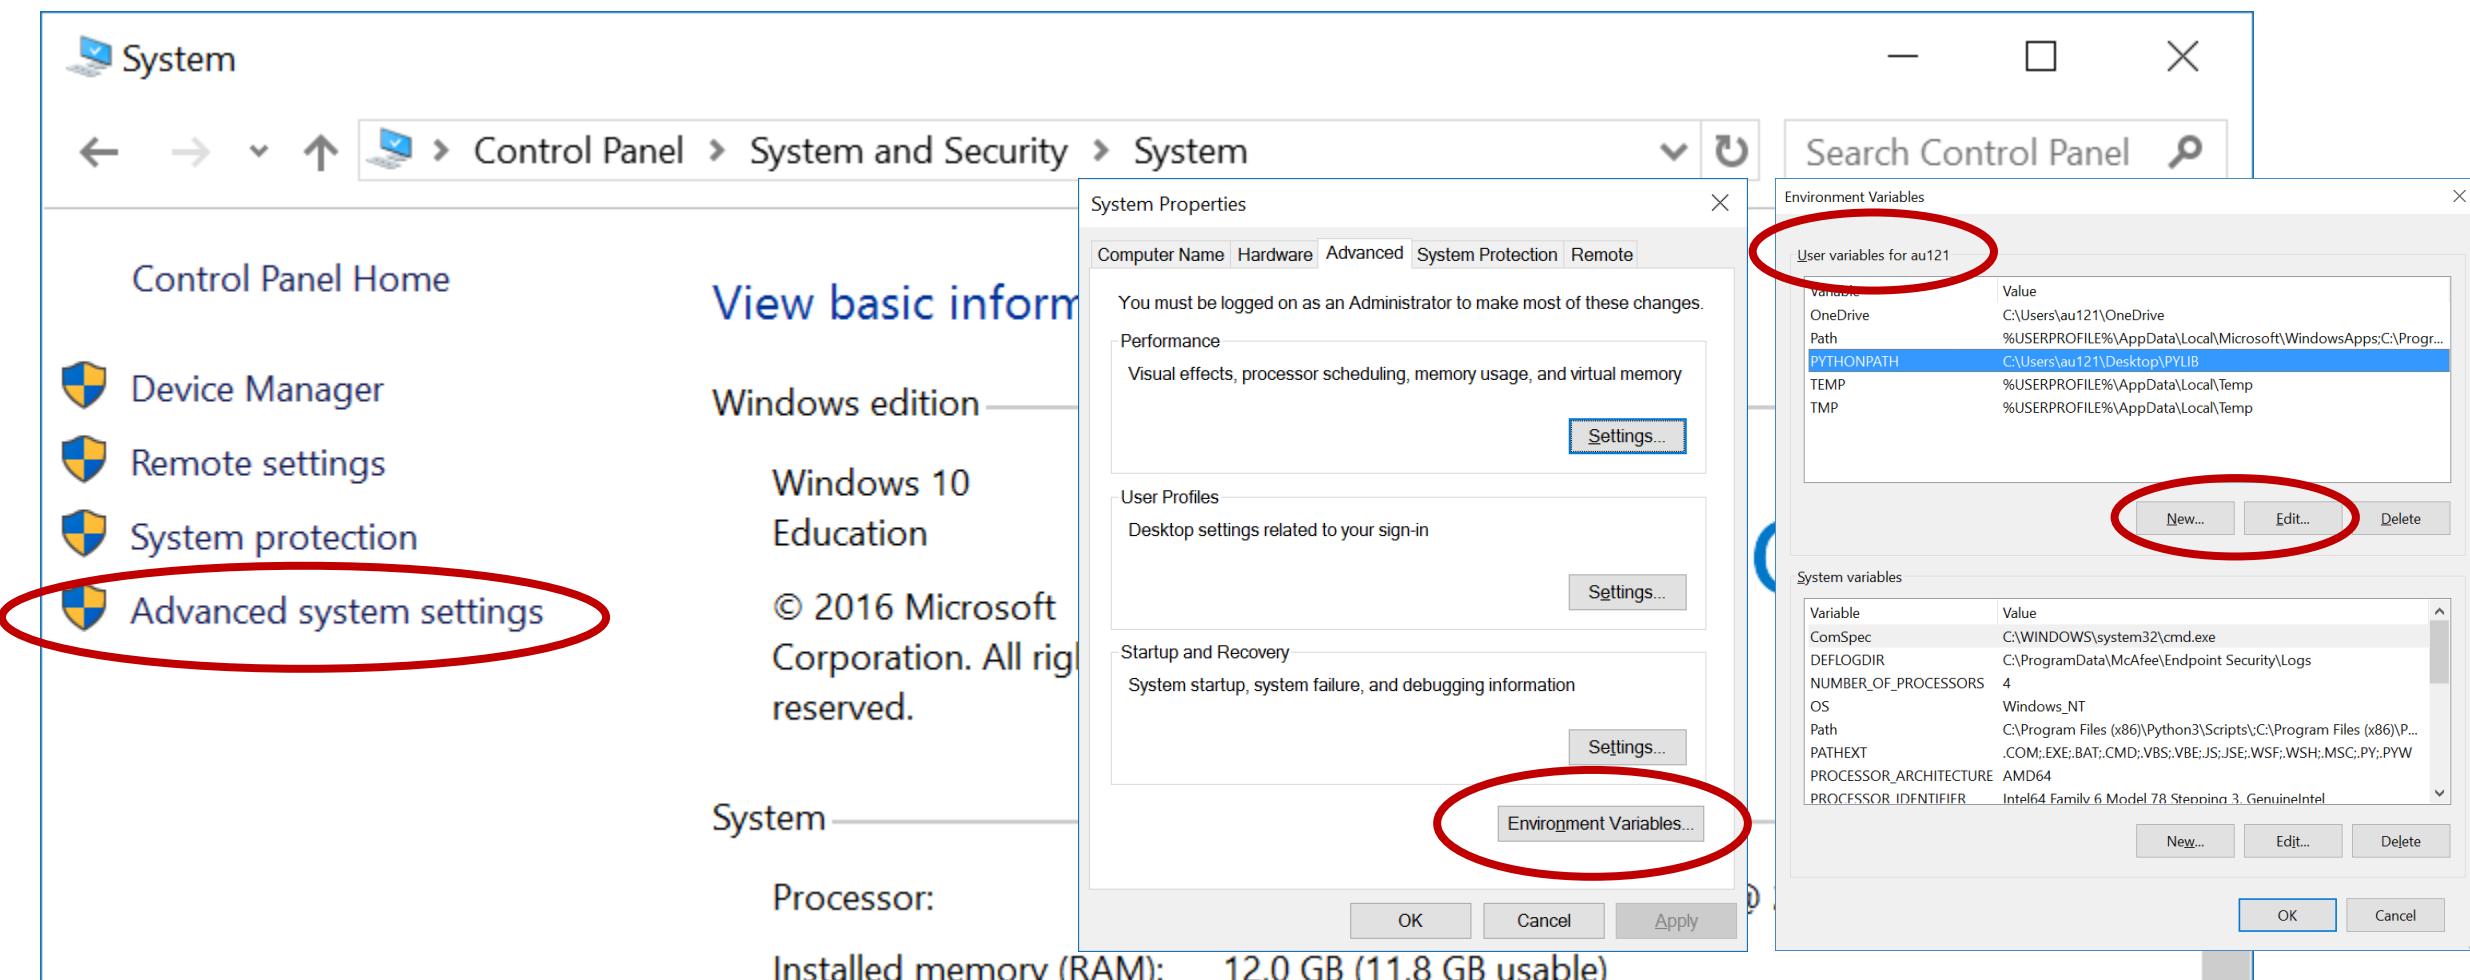

```
> import this
```

```
The Zen of Python, by Tim Peters
```

Beautiful is better than ugly.

Explicit is better than implicit.

Simple is better than complex.

Complex is better than complicated.

Flat is better than nested.

Sparse is better than dense.

Readability counts.

Special cases aren't special enough to break the rules.

Although practicality beats purity.

Errors should never pass silently.

Unless explicitly silenced.

In the face of ambiguity, refuse the temptation to guess.

There should be one-- and preferably only one --obvious way to do it.

Although that way may not be obvious at first unless you're Dutch.

Now is better than never.

Although never is often better than \*right\* now.

If the implementation is hard to explain, it's a bad idea.

If the implementation is easy to explain, it may be a good idea.

Namespaces are one honking great idea -- let's do more of those!

# module `heapq` (Priority Queue)

- Implements a binary **heap** (Williams 1964).
- Stores a set of elements in a standard list, where arbitrary elements can be inserted efficiently and the smallest element can be extracted efficiently

`heapq.heappush`  
`heapq.heappop`

`heap.py`

```
import heapq
from random import random

H = [] # a heap is just a list

for _ in range(10):
 heapq.heappush(H, random())

while True:
 x = heapq.heappop(H)
 print(x)
 heapq.heappush(H, x + random())
```

`Python shell`

```
| 0.20569933892764458
| 0.27057819339616174
| 0.31115615362876237
| 0.4841062272152259
| 0.5054280956005357
| 0.509387117524076
| 0.598647195480462
| 0.7035150735555027
| 0.7073929685826221
| 0.7091224012815325
| 0.714213496127318
| 0.727868481291271
| 0.8051275413759873
| 0.8279523767282903
| 0.8626022363202895
| 0.9376631236263869
```

# Valid heap


- A *valid heap* satisfies for all  $i$ :  
 $L[i] \leq L[2 \cdot i + 1]$  and  $L[i] \leq L[2 \cdot i + 2]$
- **heapify(L)** rearranges the elements in a list to make the list a valid heap

## Python shell

```
> from random import randint
> L = [randint(1, 20) for _ in range(10)]
> L # just random numbers
| [18, 1, 15, 17, 4, 14, 11, 3, 4, 9]
> import heapq
> heapq.heapify(L) # make L a valid heap
> L
| [1, 3, 11, 4, 4, 14, 15, 17, 18, 9]
> print(heapq.heappop(L))
| 1
> L
| [3, 4, 11, 4, 9, 14, 15, 17, 18]
> heapq.heappush(L, 7)
> L
| [3, 4, 11, 4, 7, 14, 15, 17, 18, 9]
```

# Why heapq ?

- min and remove on a list take *linear time* (runs through the whole list)
- heapq supports heappush and heappop in *logarithmic time*
- For lists of length 30.000.000 the performance gain is a **factor 200.000**

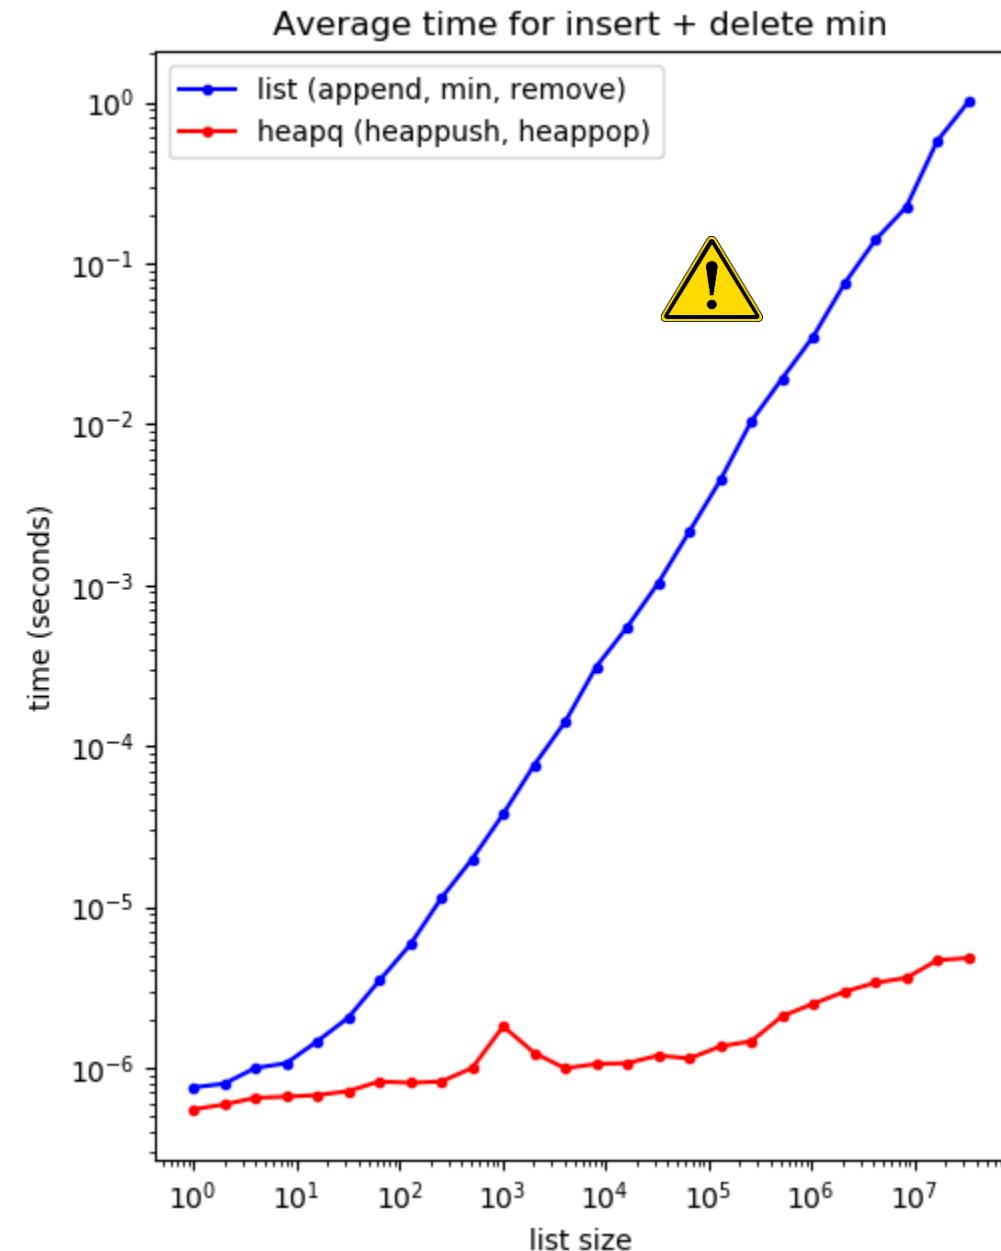

## heap\_performance.py (generating plot on previous slide)

```
import heapq
from random import random
import matplotlib.pyplot as plt
from time import time
import gc # garbage collection

size = []
time_heap = []
time_list = []

for i in range(26):
 n = 2 ** i
 size.append(n)

 L = [random() for _ in range(n)]
 R = max(1, 2 ** 23 // n)
 B gc.collect()
 start = time()
 for _ in range(R):
 L.append(random())
 x = min(L)
 L.remove(x)
 end = time()
 time_list.append((end - start) / R)
```

```
(A) L = None # avoid MemoryError
L = [random() for _ in range(n)]
heapq.heapify(L) # make L a legal heap
(B) gc.collect()
start = time()
for _ in range(100000):
 heapq.heappush(L, random())
 x = heapq.heappop(L)
end = time()
time_heap.append((end - start) / 100000)

plt.title("Average time for insert + delete min")
plt.xlabel("list size")
plt.ylabel("time (seconds)")
plt.plot(size, time_list, 'b.-',
 label='list (append, min, remove)')
plt.plot(size, time_heap, 'r.-',
 label='heapq (heappush, heappop)')
plt.xscale('log')
plt.yscale('log')
plt.legend()
plt.show()
```

- (A) Avoid out of memory error for largest experiment, by allowing old L to be garbage collected
- (B) Reduce noise in experiments by forcing Python garbage collection before measurement



# Working with text

- file formats
- CSV, JSON, XML, Excel
- regular expressions
- module re, finditer

# Some file formats

| File extension  | Content                           |
|-----------------|-----------------------------------|
| .html           | HyperText Markup Language         |
| .mp3            | Audio File                        |
| .png .jpeg .jpg | Image files                       |
| .svg            | Scalable Vector Graphics file     |
| .json           | JavaScript Object Notation        |
| .csv            | Comma separated values            |
| .xml            | eXtensible Markup Language        |
| .xlmx           | Micosoft Excel 2010/2007 Workbook |

| File extension | Description             |
|----------------|-------------------------|
| .exe           | Windows executable file |
| .app           | Max OS X Application    |
| .py            | Python program          |
| .pyc           | Python compiled file    |
| .java          | Java program            |
| .cpp           | C++ program             |
| .c             | C program               |
| .txt           | Raw text file           |

# PIL – the Python Imaging Library

- pip install Pillow

```
rotate_image.py
from PIL import Image
img = Image.open("Python-Logo.png")
img_out = img.rotate(45, expand=True)
img_out.save("Python-rotated.png")
```



Python-Logo.png

- For many file types there exist Python packages handling such files, e.g. for images Pillow supports 40+ different file formats
- For more advanced computer vision tasks you should consider OpenCV



Python-rotated.png

# CSV files - Comma Separated Values

- Simple 2D tables are stored as rows in a file, with values separated by comma
- Strings stored are quoted if necessary
- Values read are strings
- The delimiter (default comma) can be changed by keyword argument delimiter.

Other typical delimiters are tabs '\t', and semicolon ';'.

## csv-example.py

```
import csv
FILE = 'csv-data.csv'
data = [[1, 2, 3],
 ['a', '"b"'],
 [1.0, ['x', "y"], 'd']]

with open(FILE, 'w', newline='') as outfile:
 csv_out = csv.writer(outfile)
 for row in data:
 csv_out.writerow(row)

with open(FILE, 'r', newline='') as infile:
 for row in csv.reader(infile):
 print(row)
```

## Python shell

```
| ['1', '2', '3']
| ['a', '"b"']
| ['1.0', "['x', 'y']", 'd']
```

## csv-data.csv

```
1,2,3
a,""b"""
1.0,['x', 'y'],d
```

# CSV files - Tab Separated Values

```
csv-tab-separated.py
```

```
import csv

FILE = 'tab-separated.csv'

with open(FILE) as infile:
 for row in csv.reader(infile, delimiter='\t'):
 print(row)
```

```
Python shell
```

```
| ['1', '2', '3']
| ['4', '5', '6']
| ['7', '8', '9']
```

```
tab-separated.csv
```

|   |   |   |
|---|---|---|
| 1 | 2 | 3 |
| 4 | 5 | 6 |
| 7 | 8 | 9 |

# Reading an Excel generated CSV file

average.py

```
import csv

with open('grades.csv') as file:
 data = csv.reader(file, delimiter=',') # data = iterator over the rows
 header = next(data) # ['Name', 'Course', 'Grade']
 count = {}
 total = {}
 for row in data: # iterate over data rows
 course = row[header.index('Course')]
 grade = int(row[header.index('Grade')])
 count[course] = count.get(course, 0) + 1
 total[course] = total.get(course, 0) + grade
print('Average grades:')
width = max(map(len, count)) # maximum course name length
for course in count:
 print(f'{course:>{width}s} : {total[course] / count[course]:.2f}')
```

Python shell

```
Average grades:
Analysis : 1.67
Programming : 1.50
Statistics : 2.50
```

|   | A       | B           | C     |
|---|---------|-------------|-------|
| 1 | Name    | Course      | Grade |
| 2 | Alice   | Analysis    | 1     |
| 3 | Alice   | Programming | 1     |
| 4 | Bob     | Statistics  | 2     |
| 5 | Alice   | Analysis    | 1     |
| 6 | Charlie | Analysis    | 3     |
| 7 | Charlie | Statistics  | 3     |
| 8 | Bob     | Programming | 2     |
| 9 |         |             |       |

Saving a file in Excel as  
CSV (Comma delimited) (\*.csv)  
apparently uses ';' as the separator...

| Name    | Course      | Grade |
|---------|-------------|-------|
| Alice   | Analysis    | 1     |
| Alice   | Programming | 1     |
| Bob     | Statistics  | 2     |
| Alice   | Analysis    | 1     |
| Charlie | Analysis    | 3     |
| Charlie | Statistics  | 3     |
| Bob     | Programming | 2     |

# CSV files - Quoting

- The amount of quoting is controlled with keyword argument `quoting`
- `csv.QUOTE_MINIMAL` etc. can be used to select the quoting level
- Depending on choice of quoting, numeric values and strings cannot be distinguished in CSV file (`csv.reader` will read all as strings anyway)

`csv-quoting.py`

```
import csv
import sys

data = [[1, 1.0, '1.0'], ['abc', "", "\t", ',']]

quoting_options = [(csv.QUOTE_MINIMAL, "QUOTE_MINIMAL"),
 (csv.QUOTE_ALL, "QUOTE_ALL"),
 (csv.QUOTE_NONNUMERIC, "QUOTE_NONNUMERIC"),
 (csv.QUOTE_NONE, "QUOTE_NONE")]

for quoting, name in quoting_options:
 print(name)
 csv_out = csv.writer(sys.stdout, quoting=quoting, escapechar='\\')
 for row in data:
 csv_out.writerow(row)
```

`Python shell`

```
QUOTE_MINIMAL # cannot distinguish 1.0 and "1.0"
1,1.0,1.0
abc,"","","","""
QUOTE_ALL # cannot distinguish 1.0 and "1.0"
"1","1.0","1.0"
"abc","","","","",""
QUOTE_NONNUMERIC
1,1.0,"1.0"
"abc","","","","",""
QUOTE_NONE # cannot distinguish 1.0 and "1.0"
1,1.0,1.0
abc,\", \",\\",\",
```

# File encodings...

|                      |                                        |
|----------------------|----------------------------------------|
| river-utf8.py        | (size 17 bytes, encoding UTF-8)        |
| Æ Æ U I Æ Å          | ↑                                      |
| river-windows1252.py | (size 13 bytes, encoding Windows-1252) |
| Æ Æ U I Æ Å          | ↑                                      |

- Text files can be *encoded* using many different encodings (UTF-8, UTF-16, UTF-32, Windows-1252, ANSI, ASCII, ISO-8859-1, ...)
- Different encodings can result in different file sizes, in particular when containing non-ASCII symbols
- Programs often try to predict the encoding of text files (often with success, but not always)
- Opening files assuming wrong encoding can give strange results....

The screenshot shows the Emacs text editor window. The title bar says "emacs". The buffer content is "Ã† Æ U I Å† Å...". The mode line at the bottom shows "\*\--- river-utf8.txt All (2,0)".

Opening UTF-8 encoded file but trying  
to decode using Windows-1252

The screenshot shows the Emacs text editor window. The title bar says "emacs". The buffer content is "Â Ä U I Â %". The mode line at the bottom shows "U\--- river-windows1252.txt All (2,0)".

Opening Windows-1252 encoded file  
but trying to decode using UTF-8

## encoding.py

```
for filename in ['river-utf8.txt', 'river-windows1252.txt']:
 print(filename)
 f = open(filename, 'rb') # open input in binary mode, default = text mode = 't'
 line = f.readline() # type(line) = bytes = immutable list of integers in 0..255
 print(line) # byte literals look like strings, prefixed 'b'
 print(list(line)) # print bytes as list of integers
 f = open(filename, 'r', encoding='utf-8') # try to open file as UTF-8
 line = f.readline() # fails if input line is not utf-8
 print(line)
```

## Python shell

```
| river-utf8.txt
| b'\xc3\x86 \xc3\x86 U I \xc3\x86 \xc3\x85\r\n' # \x = hexadecimal value follows
| [195, 134, 32, 195, 134, 32, 85, 32, 73, 32, 195, 134, 32, 195, 133, 13, 10]
| E E U I E A

| river-windows1252.txt
| b'\xc6 \xc6 U I \xc6 \xc5\r\n'
| [198, 32, 198, 32, 85, 32, 73, 32, 198, 32, 197, 13, 10]
| UnicodeDecodeError: 'utf-8' codec can't decode byte 0xc6 in position 0: invalid continuation
byte
> 'E E U I E A'.encode('utf8') # convert string to (an immutable array of) bytes
| b'\xc3\x86 \xc3\x86 U I \xc3\x86 \xc3\x85'
> 'E E U I E A'.encode('utf8').decode('Windows-1252') # decode bytes to string
| 'Ã† Ã† U I Ã† Ã...'
```

## river-utf8.py

```
E E U I E A
```

# Reading CSV files with specific encoding

read\_shopping.py

```
import csv

with open("shopping.csv", encoding="Windows-1252") as file:
 for article, amount in csv.reader(file):
 print("Buy", amount, article)
```

Python shell

```
| Buy 2 æbler
| Buy 4 pærer
| Buy 3 jordbær
| Buy 10 gulerøder
```

shopping.csv

```
æbler,2
pærer,4
jordbær,3
gulerøder,10
```

CSV file saved with  
Windows-1252 encoding

# JSON

*“**JSON (JavaScript Object Notation)** is a lightweight data-interchange format. It is easy for humans to read and write. It is easy for machines to parse and generate. It is based on a subset of the **JavaScript Programming Language**, Standard ECMA-262 3rd Edition - December 1999. JSON is an ideal data-interchange language.”*

[www.json.org](http://www.json.org)

- Human readable file format
- Easy way to save a Python expression to a file
- Does *not* support all Python types, e.g. sets are not supported, and tuples are saved (and later loaded) as lists

# JSON example

json-example.py

```
import json
FILE = 'json-data.json'
data = ((None, True), (42.7, (42,)), [3,2,4], (5,6,7),
 {'b': 'banana', 'a': 'apple', 'c': 'coconut'})

with open(FILE, 'w') as outfile:
 json.dump(data, outfile, indent=2, sort_keys=True)

with open(FILE) as infile:
 indata = json.load(infile)

print(indata)
```

Python shell


```
| [[None, True], [42.7, [42]], [3, 2, 4], [5, 6, 7], {'a': 'apple', 'b': 'banana', 'c': 'coconut'}]
```

json-data.json

```
[[null, true],
 [42.7,
 [42],
 [3, 2, 4],
 [5, 6, 7],
 {
 "a": "apple",
 "b": "banana",
 "c": "coconut"
 }
]
]
```

# XML - eXtensible Markup Language

- XML is a widespread used data format to store hierarchical data with **tags** and **attributes**

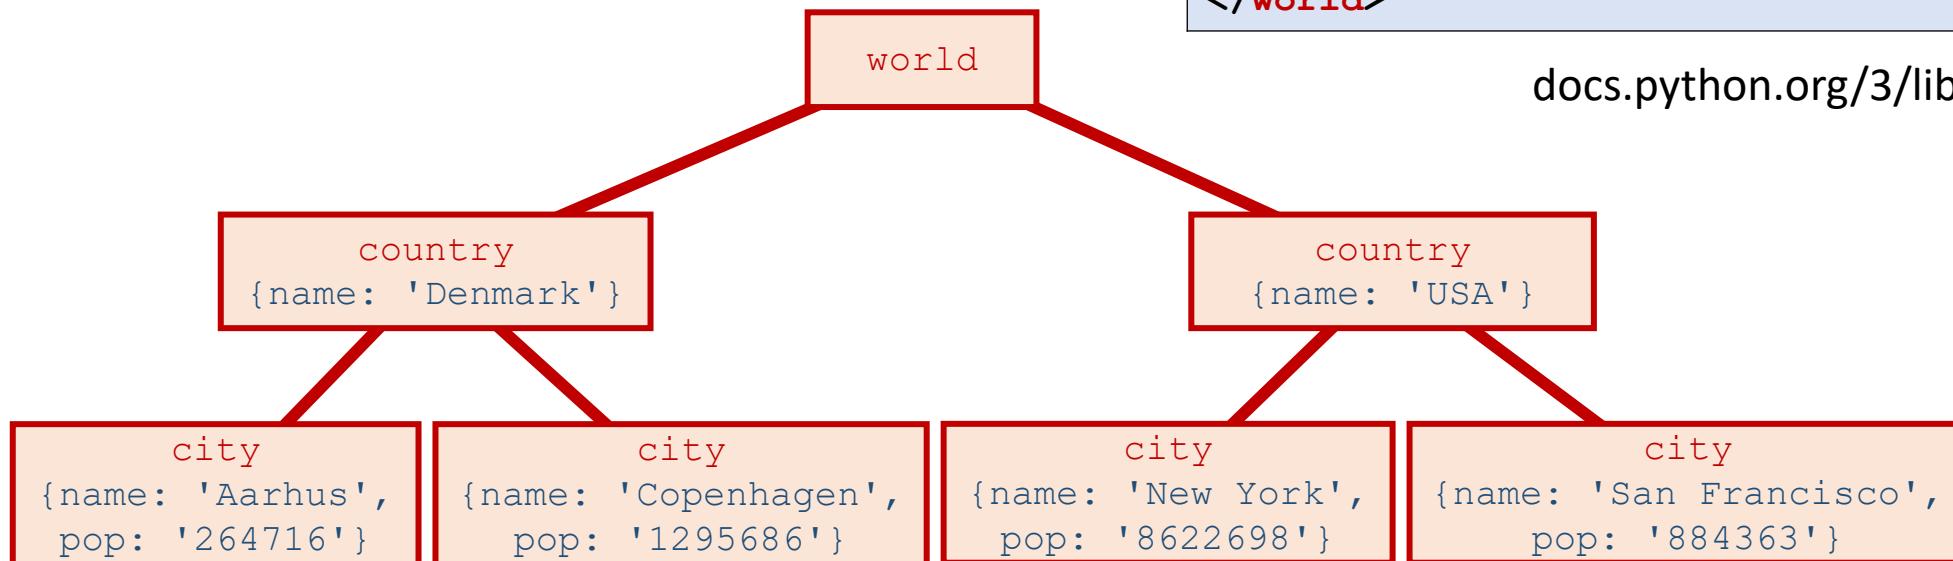

`cities.xml`

```
<?xml version="1.0"?>
<world>
 <country name="Denmark">
 <city name="Aarhus" pop="264716"/>
 <city name="Copenhagen" pop="1295686"/>
 </country>
 <country name="USA">
 <city name="New York" pop="8622698"/>
 <city name="San Francisco" pop="884363"/>
 </country>
</world>
```

[docs.python.org/3/library/xml.html](https://docs.python.org/3/library/xml.html)

## xml-example.py

```
import xml.etree.ElementTree as ET
FILE = 'cities.xml'
tree = ET.parse(FILE) # parse XML file to internal representation
root = tree.getroot() # get root element
for country in root:
 for city in country:
 print(city.attrib['name'], # get value of attribute for an element
 'in',
 country.attrib['name'],
 'has a population of',
 city.attrib['pop'])
print(root.tag, root[0][1].attrib) # the tag & indexing the children of an element
print([city.attrib['name'] for city in root.iter('city')]) # .iter finds elements
```

## Python shell

```
| Aarhus in Denmark has a population of 264716
| Copenhagen in Denmark has a population of 1295686
| New York in USA has a population of 8622698
| San Francisco in USA has a population of 884363
world {'name': 'Copenhagen', 'pop': '1295686'}
['Aarhus', 'Copenhagen', 'New York', 'San Francisco']
```

## cities.xml

```
<?xml version="1.0"?>
<world>
 <country name="Denmark">
 <city name="Aarhus" pop="264716"/>
 <city name="Copenhagen" pop="1295686"/>
 </country>
 <country name="USA">
 <city name="New York" pop="8622698"/>
 <city name="San Francisco" pop="884363"/>
 </country>
</world>
```

# XML tags with text

city-descriptions.xml

```
<?xml version="1.0"?>
<world>
 <country name="Denmark">
 <city name="Aarhus" pop="264716">The capital of Jutland</city>
 <city name="Copenhagen" pop="1295686">The capital of Denmark</city>
 </country>
 <country name="USA">
 <city name="New York" pop="8622698">Known as Big Apple</city>
 <city name="San Francisco" pop="884363">Home of the Golden Gate Bridge</city>
 </country>
</world>
```

xml-descriptions.py

```
import xml.etree.ElementTree as ET
FILE = 'city-descriptions.xml'
tree = ET.parse(FILE)
root = tree.getroot()

for city in root.iter('city'):
 print(city.get('name'), "-", city.text)
```

Python shell

```
| Aarhus - The capital of Jutland
| Copenhagen - The capital of Denmark
| New York - Known as Big Apple
| San Francisco - Home of the Golden Gate Bridge
```

# Openpyxl - Microsoft Excel 2010 manipulation

openpyxl-example.py

```
from openpyxl import Workbook
from openpyxl.styles import Font, PatternFill


wb = Workbook() # create workbook
ws = wb.active # active worksheet

ws['A1'] = 42
ws['B3'] = 7
ws['C2'] = ws['A1'].value + ws['B3'].value
ws['D3'] = '=A1+B3+C2'

ws.title = 'My test sheet'

ws['A1'].fill = PatternFill('solid', fgColor='ffff00')
ws['C2'].font = Font(bold=True)

wb.save("openpyxl-example.xlsx")
```

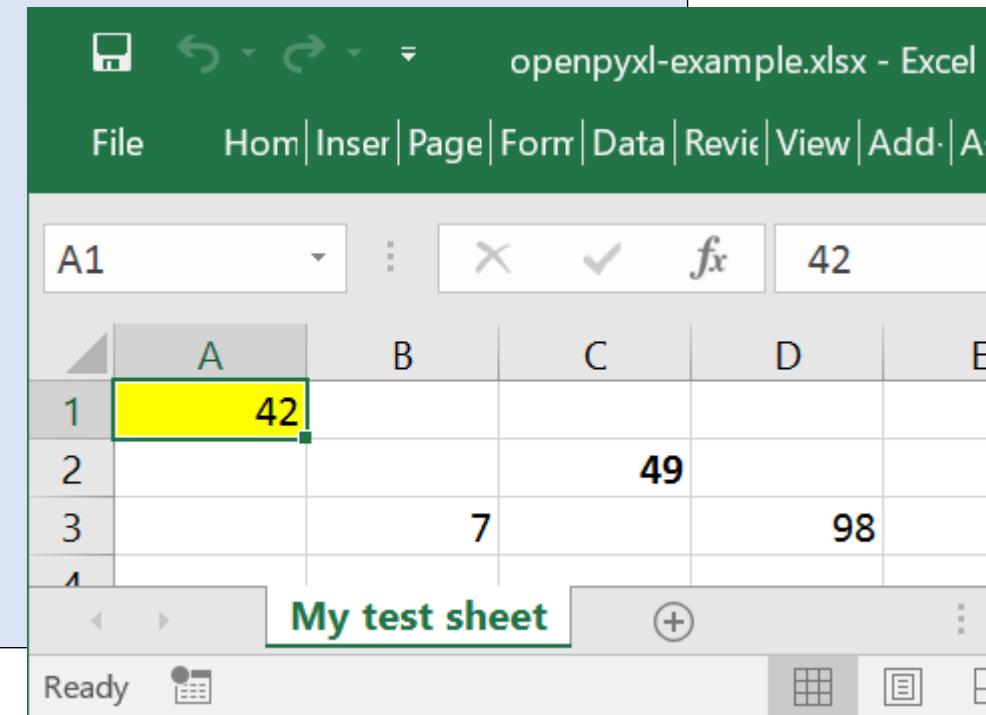

# String searching using `find`

- Search for first occurrence of `substring` in `str[start, end]`  
`str.find(substring[, start[, end]])`
- Returns -1 if no occurrence found.
- `.index` similar as `.find`, except raises `ValueError` exception if substring not found

`string-search.py`

```
text = 'this is a string - a list of characters'
pattern = 'is'

idx = text.find(pattern)
while idx >= 0:
 print(idx, end=" ")
 idx = text.find(pattern, idx + 1)
```

`Python shell`

```
| 2 5 22
```


# Is `str.find` fast?

- Typically linear
- Until Python 3.9 in some cases quadratic

```
"A2nBAn".find("AnBAn")
```

- [docs.python.org/3/whatsnew/3.10.html](https://docs.python.org/3/whatsnew/3.10.html)

*"Substring search functions such as `str1 in str2` and `str2.find(str1)` now sometimes use Crochemore & Perrin's "Two-Way" string searching algorithm to avoid quadratic behavior on long strings."*

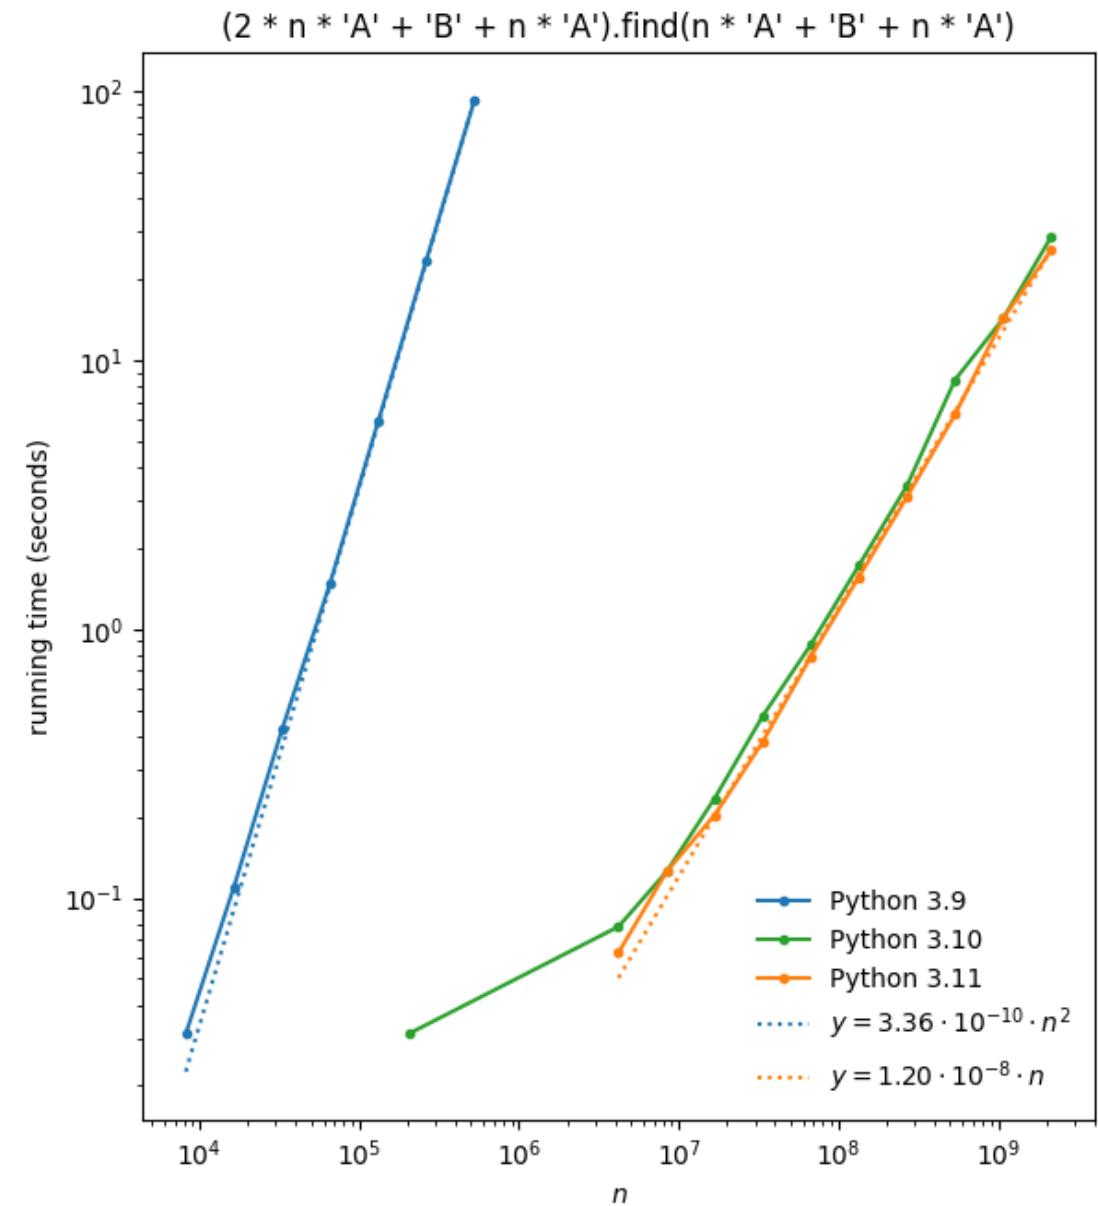

# Regular expression

## – A powerful language to describe sets of strings

- **Examples**
  - abc denotes a string of letters
  - ab<sup>\*</sup>c any string starting with a, followed by an arbitrary number of bs and terminated by c, i.e. {ac, abc, abbc, abbbc, ...}
  - ab<sup>+</sup>c equivalent to abb<sup>\*</sup>c, i.e. there must be at least one b
  - a\w{c} any three letter string, starting with a and ending with c, where second character is any character in [a-zA-Z0-9\_]
  - a[xyz]c any three letter string, starting with a and ending with c, where second character is either x, y or z
  - a[^xyz]c any three letter string, starting with a and ending with c, where second character is *none* of x, y or z
  - ^xyz match at start of string (prefix)
  - xyz\$ match at end of string (suffix)
  - ...
- See [docs.python.org/3/library/re.html](https://docs.python.org/3/library/re.html) for more

# String searching using regular expressions

- `re.search(pattern, text)`
  - find the first occurrence of *pattern* in *text* – returns None or a *match object*
- `re.findall(pattern, text)`
  - returns a list of non-overlapping occurrence of *pattern* in *text* – returns a list of substrings
- `re.finditer(pattern, text)`
  - iterator returning a match object for each non-overlapping occurrence of *pattern* in *text*

## Python shell

```
> import re
> text = 'this is a string - a list of characters'
> re.findall(r'i\w*', text) # prefix with 'r' for raw string literal
| ['is', 'is', 'ing', 'ist']
> for m in re.finditer(r'a[^at]*t', text):
 print('text[%s, %s] = %s' % (m.start(), m.end(), m.group()))
| text[8, 12] = a st
| text[19, 25] = a list
| text[33, 36] = act
```

# Substitution and splitting using regular expressions

- `re.sub(pattern, replacement, text)`
  - replace any occurrence of the *pattern* in *text* by *replacement*
- `re.split(pattern, text)`
  - split *text* at all occurrences of *pattern*

## Python shell

```
> text = 'this is a string - a list of characters'
> re.sub(r'\w*i\w*', 'X', text) # all words containing i
| 'X X a X - a X of characters'
> re.split(r'[^w]+a[^w]+', text) # split around word 'a'
| ['this is', 'string', 'list of characters']
```

# Regular expression substitution: \b \w \1 \2 ...

- Assume we want to replace "a" with "an" in front of words starting with the vowels a, e, i, o and u.

## Python shell

```
> txt = 'A elephant, a zebra and a ape' # two places to correct
> re.sub('a', 'an', txt)
| 'A elephannt, an zebran annd an anpe' # replaces all letters 'a' with 'an'
> re.sub(r'\ba\b', 'an', txt) # raw string + \b boundary of word
| 'A elephant, an zebra and an ape' # all lower 'a' replaced
> re.sub(r'\b[aA]\b', 'an', txt)
| 'an elephant, an zebra and an ape' # both 'a' and 'A' replaced by 'an'
> re.sub(r'\b([aA])\b', r'\1n', txt) # use () and \1 to reinsert match
| 'An elephant, an zebra and an ape' # kept 'a' and 'A'
> re.sub(r'\b([aA])\s+[aeiou]', r'\1n', txt) # \s+ = one or more whitespace
| 'Anlephant, a zebra and anpe' # missing original whitespace + vowel
> re.sub(r'\b([aA])(\s+[aeiou])', r'\1n\2', txt) # reinsert both () using \1 \2
| 'An elephant, a zebra and an ape'
```

# Fun with strings: Lindenmayer systems (L-systems)

Axiom A		Rules
(1)	AB	$A \rightarrow AB$
(2)	ABA	$B \rightarrow A$
(3)	ABAAB	
(4)	ABAABABA	


## First four iterations of parallel rewriting

*“L-systems were introduced and developed in 1968 by Aristid Lindenmayer, a Hungarian theoretical biologist and botanist at the University of Utrecht. Lindenmayer used L-systems to describe the behaviour of plant cells and to model the growth processes of plant development.”*

- Wikipedia

[en.wikipedia.org/wiki/L-system](https://en.wikipedia.org/wiki/L-system)

# Heighway Dragon

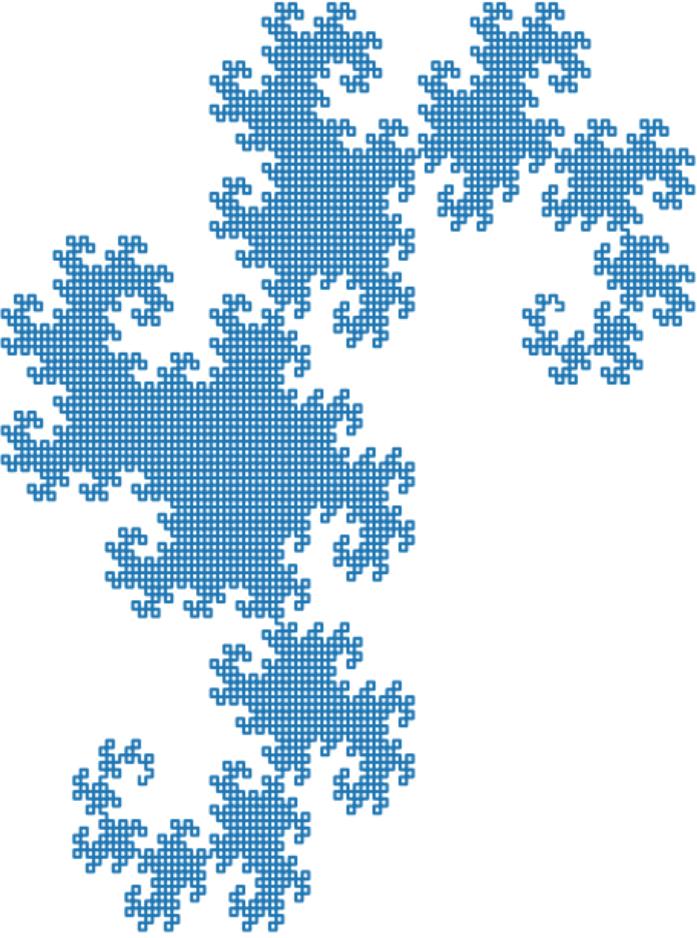

dragon.py

```
import matplotlib.pyplot as plt
from math import sin, cos, radians

axiom = 'FX'
rules = {'X': 'X+YF+', 'Y': '-FX-Y'}

def apply_rules(axiom, rules, repeat):
 for _ in range(repeat):
 axiom = ''.join(rules.get(symbol, symbol) for symbol in axiom)
 return axiom

def walk(commands, position=(0, 0), angle=0, turn=90):
 path = [position]
 for move in commands:
 if move == 'F':
 position = (position[0] + cos(radians(angle)),
 position[1] + sin(radians(angle)))
 path.append(position)
 elif move == '-': angle -= turn
 elif move == '+': angle += turn
 return path

path = walk(apply_rules(axiom, rules, 13))
plt.plot(*zip(*path), '-')
plt.title('Heighway dragon')
plt.show()
```

Interpret the symbols of the resulting string as a walk where 'F' = draw line forward, and '+' and '-' are turn left and right  $90^\circ$  (X and Y are skipped)

# More space filling curves...

Sierpinski triangle



Axiom F-G-G  
 $F \rightarrow F-G+F+G-F$   
 $G \rightarrow GG$


Forward F and G  
Turns 120°

Heighway dragon




Axiom FX  
 $X \rightarrow X+YF+$   
 $Y \rightarrow -FX-Y$

McWorter Pentigree curve



Axiom F-F-F-F-F  
 $F \rightarrow F-F-F++F+F-F$   
Turns 72°


Sierpinski arrowhead curve



Axiom A  
 $A \rightarrow B-A-B$   
 $B \rightarrow A+B+A$

Forward A and B  
Turns 60°

Koch curve

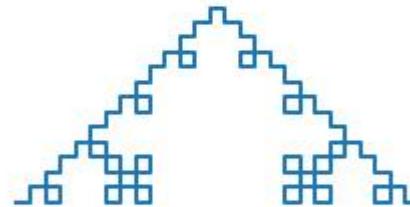


Axiom F  
 $F \rightarrow F+F-F-F+F$

Tree




Axiom F  
 $F \rightarrow F[+FF][-FF]F[-F][+F]F$   
Turns 36°  
[ and ] return to start point when done

Peano curve



Axiom L  
 $L \rightarrow LFRFL-F-RFLFR+F+LFRFL$   
 $R \rightarrow RFLFR+F+LFRFL-F-RFLFR$

Hilbert curve



Axiom L  
 $L \rightarrow +RF-LFL-FR+$   
 $R \rightarrow -LF+RFR+FL-$

Cesero fractal



Axiom F  
 $F \rightarrow F+F--F+F$

Turns 80°

# More space filling curves... (source code)

space-filling-L\_systems.py

```
import matplotlib.pyplot as plt
from math import sin, cos, radians

def walk(commands,
 pos=(0, 0),
 forward=frozenset('F'),
 angle=0,
 turn=90):
 paths = [[pos]]
 stack = []
 for move in commands:
 if move in forward:
 pos = (pos[0]+cos(radians(angle)),
 pos[1]+sin(radians(angle)))
 paths[-1].append(pos)
 elif move == '-': angle -= turn
 elif move == '+': angle += turn
 elif move == '[':
 stack.append((pos, angle))
 elif move == ']':
 pos, angle = stack.pop()
 paths.append([pos])
 return paths

def apply_rules(axiom, rules, repeat=1):
 for _ in range(repeat):
 axiom = ''.join(rules.get(symbol, symbol) for symbol in axiom)
 return axiom

curves = [# Lindenmayer systems (L-systems)
 ('Sierpinski triangle', 'F-G-G', {'F': 'F-G+F+G-F', 'G': 'GG'}, 5, {'turn': 120, 'forward': {'F', 'G'}}),
 ('Sierpinski arrowhead curve', 'A', {'A': 'B-A-B', 'B': 'A+B+A'}, 5, {'turn': 60, 'forward': {'A', 'B'}}),
 ('Peano curve', 'L', {'L': 'LFRFL-F-RFLFR+F+LFRLF', 'R': 'RFLFR+F+LFRFL-F-RFLFR'}, 3, {}),
 ('Heighway dragon', 'FX', {'X': 'X+YF+', 'Y': '-FX-Y'}, 10, {}),
 ('Koch curve', 'F', {'F': 'F+F-F-F+F'}, 3, {}),
 ('Hilbert curve', 'L', {'L': '+RF-LFL-FR+', 'R': '-LF+RFR+FL-'}, 4, {}),
 ('McWorter Pentigree curve', 'F-F-F-F-F', {'F': 'F-F-F++F+F-F'}, 3, {'turn': 72}),
 ('Tree', 'F', {'F': 'F[+FF][-FF]F[-F][+F]F'}, 3, {'turn': 36}),
 ('Cesero fractal', 'F', {'F': 'F+F--F+F'}, 5, {'turn': 80})
]

for idx, (title, axiom, rules, repeat, walk_arg) in enumerate(curves, start=1):
 paths = walk(apply_rules(axiom, rules, repeat), **walk_arg)
 ax = plt.subplot(3, 3, idx, aspect='equal')
 ax.set_title(title)
 for path in paths:
 plt.plot(*zip(*path), '-')
 plt.axis('off')
 plt.show()
```

## Relational data

- SQLite
- pandas

# Two tables

Table: country			
name	population	area	capital
'Denmark'	5748769	42931	'Copenhagen'
'Germany'	82800000	357168	'Berlin'
'USA'	325719178	9833520	'Washington, D.C.'
'Iceland'	334252	102775	'Reykjavik'

Table: city			
name	country	population	established
'Copenhagen'	'Denmark'	775033	800
'Aarhus'	'Denmark'	273077	750
'Berlin'	'Germany'	3711930	1237
'Munich'	'Germany'	1464301	1158
'Reykjavik'	'Iceland'	126100	874
'Washington D.C.'	'USA'	693972	1790
'New Orleans'	'USA'	343829	1718
'San Francisco'	'USA'	884363	1776

# SQL

pronounced *'es,kju:'el* or *'si:kwəl*

- SQL = Structured Query **Language**
- **Database** = **collection of tables** stored persistently on disk
- ANSI and ISO standards since 1986 and 1987, respectively; origin early 70s
- Widespread used SQL databases (can handle many tables/rows/users): Oracle, MySQL, Microsoft SQL Server, PostgreSQL and IBM DB2
- **SQLite** is a very lightweight version storing a database in a single file, without a separate database server
- SQLite is included in both iOS and Android mobile phones



Table: country			
name	population	area	capital
'Denmark'	5748769	42931	'Copenhagen'
'Germany'	82800000	357168	'Berlin'
'USA'	325719178	9833520	'Washington, D.C.'
'Iceland'	334252	102775	'Reykjavik'

The Course "Database Systems" gives a more in-depth introduction to SQL (MySQL)

# SQL examples

Table: country			
name	population	area	capital
'Denmark'	5748769	42931	'Copenhagen'
'Germany'	82800000	357168	'Berlin'
'USA'	325719178	9833520	'Washington, D.C.'
'Iceland'	334252	102775	'Reykjavik'

- CREATE TABLE country (name, population, area, capital)
- INSERT INTO country VALUES ('Denmark', 5748769, 42931, 'Copenhagen')
- UPDATE country SET population=5748770 WHERE name='Denmark'
- SELECT name, capital FROM country WHERE population >= 1000000  
    > [('Denmark', 'Copenhagen'), ('Germany', 'Berlin'), ('USA', 'Washington, D.C.')]
- SELECT \* FROM country WHERE capital = 'Berlin'  
    > [('Germany', 82800000, 357168, 'Berlin')]
- SELECT country.name, city.name, city.established FROM city, country  
    WHERE city.name=country.capital AND city.population < 500000  
    > [('Iceland', 'Reykjavik', 874), ('USA', 'Washington, D.C.', 1790)]
- DELETE FROM country WHERE name = 'Germany'
- DROP TABLE country

## sqlite-example.py

```
import sqlite3

connection = sqlite3.connect('example.sqlite') # creates file if necessary
c = connection.cursor()

c.executescript('''DROP TABLE IF EXISTS country; -- multiple SQL statements
 DROP TABLE IF EXISTS city''')

countries = [('Denmark', 5748769, 42931, 'Copenhagen'),
 ('Germany', 82800000, 357168, 'Berlin'),
 ('USA', 325719178, 9833520, 'Washington, D.C.'),
 ('Iceland', 334252, 102775, 'Reykjavik')]

cities = [('Copenhagen', 'Denmark', 775033, 800),
 ('Aarhus', 'Denmark', 273077, 750),
 ('Berlin', 'Germany', 3711930, 1237),
 ('Munich', 'Germany', 1464301, 1158),
 ('Reykjavik', 'Iceland', 126100, 874),
 ('Washington, D.C.', 'USA', 693972, 1790),
 ('New Orleans', 'USA', 343829, 1718),
 ('San Francisco', 'USA', 884363, 1776)]

c.execute('CREATE TABLE country (name, population, area, capital)')
c.execute('CREATE TABLE city (name, country, population, established)')
c.executemany('INSERT INTO country VALUES (?,?,?,?,?)', countries)
c.executemany('INSERT INTO city VALUES (?,?,?,?,?)', cities)

connection.commit() # save data to database before closing
connection.close()
```

SQLite

# SQLite query examples

try to avoid using the asterisk (\*) as a good habit  
[www.sqlitetutorial.net/sqlite-select](http://www.sqlitetutorial.net/sqlite-select)

## sqlite-example.py

```
for row in c.execute('SELECT * FROM country'): # * = all columns, execute returns iterator
 print(row) # row is by default a Python tuple

for row in c.execute('''SELECT * FROM city, country -- all pairs of rows from city × country
 WHERE city.name = country.capital AND city.population < 700000'''):
 print(row)

print(*c.execute('''SELECT country.name,
 COUNT(city.name) AS cities,
 100 * SUM(city.population) / country.population
 FROM city JOIN country ON city.country = country.name -- SQL join 2 tables
 WHERE city.population > 500000 -- only consider big cities
 GROUP BY city.country -- output has one row per group of rows
 ORDER BY cities DESC, SUM(city.population) DESC'''')) # ordering of output
```

## Python shell

```
| ('Denmark', 5748769, 42931, 'Copenhagen')
| ('Germany', 82800000, 357168, 'Berlin')
| ('USA', 325719178, 9833520, 'Washington, D.C.')
| ('Iceland', 334252, 102775, 'Reykjavik')
|
| ('Reykjavik', 'Iceland', 126100, 874, 'Iceland', 334252, 102775, 'Reykjavik')
| ('Washington, D.C.', 'USA', 693972, 1790, 'USA', 325719178, 9833520, 'Washington, D.C.')
|
| ('Germany', 2, 6) ('USA', 2, 0) ('Denmark', 1, 13)
```

# SQL injection

Right way

```
c.execute('INSERT INTO users VALUES (?)', (user,))
```

## unsafe-example.py

```
import sqlite3

connection = sqlite3.connect('users.sqlite')
c = connection.cursor()
c.execute('CREATE TABLE users (name)')
while True:
 user = input('New user: ')
 c.executescript('INSERT INTO users VALUES ("%s")' % user)
 connection.commit()
 print(list(c.execute('SELECT * FROM users')))
```

can execute a string  
containing several  
SQL statements



Insecure: NEVER  
use % on user input

## Python shell


```
> New user: gerth
| [('gerth',)]
> New user: guido
| [('gerth,), ('guido',)]
> New user: evil"); DROP TABLE users; --
| sqlite3.OperationalError: no such table: users
```

INSERT INTO users VALUES ("evil");  
DROP TABLE users; --

HI, THIS IS  
YOUR SON'S SCHOOL.  
WE'RE HAVING SOME  
COMPUTER TROUBLE.



OH, DEAR - DID HE  
BREAK SOMETHING?

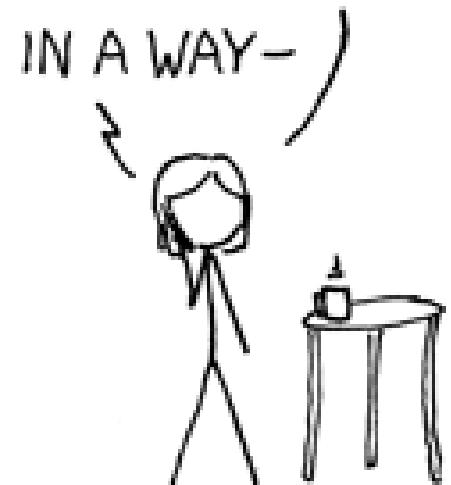

DID YOU REALLY  
NAME YOUR SON  
Robert'); DROP  
TABLE Students;-- ?



OH, YES. LITTLE  
BOBBY TABLES,  
WE CALL HIM.

WELL, WE'VE LOST THIS  
YEAR'S STUDENT RECORDS.  
I HOPE YOU'RE HAPPY.




AND I HOPE  
YOU'VE LEARNED  
TO SANITIZE YOUR  
DATABASE INPUTS.

# Pandas

- Comprehensive Python library for data manipulation and analysis, in particular tables and time series
- Pandas **data frames** = tables
- Supports interaction with SQL, CSV, JSON, ...
- Integrates with Jupyter, numpy, matplotlib, ...

pandas  
 $y_{it} = \beta' x_{it} + \mu_i + \epsilon_{it}$

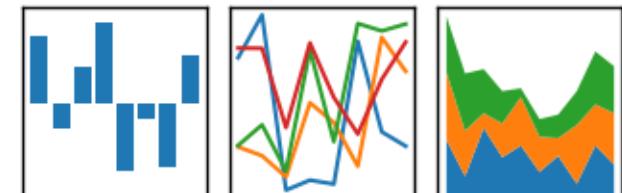

[pandas.pydata.org](http://pandas.pydata.org)

# Pandas integration with Jupyter

- Tables (Pandas data frames) are rendered nicely in Jupyter

In [1]:

```
1 import pandas as pd
2 students = pd.read_csv('students.csv')
3 students
```

Out[1]:

	Name	City
0	Donald Duck	Copenhagen
1	Goofy	Aarhus
2	Mickey Mouse	Aarhus

students.csv

Name,City
"Donald Duck","Copenhagen"
"Goofy","Aarhus"
"Mickey Mouse","Aarhus"

# Reading tables (data frames)

- Pandas provide functions for reading different data formats, e.g. SQLite and .csv files, into pandas.DataFrame

pandas-example.py

```
import pandas as pd

import sqlite3
connection = sqlite3.connect('example.sqlite')
countries = pd.read_sql_query('SELECT * FROM country', connection)
cities = pd.read_sql_query('SELECT * FROM city', connection)
students.to_sql('students', connection, if_exists='replace')
print(students)
```

Python shell

	Name	City
0	Donald Duck	Copenhagen
1	Goofy	Aarhus
2	Mickey Mouse	Aarhus

Table: country

name	population	area	capital
'Denmark'	5748769	42931	'Copenhagen'
'Germany'	82800000	357168	'Berlin'
'USA'	325719178	9833520	'Washington, D.C.'
'Iceland'	334252	102775	'Reykjavik'

# Selecting columns and rows

## Python shell

```
> countries['name'] # select column
> countries.name # same as above
> countries[['name', 'capital']] # select multiple columns, note double-[]
> countries.head(2) # first 2 rows
> countries[1:3] # slicing rows, rows 1 and 2
> countries[::-2] # slicing rows, rows 0 and 2
> countries.at[1, 'area'] # indexing cell by (row label, column name)
> cities[(cities['name'] == 'Berlin') | (cities['name'] == 'Munich')] # select rows
 name country population established
 2 Berlin Germany 3711930 1237 # note original row labels
 3 Munich Germany 1464301 1158
> pd.DataFrame([[1,2], [3, 4], [5,6]], columns=['x', 'y']) # create DF from list
> pd.DataFrame(np.random.random((3,2)), columns=['x', 'y']) # from numpy
```

# Row labels

## Python shell

```
> df = pd.DataFrame(np.arange(1, 13).reshape(3, 4),
 index=['q', 'w', 'e'], # row labels
 columns=['c', 'a', 'd', 'e']) # column names
> df
 c a d e
q 1 2 3 4 # row labels can be strings
w 5 6 7 8
e 9 10 11 12
> df.loc['w':'e', ['e', 'a']] # slice of labeled rows
 e a
w 8 6
e 12 10
> df.loc['w'] # single row
 c 5
 a 6
 d 7
 e 8
Name: w, dtype: int32
> df.iloc[:2,:2] # use iloc to work with integer indexes
 c a
q 1 2
w 5 6
```

# Merging tables and creating a new column

pandas-example.py


```
M = pd.merge(countries, cities, left_on='capital', right_on='name')
both data frames had a 'name' and 'population' column
M1 = M.rename(columns={
 'population_x': 'country_population',
 'population_y': 'capital_population'
})
M2 = M1.drop(columns=['name_x', 'name_y'])
M2['%pop in capital'] = M2.capital_population / M2.country_population
M2.sort_values('%pop in capital', ascending=False, inplace=True)
print(M2[['country', '%pop in capital']])
```

Python shell

```
| country %pop in capital
| 3 Iceland 0.377260 # note row labels are permuted
| 0 Denmark 0.134817
| 1 Germany 0.044830
| 2 USA 0.002131
```

# Pandas datareader and Matplotlib

- pandas\_datareader provides access to many data sources
- dataframes have a .plot method (using matplotlib.pyplot)

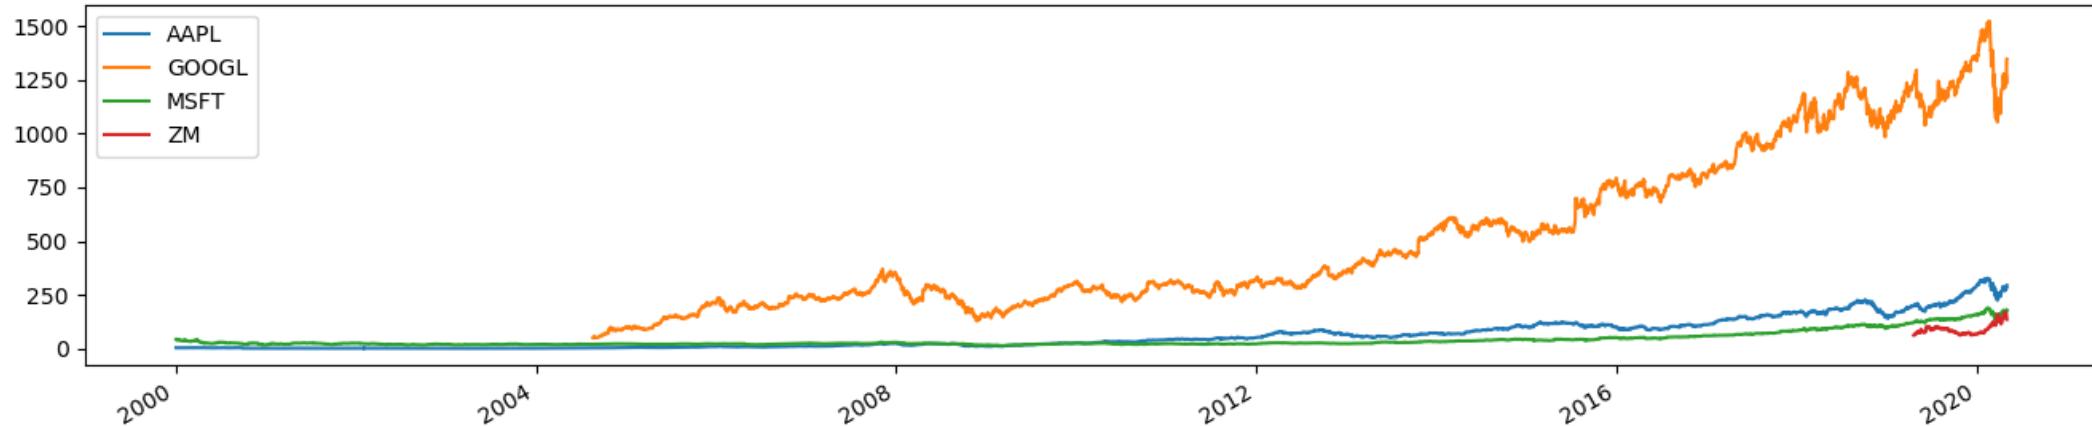

pandas-datareader.py

```
import matplotlib.pyplot as plt
import pandas_datareader
#df = pandas_datareader.data.DataReader(['AAPL', 'GOOGL', 'MSFT', 'ZM'], 'stooq') # ignores start=...
df = pandas_datareader.stooq.StooqDailyReader(['AAPL', 'GOOGL', 'MSFT', 'ZM'], start='2000-01-01').read()
df['Close'].plot()
plt.legend()
plt.show()
```

# Hierarchical / Multi-level indexing (MultiIndex)

## Python shell

```
> df.tail(2)
 Attributes Close ... Volume
 Symbols AAPL GOOGL MSFT ...
 Date
2020-04-29 287.73 1342.18 177.43 ...
2020-04-30 293.80 1346.70 179.21 ...
> df['Close'].tail(2)
 Symbols AAPL GOOGL MSFT ZM
 Date
2020-04-29 287.73 1342.18 177.43 146.48
2020-04-30 293.80 1346.70 179.21 135.17
> df['Close']['GOOGL'].tail(2)
 Date
2020-04-29 1342.18
2020-04-30 1346.70
Name: GOOGL, dtype: float64
> df.loc[:, pd.IndexSlice[:, 'GOOGL']].tail(2)
 Attributes Close High Low Open Volume
 Symbols GOOGL GOOGL GOOGL GOOGL GOOGL
 Date
2020-04-29 1342.18 1360.15 1326.73 1345.00 5417888.0
2020-04-30 1346.70 1350.00 1321.50 1331.36 2788644.0
```

Both rows and columns can have multi-level indexing

## Python shell


```
> df.columns
MultiIndex([('Close', 'AAPL'),
 ('Close', 'GOOGL'),
 ('Close', 'MSFT'),
 ('Close', 'ZM'),
 ('High', 'AAPL'),
 ('High', 'GOOGL'),
 ('High', 'MSFT'),
 ('High', 'ZM'),
 ('Low', 'AAPL'),
 ('Low', 'GOOGL'),
 ('Low', 'MSFT'),
 ('Low', 'ZM'),
 ('Open', 'AAPL'),
 ('Open', 'GOOGL'),
 ('Open', 'MSFT'),
 ('Open', 'ZM'),
 ('Volume', 'AAPL'),
 ('Volume', 'GOOGL'),
 ('Volume', 'MSFT'),
 ('Volume', 'ZM')],
 names=['Attributes', 'Symbols'])
```

THIS IS YOUR MACHINE LEARNING SYSTEM?

YUP! YOU POUR THE DATA INTO THIS BIG  
PILE OF LINEAR ALGEBRA, THEN COLLECT  
THE ANSWERS ON THE OTHER SIDE.

WHAT IF THE ANSWERS ARE WRONG?


JUST STIR THE PILE UNTIL  
THEY START LOOKING RIGHT.

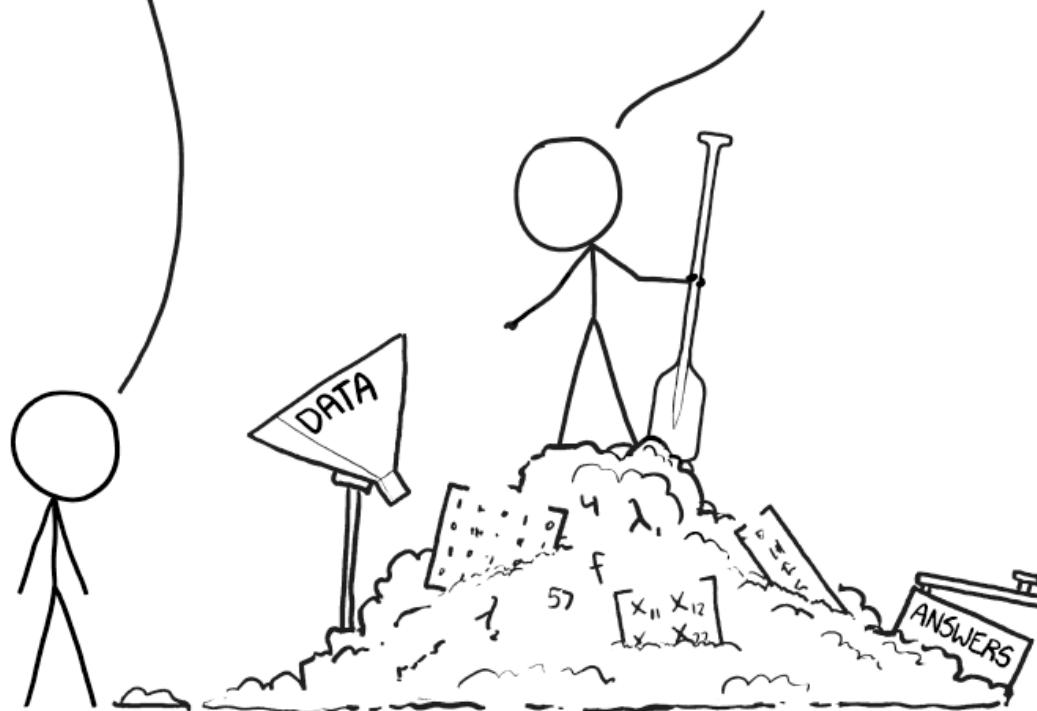

## Clustering

- k-means
- `scipy.cluster.vq.kmeans`
- DBSCAN\*
- neural networks


3 clusters / groups of points

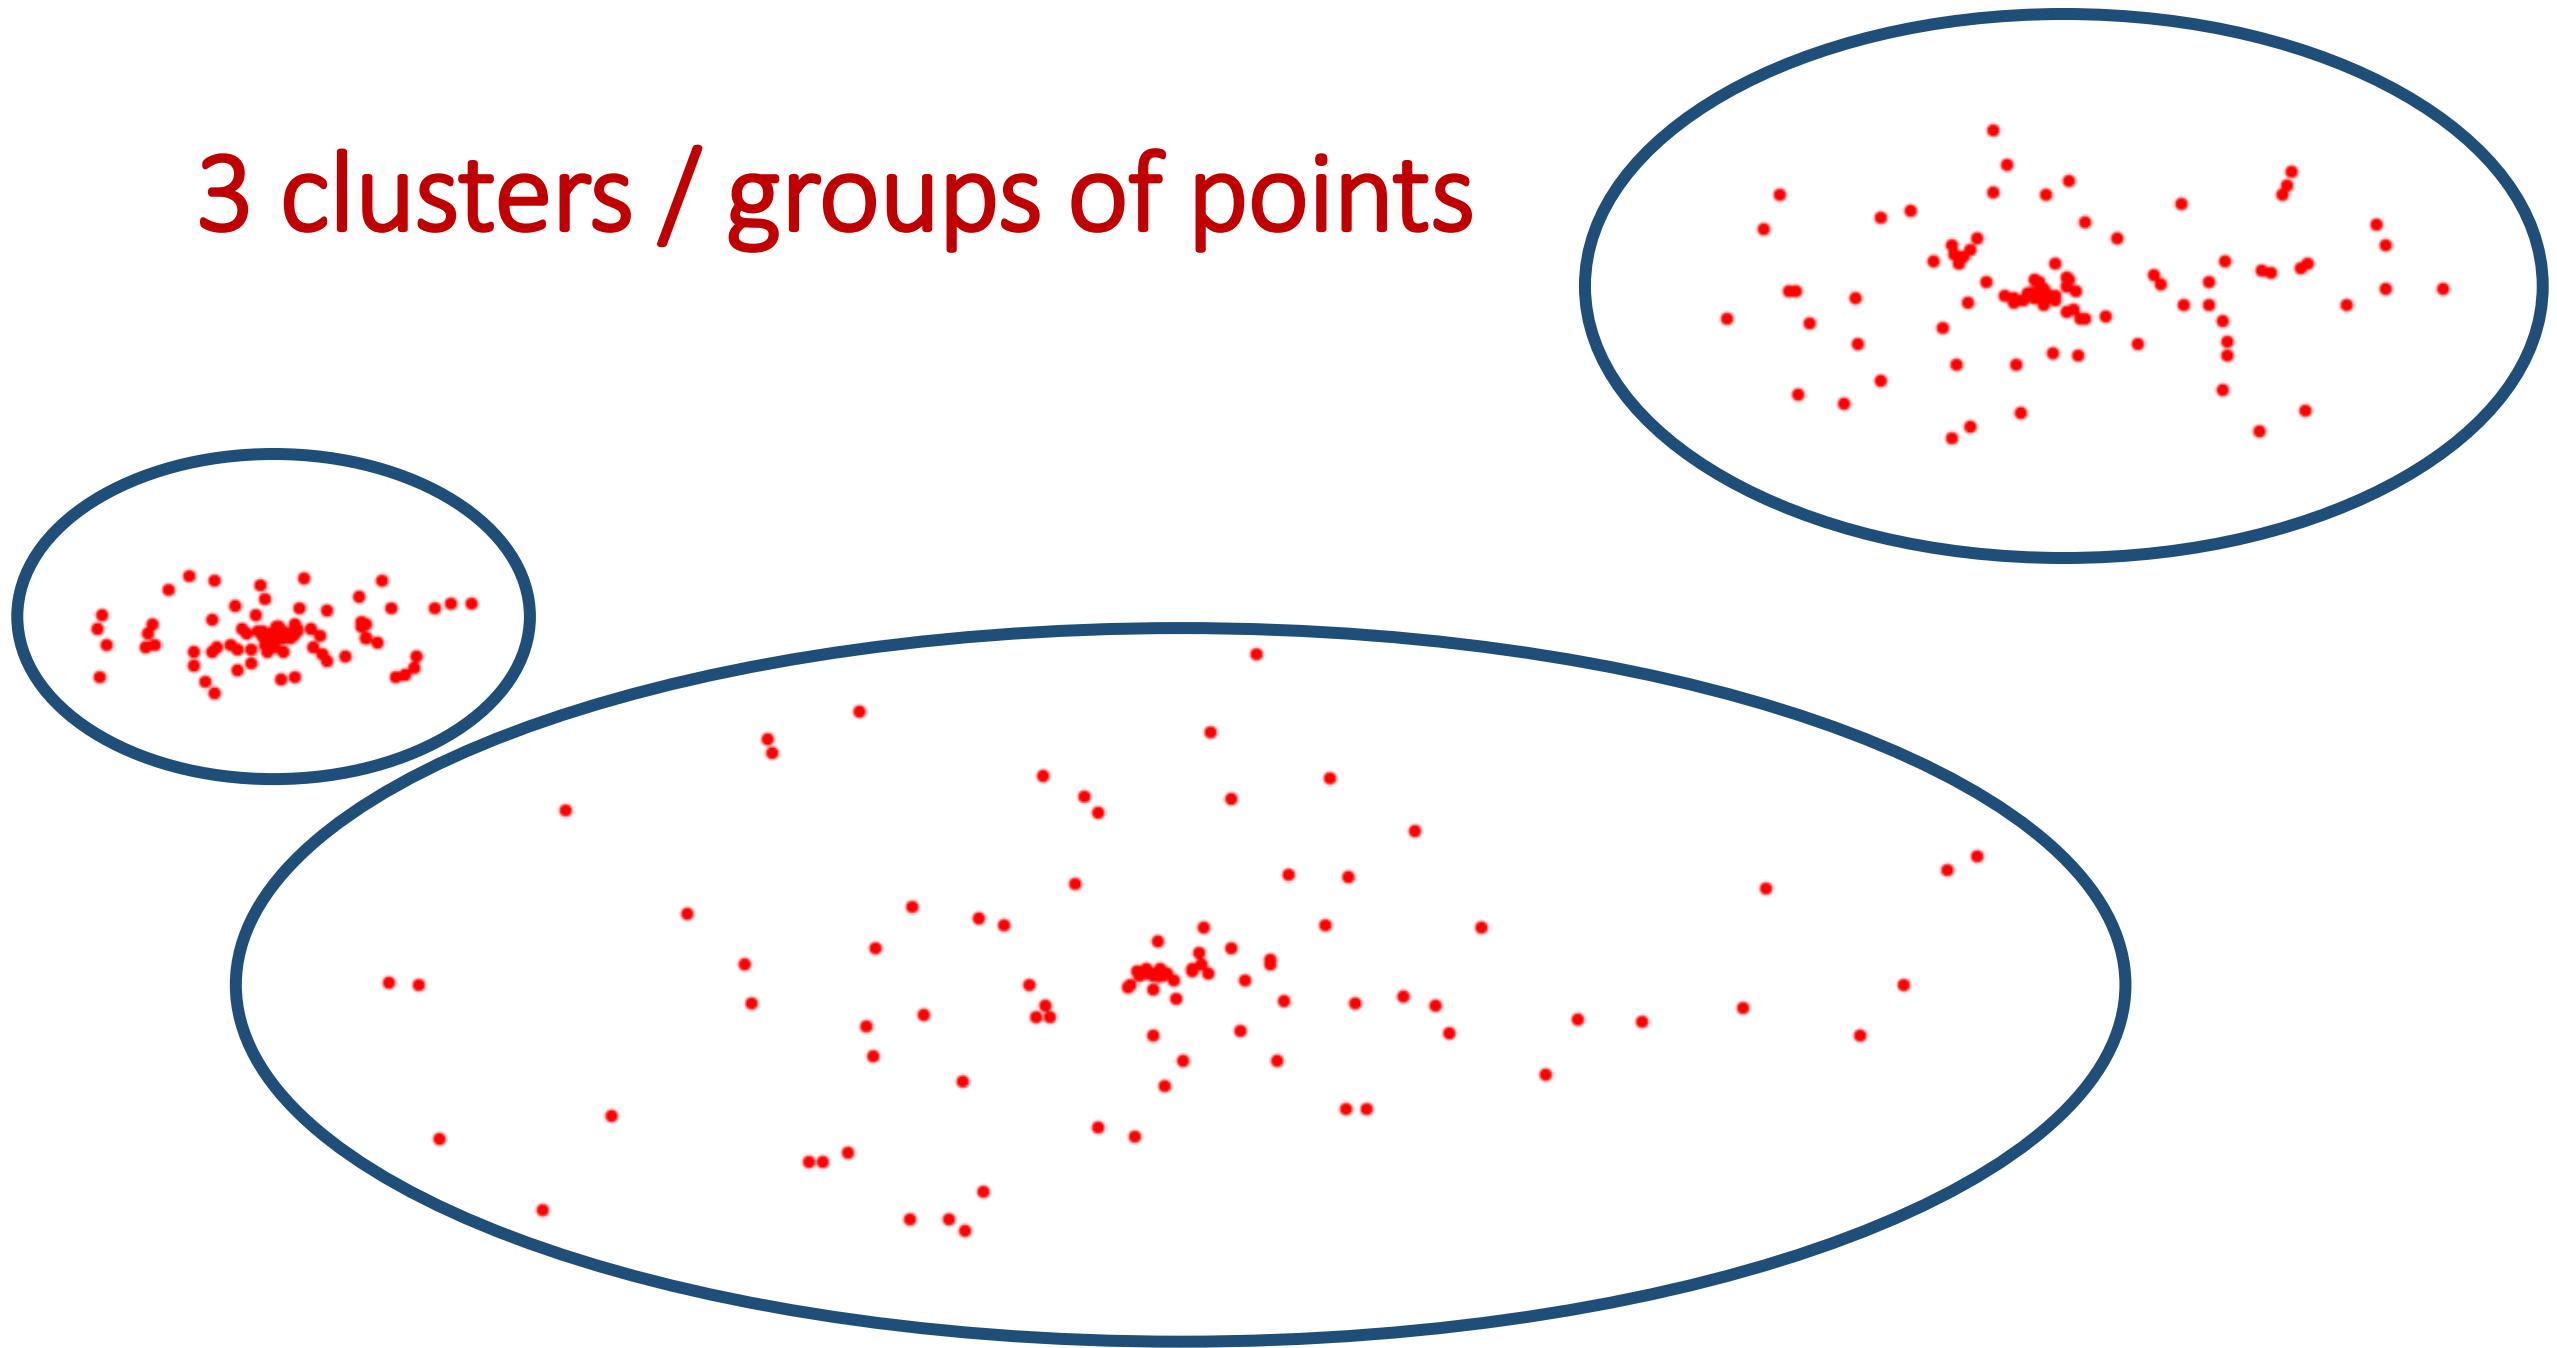

# Clustering = Optimization problem

Example: k-means

- Find  $k$  points *centroids*
- Assign each input point to nearest centroid  $\rightarrow k$  clusters  $\mathcal{C}$
- distortion =  $\sum_{C \in \mathcal{C}} \sum_{p \in C} |p - \text{centroid}(C)|^2$
- **Goal** : Find  $k$  centroids that minimize distortion

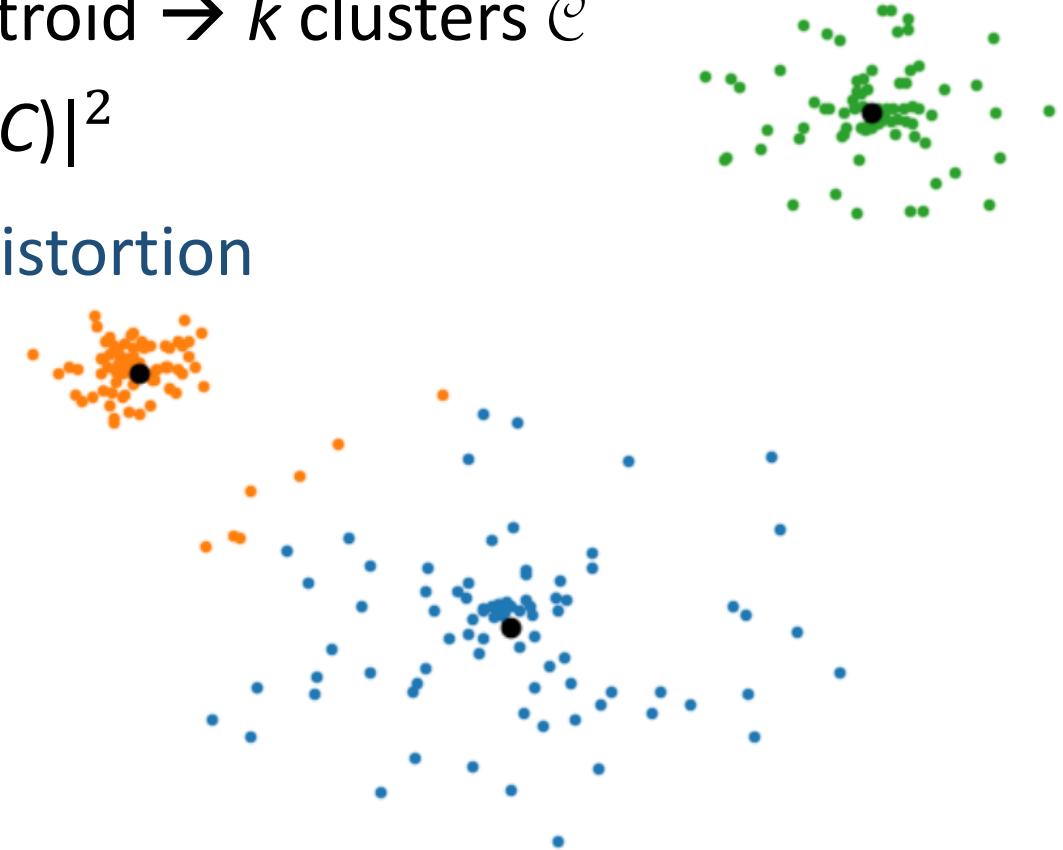


## k-means for $k = 1$

- Let the centroid point  $c$  for a point set  $C$  be the point minimizing the


$$\text{distortion} = \sum_{p \in C} |p - c|^2$$


- Theorem  $c = \text{average}(C)$

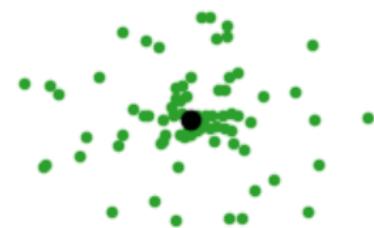


## k-means - Lloyd's method (pseudo code)

```
centroids = k distinct random input points
while centroids change:
 create clusters C by assigning points to the nearest centroid
 centroids = average of each cluster
```

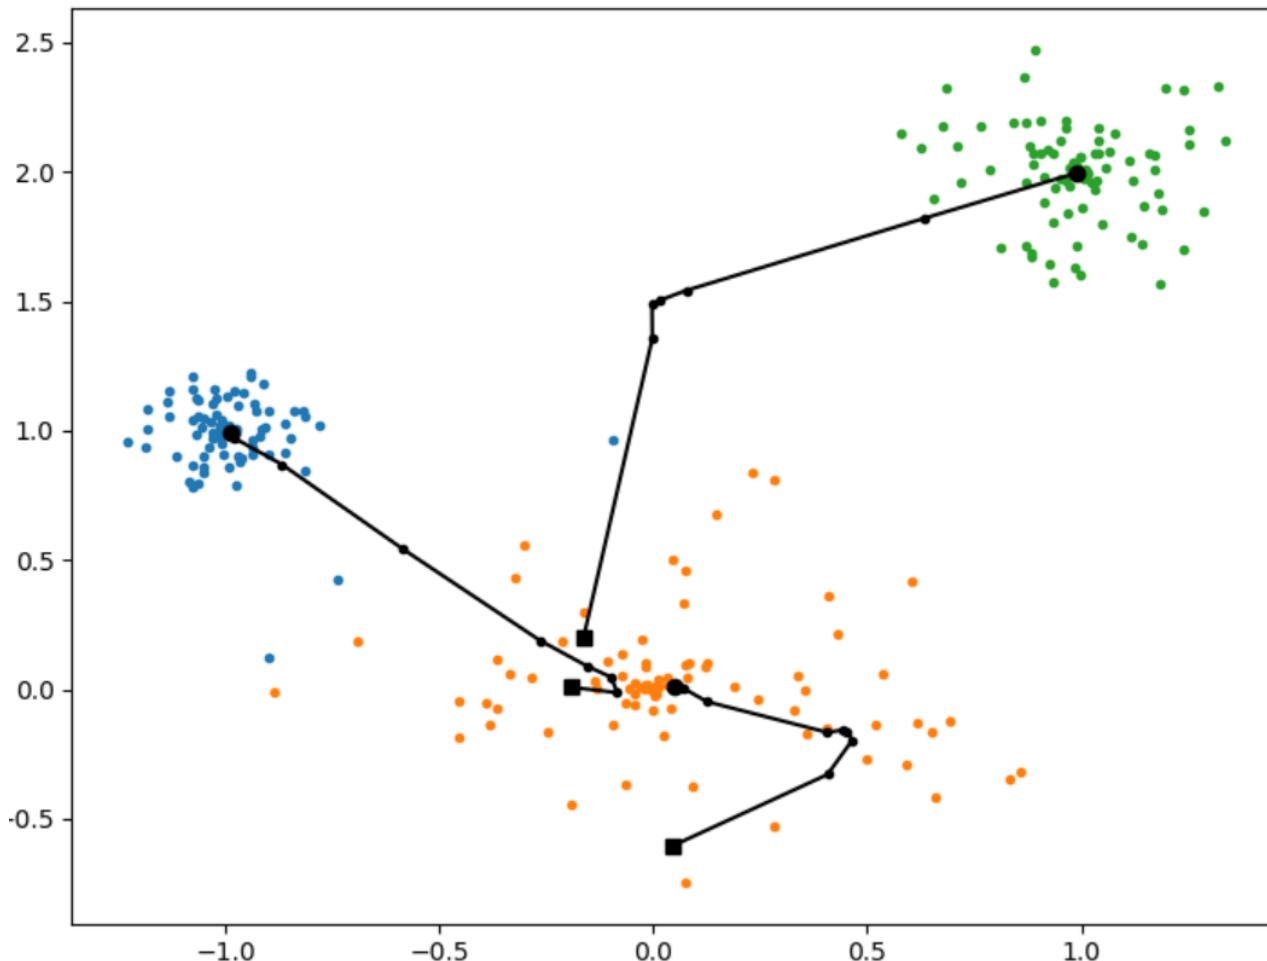

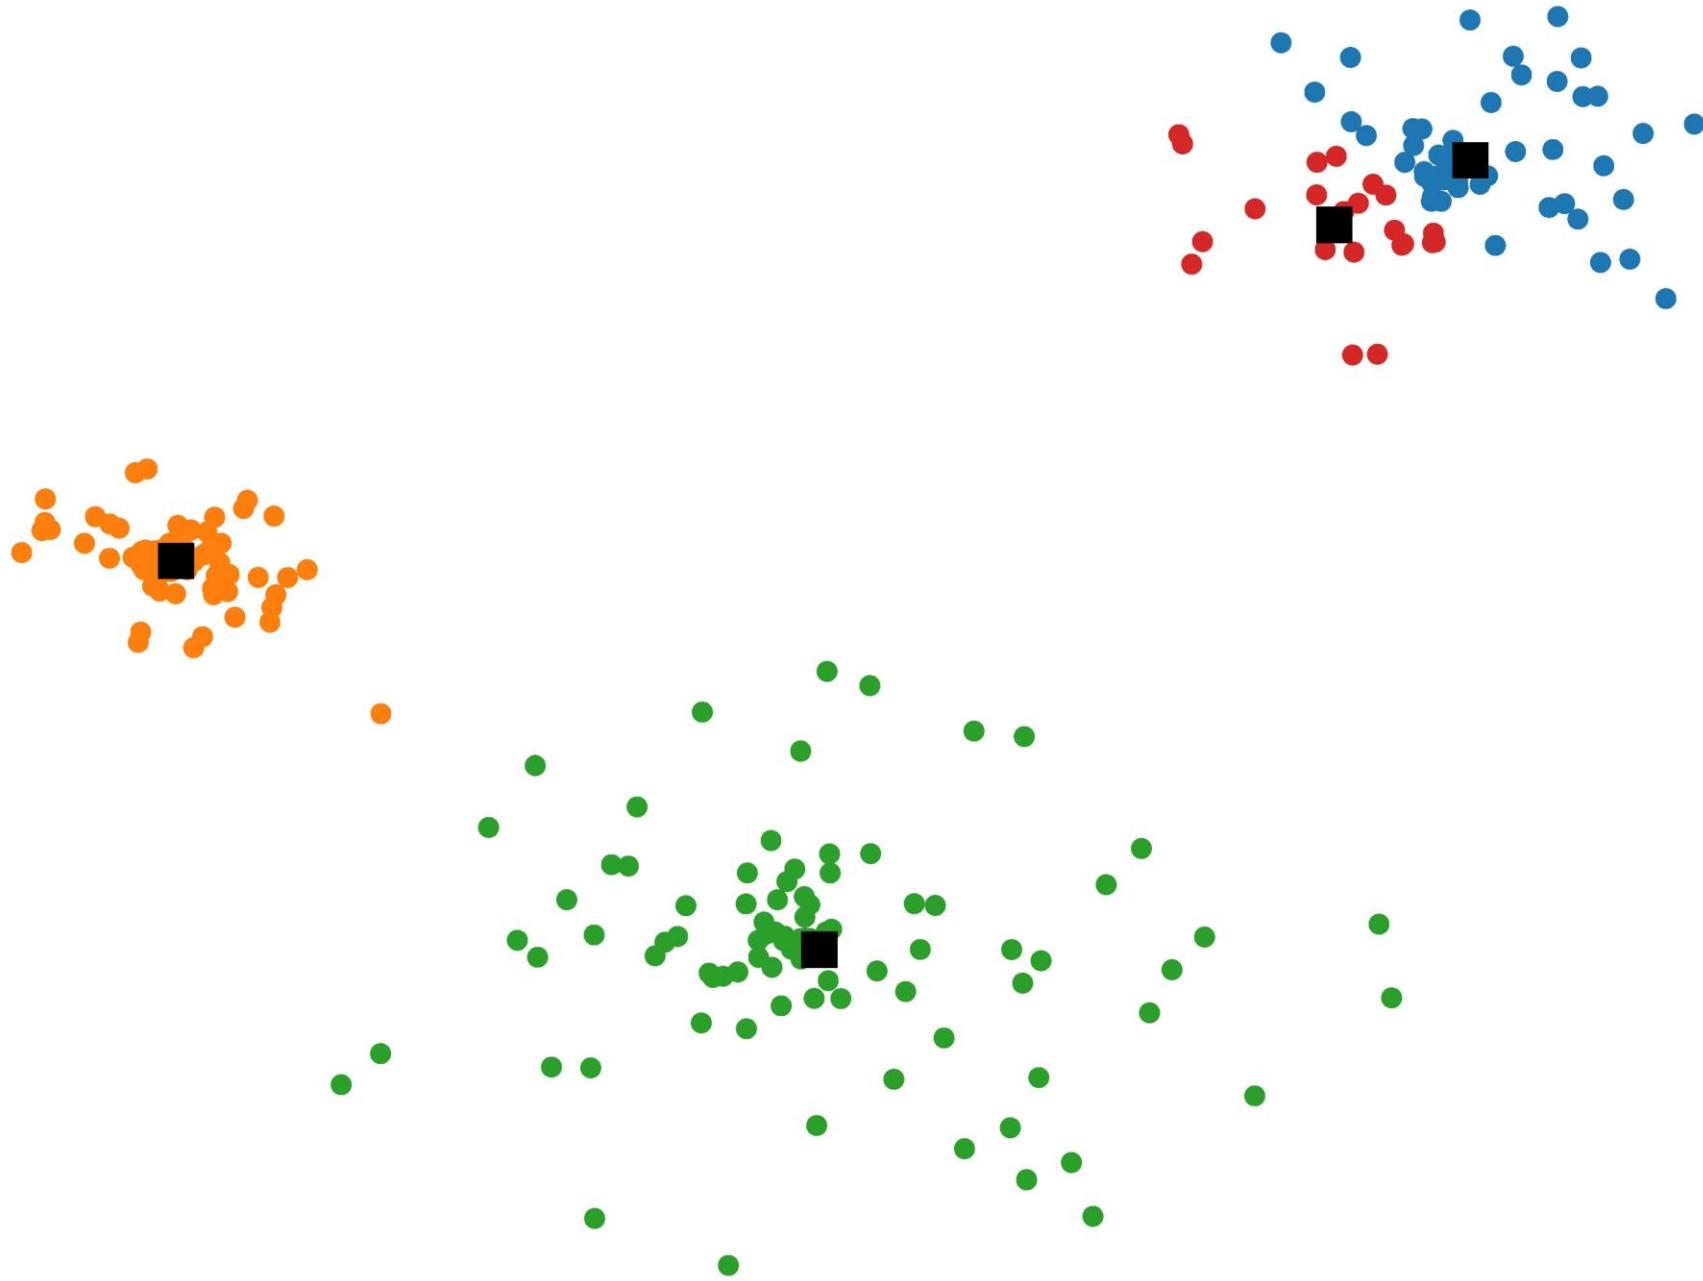

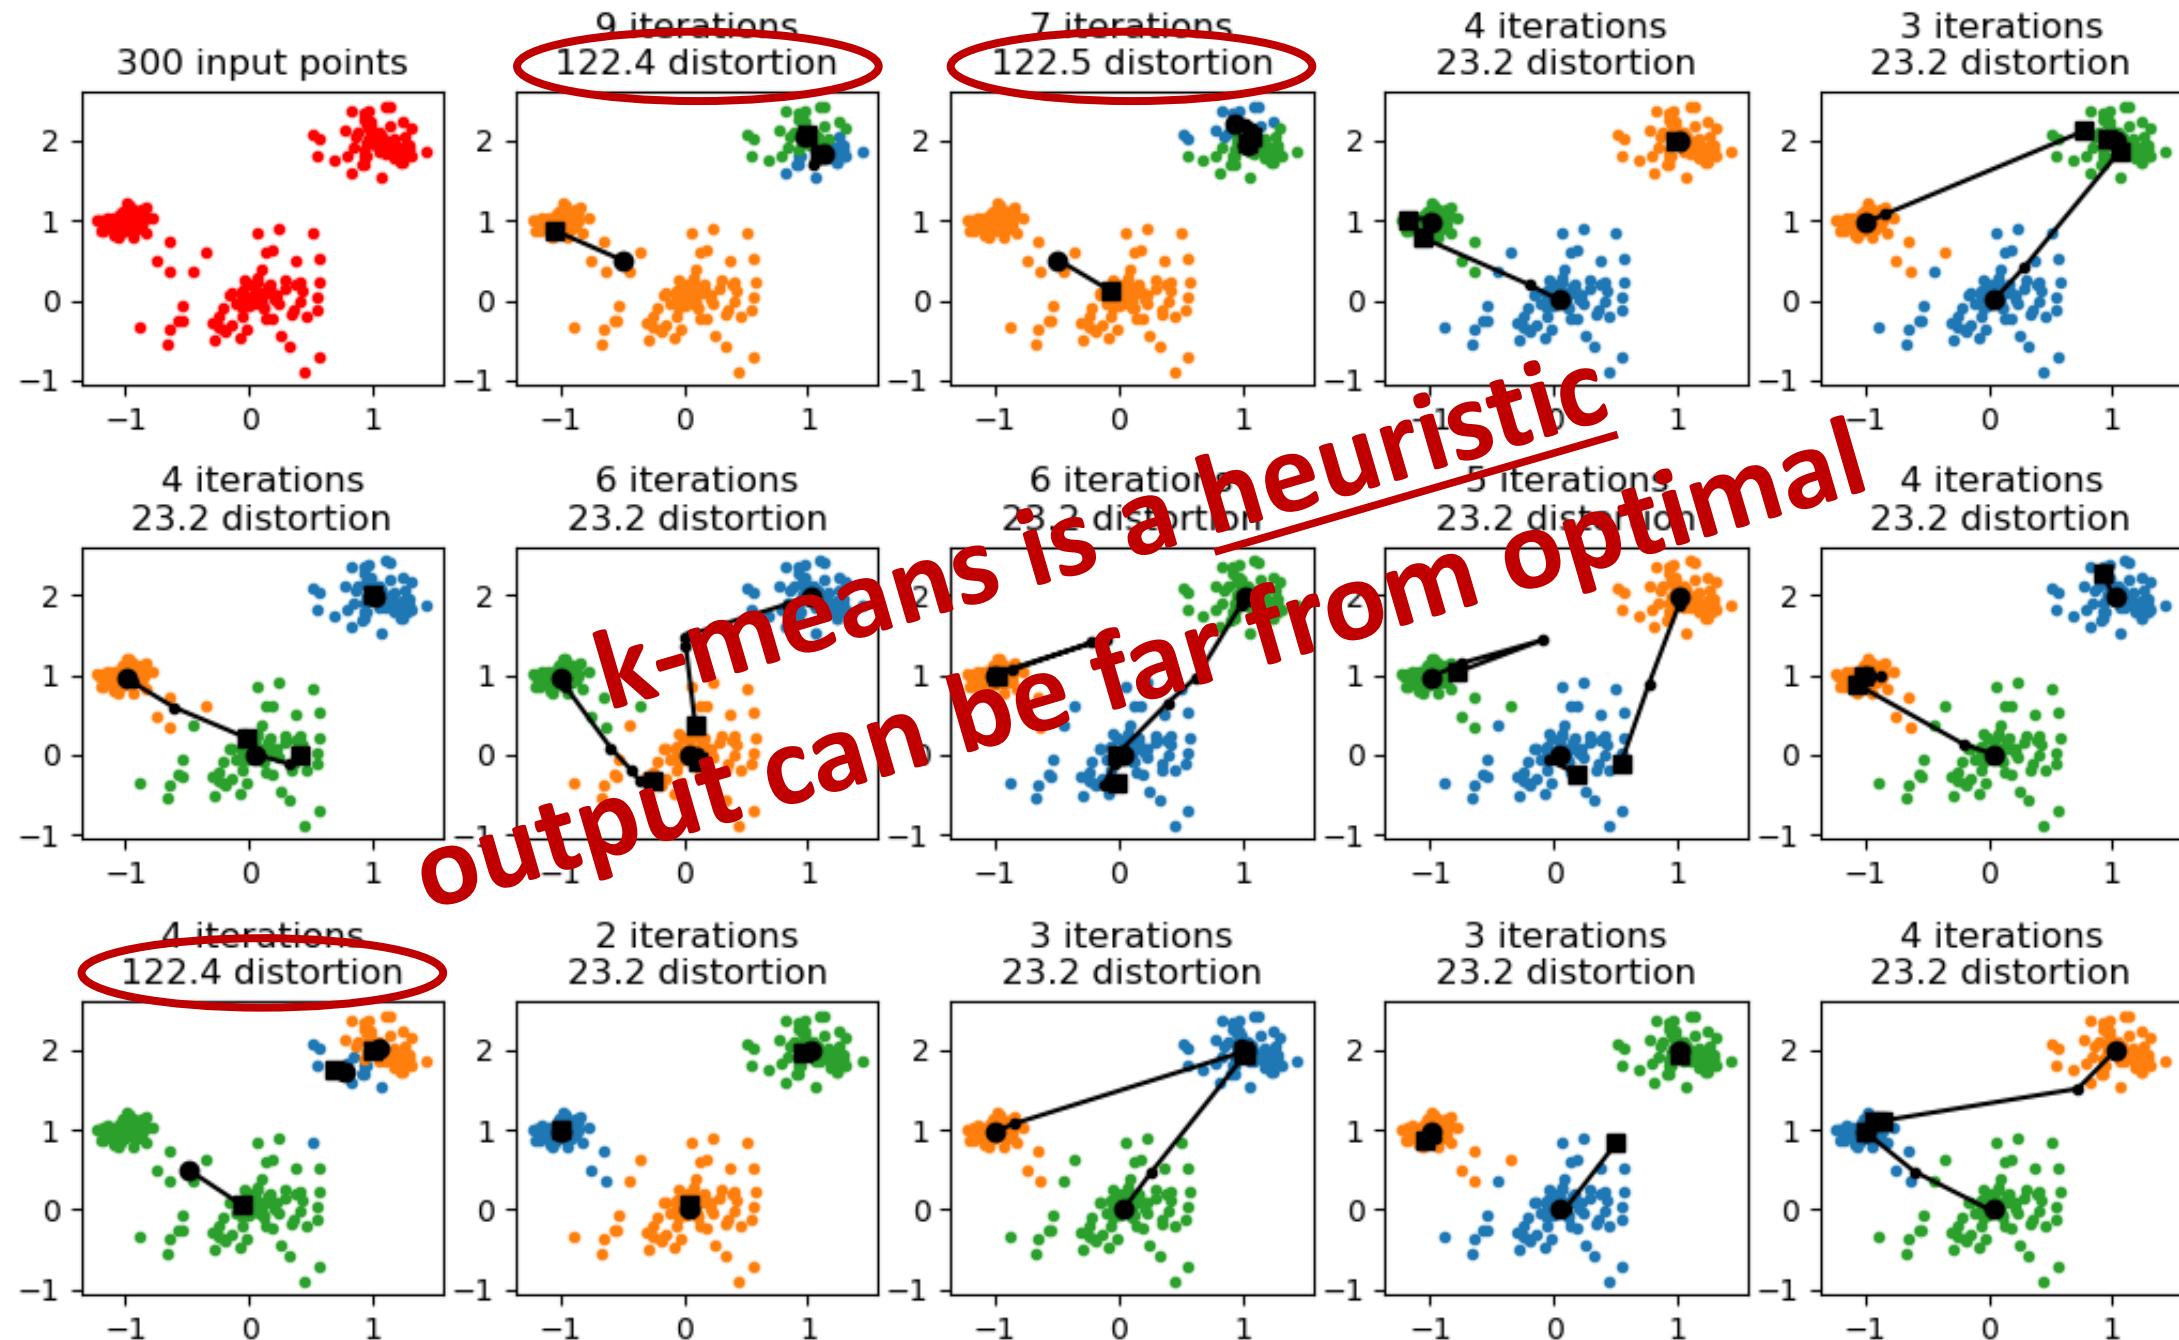


# Generating random points (just one random approach)

k\_means.py


```
from random import random
from math import pi, cos, sin

def random_point(x, y, radius):
 angle = 2 * pi * random()
 r = radius * random() ** 2
 return x + r * cos(angle), y + r * sin(angle)

def random_points(n, x, y, radius):
 for _ in range(n):
 yield random_point(x, y, radius)
```

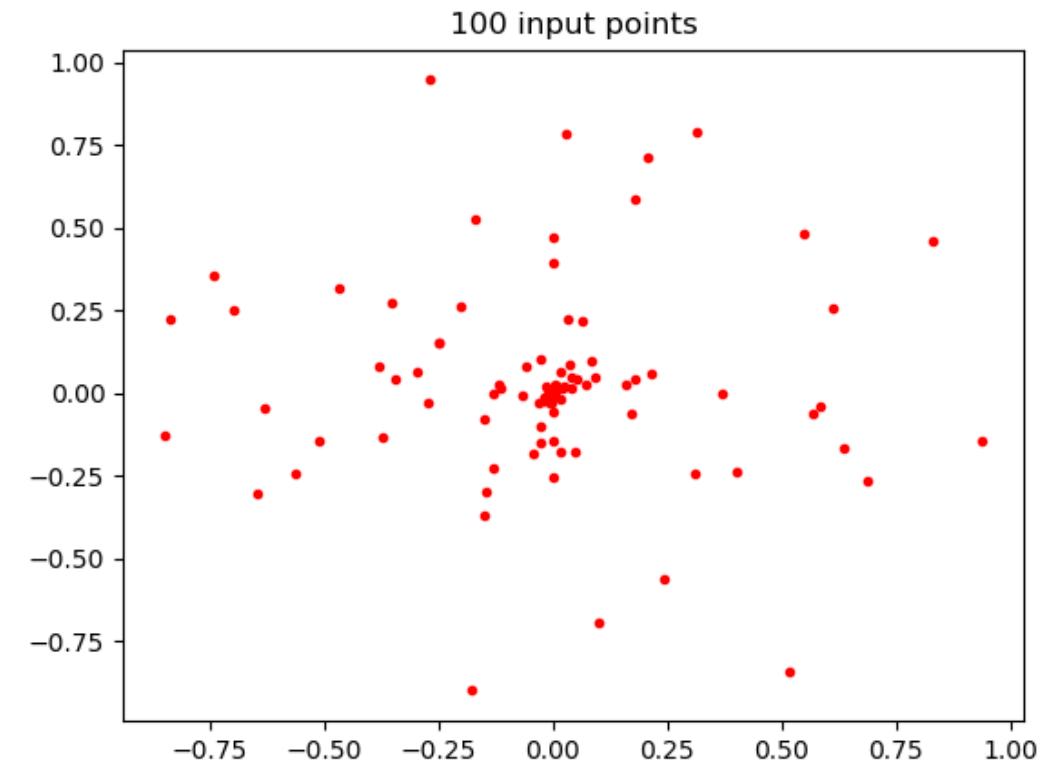

# k-means

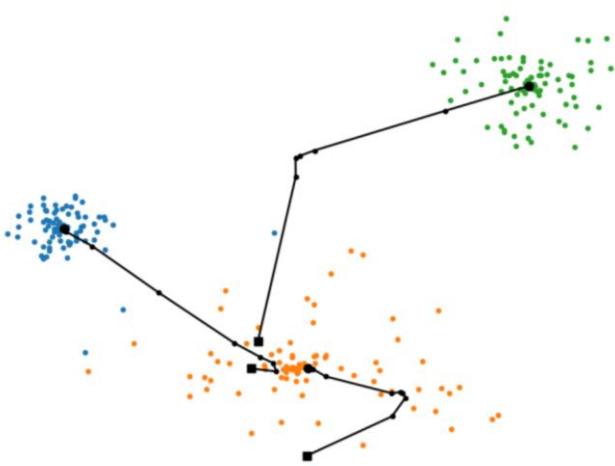

## k\_means.py

```
from random import sample
from numpy import argmin, mean

def k_means(points, k):
 centroid = sample(points, k)
 centroids = [centroid] # history for visualization

 while True:
 clusters = [[] for _ in centroid]
 for p in points:
 i = argmin([dist(p, c) for c in centroid])
 clusters[i].append(p)

 centroid = [tuple(map(mean, zip(*c))) for c in clusters]

 if centroid == centroids[-1]:
 break

 centroids.append(centroid)
 if min(len(c) for c in clusters) == 0:
 print("Not good - empty cluster")
 break

 return clusters
```

# k-mean limitations

- Can easily converge to a solution far from a global minimum
  - Solution – try several times and take the best  
(possibly since we can measure the quality (= distortion) of a solution)
- Clusters can become empty
  - Solution – discard and restart / take a random point out as a new centroid / take point furthest away from existing centroids / ....
- Sensitive to the scales of the different dimensions
  - Solution – apply some kind of initial normalization of coordinates

# k-means - better bounds

- The k-means++ algorithm achieves an expected guarantee to be at most a factor  $8(2 + \ln k)$  from the optimal [Vassilvitskii & Arthur]
- There exist polynomial time approximation schemes that find a solution that is guaranteed  $1 + \varepsilon$  of the optimal (but running time exponential in  $k$  and dimension of points) [Har Peled et al.]
- **In practice: A heuristic is most often the algorithm of choice**

# scipy.cluster.vq.kmeans

k\_means.py


```
from scipy.cluster.vq import kmeans, whiten
import matplotlib.pyplot as plt

points = whiten(points) # normalize variance of points
centroids, distortion = kmeans(points, K)

plt.plot(*zip(*points), 'r.')
plt.plot(*zip(*centroids), 'bo')
plt.title('scipy.cluster.vq.kmeans')
plt.show()
```

**Note:** According to the documentation "whiten must be called prior to passing an observation matrix to kmeans"

scipy.cluser.vq.kmeans

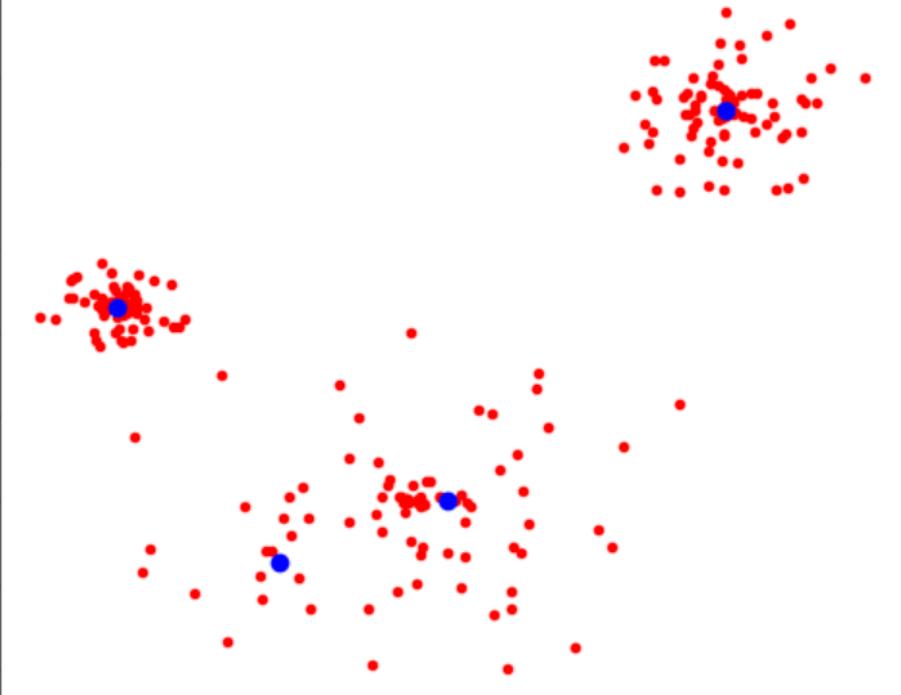


# scipy.cluster.vq.whiten

- Normalizes / scales each dimension to have unit variance 1.0

$$\text{Var}(X) = \frac{1}{n} \sum_{i=1}^n (x_i - \mu)^2 \quad \mu = \frac{1}{n} \sum_{i=1}^n x_i$$

# Other Python clustering methods - `sklearn.cluster`

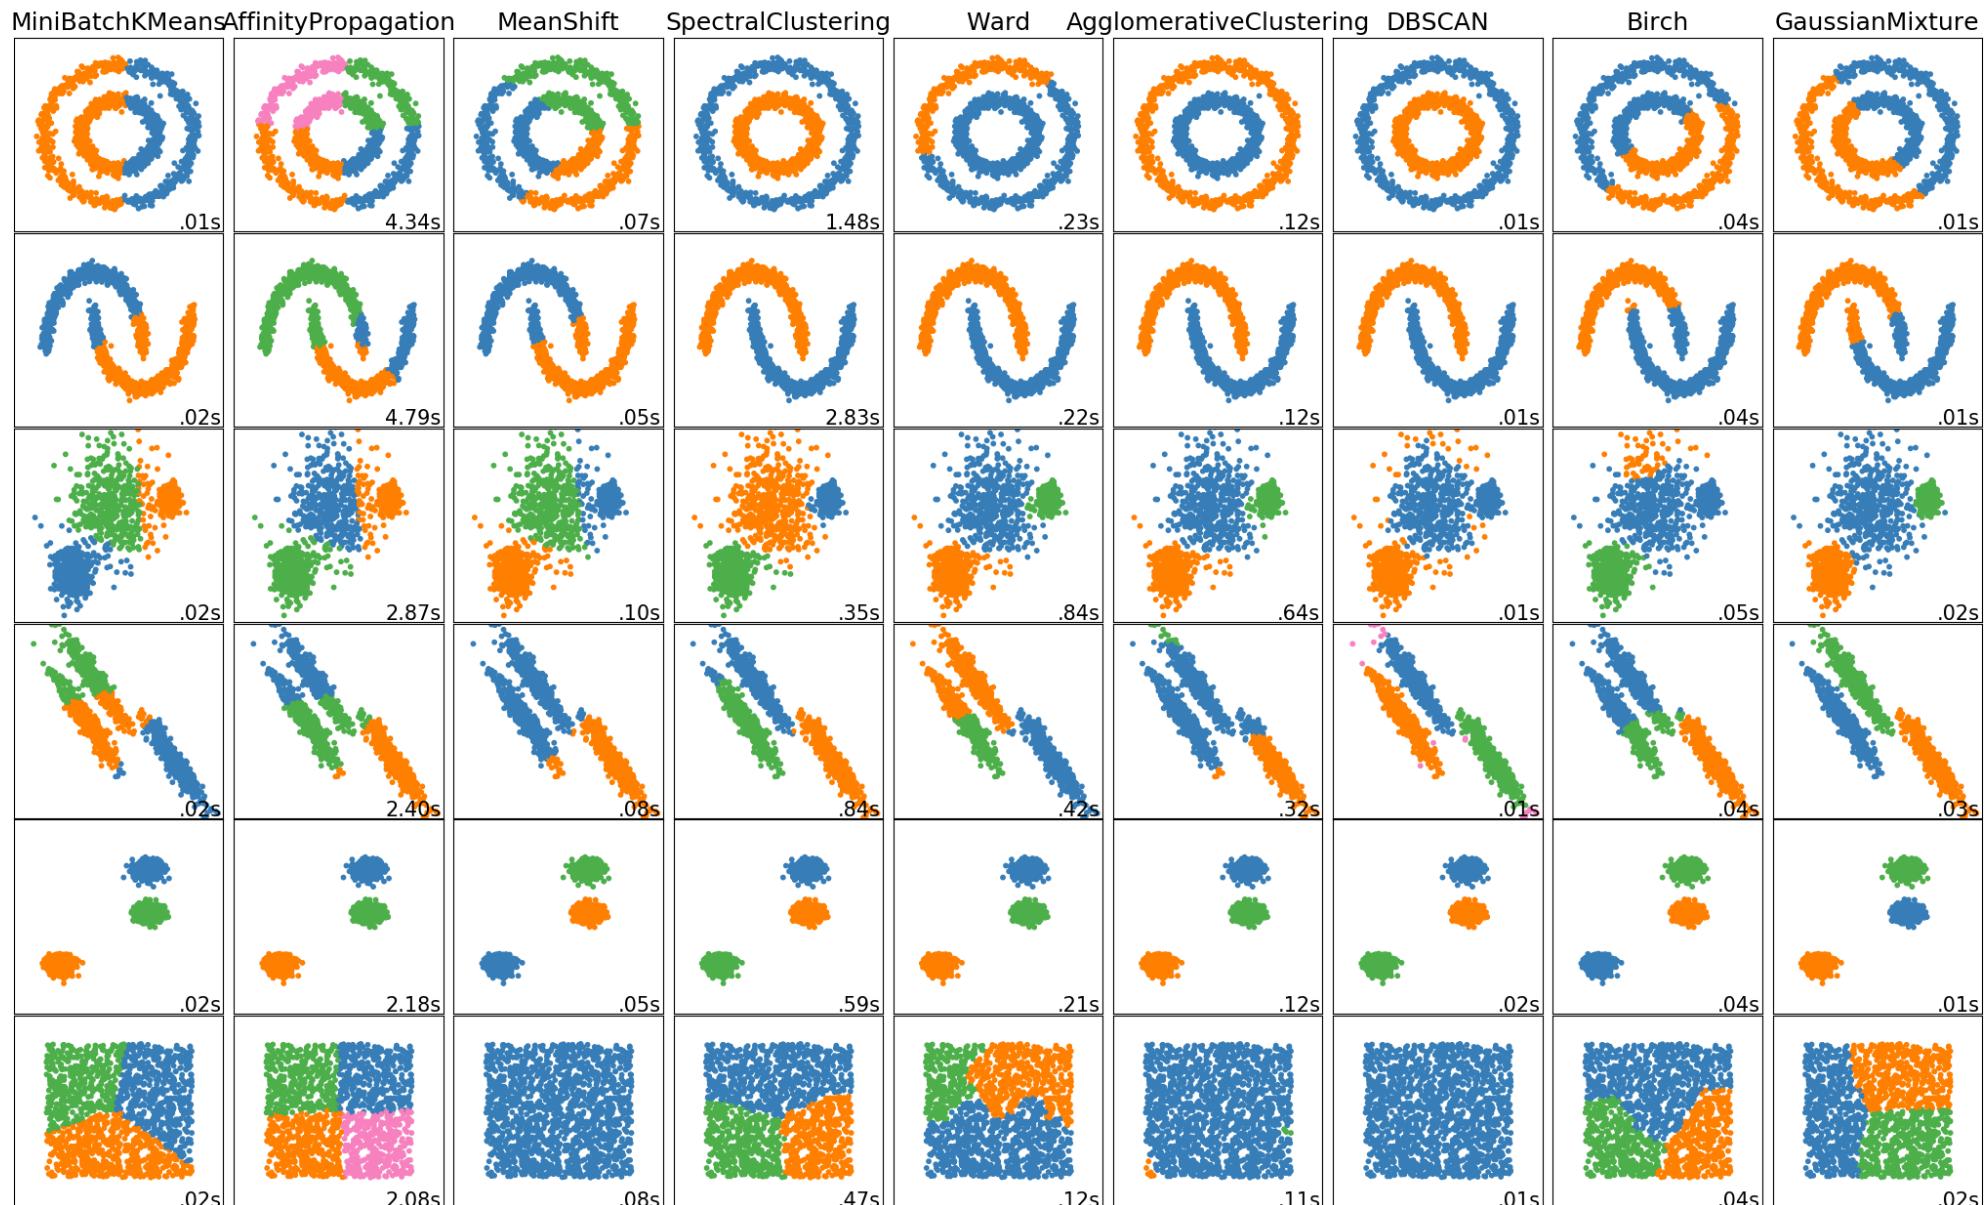

# DBSCAN\*

dbscan.py

```
def dbscan(points, epsilon, m):
 def dist(p, q):
 return sum((pi - qi) ** 2 for pi, qi in zip(p, q))


 def close(p, q):
 return dist(p, q) <= epsilon ** 2

 core, noise, clusters = [], [], []
 for p in points:
 if sum(close(p, q) for q in points) >= m:
 core.append(p)
 else:
 noise.append(p)

 while core:
 cluster = [core.pop()]
 for p in cluster:
 for q in list(core):
 if close(p, q):
 cluster.append(q)
 core.remove(q)
 clusters.append(cluster)

 return clusters, noise
```


- Parameters  $\varepsilon$  and  $m$
- $p$  is a **core point** when  $|\{q \mid |p - q| \leq \varepsilon\}| \geq m$
- Remaining points are **noise**
- Core points  $p$  and  $q$  are in the same **cluster** if  $|p - q| \leq \varepsilon$

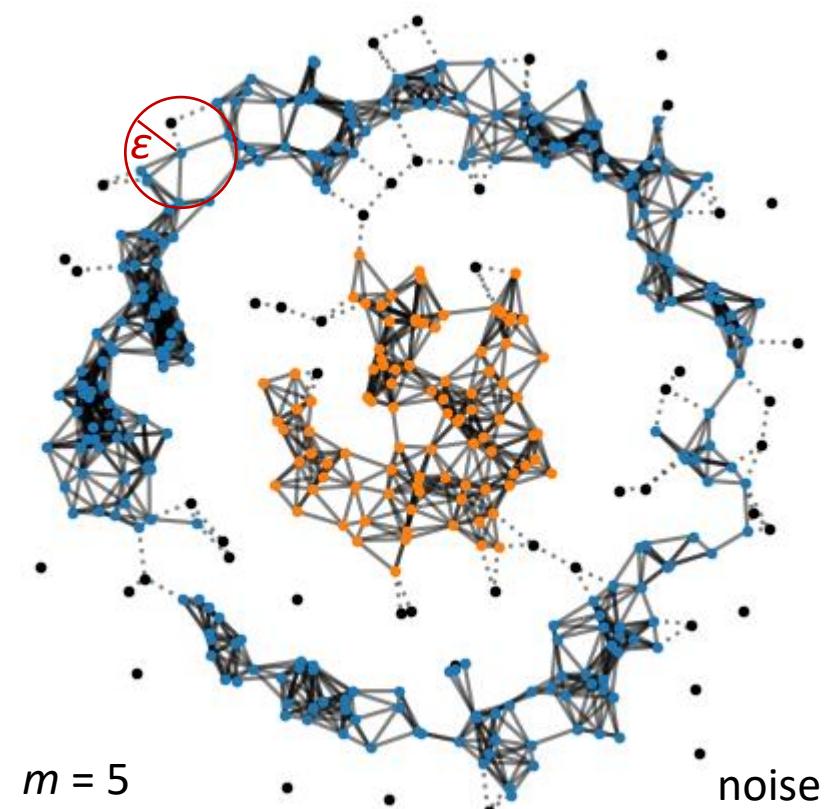

# Data Mining Algorithms

- k-means, and more generally clustering, is just one field in the area of *Data Mining*
- For more information see the webpage  
[Top 10 Data Mining Algorithms, Explained](#)  
a follow up to the below paper
- X. Wu et al., *Top 10 algorithms in data mining*,  
Knowledge and Information Systems, 14(1):1–37, 2008.  
DOI [10.1007/s10115-007-0114-2](#)


# Neural networks (one slide introduction)

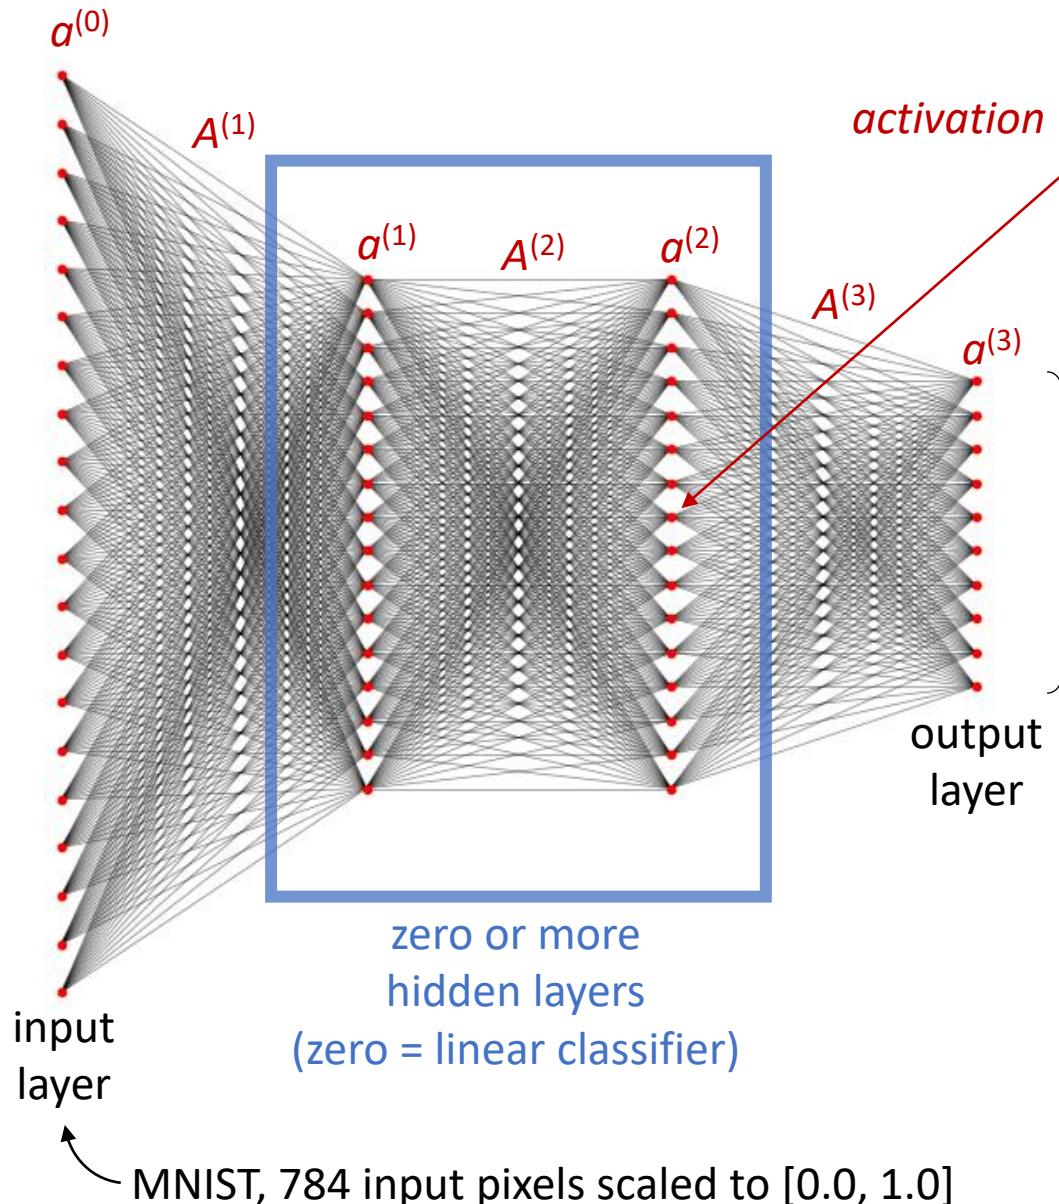

Classification, like MNIST,  
prediction = index of node  
with maximum output

e.g. mean squared error

$$\frac{1}{n} \sum_{(x,y)} |out(x) - y|^2$$

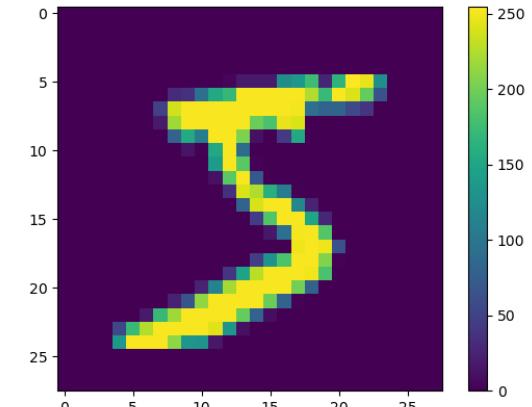


MNIST : 28 x 28 pixel  
values from [0, 255]

Common activation functions

Sigmoid =  $\frac{1}{1+e^{-x}}$

tanh(x)

ReLU = max(0, x)

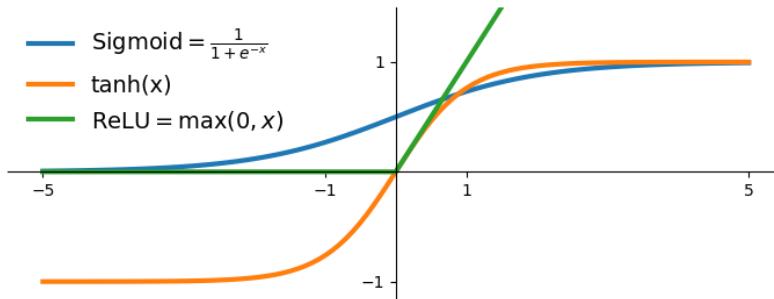

## Learning


Find  $As$  and  $bs$  performing well  
(minimize a cost function) on a set  
of  $n$  training inputs  $x$  with known  
output  $y$  using *backpropagation* /  
*stochastic gradient descend*

# Applying a linear classifier using Numpy: $x \cdot A + b$

## Python shell

```
import matplotlib.pyplot as plt
import numpy as np
from tensorflow import keras
(train_images, train_labels), (test_images, test_labels) = keras.datasets.mnist.load_data()
type(test_images)
> <class 'numpy.ndarray'>
test_images.shape
> (10000, 28, 28) # 10_000 images 28 x 28
test_labels.shape
> (10000,) # 10_000 labels
test_labels[:3] # manually generated labels
> array([7, 2, 1], dtype=uint8)
for i, image in zip(range(3), test_images):
 plt.subplot(1, 3, i + 1)
 plt.imshow(image)
plt.show()

A, b = map(np.array, eval(open('mnist_linear.weights').read())) # read A and b from file
print(A.shape, A.dtype, b.shape, b.dtype)
> (784, 10) float64 (10,) float64
print([np.argmax(image.reshape(28 * 28) @ A + b) for image in test_images[:3]])
> [7, 2, 1] # correct on 9_142 of the 10_000 images for the above file, ie accuracy 91%
```

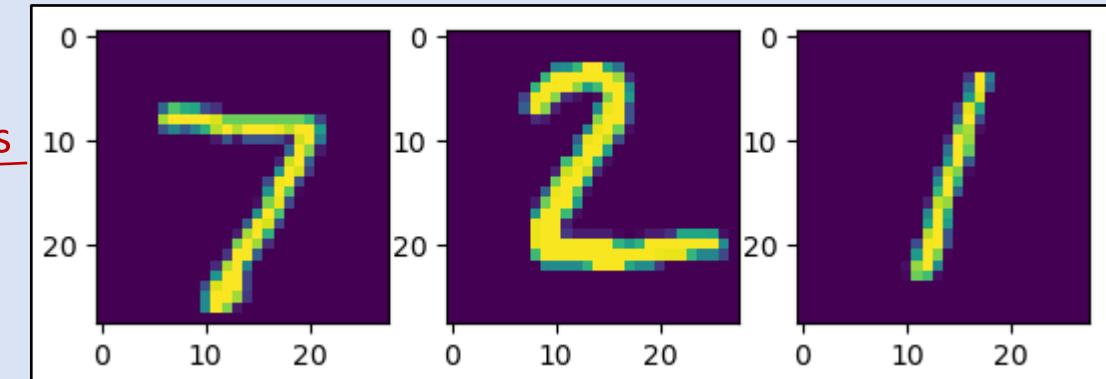

# Graphical user interfaces (GUI)

- Tkinter

## primitive\_calculator.py

```
accumulator = 0

while True:
 print("Accumulator:", accumulator)
 print("Select:")
 print(" 1: clear")
 print(" 2: add")
 print(" 3: subtract")
 print(" 4: multiply")
 print(" 5: quit")

 choice = int(input("Choice: "))

 match choice:
 case 1: accumulator = 0
 case 2: accumulator += int(input("add: "))
 case 3: accumulator -= int(input("subtract: "))
 case 4: accumulator *= int(input("multiply by: "))
 case 5: break
```

## Python shell

```
Accumulator: 0
Select:
 1: clear
 2: add
 3: subtract
 4: multiply
 5: quit
Choice: 2
add: 10
Accumulator: 10
Select:
 1: clear
 2: add
 3: subtract
 4: multiply
 5: quit
Choice: 2
add: 15
Accumulator: 25
Select:
 ...
```


# Python GUI's (Graphical Users Interfaces)

- There is a long list of GUI frameworks and toolkits, designer tools
  - we will only briefly look at Tkinter
- GUI are, opposed to a text terminal,  
**easier to use, more intuitive and flexible**
- Windows, icons, menus, buttons, scrollbars  
mouse / touch / keyboard interaction etc.
- Operating system (e.g. Windows, macOS, iOS, Linux, Android) provides basic functionality  
in particular a **windows manager**
- Writing GUI applications from scratch can be  
painful – frameworks try to provide all standard  
functionality



[en.wikipedia.org/wiki/Colossal\\_Cave\\_Adventure](https://en.wikipedia.org/wiki/Colossal_Cave_Adventure)

[wiki.python.org/moin/GuiProgramming](https://wiki.python.org/moin/GuiProgramming)

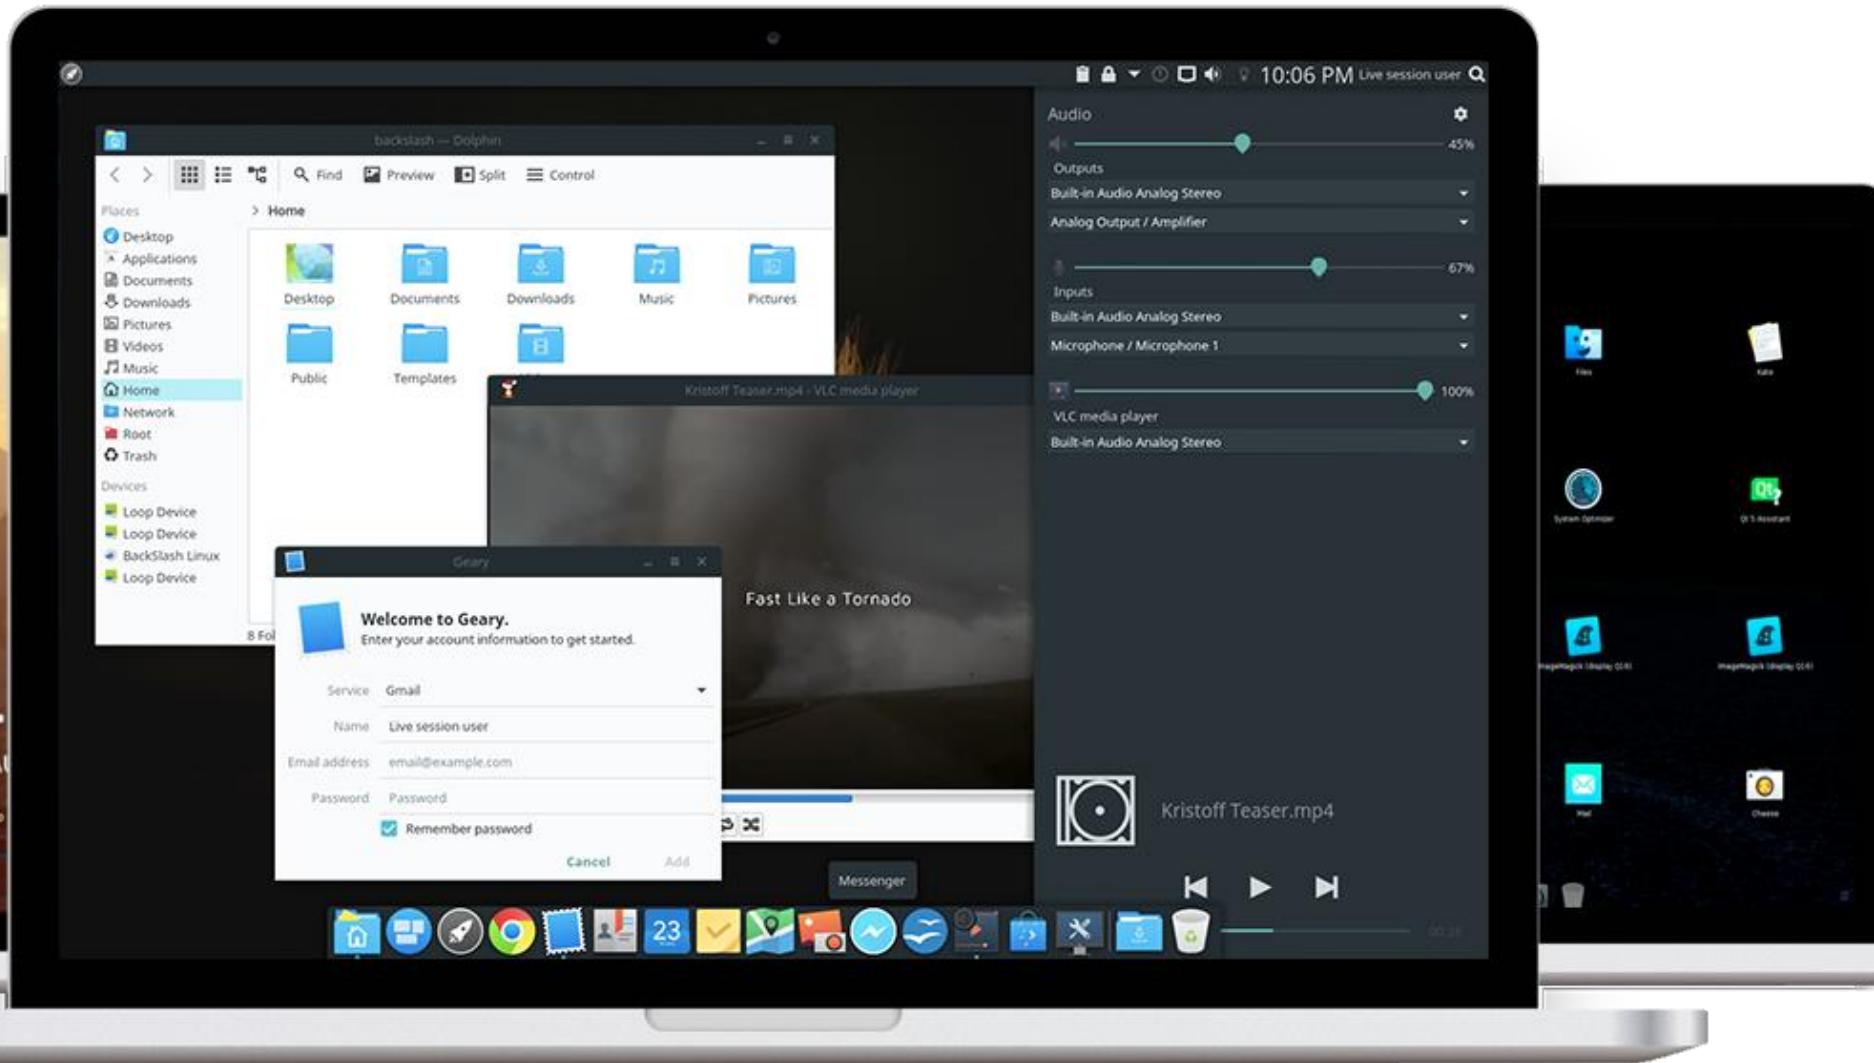

**BackSlash Linux GUI**  
[www.backslashlinux.com](http://www.backslashlinux.com)

# Tkinter

- “Tkinter is Python's de-facto standard GUI (Graphical User Interface) package. It is a thin object-oriented layer on top of **Tcl/Tk**.”
- “Tcl is a high-level, general-purpose, interpreted, dynamic programming language.”
- “Tk is a free and open-source, cross-platform widget toolkit that provides a library of basic elements of GUI widgets for building a graphical user interface (GUI) in many programming languages.”
- “The popular combination of Tcl with the Tk extension is referred to as **Tcl/Tk**, and enables building a graphical user interface (GUI) natively in Tcl. **Tcl/Tk is included in the standard Python installation in the form of Tkinter**.”

# Terminology

- **widgets** (e.g. buttons, editable text fields, labels, scrollbars, menus, radio buttons, check buttons, canvas for drawing, frames...)
- **events** (e.g. key press, mouse click, mouse entering/leaving, resizing windows, redraw requests, ...)
- **listening** (application waits for events to be fired)
- **event handler** (a function whose purpose is to handle an event, many triggered by user or OS/Window manager)
- **geometry managers** (how to organize widgets in a window: Tkinter *pack, grid, place*)

Homepage - Introduktion til proX

AutoSave On

gui.p... - Sa... GS

Gerth Stølting Brodal

File Home AU Insert Design Transitions Animations Slide Show Review View Help Acrobat

Templafy Paste Slides Font Paragraph Drawing Editing Create and Share Adobe PDF

Clipboard

Templafy

1 Graphical user interface (GUI)

2 Python GUI (Graphical User Interface)

3 Python GUI (Graphical User Interface)

4 Python GUI (Graphical User Interface)

5 Python GUI (Graphical User Interface)

6 Python GUI (Graphical User Interface)

7 Python GUI (Graphical User Interface)

8 Python GUI (Graphical User Interface)

9 Python GUI (Graphical User Interface)

Course Home Content Course Tools Classlist

def memoize(f):  
 # answers[args] = f(\*args)  
 answers = {}  
 def wrapper(\*args):  
 if args not in answers:  
 answers[args] = f(\*args)  
 return answers[args]

Introduction to Programming Applications (2022)

This course is open for students

Graphical user interfaces (GUI)  
▪ Tkinter

Click to add notes

Slide 1 of 19 Notes Display Settings

Danish

48%

Windows Taskbar: Spotify, Firefox, Microsoft Edge, File Explorer, Brightspace, Task View, Task Manager, Volume, Network, Battery, Bluetooth, ENG, 07:15

[docs.python.org/3/library/tk.html](https://docs.python.org/3/library/tk.html)



*“tkinter is also famous for having an outdated look and feel”*

- Comes with Python
- Alternative PyQt

# Welcome example



welcome.py

```
import tkinter

root = tkinter.Tk() # root window

def do_quit(): # event handler for "Close" button
 root.destroy()

root.title("Tkinter Welcome GUI")

label = tkinter.Label(root, text="Welcome to Tkinter", background="yellow",
 anchor=tkinter.SE, font=("Helvetica", "24", "bold italic"),
 padx=10, pady=10)

label.pack(side=tkinter.LEFT, fill=tkinter.BOTH, expand=True)
 # parent window
close_button = tkinter.Button(root, text="Close", command=do_quit)
close_button.pack(side=tkinter.RIGHT)
tkinter.mainloop() # loop until all windows are closed/destroyed
```

# Welcome example (class)

```
welcome_class.py
```

```
import tkinter

class Welcome:
 def do_quit(self): # event handler for "Close"
 self.root.destroy()


 def __init__(self, window_title):
 self.root = tkinter.Tk()
 self.root.title(window_title)

 self.label = tkinter.Label(self.root, text="Welcome")
 self.label.pack(side=tkinter.LEFT)

 self.close_button = tkinter.Button(self.root, text="Close", command=self.do_quit)
 self.close_button.pack(side=tkinter.RIGHT)

 Welcome("My Window")

 tkinter.mainloop()
```

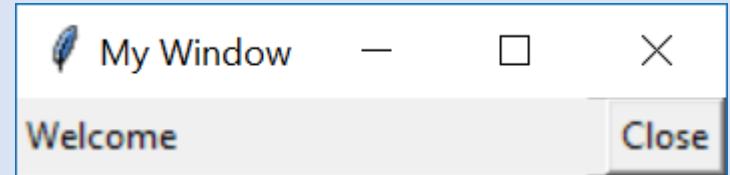

## increment.py (part I)

```
import tkinter

class Counter:
 def do_quit(self):
 self.root.destroy()

 def add(self, x):
 self.counter += x
 self.count.set(self.counter)

 def __init__(self, message):
 self.counter = 0



 self.root = tkinter.Toplevel() # new window
 self.root.title("Counter")

 self.label = tkinter.Label(self.root, text=message)
 self.label.grid(row=0, columnspan=3)

 self_MINUS_button = tkinter.Button(self.root, text="-", command=lambda: self.add(-1))
 self_MINUS_button.grid(row=1, column=0)

 self.count = tkinter.IntVar()
 self.count_label = tkinter.Label(self.root, textvariable=self.count)
 self.count_label.grid(row=1, column=1)

 self_PLUS_button = tkinter.Button(self.root, text="+", command=lambda: self.add(+1))
 self_PLUS_button.grid(row=1, column=2)
```

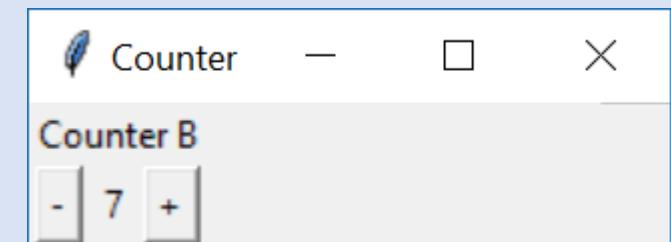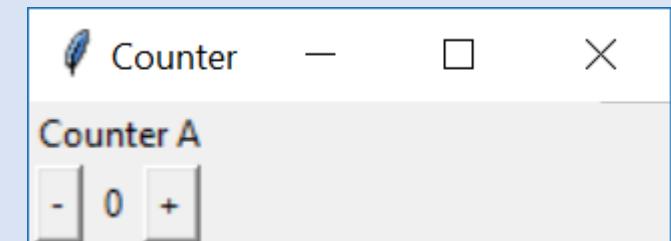

## increment.py (part II)

```
class Counter_app:
 def __init__(self):
 self.counters = 0


 self.root = tkinter.Tk()

 self.create = tkinter.Button(self.root, text="Create counter", command=self.new_counter)
 self.create.pack()

 def new_counter(self):
 Counter("Counter " + chr(ord('A') + self.counters))
 self.counters += 1

Counter_app()

tkinter.mainloop()
```

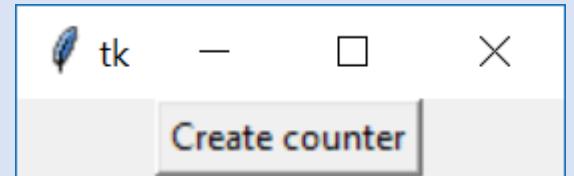

# Canvas

canvas.py


```
import tkinter

root = tkinter.Tk()

canvas = tkinter.Canvas(root, width=100, height=100)
canvas.pack()
canvas.create_line(0, 0, 100, 100)
canvas.create_oval(20, 20, 80, 80, fill="blue")

close = tkinter.Button(root, text="Close", command=root.destroy)
close.pack()

tkinter.mainloop()
```

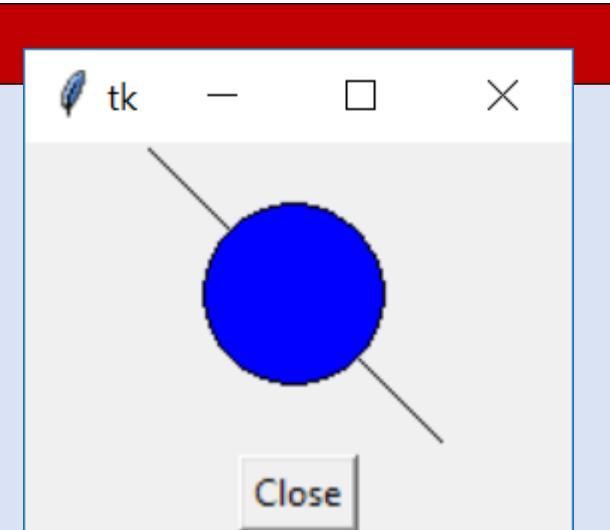



Calculator

-



42

7

8

9

\*

C

4

5

6

/

%

1

2

3

-

=

0

.

+


## calculator.py (Part I)

```
import tkinter
from tkinter import messagebox

class Calculator:
 def __init__(self, root):
 self.root = root

 self.display = tkinter.Entry(self.root, font=("Helvetica", 16), justify=tkinter.RIGHT)
 self.display.insert(0, "0")
 self.display.grid(row=0, column=0, columnspan=5) # grid = geometry manager

 self.button(1, 0, '7')
 self.button(1, 1, '8')
 self.button(1, 2, '9')
 self.button(1, 3, '*')
 self.button(1, 4, 'C', command=self.clearText) # 'C' button
 self.button(2, 0, '4')
 self.button(2, 1, '5')
 self.button(2, 2, '6')
 self.button(2, 3, '/')
 self.button(2, 4, '%')
 self.button(3, 0, '1')
 self.button(3, 1, '2')
 self.button(3, 2, '3')
 self.button(3, 3, '-')
 self.button(3, 4, '=', rowspan=2, command=self.calculateExpression) # '=' button
 self.button(4, 0, '0', columnspan=2)
 self.button(4, 2, '.')
 self.button(4, 3, '+')
```

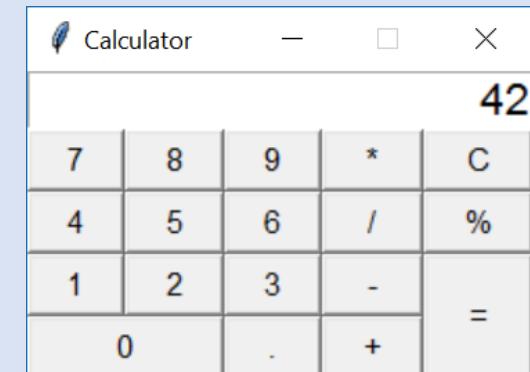

## calculator.py (Part II)

```
def button(self, row, column, text, command=None, columnspan=1, rowspan=1):
 if command == None:
 command = lambda: self.appendToDisplay(text)
 B = tkinter.Button(self.root, font=("Helvetica", 11), text=text, command=command)
 B.grid(row=row, column=column, rowspan=rowspan, columnspan=columnspan, sticky="NWNESWSE")


def clearText(self):
 self.replaceText("0")

def replaceText(self, text):
 self.display.delete(0, tkinter.END)
 self.display.insert(0, text)

def appendToDisplay(self, text):
 if self.display.get() == "0":
 self.replaceText(text)
 else:
 self.display.insert(tkinter.END, text)

def calculateExpression(self):
 expression = self.display.get().replace("%", "/ 100")
 try:
 result = eval(expression) # DON'T DO THIS !!!
 self.replaceText(result)
 except:
 messagebox.showwarning("Message", "Invalid expression")

root = tkinter.Tk()
root.title("Calculator")
root.resizable(0, 0)
Calculator(root)
tkinter.mainloop()
```

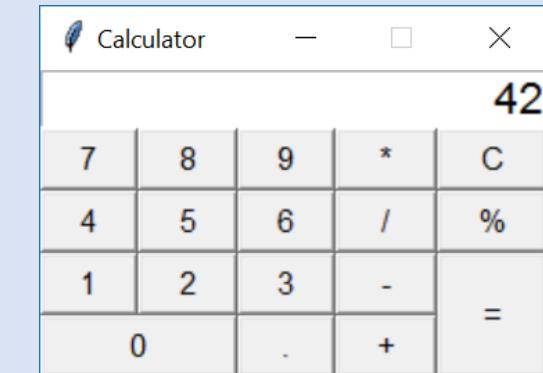

# Creating a menu


rectangles.py

```
class Rectangles:
 Colors = ['black', 'red', 'blue', 'green', 'yellow']

 def create_menu(self):
 menubar = tkinter.Menu(self.root)
 menubar.add_command(label="Quit! (Ctrl-q)", command=self.do_quit)
 editmenu = tkinter.Menu(menubar, tearoff=0)
 editmenu.add_command(label="Clear", command=self.clear_all)
 editmenu.add_command(label="Delete last (Ctrl-z)", command=self.delete_last_rectangle)
 colormenu = tkinter.Menu(menubar, tearoff=0)
 for color in self.Colors: # list of color names
 colormenu.add_command(label=color,
 foreground=color,
 command=self.get_color_handler(color))
 menubar.add_cascade(label="Edit", menu=editmenu)
 menubar.add_cascade(label="Color", menu=colormenu)
 self.root.config(menu=menubar) # Show menubar

 def get_color_handler(self, color):
 return lambda : self.set_color(color)

 def set_color(self, color):
 self.current_color = color
...
```

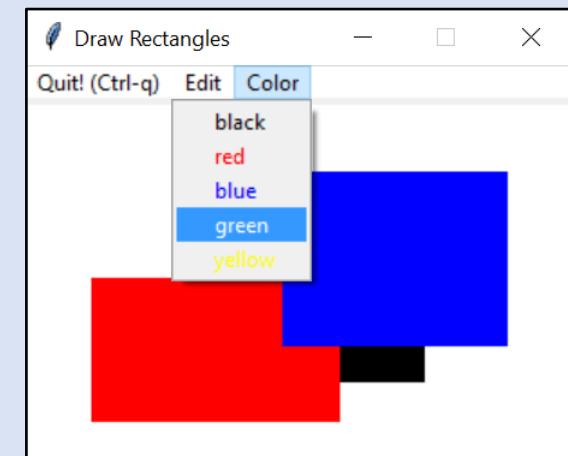


# Binding key and mouse events

- Whenever a key is pressed, mouse button is pressed/released, mouse is moved, mouse enters/leaves objects etc. **events** are triggered that can be bound to call a user defined **event handler**

rectangles.py (continued)

```
...
self.root = tkinter.Tk()
self.root.bind('<Control-q>', self.do_quit)
self.root.bind('<Control-z>', self.delete_last_rectangle)
...
self.canvas = tkinter.Canvas(self.root, width=300, height=200,
 background='white')
self.canvas.bind('<Button-1>', self.create_rectangle_start)
self.canvas.bind('<B1-Motion>', self.create_rectangle_mouse_move)
self.canvas.bind('<ButtonRelease-1>', self.create_rectangle_end)
...
```

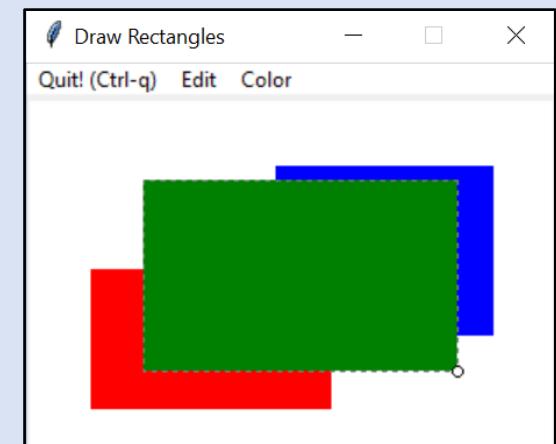


# Handling mouse events

rectangles.py (continued)


```
def create_rectangle_start(self, event):
 radius = 3
 x, y = event.x, event.y
 self.top_pos = (x, y)
 self.bottom_pos = (x, y)
 self.rectangle = self.canvas.create_rectangle(x, y, x, y, # top-left = bottom-right
 fill=self.current_color, width=1, outline='grey', dash=(3, 5))
 self.corner = self.canvas.create_oval(x - radius, y - radius, x + radius, y + radius, fill='white')


def create_rectangle_mouse_move(self, event):
 if self.corner:
 x, y = event.x, event.y
 x_, y_ = self.bottom_pos
 self.bottom_pos = (x, y)
 self.canvas.coords(self.rectangle, *self.top_pos, *self.bottom_pos)
 self.canvas.move(self.corner, x - x_, y - y_)

def create_rectangle_end(self, event):
 if self.corner:
 self.canvas.delete(self.corner)
 self.corner = None
 if self.bottom_pos != self.top_pos:
 self.rectangles.append(self.rectangle)
 self.canvas.itemconfig(self.rectangle, width=0)
 else: # empty rectangle, skip
 self.canvas.delete(self.rectangle)
 self.rectangle = None
```

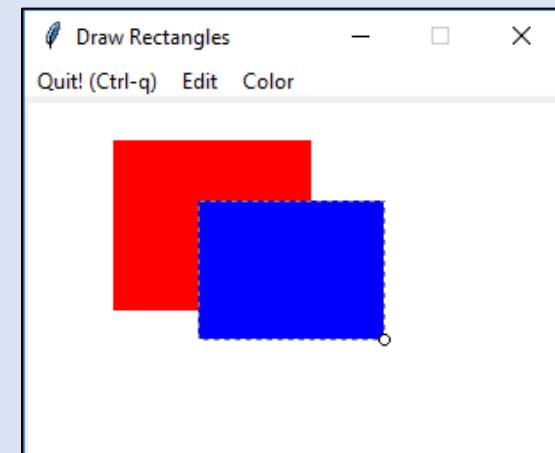

# Exercise 25.1 (convex hull GUI)

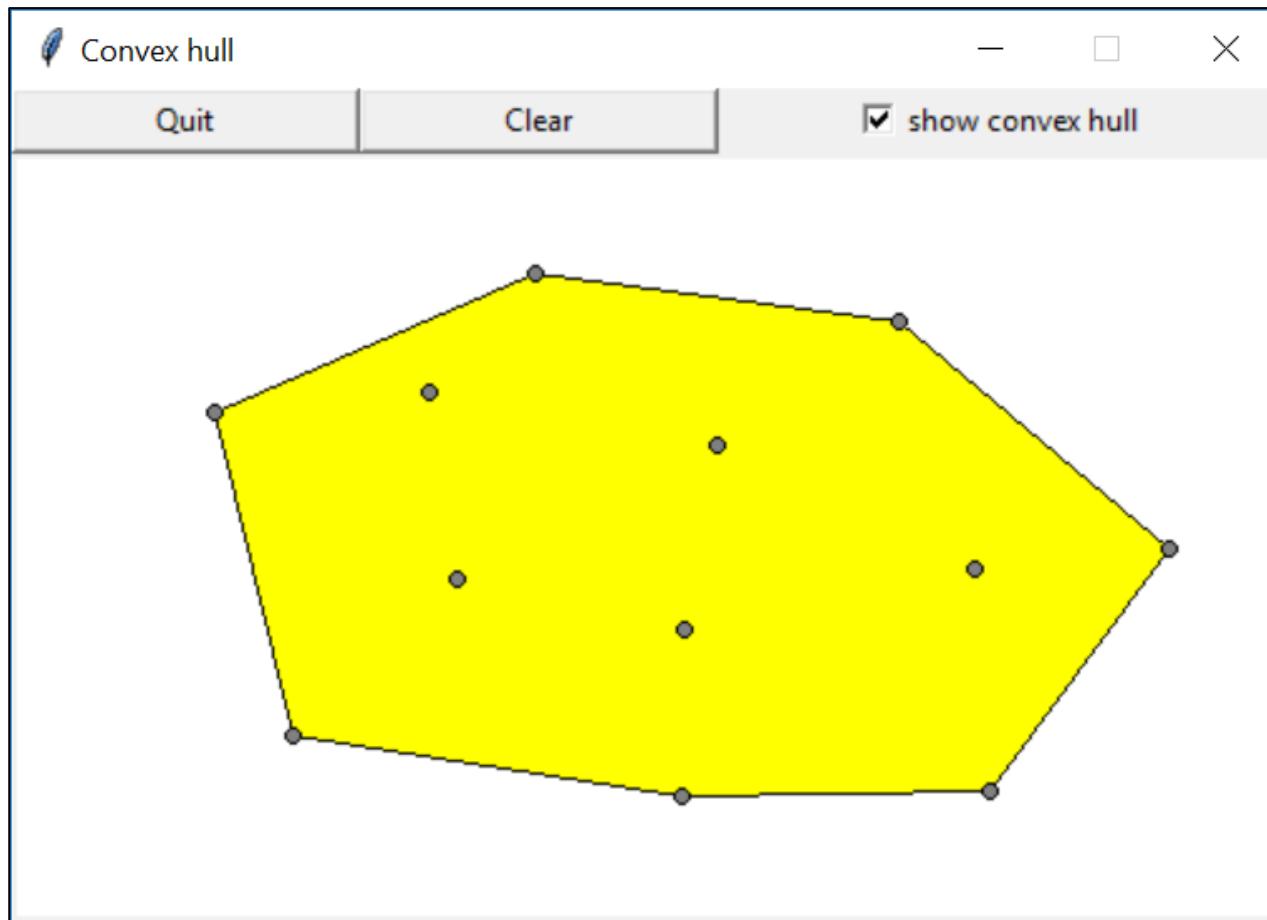


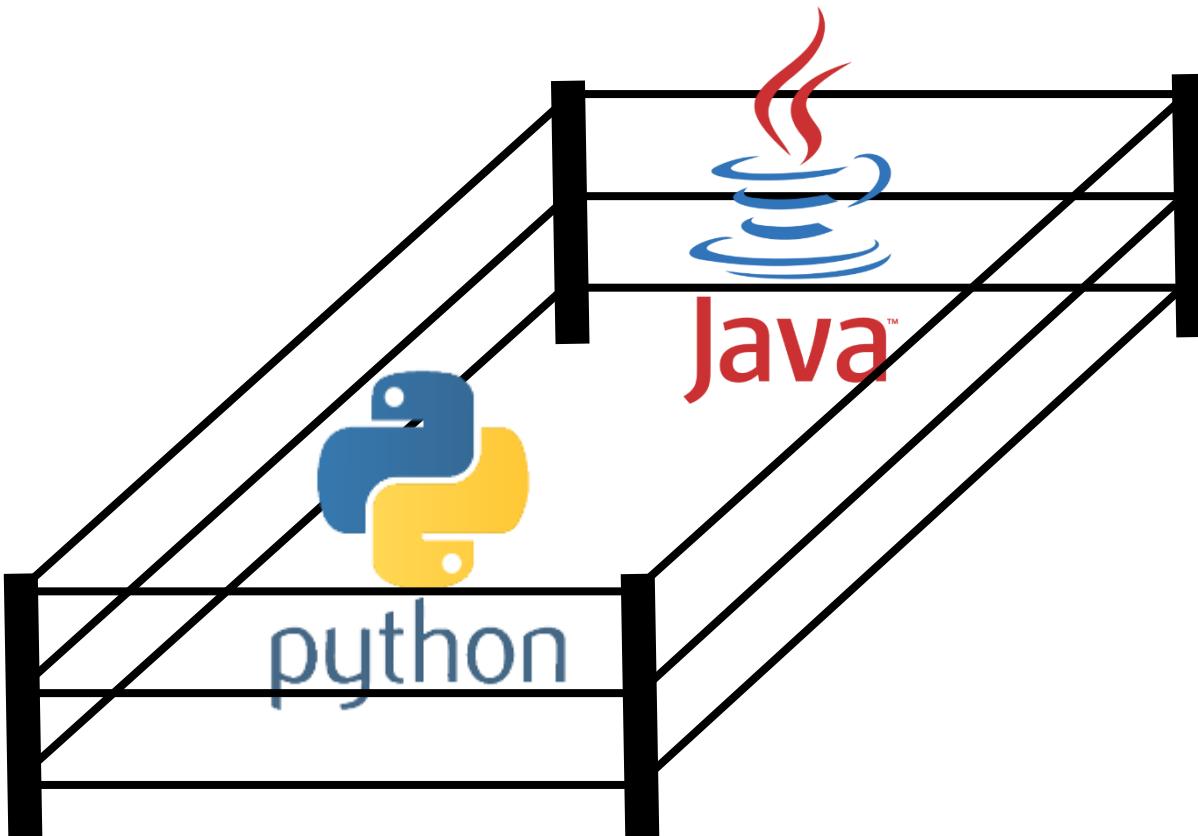


## Java vs Python

# Why should you know something about Java?

- Java is an example of a statically typed object oriented language (like C and C++) opposed to Python's being dynamically typed
- One of the most widespread used programming languages
- Used in other courses at the Department of Computer Science

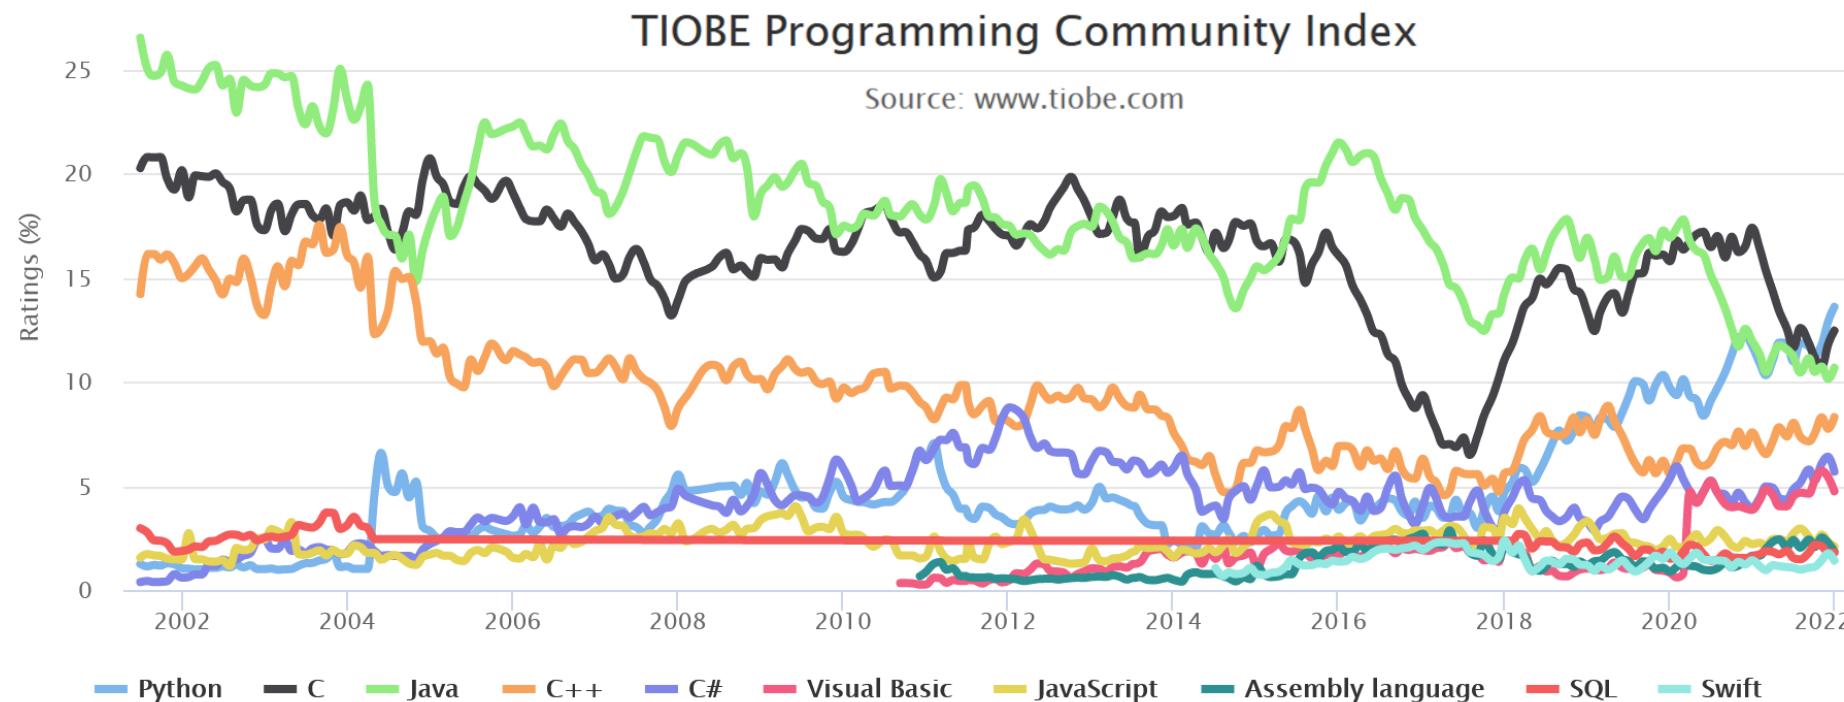

# Java history

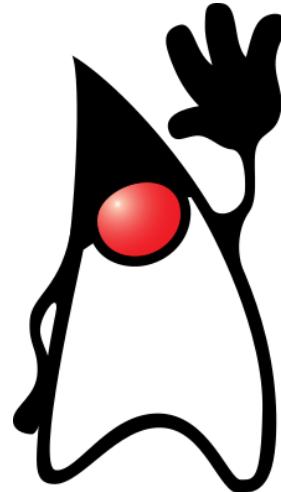

- Java 1.0 released 1995 by Sun Microsystems (acquired by Oracle 2010)
- “Write Once, Run Anywhere”
- 1999 improved performance by the **Java HotSpot Performance Engine**
- Current version Java 18 (released March 2022)
- Java compiler generates **Java bytecode** that is executed on a **Java virtual machine (JVM)**

PyPy is adopting the same ideas to Python (Just-in-Time compilation)

# Installing Java

- To compile Java programs into **bytecode** you need a **compiler**, e.g. from Java SE Development Kit (**JDK**):

[www.oracle.com/java/technologies/downloads/](https://www.oracle.com/java/technologies/downloads/)

(you might need to add the JDK directory to your PATH, e.g. C:\Program Files\Java\jdk-18.0.1.1\bin)

- To only run compiled Java programs:

[java.com/download](https://java.com/download)

(If you use JDK, you should not download this)


The screenshot shows a web browser window with the URL <https://www.oracle.com/java/technologies/downloads/#jdk18-windows>. The page title is "Java Downloads | Oracle". The main content area is titled "Java SE Development Kit 18.0.1.1 downloads". It includes a brief description of the JDK and a note about its purpose. Below this, there are tabs for "Linux", "macOS", and "Windows", with "Windows" being the active tab. A table lists two download options: "x64 Compressed Archive" (172.8 MB) and "x64 Installer" (153.38 MB), each with a corresponding download link.

Product/file description	File size	Download
x64 Compressed Archive	172.8 MB	<a href="https://download.oracle.com/jdk-18_windows.c">https://download.oracle.com/jdk-18_windows.c</a>
x64 Installer	153.38 MB	<a href="https://download.oracle.com/...">https://download.oracle.com/...</a>

The screenshot shows a web browser window with the URL <https://java.com/en/>. The page has a red header with the Java logo and navigation links for "Download", "Help", and "Developers". The main content features a large call-to-action text "JAVA + YOU, DOWNLOAD TODAY!" and a "Java Download" button. To the right, there is a photograph of a woman smiling while using a laptop.

# Java IDE

- Many available, some popular:  
Visual Studio Code, IntelliJ IDEA, Eclipse, and NetBeans
- An IDE for beginners: BlueJ

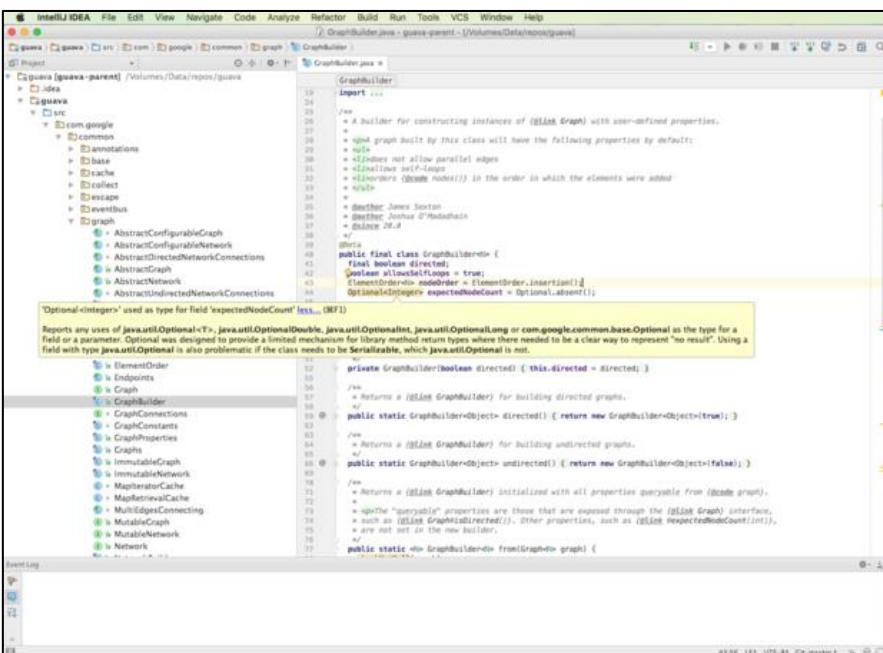

IntelliJ IDEA interface showing the code editor for GraphBuilder.java. The code defines a GraphBuilder class with methods for building directed and undirected graphs. A tooltip for the 'Optional<Integer>' type is shown, stating: "Optional<Integer> uses as type for field 'expectedNodeCount' (line 107). (REF)"

```
GraphBuilder.java
1 package com.google.common.graph;
2
3 import java.util.*;
4 import java.util.concurrent.*;
5 import java.util.function.*;
6 import java.util.stream.*;
7
8 import com.google.common.annotations.GwtCompatible;
9 import com.google.common.base.*;
10 import com.google.common.collect.*;
11 import com.google.common.primitives.*;
12
13 /**
14 * A Builder for constructing instances of (either Graph) with user-defined properties.
15 *
16 * A graph built by this class will have the following properties by default:
17 *
18 *

19 * - It is a Directed graph.

20 * - It does not allow parallel edges.


21 * - It allows self-loops.

22 * - The nodes (Object) in the order in which the elements were added.

23 *

24 */
25 @GwtCompatible
26 public final class GraphBuilder<T extends Graph<T, V, E>, V, E extends Edge<V, E>> {
27
28 /**
29 * Whether the graph is directed or not.
30 */
31 private final boolean directed;
32
33 /**
34 * Whether the graph allows loops or not.
35 */
36 private final boolean allowsLoops;
37
38 /**
39 * The order in which the elements were added.
40 */
41 private final ElementOrder<V> elementOrder;
42
43 /**
44 * The number of nodes expected to be added.
45 */
46 private final Optional<Integer> expectedNodeCount = Optional.absent();
47
48 /**
49 * The builder's properties.
50 */
51 private final Map<String, Object> properties;
52
53 /**
54 * The vertex set.
55 */
56 private final Set<V> vertices;
57
58 /**
59 * The edge set.
60 */
61 private final Set<E> edges;
62
63 /**
64 * The vertex map.
65 */
66 private final Map<V, Integer> vertexMap;
67
68 /**
69 * The edge map.
70 */
71 private final Map<E, Integer> edgeMap;
72
73 /**
74 * The vertex index map.
75 */
76 private final Map<V, Integer> vertexIndexMap;
77
78 /**
79 * The edge index map.
80 */
81 private final Map<E, Integer> edgeIndexMap;
82
83 /**
84 * The vertex name map.
85 */
86 private final Map<V, String> vertexNameMap;
87
88 /**
89 * The edge name map.
90 */
91 private final Map<E, String> edgeNameMap;
92
93 /**
94 * The vertex id map.
95 */
96 private final Map<V, long> vertexIdMap;
97
98 /**
99 * The edge id map.
100 */
101 private final Map<E, long> edgeIdMap;
102
103 /**
104 * The vertex count.
105 */
106 private int vertexCount;
107
108 /**
109 * The edge count.
110 */
111 private int edgeCount;
112
113 /**
114 * The vertex index count.
115 */
116 private int vertexIndexCount;
117
118 /**
119 * The edge index count.
120 */
121 private int edgeIndexCount;
122
123 /**
124 * The vertex name count.
125 */
126 private int vertexNameCount;
127
128 /**
129 * The edge name count.
130 */
131 private int edgeNameCount;
132
133 /**
134 * The vertex id count.
135 */
136 private int vertexIdCount;
137
138 /**
139 * The edge id count.
140 */
141 private int edgeIdCount;
142
143 /**
144 * The vertex map size.
145 */
146 private int vertexMapSize;
147
148 /**
149 * The edge map size.
150 */
151 private int edgeMapSize;
152
153 /**
154 * The vertex index map size.
155 */
156 private int vertexIndexMapSize;
157
158 /**
159 * The edge index map size.
160 */
161 private int edgeIndexMapSize;
162
163 /**
164 * The vertex name map size.
165 */
166 private int vertexNameMapSize;
167
168 /**
169 * The edge name map size.
170 */
171 private int edgeNameMapSize;
172
173 /**
174 * The vertex id map size.
175 */
176 private int vertexIdMapSize;
177
178 /**
179 * The edge id map size.
180 */
181 private int edgeIdMapSize;
182
183 /**
184 * The vertex count limit.
185 */
186 private int vertexCountLimit;
187
188 /**
189 * The edge count limit.
190 */
191 private int edgeCountLimit;
192
193 /**
194 * The vertex index count limit.
195 */
196 private int vertexIndexCountLimit;
197
198 /**
199 * The edge index count limit.
200 */
201 private int edgeIndexCountLimit;
202
203 /**
204 * The vertex name count limit.
205 */
206 private int vertexNameCountLimit;
207
208 /**
209 * The edge name count limit.
210 */
211 private int edgeNameCountLimit;
212
213 /**
214 * The vertex id count limit.
215 */
216 private int vertexIdCountLimit;
217
217
218 /**
219 * The vertex count limit.
220 */
221 private int vertexCountLimit;
222
223 /**
224 * The edge count limit.
225 */
226 private int edgeCountLimit;
227
228 /**
229 * The vertex index count limit.
230 */
231 private int vertexIndexCountLimit;
232
232
233 /**
234 * The vertex count limit.
235 */
236 private int vertexCountLimit;
237
237
238 /**
239 * The vertex count limit.
240 */
241 private int vertexCountLimit;
242
242
243 /**
244 * The vertex count limit.
245 */
246 private int vertexCountLimit;
247
247
248 /**
249 * The vertex count limit.
250 */
251 private int vertexCountLimit;
252
252
253 /**
254 * The vertex count limit.
255 */
256 private int vertexCountLimit;
257
257
258 /**
259 * The vertex count limit.
260 */
261 private int vertexCountLimit;
262
262
263 /**
264 * The vertex count limit.
265 */
266 private int vertexCountLimit;
267
267
268 /**
269 * The vertex count limit.
270 */
271 private int vertexCountLimit;
272
272
273 /**
274 * The vertex count limit.
275 */
276 private int vertexCountLimit;
277
277
278 /**
279 * The vertex count limit.
280 */
281 private int vertexCountLimit;
282
282
283 /**
284 * The vertex count limit.
285 */
286 private int vertexCountLimit;
287
287
288 /**
289 * The vertex count limit.
290 */
291 private int vertexCountLimit;
292
292
293 /**
294 * The vertex count limit.
295 */
296 private int vertexCountLimit;
297
297
298 /**
299 * The vertex count limit.
300 */
301 private int vertexCountLimit;
302
302
303 /**
304 * The vertex count limit.
305 */
306 private int vertexCountLimit;
307
307
308 /**
309 * The vertex count limit.
310 */
311 private int vertexCountLimit;
312
312
313 /**
314 * The vertex count limit.
315 */
316 private int vertexCountLimit;
317
317
318 /**
319 * The vertex count limit.
320 */
321 private int vertexCountLimit;
322
322
323 /**
324 * The vertex count limit.
325 */
326 private int vertexCountLimit;
327
327
328 /**
329 * The vertex count limit.
330 */
331 private int vertexCountLimit;
332
332
333 /**
334 * The vertex count limit.
335 */
336 private int vertexCountLimit;
337
337
338 /**
339 * The vertex count limit.
340 */
341 private int vertexCountLimit;
342
342
343 /**
344 * The vertex count limit.
345 */
346 private int vertexCountLimit;
347
347
348 /**
349 * The vertex count limit.
350 */
351 private int vertexCountLimit;
352
352
353 /**
354 * The vertex count limit.
355 */
356 private int vertexCountLimit;
357
357
358 /**
359 * The vertex count limit.
360 */
361 private int vertexCountLimit;
362
362
363 /**
364 * The vertex count limit.
365 */
366 private int vertexCountLimit;
367
367
368 /**
369 * The vertex count limit.
370 */
371 private int vertexCountLimit;
372
372
373 /**
374 * The vertex count limit.
375 */
376 private int vertexCountLimit;
377
377
378 /**
379 * The vertex count limit.
380 */
381 private int vertexCountLimit;
382
382
383 /**
384 * The vertex count limit.
385 */
386 private int vertexCountLimit;
387
387
388 /**
389 * The vertex count limit.
390 */
391 private int vertexCountLimit;
392
392
393 /**
394 * The vertex count limit.
395 */
396 private int vertexCountLimit;
397
397
398 /**
399 * The vertex count limit.
400 */
401 private int vertexCountLimit;
402
402
403 /**
404 * The vertex count limit.
405 */
406 private int vertexCountLimit;
407
407
408 /**
409 * The vertex count limit.
410 */
411 private int vertexCountLimit;
412
412
413 /**
414 * The vertex count limit.
415 */
416 private int vertexCountLimit;
417
417
418 /**
419 * The vertex count limit.
420 */
421 private int vertexCountLimit;
422
422
423 /**
424 * The vertex count limit.
425 */
426 private int vertexCountLimit;
427
427
428 /**
429 * The vertex count limit.
430 */
431 private int vertexCountLimit;
432
432
433 /**
434 * The vertex count limit.
435 */
436 private int vertexCountLimit;
437
437
438 /**
439 * The vertex count limit.
440 */
441 private int vertexCountLimit;
442
442
443 /**
444 * The vertex count limit.
445 */
446 private int vertexCountLimit;
447
447
448 /**
449 * The vertex count limit.
450 */
451 private int vertexCountLimit;
452
452
453 /**
454 * The vertex count limit.
455 */
456 private int vertexCountLimit;
457
457
458 /**
459 * The vertex count limit.
460 */
461 private int vertexCountLimit;
462
462
463 /**
464 * The vertex count limit.
465 */
466 private int vertexCountLimit;
467
467
468 /**
469 * The vertex count limit.
470 */
471 private int vertexCountLimit;
472
472
473 /**
474 * The vertex count limit.
475 */
476 private int vertexCountLimit;
477
477
478 /**
479 * The vertex count limit.
480 */
481 private int vertexCountLimit;
482
482
483 /**
484 * The vertex count limit.
485 */
486 private int vertexCountLimit;
487
487
488 /**
489 * The vertex count limit.
490 */
491 private int vertexCountLimit;
492
492
493 /**
494 * The vertex count limit.
495 */
496 private int vertexCountLimit;
497
497
498 /**
499 * The vertex count limit.
500 */
501 private int vertexCountLimit;
502
502
503 /**
504 * The vertex count limit.
505 */
506 private int vertexCountLimit;
507
507
508 /**
509 * The vertex count limit.
510 */
511 private int vertexCountLimit;
512
512
513 /**
514 * The vertex count limit.
515 */
516 private int vertexCountLimit;
517
517
518 /**
519 * The vertex count limit.
520 */
521 private int vertexCountLimit;
522
522
523 /**
524 * The vertex count limit.
525 */
526 private int vertexCountLimit;
527
527
528 /**
529 * The vertex count limit.
530 */
531 private int vertexCountLimit;
532
532
533 /**
534 * The vertex count limit.
535 */
536 private int vertexCountLimit;
537
537
538 /**
539 * The vertex count limit.
540 */
541 private int vertexCountLimit;
542
542
543 /**
544 * The vertex count limit.
545 */
546 private int vertexCountLimit;
547
547
548 /**
549 * The vertex count limit.
550 */
551 private int vertexCountLimit;
552
552
553 /**
554 * The vertex count limit.
555 */
556 private int vertexCountLimit;
557
557
558 /**
559 * The vertex count limit.
560 */
561 private int vertexCountLimit;
562
562
563 /**
564 * The vertex count limit.
565 */
566 private int vertexCountLimit;
567
567
568 /**
569 * The vertex count limit.
570 */
571 private int vertexCountLimit;
572
572
573 /**
574 * The vertex count limit.
575 */
576 private int vertexCountLimit;
577
577
578 /**
579 * The vertex count limit.
580 */
581 private int vertexCountLimit;
582
582
583 /**
584 * The vertex count limit.
585 */
586 private int vertexCountLimit;
587
587
588 /**
589 * The vertex count limit.
590 */
591 private int vertexCountLimit;
592
592
593 /**
594 * The vertex count limit.
595 */
596 private int vertexCountLimit;
597
597
598 /**
599 * The vertex count limit.
600 */
601 private int vertexCountLimit;
602
602
603 /**
604 * The vertex count limit.
605 */
606 private int vertexCountLimit;
607
607
608 /**
609 * The vertex count limit.
610 */
611 private int vertexCountLimit;
612
612
613 /**
614 * The vertex count limit.
615 */
616 private int vertexCountLimit;
617
617
618 /**
619 * The vertex count limit.
620 */
621 private int vertexCountLimit;
622
622
623 /**
624 * The vertex count limit.
625 */
626 private int vertexCountLimit;
627
627
628 /**
629 * The vertex count limit.
630 */
631 private int vertexCountLimit;
632
632
633 /**
634 * The vertex count limit.
635 */
636 private int vertexCountLimit;
637
637
638 /**
639 * The vertex count limit.
640 */
641 private int vertexCountLimit;
642
642
643 /**
644 * The vertex count limit.
645 */
646 private int vertexCountLimit;
647
647
648 /**
649 * The vertex count limit.
650 */
651 private int vertexCountLimit;
652
652
653 /**
654 * The vertex count limit.
655 */
656 private int vertexCountLimit;
657
657
658 /**
659 * The vertex count limit.
660 */
661 private int vertexCountLimit;
662
662
663 /**
664 * The vertex count limit.
665 */
666 private int vertexCountLimit;
667
667
668 /**
669 * The vertex count limit.
670 */
671 private int vertexCountLimit;
672
672
673 /**
674 * The vertex count limit.
675 */
676 private int vertexCountLimit;
677
677
678 /**
679 * The vertex count limit.
680 */
681 private int vertexCountLimit;
682
682
683 /**
684 * The vertex count limit.
685 */
686 private int vertexCountLimit;
687
687
688 /**
689 * The vertex count limit.
690 */
691 private int vertexCountLimit;
692
692
693 /**
694 * The vertex count limit.
695 */
696 private int vertexCountLimit;
697
697
698 /**
699 * The vertex count limit.
700 */
701 private int vertexCountLimit;
702
702
703 /**
704 * The vertex count limit.
705 */
706 private int vertexCountLimit;
707
707
708 /**
709 * The vertex count limit.
710 */
711 private int vertexCountLimit;
712
712
713 /**
714 * The vertex count limit.
715 */
716 private int vertexCountLimit;
717
717
718 /**
719 * The vertex count limit.
720 */
721 private int vertexCountLimit;
722
722
723 /**
724 * The vertex count limit.
725 */
726 private int vertexCountLimit;
727
727
728 /**
729 * The vertex count limit.
730 */
731 private int vertexCountLimit;
732
732
733 /**
734 * The vertex count limit.
735 */
736 private int vertexCountLimit;
737
737
738 /**
739 * The vertex count limit.
740 */
741 private int vertexCountLimit;
742
742
743 /**
744 * The vertex count limit.
745 */
746 private int vertexCountLimit;
747
747
748 /**
749 * The vertex count limit.
750 */
751 private int vertexCountLimit;
752
752
753 /**
754 * The vertex count limit.
755 */
756 private int vertexCountLimit;
757
757
758 /**
759 * The vertex count limit.
760 */
761 private int vertexCountLimit;
762
762
763 /**
764 * The vertex count limit.
765 */
766 private int vertexCountLimit;
767
767
768 /**
769 * The vertex count limit.
770 */
771 private int vertexCountLimit;
772
772
773 /**
774 * The vertex count limit.
775 */
776 private int vertexCountLimit;
777
777
778 /**
779 * The vertex count limit.
780 */
781 private int vertexCountLimit;
782
782
783 /**
784 * The vertex count limit.
785 */
786 private int vertexCountLimit;
787
787
788 /**
789 * The vertex count limit.
790 */
791 private int vertexCountLimit;
792
792
793 /**
794 * The vertex count limit.
795 */
796 private int vertexCountLimit;
797
797
798 /**
799 * The vertex count limit.
800 */
801 private int vertexCountLimit;
802
802
803 /**
804 * The vertex count limit.
805 */
806 private int vertexCountLimit;
807
807
808 /**
809 * The vertex count limit.
810 */
811 private int vertexCountLimit;
812
812
813 /**
814 * The vertex count limit.
815 */
816 private int vertexCountLimit;
817
817
818 /**
819 * The vertex count limit.
820 */
821 private int vertexCountLimit;
822
822
823 /**
824 * The vertex count limit.
825 */
826 private int vertexCountLimit;
827
827
828 /**
829 * The vertex count limit.
830 */
831 private int vertexCountLimit;
832
832
833 /**
834 * The vertex count limit.
835 */
836 private int vertexCountLimit;
837
837
838 /**
839 * The vertex count limit.
840 */
841 private int vertexCountLimit;
842
842
843 /**
844 * The vertex count limit.
845 */
846 private int vertexCountLimit;
847
847
848 /**
849 * The vertex count limit.
850 */
851 private int vertexCountLimit;
852
852
853 /**
854 * The vertex count limit.
855 */
856 private int vertexCountLimit;
857
857
858 /**
859 * The vertex count limit.
860 */
861 private int vertexCountLimit;
862
862
863 /**
864 * The vertex count limit.
865 */
866 private int vertexCountLimit;
867
867
868 /**
869 * The vertex count limit.
870 */
871 private int vertexCountLimit;
872
872
873 /**
874 * The vertex count limit.
875 */
876 private int vertexCountLimit;
877
877
878 /**
879 * The vertex count limit.
880 */
881 private int vertexCountLimit;
882
882
883 /**
884 * The vertex count limit.
885 */
886 private int vertexCountLimit;
887
887
888 /**
889 * The vertex count limit.
890 */
891 private int vertexCountLimit;
892
892
893 /**
894 * The vertex count limit.
895 */
896 private int vertexCountLimit;
897
897
898 /**
899 * The vertex count limit.
900 */
901 private int vertexCountLimit;
902
902
903 /**
904 * The vertex count limit.
905 */
906 private int vertexCountLimit;
907
907
908 /**
909 * The vertex count limit.
910 */
911 private int vertexCountLimit;
912
912
913 /**
914 * The vertex count limit.
915 */
916 private int vertexCountLimit;
917
917
918 /**
919 * The vertex count limit.
920 */
921 private int vertexCountLimit;
922
922
923 /**
924 * The vertex count limit.
925 */
926 private int vertexCountLimit;
927
927
928 /**
929 * The vertex count limit.
930 */
931 private int vertexCountLimit;
932
932
933 /**
934 * The vertex count limit.
935 */
936 private int vertexCountLimit;
937
937
938 /**
939 * The vertex count limit.
940 */
941 private int vertexCountLimit;
942
942
943 /**
944 * The vertex count limit.
945 */
946 private int vertexCountLimit;
947
947
948 /**
949 * The vertex count limit.
950 */
951 private int vertexCountLimit;
952
952
953 /**
954 * The vertex count limit.
955 */
956 private int vertexCountLimit;
957
957
958 /**
959 * The vertex count limit.
960 */
961 private int vertexCountLimit;
962
962
963 /**
964 * The vertex count limit.
965 */
966 private int vertexCountLimit;
967
967
968 /**
969 * The vertex count limit.
970 */
971 private int vertexCountLimit;
972
972
973 /**
974 * The vertex count limit.
975 */
976 private int vertexCountLimit;
977
977
978 /**
979 * The vertex count limit.
980 */
981 private int vertexCountLimit;
982
982
983 /**
984 * The vertex count limit.
985 */
986 private int vertexCountLimit;
987
987
988 /**
989 * The vertex count limit.
990 */
991 private int vertexCountLimit;
992
992
993 /**
994 * The vertex count limit.
995 */
996 private int vertexCountLimit;
997
997
998 /**
999 * The vertex count limit.
1000 */
1001 private int vertexCountLimit;
1002
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
12210
12211
12212
12213
12214
12215
12216
12217
12218
12219
12220
12221
12222
12223
12224
12225
12226
12227
12228
12229
122210
122211
122212
122213
122214
122215
122216
122217
122218
122219
122220
122221
122222
122223
122224
122225
122226
122227
122228
122229
1222210
1222211
1222212
1222213
1222214
1222215
1222216
1222217
1222218
1222219
1222220
1222221
1222222
1222223
1222224
1222225
1222226
1222227
1222228
1222229
12222210
12222211
12222212
12222213
12222214
12222215
12222216
12222217
12222218
12222219
12222220
12222221
12222222
12222223
12222224
12222225
12222226
12222227
12222228
12222229
122222210
122222211
122222212
122222213
122222214
122222215
122222216
122222217
122222218
122222219
122222220
122222221
122222222
122222223
122222224
122222225
122222226
122222227
122222228
122222229
1222222210
1222222211
1222222212
1222222213
1222222214
1222222215
1222222216
1222222217
1222222218
1222222219
1222222220
1222222221
1222222222
1222222223
1222222224
1222222225
1222222226
1222222227
1222222228
1222222229
12222222210
12222222211
12222222212
12222222213
12222222214
12222222215
12222222216
12222222217
12222222218
12222222219
12222222220
12222222221
12222222222
12222222223
12222222224
12222222225
12222222226
12222222227
12222222228
12222222229
122222222210
122222222211
122222222212
122222222213
122222222214
122222222215
122222222216
122222222217
122222222218
122222222219
122222222220
122222222221
122222222222
122222222223
122222222224
122222222225
122222222226
122222222227
122222222228
122222222229
1222222222210
1222222222211
1222222222212
1222222222213
1222222222214
1222222222215
1222222222216
1222222222217
1222222222218
1222222222219
1222222222220
1222222222221
1222222222222
1222222222223
1222222222224
1222222222225
1222222222226
1222222222227
1222222222228
1222222222229
12222222222210
12222222222211
12222222222212
12222222222213
12222222222214
12222222222215
12222222222216
12222222222217
12222222222218
12222222222219
12222222222220
12222222222221
12222222222222
12222222222223
12222222222224
12222222222225
12222222222226
12222222222227
12222222222228
12222222222229
12222222
```

# Compiling and running a Java program

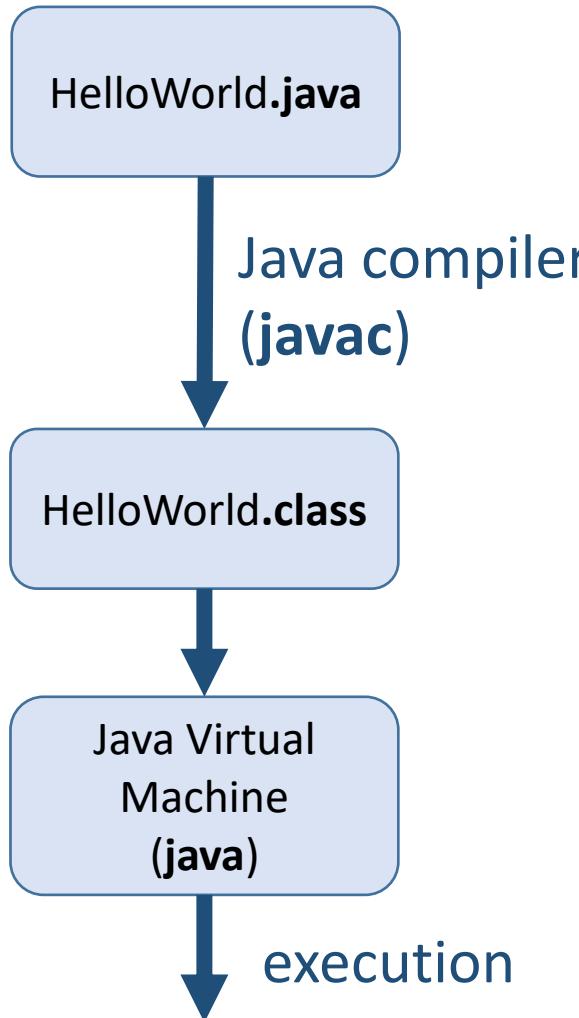

The screenshot shows a Windows Command Prompt window with two red ovals highlighting specific lines of text. The top oval surrounds the command `javac HelloWorld.java`. The bottom oval surrounds the output "Hello World!" from the execution command.

```
>HelloWorld.java
public class HelloWorld {
 public static void main(String[] args) {
 System.out.println("Hello World!");
 }
}

C:\ Command Prompt
C:\Users\au121\Desktop>javac HelloWorld.java
C:\Users\au121\Desktop>dir HelloWorld*
Volume in drive C is OSDisk
Volume Serial Number is 3CDB-90D8

Directory of C:\Users\au121\Desktop

04-05-2020 17:40 426 HelloWorld.class
09-05-2019 21:18 132 HelloWorld.java
 2 File(s) 558 bytes
 0 Dir(s) 372.191.944.704 bytes free

C:\Users\au121\Desktop>java HelloWorld
Hello World!
C:\Users\au121\Desktop>
```

# Java : main

- *name.java* must be equal to the public class *name*
- A class can only be executed using `java name` (without `.class`) if the class has a class method `main` with signature

```
public static void main(String[] args)
```

- (`main` is inherited from C and C++ sharing a lot of syntax with Java)
- Java convention is that class names should use CamelCase

**PrintArguments.java**

```
public class PrintArguments {
 public static void main(String[] args) {
 for (int i=0; i<args.length; i++)
 System.out.println(args[i]);
 }
}
```

**shell**

```
> java PrintArguments x y z
| x
| y
| z
```

a static method in  
a class is a class method  
(exists without creating objects)

there can be several classes  
in a file – but only one class  
should be public and have  
same name as file

the main method must  
be public to be visible  
outside class

declare new int variable  
locally inside for-loop

```
PrintArguments.java
public class PrintArguments {
 public static void main(String[] args) {
 for (int i=0; i<args.length; i++)
 System.out.println(args[i]);
 }
}
```

method name

type of return value  
(void = no return value)

class name containing main  
must have same name as file

type of argument,  
array of String values

name of argument

For-loop equivalent to

```
int i=0
while (i<args.length) {
 code
 i++;
}
```

the print statement is found  
in the System class

java arrays are indexed from  
0 to args.length - 1  
and the length of an array  
object is fixed once created

# Argument list also exists in Python...

```
PrintArguments.py
```

```
import sys
print(sys.argv)
```

```
shell
```

```
> python PrintArguments.py a b 42
| ['PrintArguments.py', 'a', 'b', '42']
```

## Primitive.java

```
/**
 * A Java docstring to be processed using 'javadoc'
 */
// comment until end-of-line
public class Primitive {
 public static void main(String[] args) {
 int x; // type of variable must be declared before used
 x = 1; // remember ';' after each statement
 int y=2; // indentation does not matter
 int a=3, b=4; // multiple declarations and initialization
 System.out.println(x + y + a + b);
 int[] v={1, 2, 42, 3}; // array of four int
 System.out.println(v[2]); // prints 42, arrays 0-indexed
/* multi-line comment
 that continues until here */
 v = new int[3]; // new array of size three, containing zeros
 System.out.println(v[2]); // prints 0
 if (x == y) { // if-syntax '(' and ')' mandatory
 a = 1;
 b = 2;
 } else { // use '{}' and '{}' to create block of statements
 a = 4; b = 3; // two statements on one line
 }
 } }
```

# Why state types – Python works without...

- Just enforcing a different programming style (also C and C++)
- Helps users to avoid mixing up values of different types
- (Some) type errors can be caught at compile time
- More efficient code execution

type\_error.py

```
x = 3
y = "abc"
print("program running...")
print(x / y)
```

Python shell

```
| program running...
...
| ----> 4 print(x / y)
| TypeError: unsupported operand type(s) for
|/: 'int' and 'str'
```

TypeError.java

```
public class TypeError {
 public static void main(String[] args) {
 int x = 3;
 String y = "abc";
 System.out.println(x / y);
 }
}
```

shell

```
> javac TypeError.java
| javac TypeError.java
| TypeError.java:5: error: bad operand types for
| binary operator '/'
| System.out.println(x / y);
| ^
| first type: int
| second type: String
| 1 error
```

# Basic Java types

Type	Values
boolean	true or false
byte	8 bit integer
char	character (16-bit UTF)
short	16 bit integer
int	32 bit integer
long	64 bit integer
float	32 bit floating bout
double	64 bit floating point
class BigInteger	arbitrary precision integers
class String	strings

## BigIntegerTest.java

```
import java.math.*; // import everything
// import java.math.BigInteger; // alternatively

public class BigIntegerTest {
 public static void main(String[] args) {
 BigInteger x = new BigInteger("2");
 while (true) {
 // BigIntegers are immutable
 x = x.multiply(x);
 // java.math.BigInteger.toString()
 System.out.println(x);
 }
 }
}
```

## shell

```
4
16
256
65536
4294967296
18446744073709551616
340282366920938463463374607431768211456
...
```

# Java arrays

- The size of a builtin Java array can not be modified when first created. If you need a bigger array you have to instantiate a new array.
- Or better use a standard collection class like **ArrayList**
- ArrayList** is a generic class (type of content is given by *<element type>*; generics available since Java 5, 2004)
- The for-each loop was introduced in Java 5

## ConcatenateArrayLists.java

```
import java.util.*; // java.util contains ArrayList

public class ConcatenateArrayList {
 public static void main(String[] args) {
 // ArrayList is a generic container
 ArrayList<String> a = new ArrayList<String>();
 ArrayList<String> b = new ArrayList<String>();
 ArrayList<String> c = new ArrayList<String>();

 a.add("A1"); // in Python .append
 a.add("A2");
 b.add("B1");

 c.addAll(a); // in Python .extend
 c.addAll(b);

 for (String e : c) { // foreach over iterator
 System.out.println(e);
 }
 }
}
```

## shell

```
| A1
| A2
| B1
```

# Tired of writing all these types...

- In Java 7 (2011) the “diamond operator” <> was introduced for type inference for generic instance creation to reduce verbosity
- In Java 10 (2018) the var keyword was introduced to type infer variables

ArrayListTest.java

```
import java.util.*; // java.util contains ArrayList

public class ArrayListTest {
 public static void main(String[] args) {
 // ArrayList is a generic container
 ArrayList<String> a = new ArrayList<String>(); // Full types
 List<String> b = new ArrayList<String>(); // ArrayList is subclass of class List
 ArrayList<String> c = new ArrayList<>(); // <> uses type inference
 List<String> d = new ArrayList<>(); // <> and ArrayList subclass of List
 var e = new ArrayList<String>(); // use var to infer type of variable
 var v = Math.floor(1.5); // not obvious what type v is (double)
 }
}
```

# Function arguments

- Must declare the number of arguments and their types, and the return type
- The argument types are part of the *signature* of the function
- Several functions can have the same name, but different type signatures
- Python keyword arguments, \* and \*\* do not exist in Java 😞

## Functions.java

```
public class Functions {
 private static int f(int x) {
 return x * x;
 }
 private static int f(int x, int y) {
 return x * y;
 }
 private static String f(String a, String b) {
 return a + b; // string concatenation
 }

 public static void main(String[] args) {
 System.out.println(f(7));
 System.out.println(f(3, 4));
 System.out.println(f("abc", "def"));
 }
}
```

## shell

```
| 49
| 12
| abcdef
```

## functions.py

```
def f(x, y=None):
 if y == None:
 y = x
 if type(x) is int:
 return x * y
 else:
 return x + y
print(f(7), f(3, 4), f('abc', 'def'))
```

# Class

- Constructor = method with name equal to class name (no return type)
- `this` = refers to current object (Python “self”)
- Use `private / public` on attributes / methods to give access outside class
- Use `new name(arguments)` to create new objects
- There can be multiple constructors, but with distinct type signatures

## AClass.java

```
class Rectangle {
 private int width, height; // declare attributes
 // constructor, class name, no return type
 public Rectangle(int width, int height) {
 this.width = width;
 this.height = height;
 }

 public Rectangle(int side) {
 width = side; // same as this.width = side
 height = side;
 }

 public int area() {
 return width * height;
 }
}

public class AClass {
 public static void main(String[] args) {
 Rectangle r = new Rectangle(6, 7);
 System.out.println(r.area());
 }
}
```

## shell

# Inheritance

- Java supports single inheritance using `extends`
- Attributes and methods that should be accessible in a subclass must be declared `protected` (or `public`)
- Constructors are not inherited but can be called using `super`

## Inheritance.java

```
class BasicRectangle {
 // protected allows subclass to access attributes
 protected int width, height;
 public BasicRectangle(int width, int height) {
 this.width = width; this.height = height;
 }
}

class Rectangle extends BasicRectangle {
 public Rectangle(int width, int height) {
 // call constructor of super class
 super(width, height);
 }
 public int area() {
 return width * height;
 }
}

public class Inheritance {
 public static void main(String[] args) {
 Rectangle r = new Rectangle(6, 7);
 System.out.println(r.area());
 }
}
```

## shell

# Generic class

- Class that is parameterized by one or more types (comma separated)
- Primitive types cannot be type parameters
- Instead use *wrappers*, like **Integer** for **int**

## GenericPair.java

```
class Pair<element> {
 private element x, y;
 public Pair(element x, element y) {
 this.x = x; this.y = y;
 }
 element first() { return x; }
 element second() { return y; }
}
public class GenericPair {
 public static void main(String[] args) {
 var p = new Pair<Integer>(6, 7);
 System.out.println(p.first() * p.second());
 }
}
```

## shell

# Interface

- Java does not support multiple inheritance like Python
- But a class can implement an arbitrary number of **interfaces**
- An interface specifies a set of attributes and methods a class must have
- The type of a variable can be an interface, and the variable can hold any object where the class is stated to **implement** the interface

## RectangleInterface.java

```
interface Shape {
 public int area(); // method declaration
}

class Rectangle implements Shape {
 private int width, height;

 // constructor, class name, no return type
 public Rectangle(int width, int height) {
 this.width = width; this.height = height;
 }

 public int area() {
 return width * height;
 }
}

public class RectangleInterface {
 public static void main(String[] args) {
 Shape r = new Rectangle(6, 7);
 System.out.println(r.area());
 }
}
```

# Abstract classes

- **Abstract class** = class that cannot be instantiated, labeled abstract
- **Abstract method** = method declared without definition, labeled abstract, must be in abstract class
- An abstract class can be **extended** to a non-abstract class by providing the missing method definitions

## AbstractRectangle.java

```
abstract class Shape {
 abstract public int circumference();
 abstract public int area();
 public double fatness() {
 // convert int from area() to double before /
 return (double)area() / circumference();
 }
}

class Rectangle extends Shape {
 private int width, height;
 // constructor, class name, no return type
 public Rectangle(int width, int height) {
 this.width = width; this.height = height;
 }
 public int area() {
 return width * height;
 }
 public int circumference() {
 return 2 * (width + height);
 }
}

public class AbstractRectangle {
 public static void main(String[] args) {
 Shape r = new Rectangle(6, 7);
 System.out.println(r.fatness());
 }
}
```

# Default methods in interfaces

- Before Java 8 all methods in an interface were abstract (no definition)
- Since Java 8 interfaces can have **default** methods with definition
- The distinction between abstract classes and interfaces gets blurred
  - a class can only extend one abstract class
  - a class can implement more interfaces

⇒ multiple “inheritance” is possible in Java

## DefaultInterface.java

```
interface Shape {
 public int circumference();
 public int area();
 default public double fatness() {
 // convert int from area() to double before /
 return (double)area() / circumference();
 }
}

class Rectangle implements Shape {
 private int width, height;
 // constructor, class name, no return type
 public Rectangle(int width, int height) {
 this.width = width; this.height = height;
 }
 public int area() {
 return width * height;
 }
 public int circumference() {
 return 2 * (width + height);
 }
}

public class DefaultRectangle {
 public static void main(String[] args) {
 Shape r = new Rectangle(6, 7);
 System.out.println(r.fatness());
 }
}
```

# Multiple Inheritance

- Class C implements both interfaces A and B
- Inherits default methods sayA and sayB
- Cannot inherit sayHi, since in both A and B. Must be overridden in C.
- Can use @override to enforce compiler to check if method exists in super class
- new A() {} creates an instance of an *anonymous class* (extending or implementing A)

## MultipleInheritance.java

```
interface A {
 default public void sayA() { System.out.println("say A"); }
 default public void sayHi() { System.out.println("A say's Hi"); }
}

interface B {
 default public void sayB() { System.out.println("say B"); }
 default public void sayHi() { System.out.println("B say's Hi"); }
}

class C implements A, B {
 @Override // (optional) requests compiler to
 // check if sayHi exists in supertype
 public void sayHi() {
 System.out.println("C say's Hi");
 (new A(){}).sayHi(); // instantiate an anonymous class
 }

 public void test() {
 sayA();
 sayB();
 sayHi();
 }
}

public class MultipleInheritance {
 public static void main(String[] args) {
 new C().test();
 }
}
```

## Shell output

```
say A
say B
C say's Hi
A say's Hi
```

# Lambda expression

- Lambda expressions are possible since Java 8
- Syntax : *argument -> expression*

LambdaPrinting.java

```
import java.util.*; // ArrayList
public class LambdaPrinting {
 public static void main(String[] args) {
 var elements = new ArrayList<Integer>();
 for (int i = 1; i <= 3; i++)
 elements.add(i);
 elements.forEach(e -> System.out.println(e));
 }
}
```

LambdaPrinting.java

```
1
2
3
```



# Welcome to Java for Python Programmers

## Contents:

- 1. Java for Python Programmers
  - 1.1. Preface
  - 1.2. Introduction
  - 1.3. Why Learn another programming Language?
    - 1.3.1. Why Learn Java? Why not C or C++?
  - 1.4. Lets look at a Java Program
  - 1.5. Java Data Types
    - 1.5.1. Numeric
      - 1.5.1.1. Import
      - 1.5.1.2. Declaring Variables
      - 1.5.1.3. Input / Output / Scanner
    - 1.5.2. String
    - 1.5.3. List
    - 1.5.4. Arrays

