

Introduction to Programming with Scientific Applications

Gerth Stølting Brodal
Department of Computer Science
Aarhus University



Course evaluation 2018

*"Den første forelæsning var meget
skræmmende og overvældende"*

Course description – kursuskatalog.au.dk/en/course/123832/

Introduction to Programming with Scientific Applications

Description of qualifications

After the course the participants will have knowledge of principles and techniques for systematic **construction** of **programs**.

At the end of the course, the participants will be able to:

- apply constructions of a common programming language,
- develop **well-structured** programs and perform **testing** and **debugging** of these,
- explain fundamental programming concepts and basic algorithmic techniques,
- apply standard **tools for scientific applications**,
- use the documentation for a programming language and available software packages.

Contents

The course gives an introduction to programming with scientific applications.

Programming concepts and techniques are introduced using the **Python** programming language.

The programming concepts are **illustrated in other programming languages**. The following content is included.

Basic programming constructs: Data types, operators, variables, flow of control, conditionals, loops, functions, recursion, scope, exceptions. *Object orientation:* Abstract data types, classes, inheritance, encapsulation. *Basic algorithmic techniques:* Sorting, binary search, dynamic programming. *Systematic development of programs:* Testing and debugging. File-based input/output, numerical analysis, functional programming. Scientific computing using standard packages for Python.

ECTS 10

Hours - weeks - periods

Lectures 2 x 2 hours/week

TA sessions 1 x 3 hours/week

Study café 3 x 1 hour/week

Language of instruction

Danish

Instructor

Gerth Stølting Brodal

Academic prerequisites

(Some) Linear algebra

Exam

5 hour programming

Aid: Computer and Internet, headphones, 7-point grading scale

Prerequisites for examination participation

Submission and approval of 10 mandatory assignments and submission of **1 implementation project**

Notes Grade reflects an overall assessment of implementation project and written examination. Project counts 20% and written exam counts 80%

Lecturer

Name	Gerth Stølting Brodal
Research	Algorithms and Data Structures (Computer Science)
Teaching	
2018 -	BSc course on Introduction to Programming with Scientific Applications
2003 -	BSc course on Introduction to Algorithms and Data Structures
1999 - 17	MSc courses on Computational Geometry, Algorithm Engineering, Advanced Data Structures, External Memory Algorithms and Data Structures
Python	Advanced Beginner

Question – Primary Education?

- a) Mathematics
- b) Mathematics-Economics
- c) Data Science
- d) Chemistry
- e) Physics
- f) Other Science-Technology
- g) Other

Question – Programming languages you know?

Question – Programming experience?

For the programming language you know best (if any) please state your proficiency level within the language.

- a) None
- b) Fundamental awareness (basic knowledge)
- c) Novice (limited experience)
- d) Intermediate (practical application)
- e) Advanced (applied theory)
- f) Expert (recognized authority)

Some course practicalities

Primary lecture material = slides



Week	Monday	Tuesday	Wednesday	Thursday	Friday
5	F1	no TA class	F2		
6	F3	TØ1	TØ1 / F4	TØ1	
7	F5	TØ2	TØ2 / F6	TØ2	
8	F7	TØ3	TØ3 / F8	TØ3	
9	F9	TØ4	TØ4 / F10	TØ4	
10	F11	TØ5	TØ5 / F12	TØ5	
11	F13	TØ6	TØ6 / F14	TØ6	
12	F15	TØ7	TØ7 / F16	TØ7	
13	Easter break				
14		-	- / F17	TØ8	
15	F18	TØ8	TØ8 / F19	TØ9	
16	F20	TØ9	TØ9 / F21	TØ10	
17	F22	TØ10	TØ10 / F23	TØ11	Kapsejlads?
18	F24	TØ11	TØ11 / F25	TØ12	
19	F26	TØ12	TØ12 / -	Ascesion Day	
20	F27	TØ13	TØ13 / -	TØ13	

	Monday	Tuesday	Wednesday	Thursday	Friday
8:15-9:00		TA meeting			
9:15-10:00	Studiecafé		Studiecafé		Studiecafé
10:15-11:00	Lecture		Lecture		
11:15-12:00					
12:15-13:00			DV KE		
13:15-14:00					
14:15-15:00		MA1 MØ FY		MA2 Mix	
15:15-16:00					
16:15-17:00					
17:15-18:00					



Course page on Brightspace and GitHub

The screenshot shows the Brightspace interface. At the top, there's a header with the course title 'Introduktion til programmering med videnskabelige an...', navigation icons, and the user 'Gerth Støtting Brodal as Student'. Below this is a dark blue navigation bar with links: 'Course Home', 'Content', 'Course Tools', 'Classlist', 'Zoom', 'Panopto', and 'Help'. On the left, a sidebar contains a 'Course information' link, 'Who, where and when', 'Handin deadlines', and 'Course content on GitHub'. The main content area is titled 'Course information' and contains a welcome message and introductory text about the course.

gsbrodal.github.io/ipsa

The screenshot shows the GitHub repository page for 'Introduction to Programming with Scientific Applications' by Aarhus University, Department of Computer Science. The repository has a dark theme header with the course title and a Python code snippet in the background. The main content area is titled 'Welcome' and contains a detailed description of the course, including its goals, structure, and requirements. A sidebar on the left lists the course content, and a portrait of the lecturer, Gerth Støtting Brodal, is on the right.

Welcome

This page contains the public content for the course *Introduction to Programming with Scientific Applications* offered by Aarhus University, Department of Computer Science. The lecturer is [Gerth Støtting Brodal](#).

Class lists, discussions, student handins and feedback are handled using Aarhus University's learning management system Brightspace at brightspace.au.dk.

The course gives an introduction to the Python 3 programming language and applications using Python. Throughout the course students are encouraged to seek online information in e.g. the Python language specification.

The course will be run with weekly 2 x 2 hours lectures (alternatively recorded lectures on YouTube), 3 hours of exercise classes with a teaching assistant ("øvelser"), and 3 hours of staffed study café.


During the course students are required to hand in 10 weekly handins and one larger implementation project. Handins and the project are done in groups of up to three persons. Approval of the weekly handins is a prerequisite to attend the exam. The final exam will be a programming exam with all aids, incl. internet, and *the final grade will be based on an overall evaluation of the implementation project (20%) and the programming exam (80%)*.

Course content

The course gives an introduction to programming with scientific applications. Programming concepts and techniques are introduced using the Python programming language. The programming concepts are illustrated in other programming languages. The following content is included.


- Basic programming constructs: Data types, operators, variables, flow of control, conditionals, loops, functions, recursion, scope, exceptions.

Course text book – optional

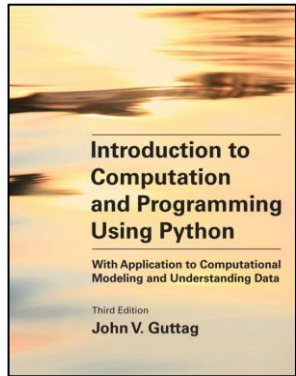

John V. Guttag: **Introduction to Computation and Programming Using Python, Third Edition With Application to Computational Modeling and Understanding Data**. Third Edition. 664 pages. MIT Press, 2021.


- *[Guttag, 2nd Ed., page 8] "The reader should be forewarned that this book is by no means a comprehensive introduction to Python". 3rd Ed. added about 80 pages on introduction to Python.*
- *Covers all basic features of Python enabling you to deal with data in Chapters 1-10 (212 pages) - remaining chapters are applications*
- *Other resources: Google, stackoverflow, Python.org, YouTube, ...*

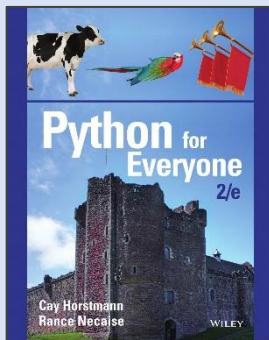


Comparison to a standard text book on the *programming language* Python by Cay Horstmann and Rance Necaise:

Topic **recursion** is covered by Guttag on page 123 (2nd edition on page 50), Horstmann and Necaise do it on page 611


Some other books on Python

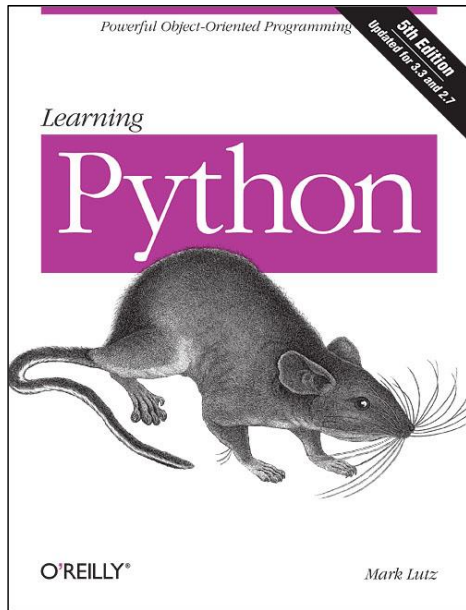


O'Reilly, 2013
1684 pages

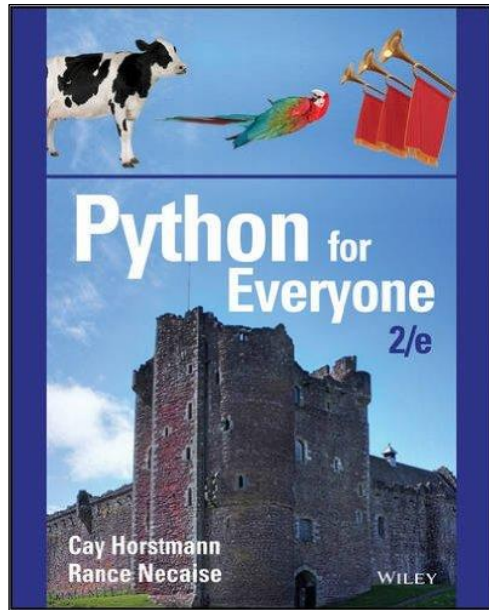


Wiley, 2016
752 pages

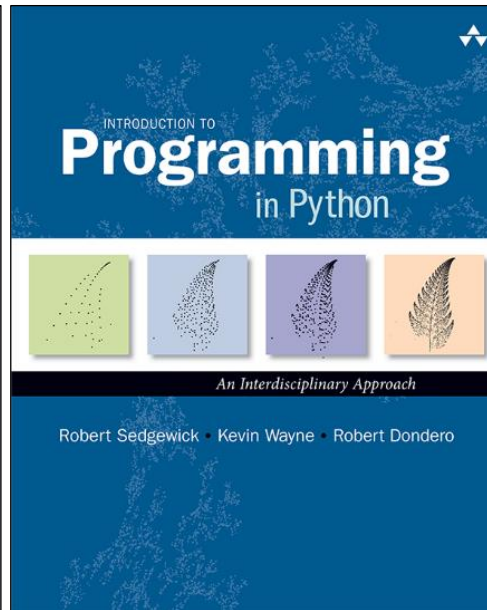

Addison-Wesley, 2015
794 pages

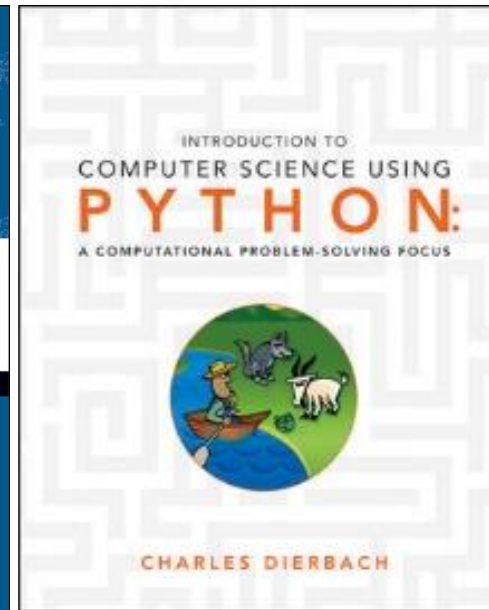

Wiley, 2013
580 pages

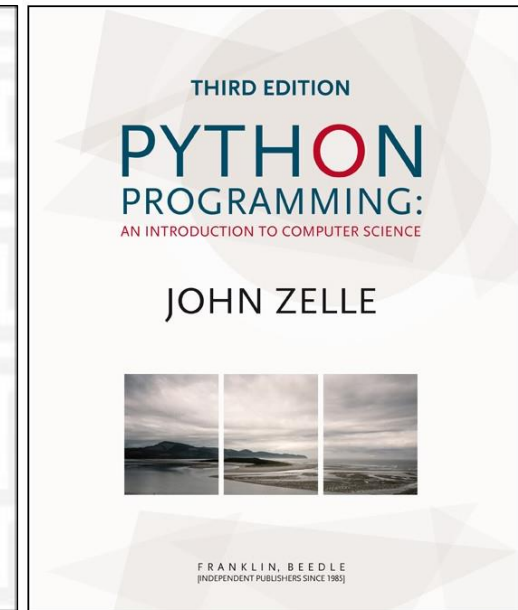

Franklin & Beedle, 2016
552 pages

... numerous online introduction texts/courses/videos on Python

Two Python programs

A Python program

Python shell

```
> x = 7
> print(x * x)
| 49
```

- 7 is an *integer literal* – in Python denoted an “int”
- x is the name of a *variable* that can hold some value
- = is assigning a value to a variable
- * denotes multiplication
- print is the name of a built-in *function*,
here we call print to print the result of 7 * 7
- A program consists of a sequence of *statements*, executed sequentially

Memory



Question – What is the result of this program?


Python shell

```
> x = 3  
> y = 5  
> x = 2  
> print(x * y)
```

x assigned new value

- 😊 a) 10
- b) 15
- c) 25
- d) [15, 10]
- e) Error
- f) Don't know

Memory

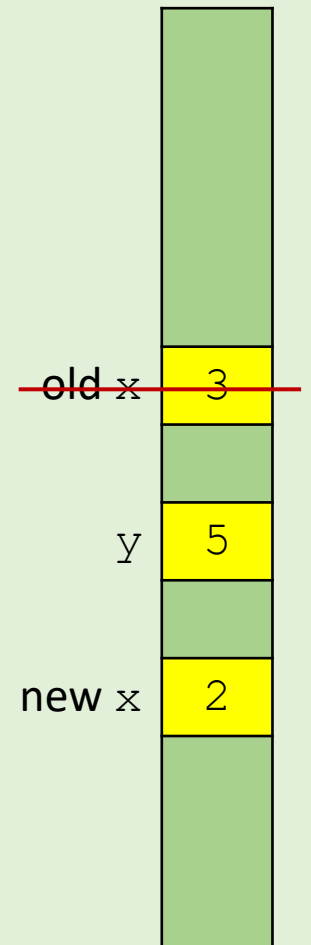


Another Python program using lists

Python shell

```
> a = [13, 27, 7, 42]
> print(a)
| [13, 27, 7, 42]
> print(a[2])
| 7
```

- `[13, 27, 7, 42]` is a *list* containing four integers
- `a[2]` refers to the entry in the list with *index* 2 (the first element has index 0, i.e. `a[2]` is the 3rd element of the list)
- Note that `print` also can print a list

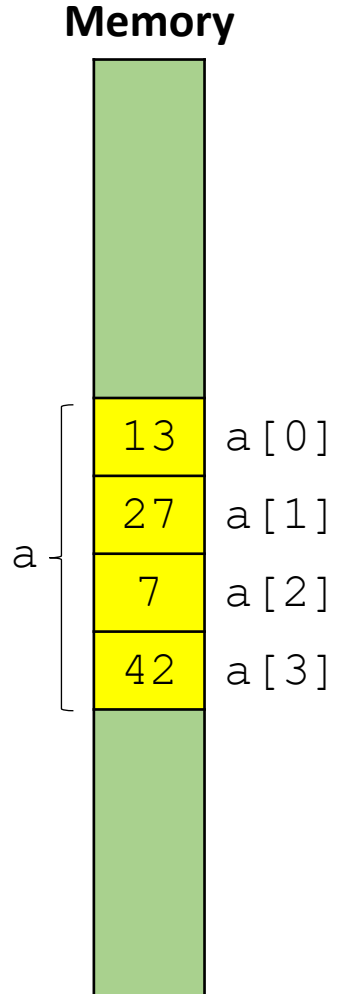


Question – What is the result of this program?

Python shell

```
> a = [3, 5, 7]  
> print(a[1] + a[2])
```

- a) 8
- b) 10
- 😊 c) 12
- d) 15
- e) Don't know

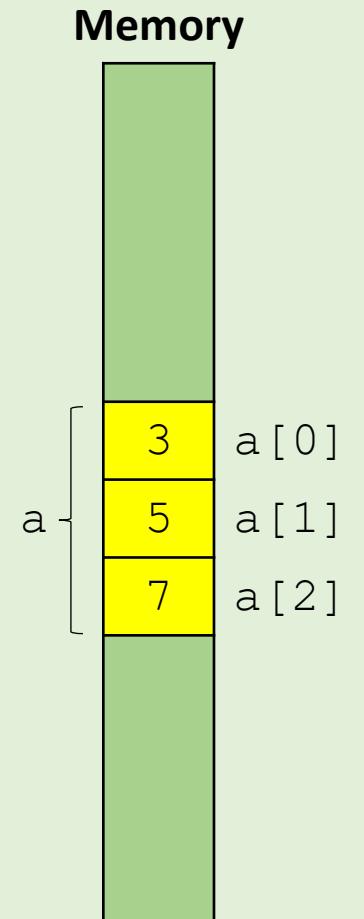











Why Python ?



the next slides will be technical

TIOBE Index January 2024


Since
November
2021
Python #1

Jan 2024	Jan 2023	Change	Programming Language		Ratings	Change
1	1			Python	13.97%	-2.39%
2	2			C	11.44%	-4.81%
3	3			C++	9.96%	-2.95%
4	4			Java	7.87%	-4.34%
5	5			C#	7.16%	+1.43%
6	7	⬆		JavaScript	2.77%	-0.11%
7	10	⬆		PHP	1.79%	+0.40%
8	6	⬇		Visual Basic	1.60%	-3.04%
9	8	⬇		SQL	1.46%	-1.04%
10	20	⬆		Scratch	1.44%	+0.86%

The TIOBE Programming Community index is an indicator of the **popularity of programming languages**. The index is updated once a month. The ratings are based on the number of skilled engineers world-wide, courses and third party vendors. Popular search engines such as Google, Bing, Yahoo!, Wikipedia, Amazon, YouTube and Baidu are used to calculate the ratings. It is important to note that the TIOBE index is not about the *best* programming language or the language in which *most lines of code* have been written.

www.tiobe.com

Popularity of programming languages

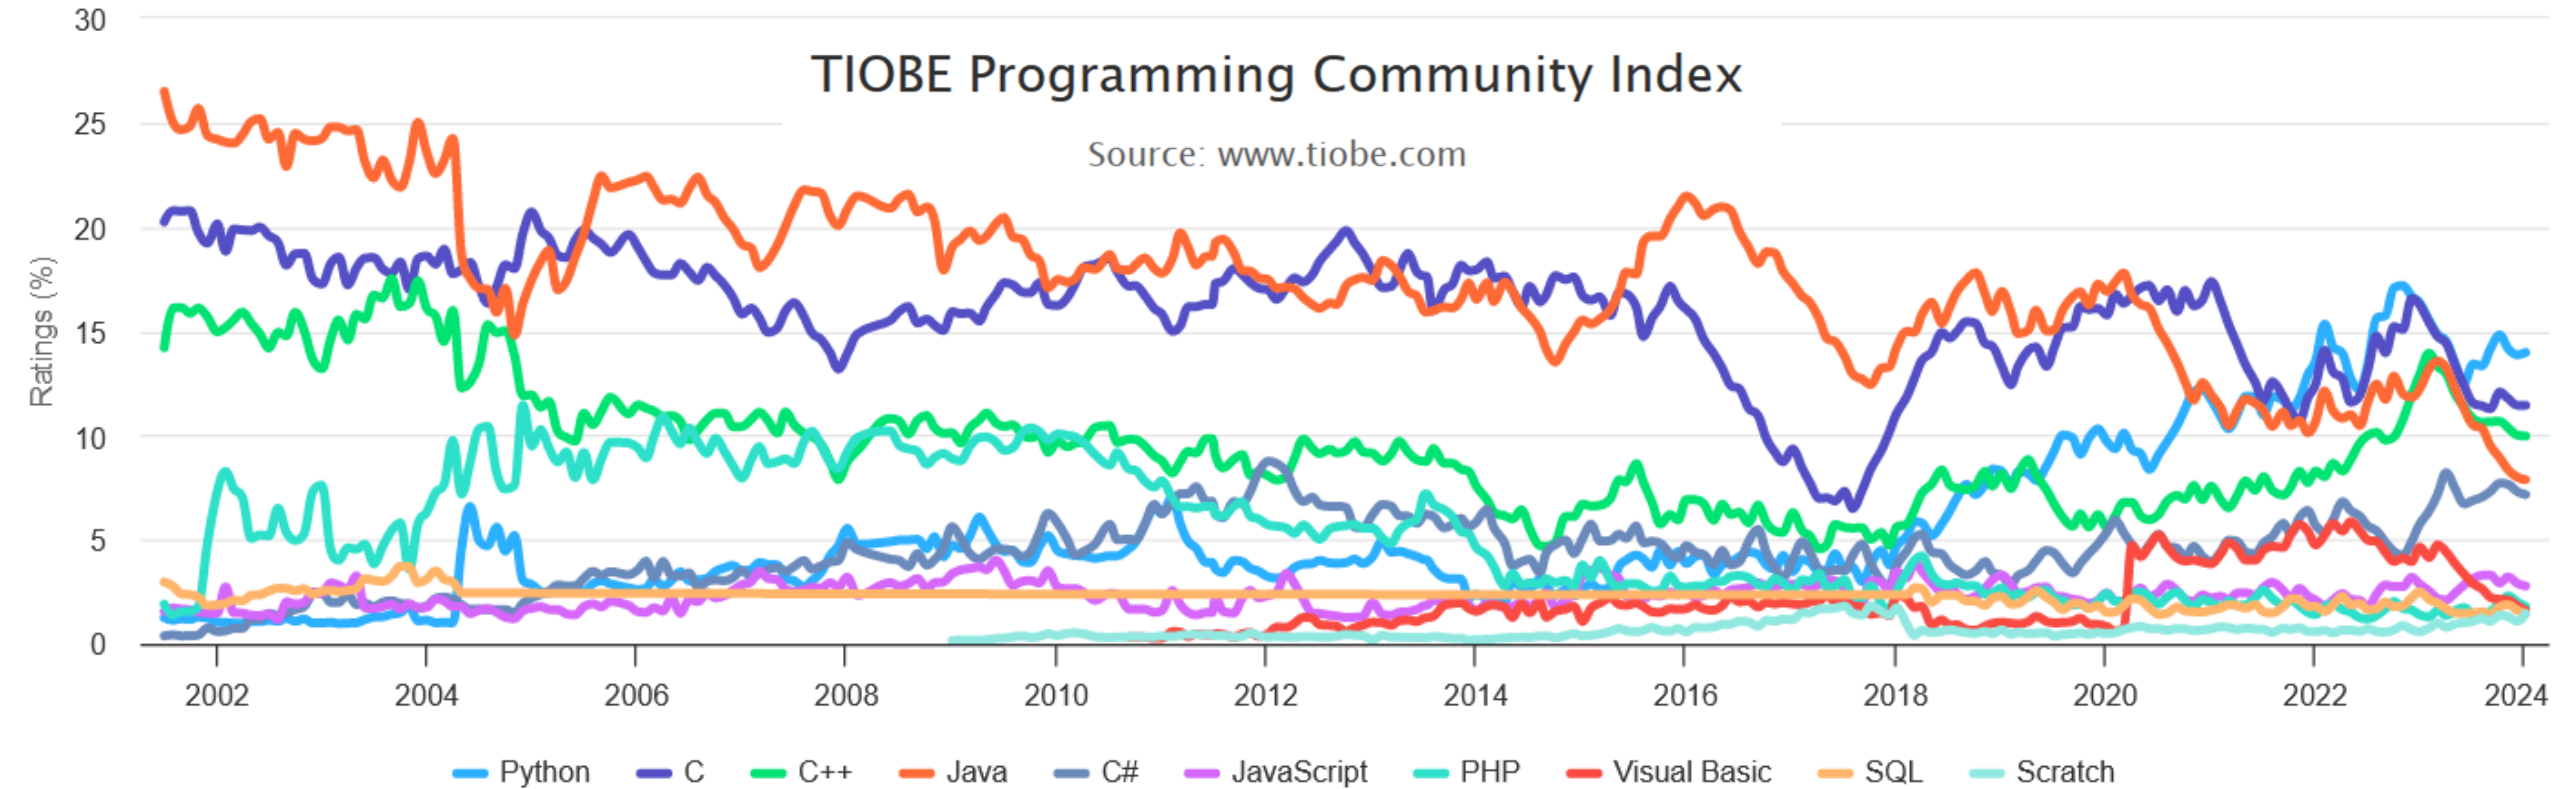

“Hello World”

- In Java, C, C++ a lot of “{”, “}” and “;” are needed
- Java tends to have a lot of “public...” details that need to be spelled out
- Python is concise

Java

```
public class HelloWorld {  
    public static void main( String[] args ) {  
        System.out.println( "Hello World!" );  
        System.exit( 0 );  
    }  
}
```

C

```
#include <stdio.h>  
  
int main(int argc, char **argv) {  
    printf("Hello World");  
    return 0;  
}
```

C++

```
#include <iostream>  
using namespace std;  
  
int main(int argc, char** argv) {  
    cout << "Hello, World!";  
    return 0;  
}
```

Python 2

```
print "Hello world"
```

Python 3

```
print("Hello world")
```


Why Python ?

- **Short concise code**

C index out of bounds

Debugging is the process of finding and resolving defects or problems within a computer program that prevent correct operation of computer software or a system.

en.wikipedia.org/wiki/Debugging

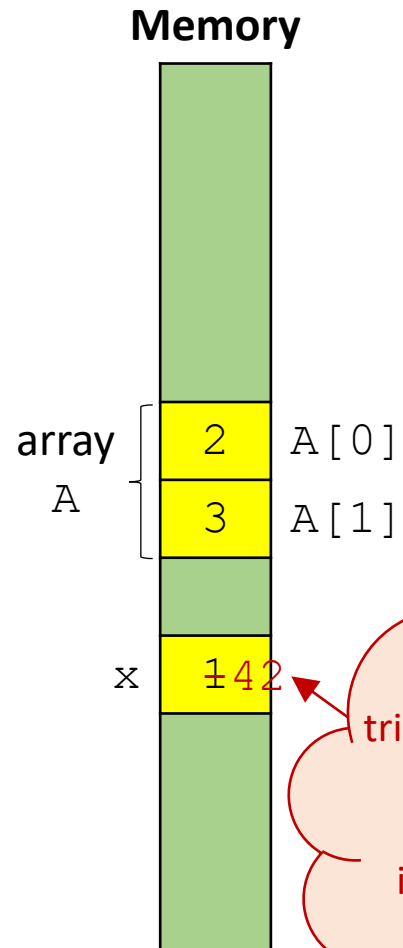

"A" only has size 2, but tries to update the 4th entry. No warning is giving. Something unexpected is overridden in memory. **Have fun debugging!**

indexing.c


```
#include <stdio.h>
int main() {
    int x = 1;
    int A[2] = {2, 3}; // A[0] = 2, A[1] = 3
    printf("x = %d, A = {%d, %d}\n", x, A[0], A[1]);
    A[3] = 42; // index A[3] out of bounds
    printf("x = %d, A = {%d, %d}\n", x, A[0], A[1]);
    return 0;
}
```

Output

```
$ gcc indexing.c
$ ./a.exe
x = 1, A = {2, 3}
x = 42, A = {2, 3}
```

Skipping checking for invalid indexing makes programs faster, but also requires disciplined programming

... and C++ index out of bounds

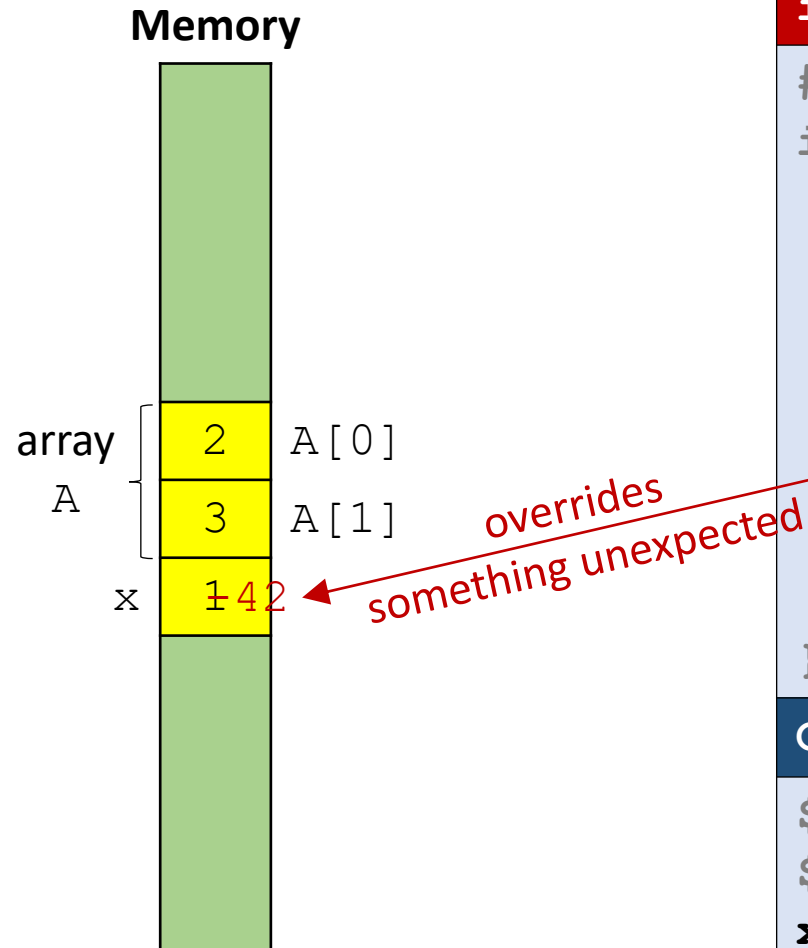


indexing.cpp

```
#include <iostream>
int main() {
    int x = 1;
    int A[2] = {2, 3}; // A[0] = 2, A[1] = 3
    std::cout << "x = " << x << ", A = {"
                << A[0] << ", " << A[1] << "}" << std::endl;
    A[2] = 42; // index A[2] out of bounds
    std::cout << "x = " << x << ", A = {"
                << A[0] << ", " << A[1] << "}" << std::endl;
    return 0;
}
```

Output

```
$ g++ indexing.cpp
$ ./a.exe
x = 1, A = {2, 3}
x = 42, A = {2, 3}
```

... and C++ vector index out of bounds

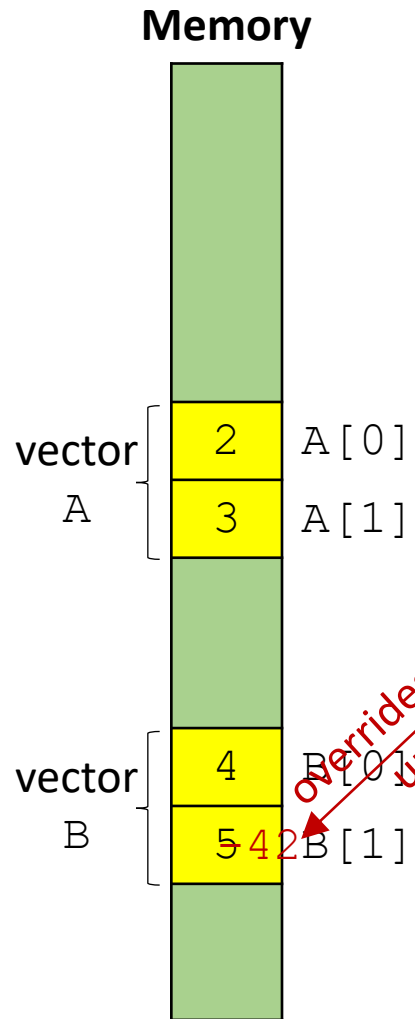


indexing.cpp

```
#include <iostream>
#include <vector>
int main() {
    std::vector<int> A = {2, 3}; // A[0] = 2, A[1] = 3
    std::vector<int> B = {4, 5}; // B[0] = 4, B[1] = 5
    std::cout << "A={" << A[0] << ", " << A[1] << "}, ";
    std::cout << "B={" << B[0] << ", " << B[1] << "}" << std::endl;
    A[9]=42; // index A[9] out of bounds
    std::cout << "A={" << A[0] << ", " << A[1] << "}, ";
    std::cout << "B={" << B[0] << ", " << B[1] << "}" << std::endl;
    return 0;
}
```

Output

```
$ g++ -std=c++11 indexing-vector.cpp
$ ./a.exe
A={2, 3}, B={4, 5}
A={2, 3}, B={4, 42}
```


... and Java index out of bounds exception

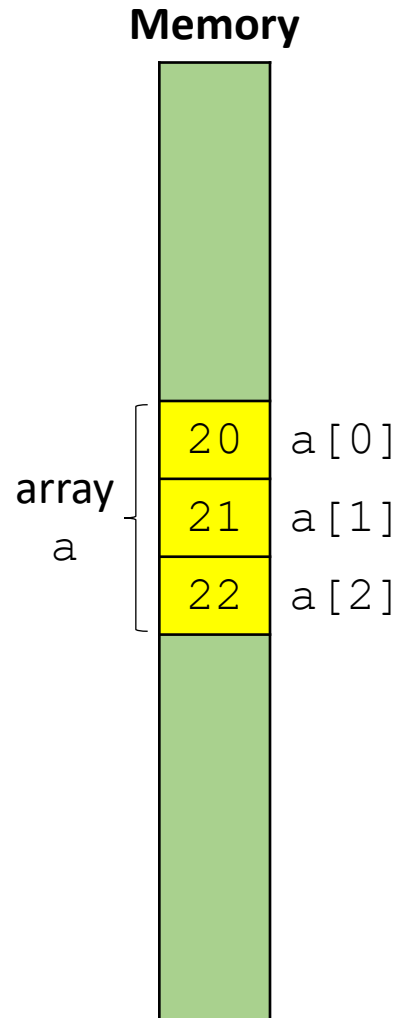

indexing.java


```
class IndexingTest{  
    public static void main(String args[]){  
        int a[] = {20, 21, 22};  
        a[5] = 42; // index a[5] out of bounds  
    }  
}
```

Output

```
$ javac indexing.java  
$ java IndexingTest  
Exception in thread "main"  
java.lang.ArrayIndexOutOfBoundsException: 5  
    at IndexingTest.main(indexing.java:5)
```

Java provides error message when running the program

... and Python index out of bounds exception

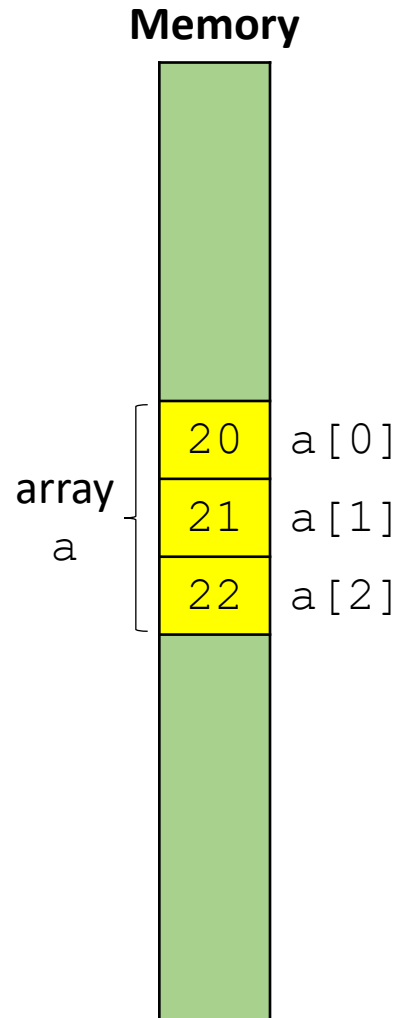

indexing.py

```
a = [20, 21, 22]
a[5] = 42 # index a[5] out of bounds
```

Output

```
$ python indexing.py
Traceback (most recent call last):
  File "indexing.py", line 3, in <module>
    a[5] = 42
IndexError: list assignment index out of range
```

Python provides error message when running the program

Why Python ?

- Short concise code
- **Index out-of-range exceptions**

C++ different ways to print a vector

vector-iterator.cpp

```
#include <iostream>
#include <vector>
int main() {
    // Vector is part of STL (Standard Template Library)
    std::vector<int> A = {20, 23, 26};
    // "C" indexing - since C++98
    for (int i = 0; i < A.size(); i++)
        std::cout << A[i] << std::endl;
    // iterator - since C++98
    for (std::vector<int>::iterator it = A.begin(); it != A.end(); ++it)
        std::cout << *it << std::endl;
    // "auto" iterator - since C++11
    for (auto it = A.begin(); it != A.end(); ++it)
        std::cout << *it << std::endl;
    // Range-based for-loop - since C++11
    for (auto e : A)
        std::cout << e << std::endl;
}
```

elegant

Java - different ways to print a vector

vector-iterator.java

```
import java.util.Vector;
import java.util.Iterator;

class IteratorTest{
    public static void main(String[] args) {
        Vector<Integer> a = new Vector<Integer>();
        a.add(7);
        a.add(42);
        // "C" for-loop & get method
        for (int i = 0; i < a.size(); i++)
            System.out.println(a.get(i));
        // iterator
        for (Iterator it = a.iterator(); it.hasNext(); )
            System.out.println(it.next());
        // for-each loop - since Java 5
        for (Integer e : a)
            System.out.println(e);
    }
}
```

elegant

The Python way to print a list

print-list.py

```
a = [20, 23, 26]
```

```
for e in a:  
    print(e)
```

Output

```
$ python print-list.py
```

```
20
```

```
23
```

```
26
```

Why Python ?

- Short concise code
- Index out of range exceptions
- **Elegant for-each loop**

C++ how not to print a vector

print-vector.cpp

```
#include <iostream>
#include <vector>


int main() {
    std::vector<int> A = {2, 3};
    std::cout << A << std::endl;
    return 0;
}
```

C++ vectors cannot be printed directly –
mistake results in +200 lines of error messages

Why Python ?

- Short concise code
- Index out of range exceptions
- Elegant for-each loop
- **Python hopefully better error messages than C++**

Python and garbage collection

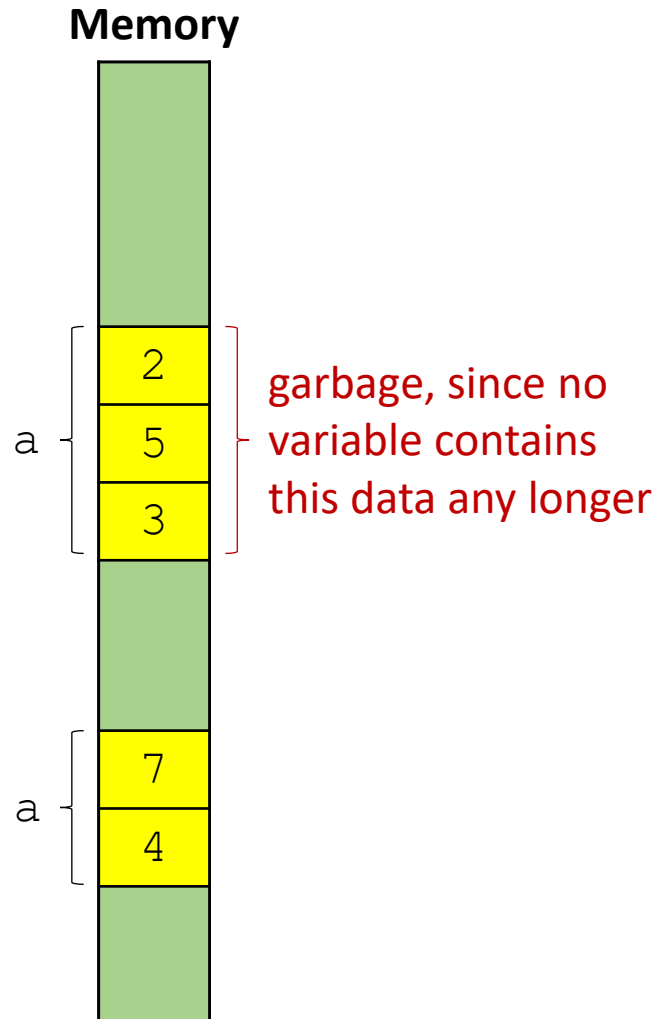

garbage.py

```
a = [2, 5, 3]  
a = [7, 4]
```

a gets new value


- Python and e.g. Java, C# and JavaScript have a **garbage collector** to automatically recycle garbage
- C and C++ garbage collection must be done explicitly by the program; forgetting to **free** memory again results in **memory leaks** – which can be really hard to find. **Have fun debugging!**

Why Python ?

- Short concise code
- Index out of range exceptions
- Elegant for-each loop
- Python hopefully better error messages than C++
- **Garbage collection is done automatically**

Python performance vs C, C++ and Java

Compute sum $1 + 2 + 3 + \dots + n = n^2/2 + n/2$

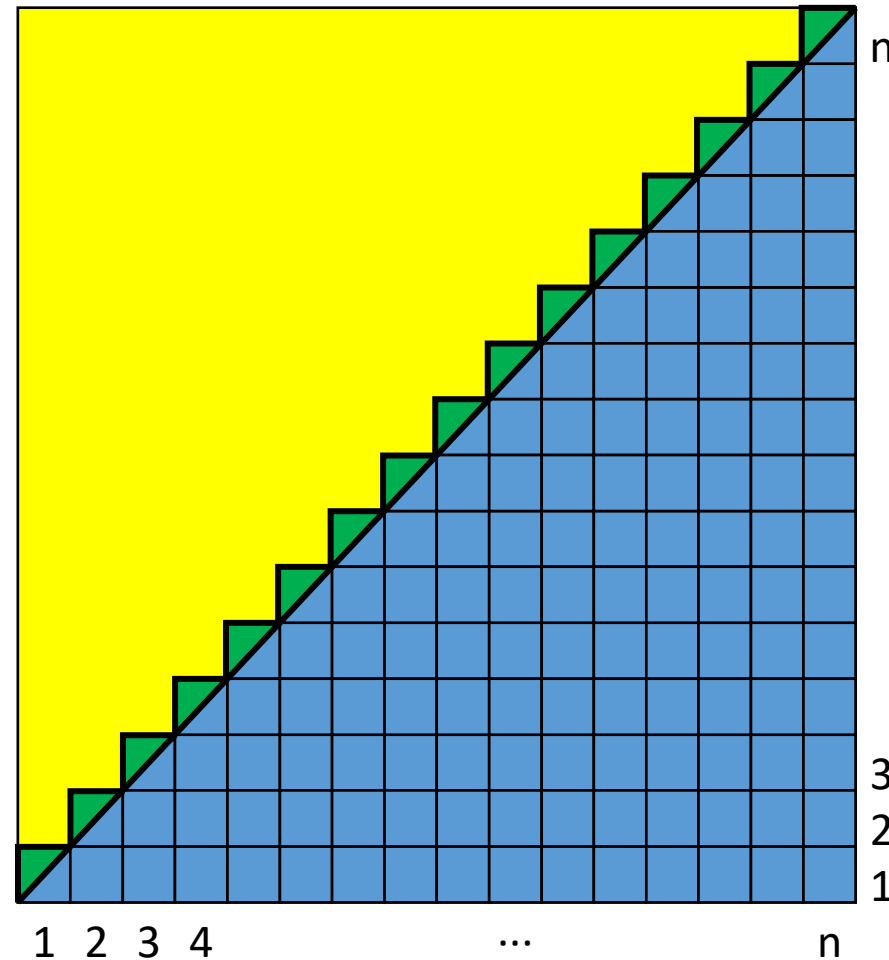

$$1 + 2 + \dots + n$$

add.py

```
import sys

n = int(sys.argv[1])
sum = 0
for i in range(1, n + 1):
    sum += i
print("Sum =", sum)
```

add.c

```
#include <stdio.h>
#include <stdlib.h>

int main(int argc, char *argv[]) {
    int n = atoi(argv[1]);
    int sum = 0;
    for (int i = 1; i <= n; i++)
        sum += i;
    printf("Sum = %d\n", sum);
}
```

add.cpp

```
#include <iostream>
#include <cstdlib>
using namespace std;

int main(int argc, char *argv[]) {
    int n = atoi(argv[1]);
    int sum = 0;
    for (int i = 1; i <= n; i++)
        sum += i;
    cout << "Sum = " << sum << endl;
}
```

add.java

```
class Add{
    public static void main(String args[]){
        int n = Integer.parseInt(args[0]);
        int sum = 0;
        for (int i = 1; i <= n; i++)
            sum += i;
        System.out.println("Sum = " + sum);
    }
}
```

Timing results

n	C (gcc 9.2)	C++, int (g++ 9.2)	C++, long (g++ 9.2)	Java (12.0)	Python		
					CPython (3.8.1)	PyPy (7.3.0)	Numba, int64
10^7	0.001 sec*	0.001 sec*	0.003 sec	0.006 sec*	1.5 sec	0.27 sec	0.002 sec
10^9	0.10 sec**	0.10 sec**	0.30 sec	0.40 sec**	145 sec	27 sec	0.2 sec

Wrong output (overflow)

* -2004260032 instead of 50000005000000

** -243309312 instead of 500000000500000000

- since C, C++, and Java only uses 32 bits to represent integers (and 64 bits for "long" integers)



Bit	666666666655555555554444444444333333333332222222222111111111110000000000
position	9876543210987654321098765432109876543210987654321098765432109876543210
<code>bin(10**9)</code>	111011100110101100101000000000
<code>bin(50000005000000)</code>	1011010111100110001000100010010110101101000000
<code>bin(-2004260032+2**32)</code>	10001000100010010110101101000000
<code>bin(500000000500000000)</code>	11011110000010110110101100111100010111111011001010000000
<code>bin(-243309312+2**32)</code>	11110001011111110110010100000000

Timing results


n	C (gcc 9.2)	C++, int (g++ 9.2)	C++, long (g++ 9.2)	Java (12.0)	Python		
					Python (3.8.1)	PyPy (7.3.0)	Numba, int64
10 ⁷	0.001 sec*	0.001 sec*	0.003 sec	0.006 sec*	1.5 sec	0.27 sec	0.002 sec
10 ⁹	0.10 sec**	0.10 sec**	0.30 sec	0.40 sec**	145 sec	27 sec	0.2 sec

- Relative speed

C ≈ C++ > Java >> Python


- C, C++, Java need to care about integer overflows – select integer representation carefully with sufficient number of bits (8, 16, 32, 64, 128)
- Python natively works with arbitrary long integers (as memory on your machine allows). Also possible in Java using the class `java.math.BigInteger`
- Python programs can (sometimes) run faster using PyPy
- Number crunching in **Python** should be delegated to **specialized modules (e.g. Numpy, CPLEX, Numba)** – often written in C or C++ and requires selecting right integer representation

Interpreter vs Compiler

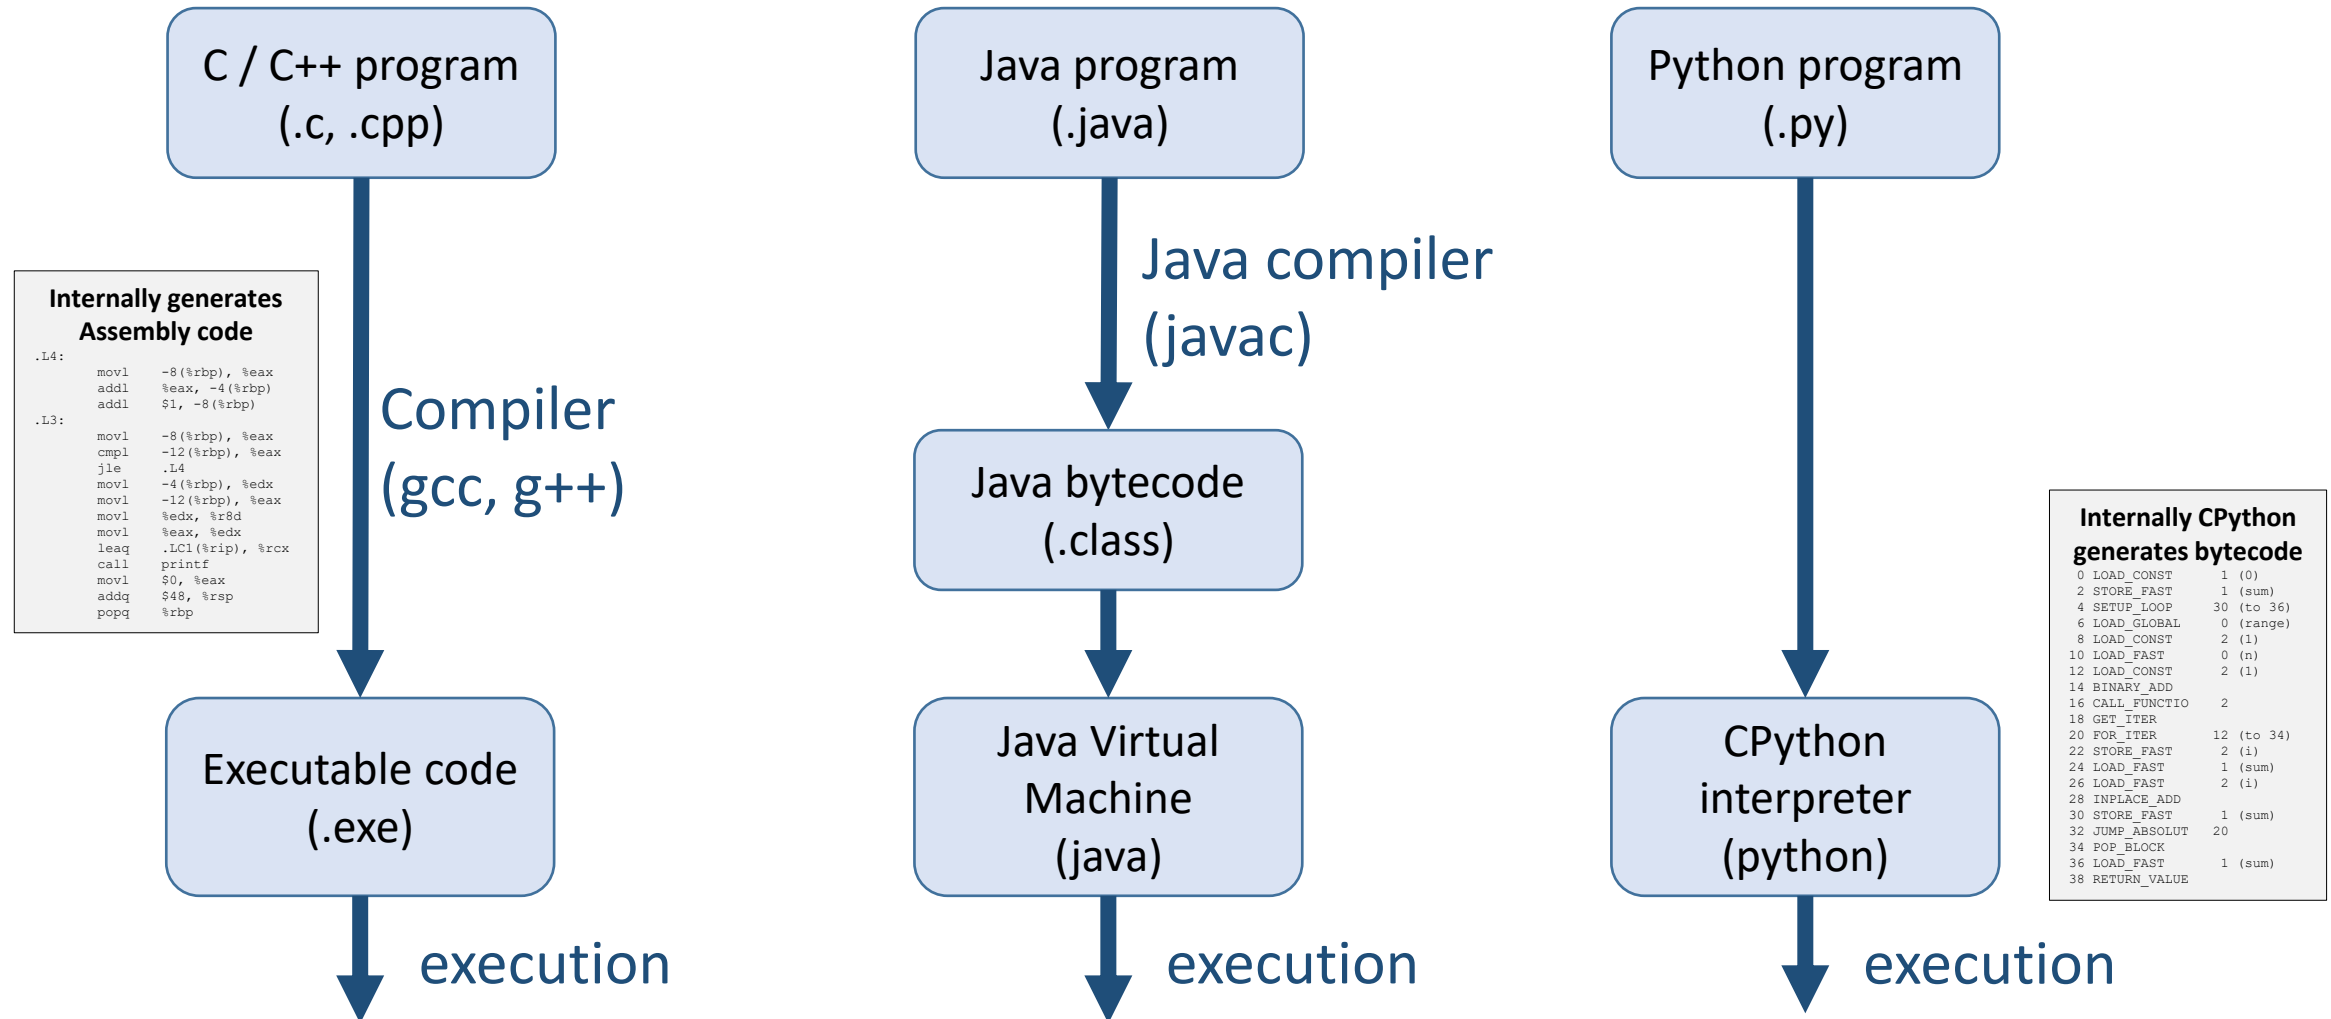

Why Python ?


- Short concise code
- Index out of range exceptions
- Elegant for-each loop
- Python hopefully better error messages than C++
- Garbage collection is done automatically
- **Exact integer arithmetic (no overflows)**
- **Can delegate number crunching to C, C++, ...**

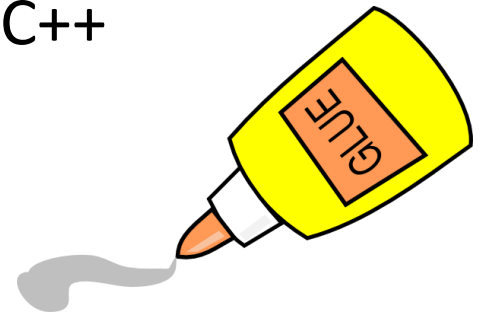

This course

Programming Languages

**(Scientific)
Applications**

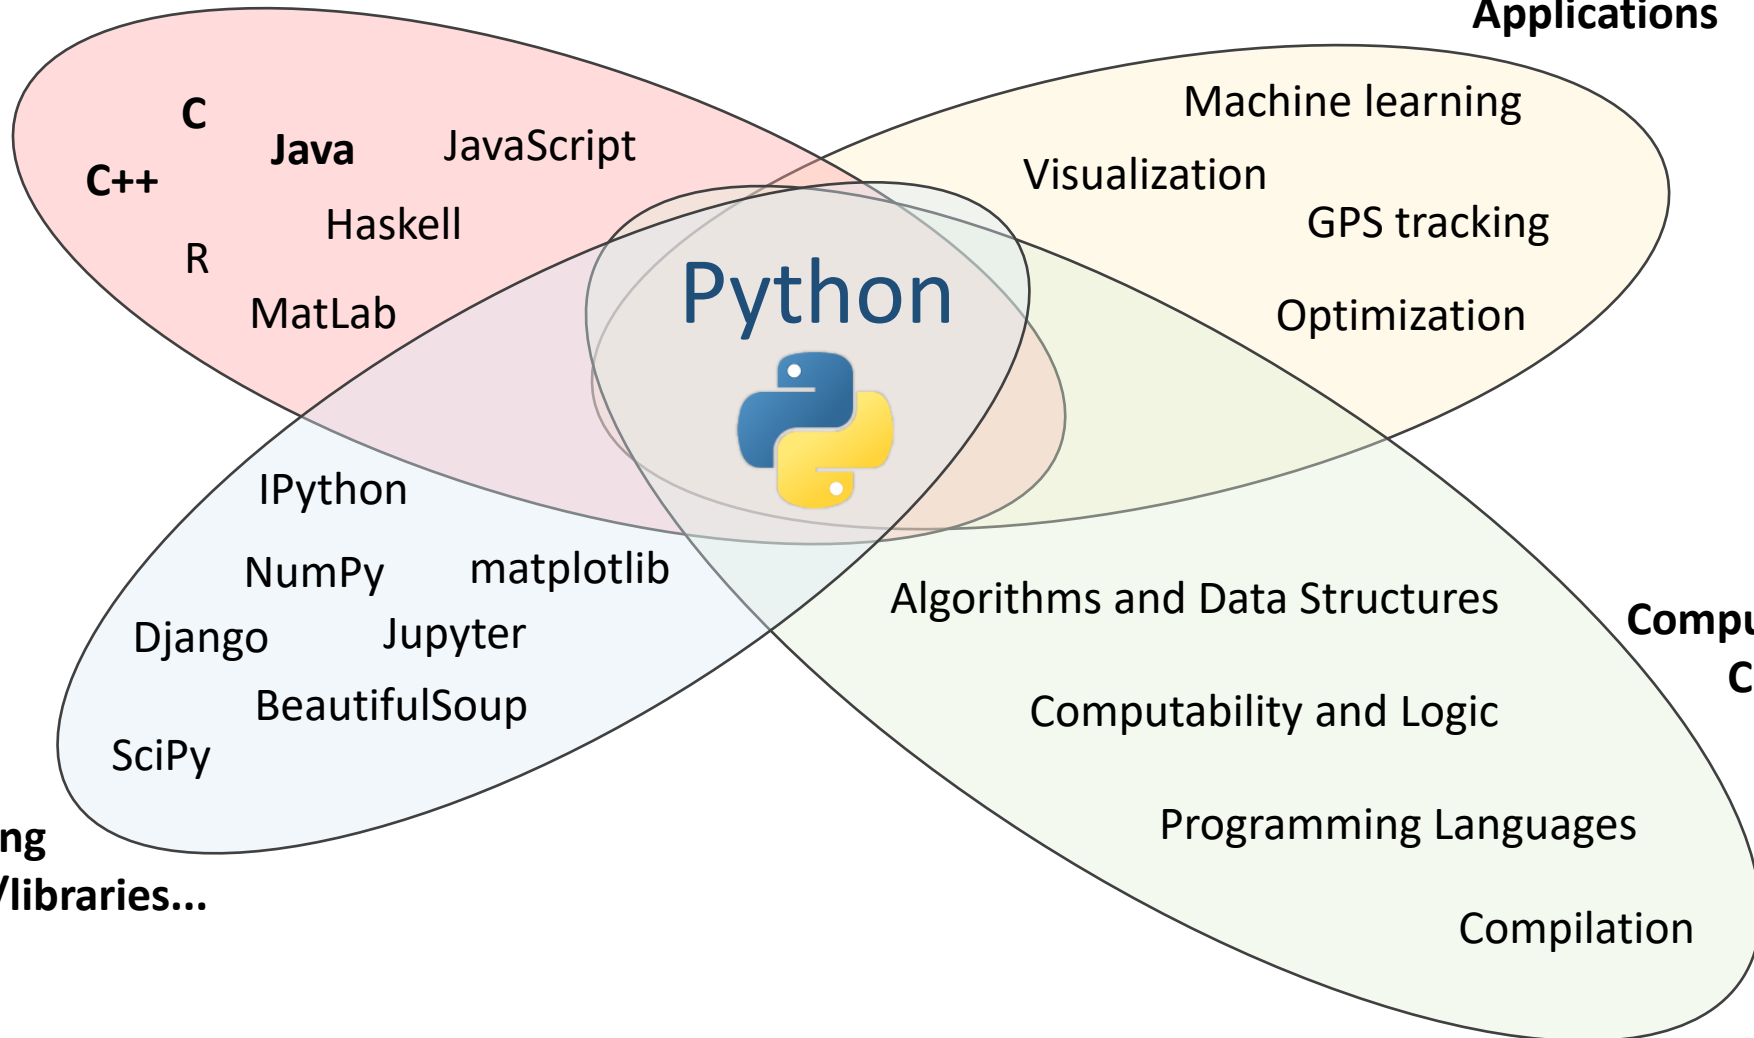

**Programming
modules/packages/libraries...**

Course overview

Basic programming
Advanced / specific python
Libraries & applications

1. Introduction to Python	10. Functions as objects	19. Linear programming
2. Python basics / if	11. Object oriented programming	20. Generators, iterators, with
3. Basic operations	12. Class hierarchies	21. Modules and packages
4. Lists / while / for	13. Exceptions and files	22. Working with text
5. Tuples / comprehensions	14. Doc, testing, debugging	23. Relational data
6. Dictionaries and sets	15. Decorators	24. Clustering
7. Functions	16. Dynamic programming	25. Graphical user interfaces (GUI)
8. Recursion	17. Visualization and optimization	26. Java vs Python
9. Recursion and Iteration	18. Multi-dimensional data	27. Final lecture

10 handins
1 final project (last 1 month)

History of Python development

- Python created by Guido van Rossum in 1989, first release 0.9.0 1991
- Python 2 → Python 3 (clean up of Python 2 language)
 - Python 2 – version 2.0 released 2000, final version 2.7 released mid-2010
 - Python 3 – released 2008, current release 3.12.1
- Python 3 is *not* backward compatible, libraries incompatible

Python 2	Python 3
<code>print 42</code>	<code>print(42)</code>
<code>int</code> = C long (32 bits)	<code>int</code> = arbitrary number of digits (= named “long” in Python 2)
<code>7/3</code> → 2 returns “int”	<code>7/3</code> → 2.333... returns “float”
<code>range()</code> returns list (memory intensive)	<code>range()</code> returns iterator (memory efficient; xrange in Python 2)

Python.org

The screenshot shows the Python.org homepage with a dark blue header and navigation bar. The header includes links for Python, PSF, Docs, PyPI, Jobs, and Community. The main navigation bar has links for About, Downloads, Documentation, Community, Success Stories, News, and Events. A search bar with a 'GO' button and a 'Socialize' button are on the right. A red arrow points from the 'Docs' link to the 'Documentation' link in the main navigation bar. Another red arrow points from the 'PyPI' link to the search bar, with the text '+500.000 Python packages' next to it. A third red arrow points from the 'Downloads' link to the 'Download Python and IDLE' link in the main content area. The main content area features a code snippet, a 'Donate' button, and a section titled 'All the Flow You'd Expect' with a link to 'More control flow tools in Python 3'. At the bottom, there are four columns: 'Get Started', 'Download', 'Docs', and 'Jobs', each with a brief description and a link.

Python

PSF

Docs

PyPI

Jobs

Community

python™

Donate

GO

Socialize

About Downloads Documentation Community Success Stories News Events

```
# For loop on a list
>>> numbers = [2, 4, 6, 8]
>>> product = 1
>>> for number in numbers:
...     product = product * number
...
>>> print('The product is:', product)
The product is: 384
```

>_

All the Flow You'd Expect

Python knows the usual control flow statements that other languages speak — `if`, `for`, `while` and `range` — with some of its own twists, of course. [More control flow tools in Python 3](#)

1 2 3 4 5

Python is a programming language that lets you work quickly and integrate systems more effectively. >>> [Learn More](#)

Get Started

Whether you're new to programming or an experienced developer, it's easy to learn and use Python.

[Start with our Beginner's Guide](#)

Download

Python source code and installers are available for download for all versions!

Latest: [Python 3.11.1](#)

Docs

Documentation for Python's standard library, along with tutorials and guides, are available online.



docs.python.org

Jobs

Looking for work or have a Python related position that you're trying to hire for? Our **relaunched community-run job board** is the place to go.


jobs.python.org

Installing Python

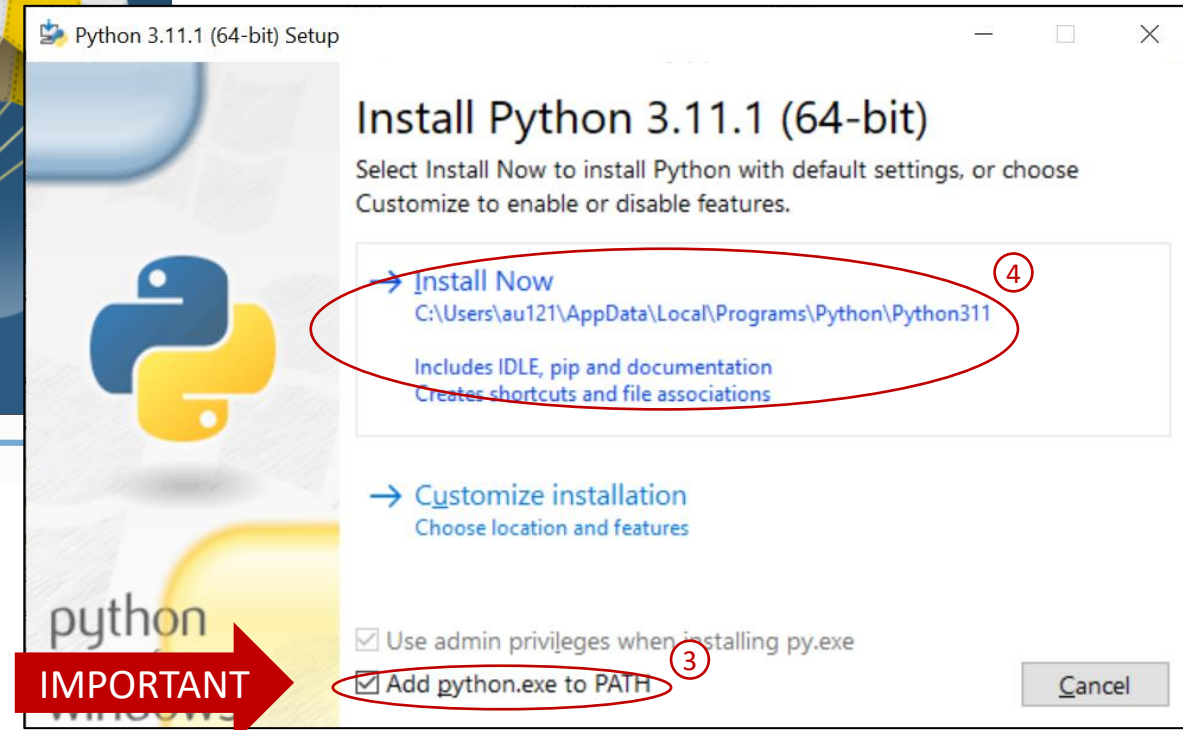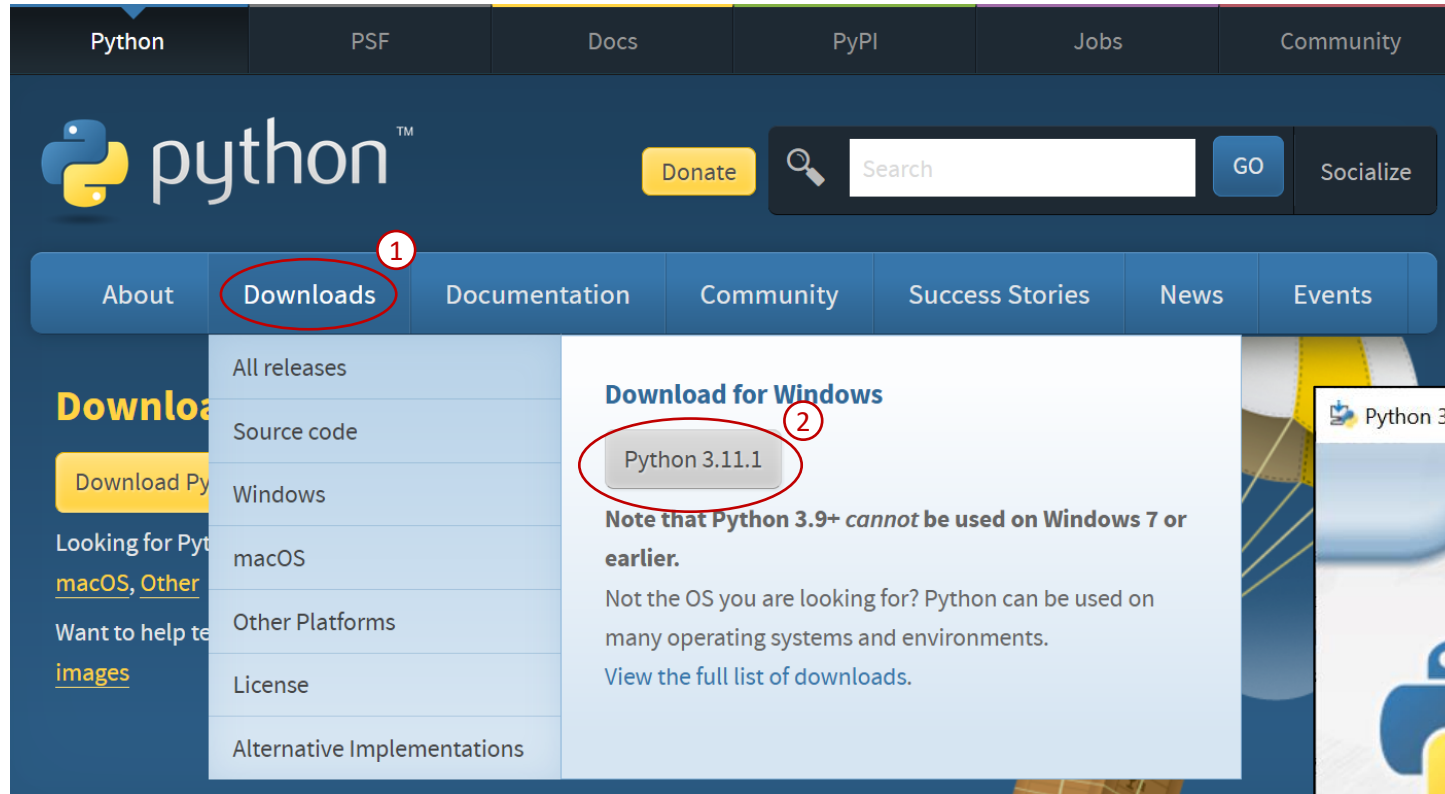

Running the Python Interpreter from a terminal

- Open Command Prompt (Windows-key + cmd)
- Type “python” + return
- Start executing Python statements
- To exit shell:
Ctrl-Z + return *or*
exit() + return

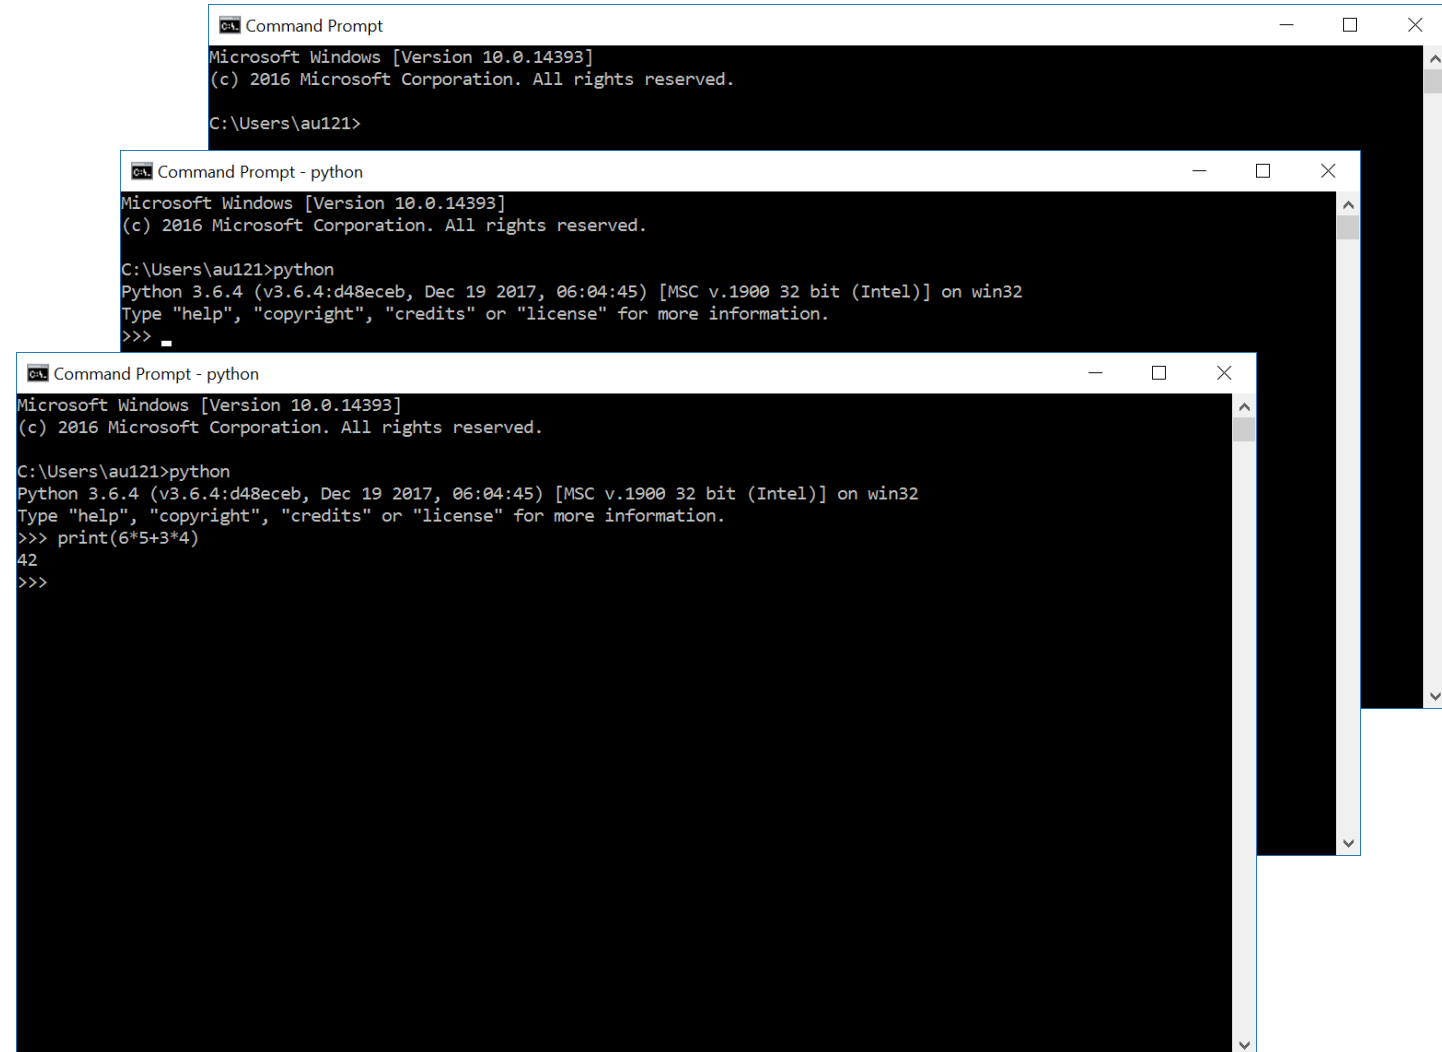

The image displays three overlapping screenshots of a Windows Command Prompt window, illustrating the process of running the Python interpreter. The top window shows the standard Windows boot-up text and the user's prompt at C:\Users\au121>. The middle window shows the user typing 'python' and the system outputting the Python version (3.6.4) and architecture (32-bit Intel). The bottom window shows the user typing a print statement 'print(6*5+3*4)' and the system outputting the result '42'.

```
Command Prompt
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\au121>

Command Prompt - python
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\au121>python
Python 3.6.4 (v3.6.4:d48eceb, Dec 19 2017, 06:04:45) [MSC v.1900 32 bit (Intel)] on win32
Type "help", "copyright", "credits" or "license" for more information.
>>>

Command Prompt - python
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\au121>python
Python 3.6.4 (v3.6.4:d48eceb, Dec 19 2017, 06:04:45) [MSC v.1900 32 bit (Intel)] on win32
Type "help", "copyright", "credits" or "license" for more information.
>>> print(6*5+3*4)
42
>>>
```

Installing IPython –

A more powerful interactive Python shell

- Open Command Prompt


- Execute:

```
pip install ipython
```

- Start ipython

```
ipython
```

pip = the Python package manager

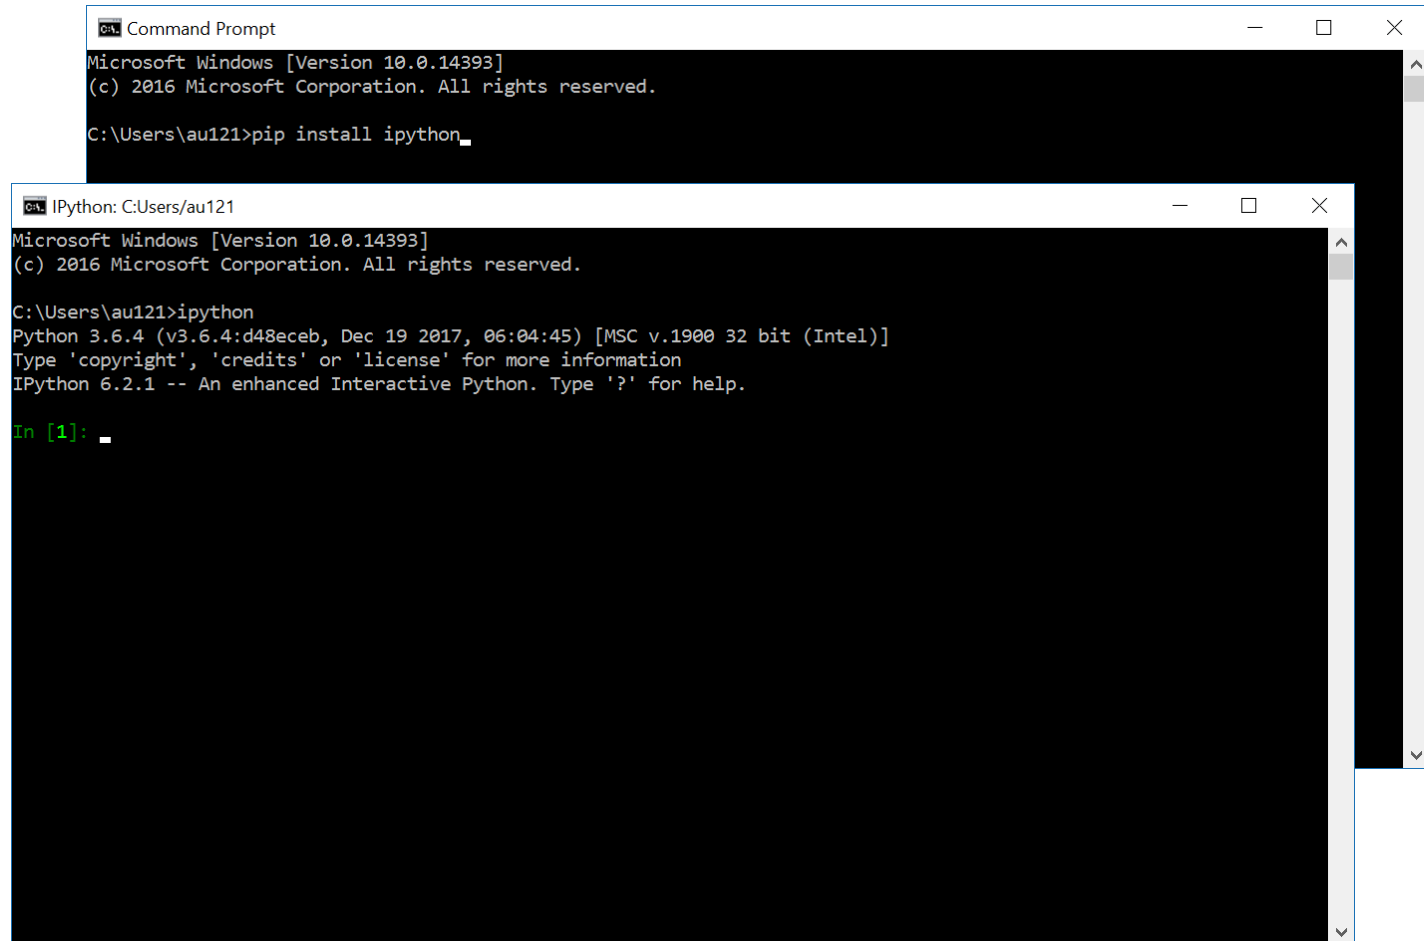

The screenshot shows two overlapping windows. The top window is titled 'Command Prompt' and displays the standard Windows command prompt interface. The bottom window is titled 'IPython: C:\Users\au121' and shows the IPython shell after installation. The Command Prompt window shows the command 'pip install ipython' being entered. The IPython window shows the output of the command, including the Python version (3.6.4) and the IPython version (6.2.1).

```
Command Prompt
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\au121>pip install ipython_

IPython: C:\Users\au121
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\au121>ipython
Python 3.6.4 (v3.6.4:d48eceb, Dec 19 2017, 06:04:45) [MSC v.1900 32 bit (Intel)]
Type 'copyright', 'credits' or 'license' for more information
IPython 6.2.1 -- An enhanced Interactive Python. Type '?' for help.

In [1]: _
```


Some other usefull packages

- Try installing some more Python packages:

```
pip install numpy
```

linear algebra support (N-dimensional arrays)

```
pip install scipy
```

numerical integration and optimization


```
pip install matplotlib
```

2D plotting library

```
pip install pylint
```

Python source code analyzer enforcing a coding standard

Creating a Python program the very basic way

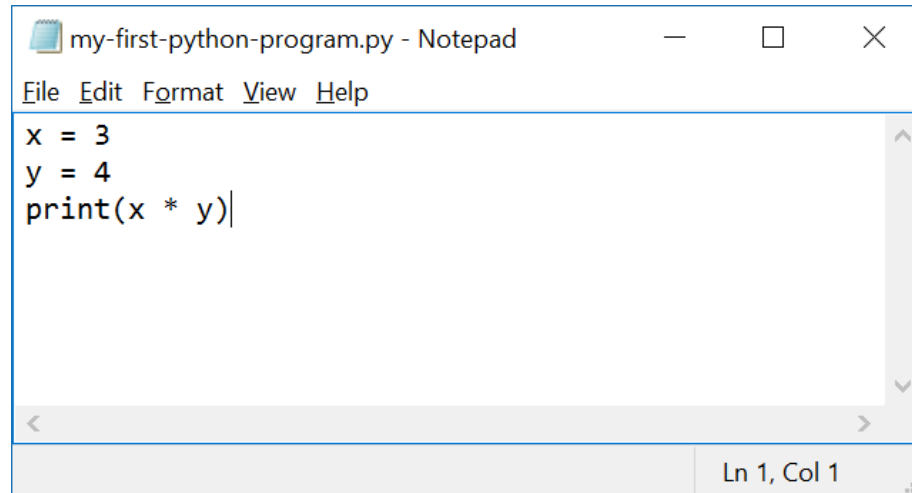


A screenshot of a Notepad window titled "my-first-python-program.py - Notepad". The window contains the following Python code:

```
x = 3
y = 4
print(x * y)
```

The status bar at the bottom right indicates "Ln 1, Col 1".

- Open Notepad (or TextEdit on Mac)
 - write a simple Python program
 - save it
- Open a command prompt
 - go to folder (using cd)
 - run the program using
`python <program name>.py`

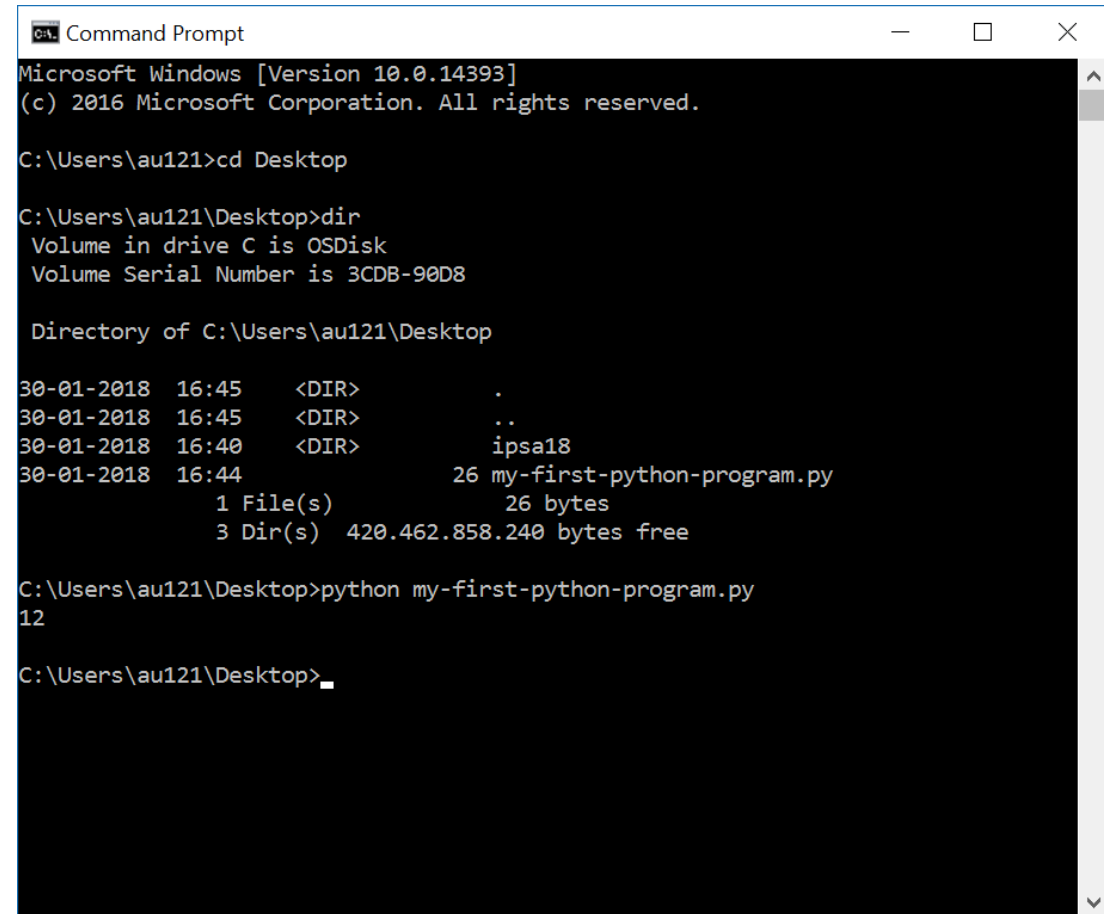

A screenshot of a Windows Command Prompt window. The text displayed is as follows:

```
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\au121>cd Desktop

C:\Users\au121\Desktop>dir
Volume in drive C is OSDisk
Volume Serial Number is 3CDB-90D8


Directory of C:\Users\au121\Desktop

30-01-2018  16:45    <DIR>          .
30-01-2018  16:45    <DIR>          ..
30-01-2018  16:40    <DIR>          ipsa18
30-01-2018  16:44                26 my-first-python-program.py
               1 File(s)                26 bytes
               3 Dir(s)  420.462.858.240 bytes free

C:\Users\au121\Desktop>python my-first-python-program.py
12

C:\Users\au121\Desktop>
```

... or open IDLE and run program with F5



enable
line numbers
under options

```
my-first-python-program.py - C:\Users\au121\Desktop\my-first-python-program.py (3.11.0)
File Edit Format Run Options Window Help
1 x = 3
2 y = 4
3 print(x * y)
4 |
Ln: 4 Col: 0
```

```
IDLE Shell 3.11.0
File Edit Shell Debug Options Window Help
Python 3.11.0 (main, Oct 24 2022, 18:26:48) [MSC v.1933 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license()" for more information.
>>>
===== RESTART: C:\Users\au121\Desktop\my-first-python-program.py =====
12
>>>
Ln: 6 Col: 0
```

- IDLE ships with Python from python.org
- Good beginner IDE (Integrated Development Environment)


The Python Ecosystem


- **Interpreters/compiler**
 - CPython – reference C implementation from python.org
 - PyPy – written in RPython (a subset of Python) – faster than Cpython
 - Jython – written in Java and compiles to Java bytecode, runs on the JVM
 - IronPython – written in C#, compiles to Microsoft's Common Language Runtime (CLR) bytecode
 - Cython – project translating Python-ish code to C
- **Shells (IPython, IDLE, Jupyter)**
- **Libraries/modules/packages**
 - pypi.python.org/pypi (PyPI - the Python Package Index, +500.000 packages)
- **IDEs (Integrated development environment)**
 - IDLE comes with Python (docs.python.org/3/library/idle.html)
 - Anaconda w. Spyder, IPython (www.anaconda.com/download)
 - Canopy (enthought.com/product/canopy)
 - Visual Studio Code (code.visualstudio.com)
 - Python tools for Visual Studio (github.com/Microsoft/PTVS)
 - PyCharm (www.jetbrains.com/pycharm/)
 - Emacs (Python mode and ElPy mode)
 - Notepad++
- **Python Style guide (PEP8)**
 - pylint, pep8, flake8
- **Python online**
 - Google colab (colab.research.google.com), repl.it, sagemath.org, ...

Try to google "best ide python"



IDEs and AI assistants

- Some IDEs integrate AI assistants to support code suggestions, e.g. GitHub Copilot in VS Code
- AI assistants increase productivity *if* you understand their output
-  ■ AI assistants are not allowed at the exam

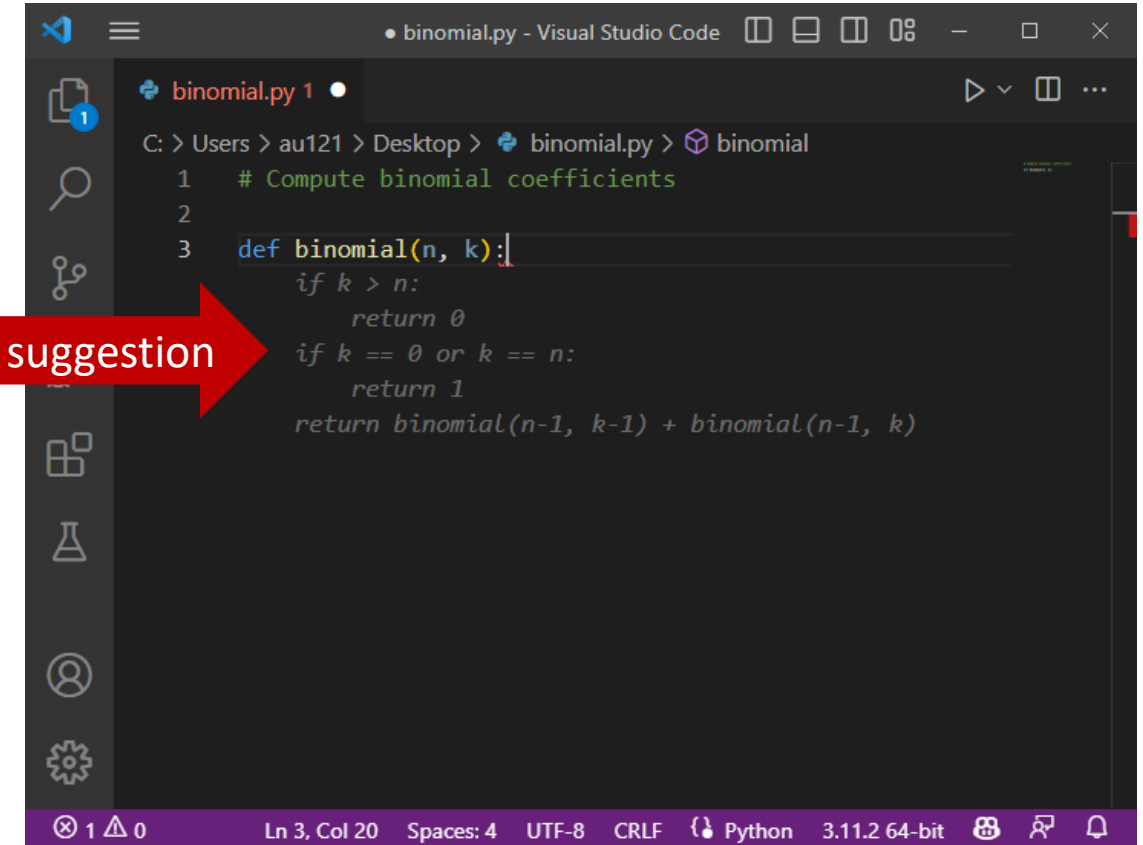

```
binomial.py 1
C: > Users > au121 > Desktop > binomial.py > binomial
1 # Compute binomial coefficients
2
3 def binomial(n, k):
    if k > n:
        return 0
    if k == 0 or k == n:
        return 1
    return binomial(n-1, k-1) + binomial(n-1, k)
```

Guido van Rossum, inventor of Python, on GitHub Copilot

"I use it every day. It writes a lot of code for me... and usually it is slightly wrong but it still saves me typing."

Python and the Future of Programming, Guido van Rossum interviewed by Lex Fridman