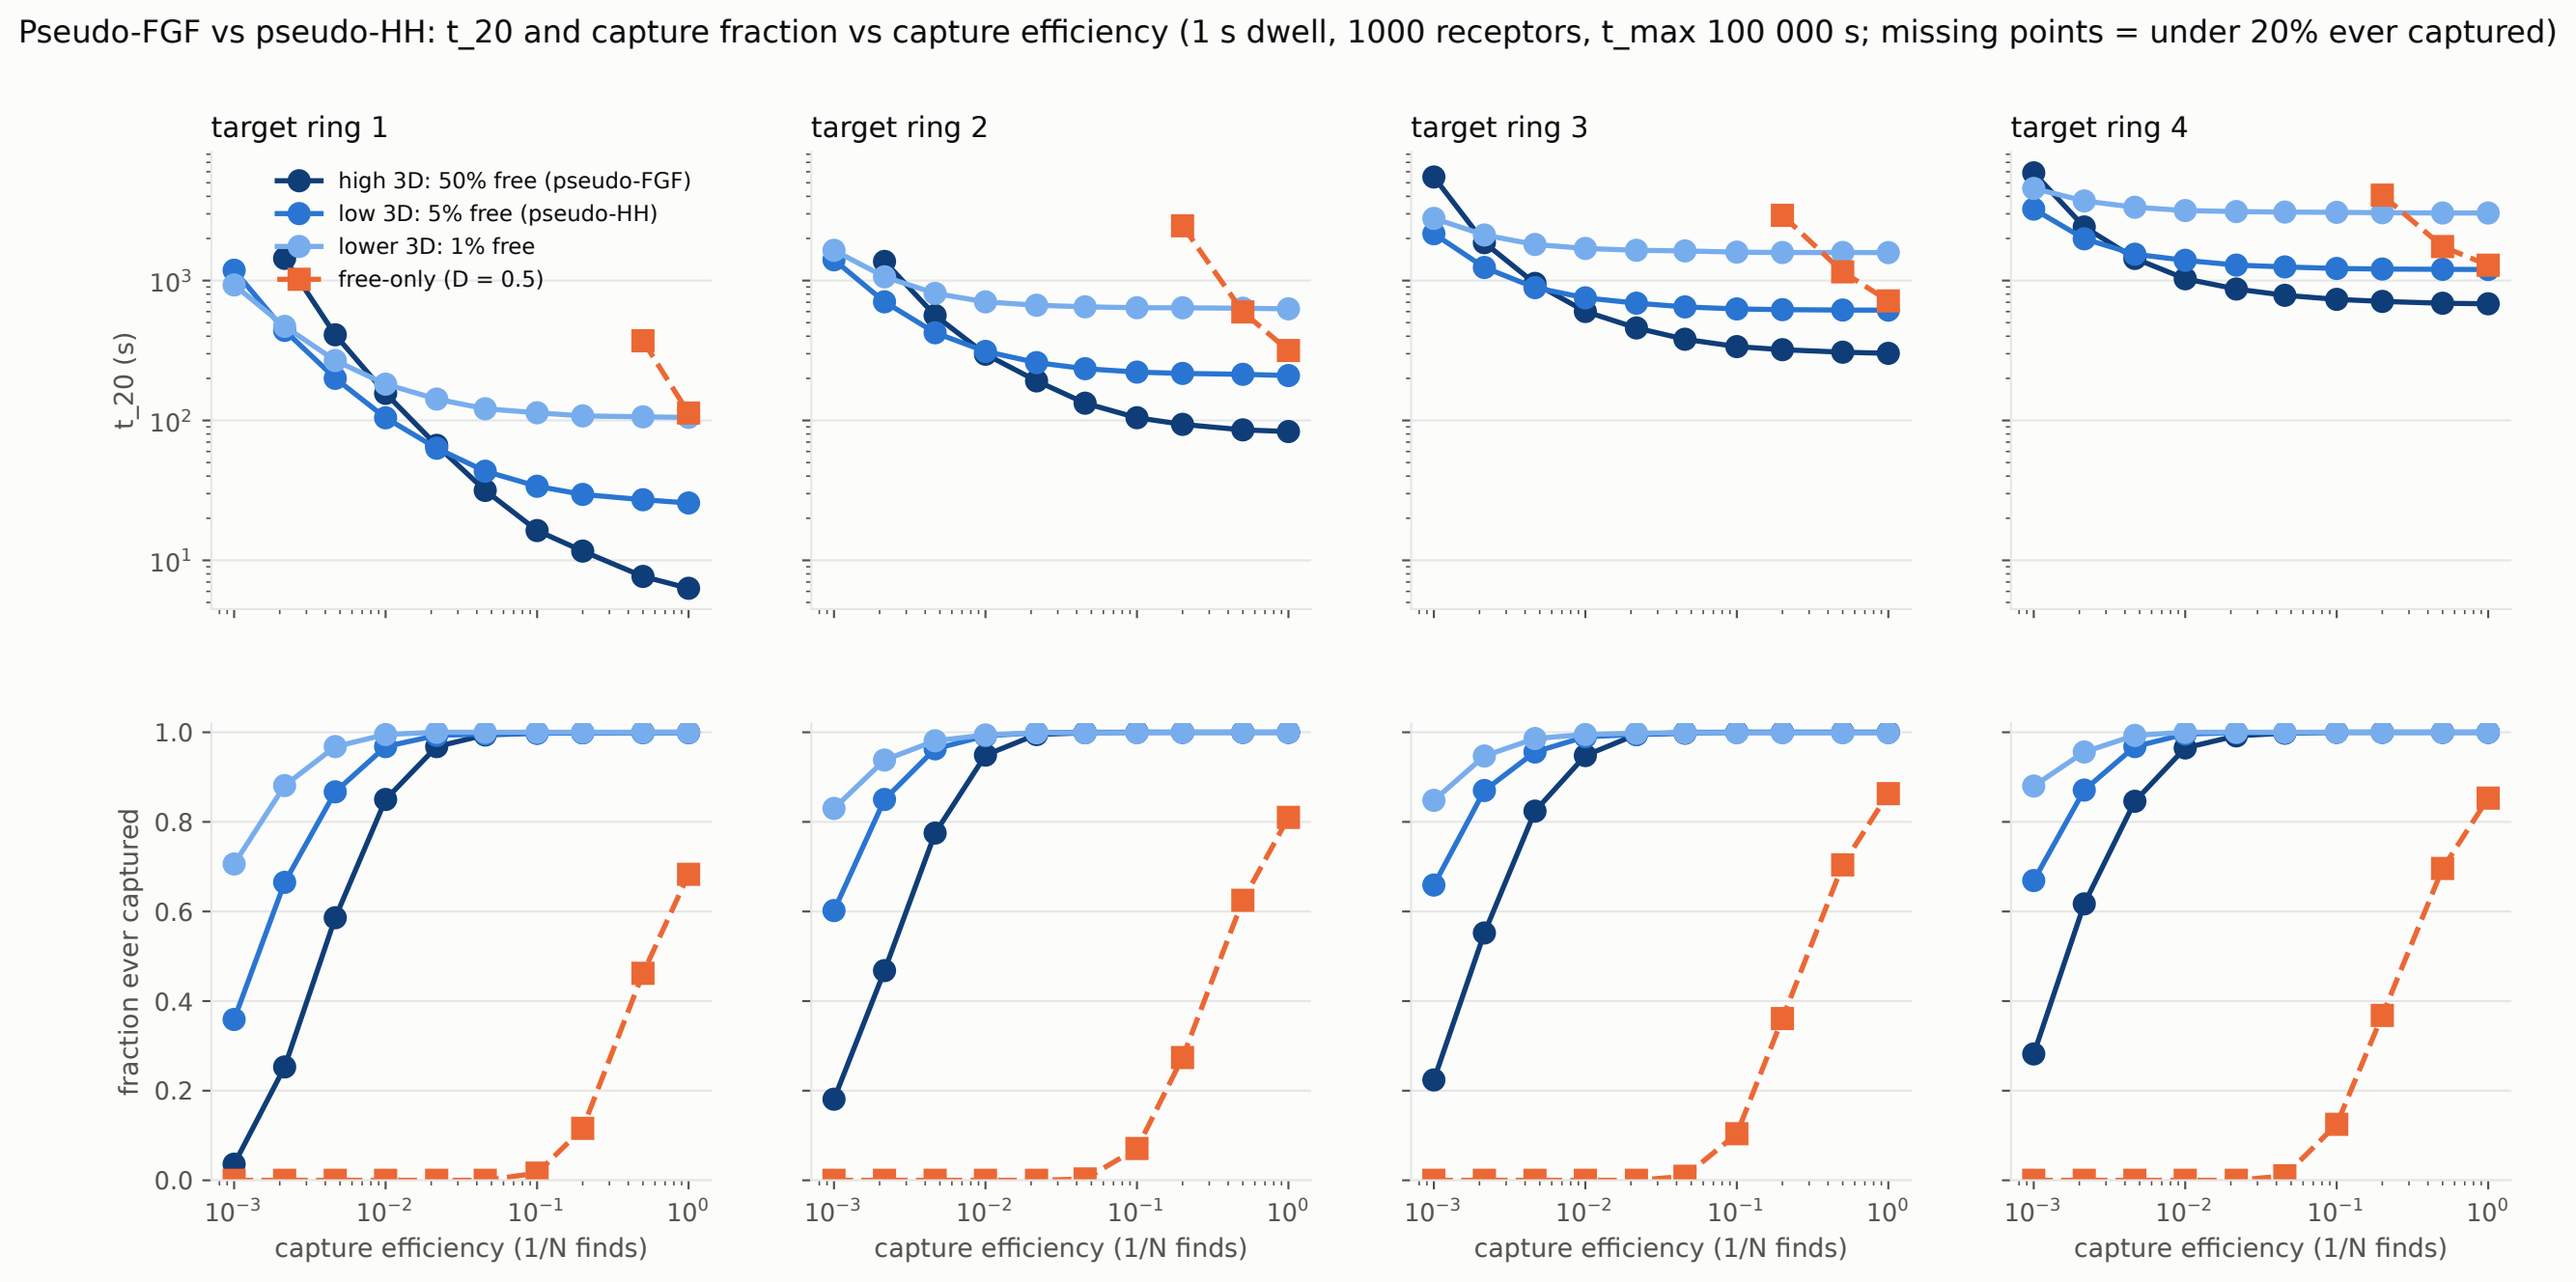
Pseudo-FGF vs pseudo-HH: t_20 and capture fraction vs capture efficiency (1 s dwell, 1000 receptors, t_max 100 000 s; missing points = under 20% ever captured)
target ring 1
target ring 2
target ring 3
target ring 4
high 3D: 50% free (pseudo-FGF)
low 3D: 5% free (pseudo-HH)
lower 3D: 1% free
free-only (D = 0.5)
t_20 (s)
fraction ever captured
capture efficiency (1/N finds)