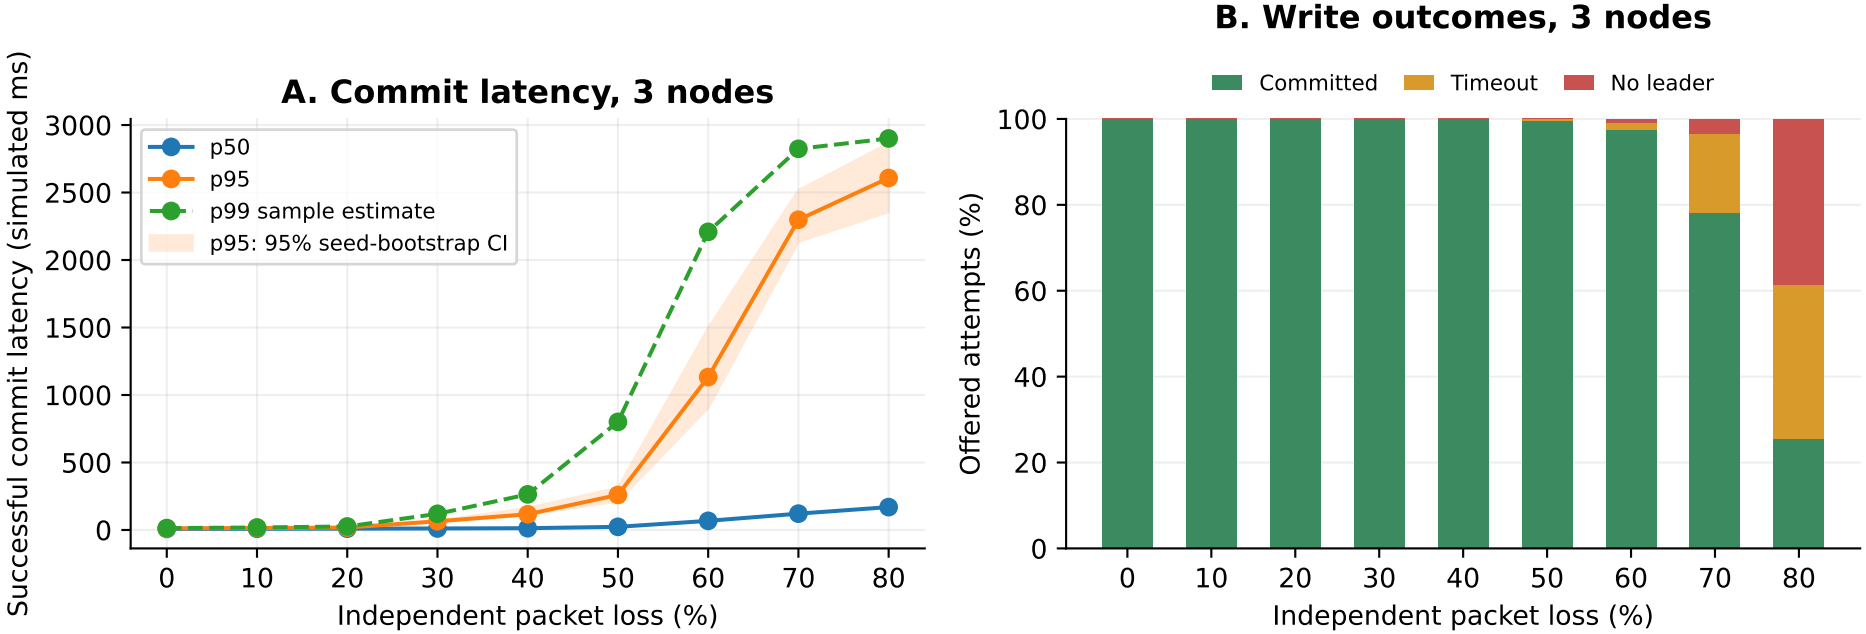
A. Commit latency, 3 nodes
Successful commit latency (simulated ms)
Independent packet loss (%)
p50
p95
p99 sample estimate
p95: 95% seed-bootstrap CI
0
500
1000
1500
2000
2500
3000
0
10
20
30
40
50
60
70
80
B. Write outcomes, 3 nodes
Offered attempts (%)
Independent packet loss (%)
Committed
Timeout
No leader
0
20
40
60
80
100