

Ojet - Jenkins Environment Setup

Step 1: Open Jenkins


Open your web browser and navigate to:

`http://localhost:8080`


Log in using your Jenkins administrator credentials.

Step 2: Install Required Plugins


1. From the Jenkins Dashboard, click **Manage Jenkins**.

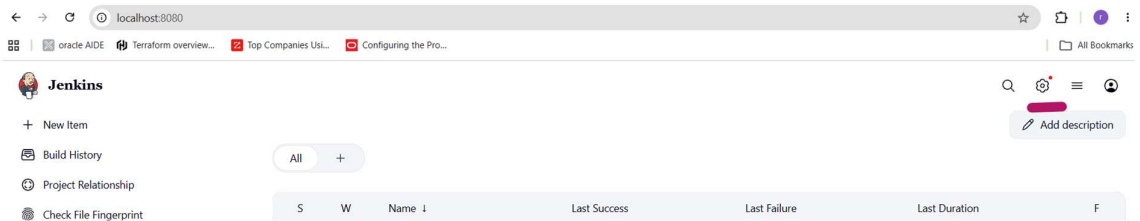

2. Select **Plugins**.

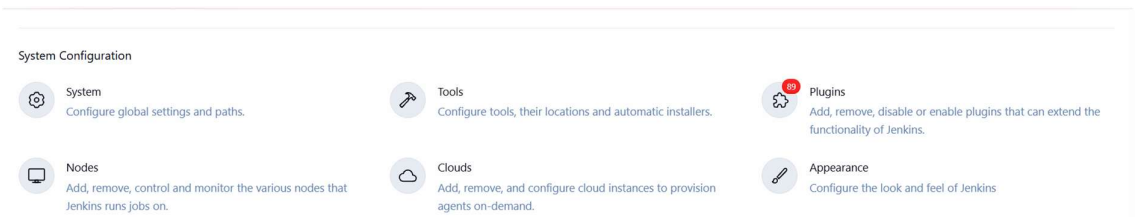

3. Open the **Available Plugins** tab.
4. Search for and install the following plugins:

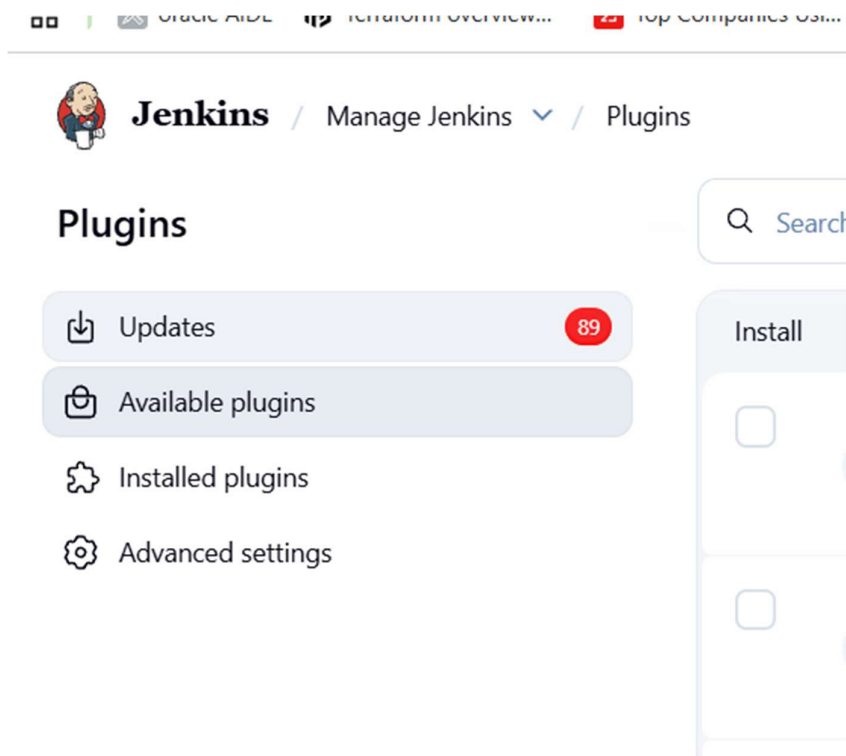

- Git Plugin

git client		
Name ↓	Health	Enabled
Git 5.7.0 This plugin integrates Git with Jenkins. Report an issue with this plugin	100	☒
Git client 6.3.0 Utility plugin for Git support in Jenkins Report an issue with this plugin	100	☒
Warning: The currently installed plugin version may not be safe to use. Please review the following security notices: • OS command injection vulnerability on agents • OS command injection vulnerability on agents • File system information disclosure vulnerability		
Git server Plugin 137.ve0060b_432302 Allows Jenkins to act as a Git server. Report an issue with this plugin	94	☒

- Git Client Plugin
- Pipeline Plugin
- NodeJS Plugin

(note: use same screen for rest of the plugin installations)

5. Restart Jenkins if prompted.

Step 3: Configure Git

1. Go to **Manage Jenkins**.
2. Select **Tools**.
3. Scroll to the **Git Installations** section.

Git installations

≡ Git

Name

Default

Path to Git executable ?

git

☐ Install automatically ?

+ Add Git

4. Verify that Git is detected automatically or provide the Git installation path.
5. Click **Save**.

Step 4: Configure Node.js

1. Navigate to **Manage Jenkins** → **Tools**.
2. Scroll to **NodeJS Installations**.
3. Click **Add NodeJS**.
4. Configure the following:

Property	Value
Name	NodeJS_18
Install Automatically	Enabled
Version	Latest LTS (or the version used in the lab)

NodeJS

Name

NodeJS_18

☒ Install automatically ?

Install from nodejs.org

Version

NodeJS 18.0.0

For the underlying architecture, if available, force the installation of the 32bit package. Otherwise the build will fail

☐ Force 32bit architecture

Global npm packages to install

Specify list of packages to install globally -- see npm install -g. Note that you can fix the packages version by using the syntax "packageName@version"

Global npm packages refresh hours

Duration, in hours, before 2 npm cache update. Note that 0 will always update npm cache

72

+ Add Installer

Save

Apply

5. Click **Save**.