

3.3. Oracle-jet form with radio buttons and checkboxes

Introduction

This is **Practice 3** in our progressive form-building activity using Oracle JET. In this step, we will extend the existing form to include:

- A **radio button set** for Gender selection
- A **checkbox set** for Hobbies

Each new feature builds on previous practices while retaining all earlier functionality.

Purpose

- To use oj-radioset for single-choice selection (Gender)
- To use oj-checkboxset for multi-choice selection (Hobbies)
- To bind values with Knockout observables
- To practice combining multiple Oracle JET form components in a layout


Pre-requisites

Before starting, ensure the following:

1. **Practice 2** (Name, Email, and Country dropdown) is already complete.
2. You are working within a JET application created using the **NavDrawer** template.

Note: For the form components practices, change the appController.js file same way like we did in previous practices. You have to define the route to the form practice tab. So, from this practice onwards, write the same code for every new progressive practice.

Project structure:

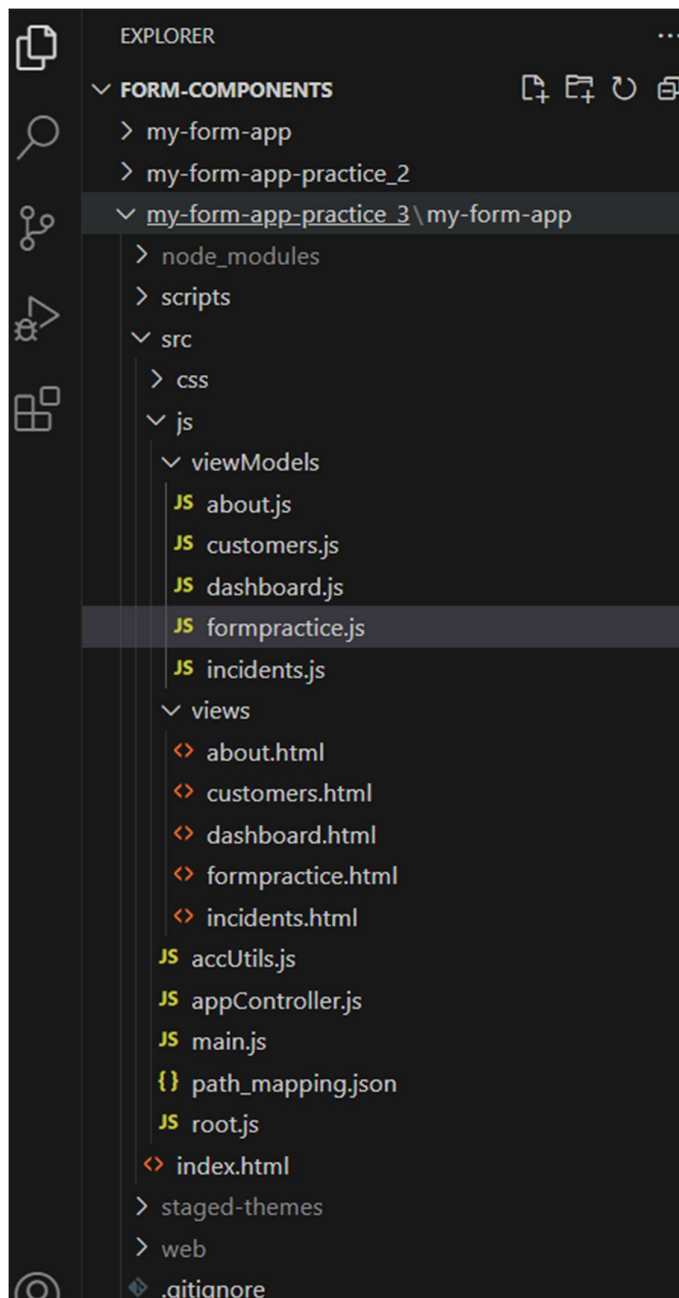

Tasks:

1. Create a new folder named "my-form-app-practice_3" and move to that directory
2. In the command line run,
Ojet create my-form-app --template=navdrawer
3. Then run **ojet build web** and **ojet serve** respectively (like we did before)
4. Create folders `/js/viewModels/formpractice.js` and `/js/views/formpractice.html`
5. Add code to formpractice.js

```

JS formpractice.js
my-form-app-practice_3 > my-form-app > src > js > viewModels > JS formpractice.js > define() callback > FormPracticeViewModel
1  define([
2    'knockout',
3    'ojs/ojlabel',
4    'ojs/ojinputtext',
5    'ojs/ojformlayout',
6    'ojs/ojselectsingle',
7    'ojs/ojradioset',
8    'ojs/ojcheckboxset',
9    'ojs/ojarraydataprovider'
10 ], function (ko, ojlabel, ojinputtext, ojformlayout, ojselectsingle, ojradioset, ojcheckboxset, ArrayDataProvider) {
11
12     function FormPracticeViewModel() {
13         // Practice 1
14         this.name = ko.observable('');
15         this.email = ko.observable('');
16
17         // Practice 2
18         this.selectedCountry = ko.observable('');
19         this.countryList = [
20             { value: 'IN', label: 'India' },
21             { value: 'US', label: 'United States' },
22             { value: 'UK', label: 'United Kingdom' },
23             { value: 'CA', label: 'Canada' },
24             { value: 'AU', label: 'Australia' }
25         ];
26         this.countryDataProvider = new ArrayDataProvider(this.countryList, { keyAttributes: 'value' });
27
28         // Practice 3: Gender (Radio) and Hobbies (Checkbox)
29         this.gender = ko.observable('');
30         this.genderOptions = [
31             { value: 'male', label: 'Male' },
32             { value: 'female', label: 'Female' },
33             { value: 'other', label: 'Other' }
34         ];

```

```

        this.hobbies = ko.observableArray([]);
        this.hobbyOptions = [
            { value: 'reading', label: 'Reading' },
            { value: 'sports', label: 'Sports' },
            { value: 'music', label: 'Music' }
        ];
    }

    return FormPracticeViewModel;
});

```

6. Now add following code to the formpractice.html file

```

JS formpractice.js M  formpractice.html X
my-form-app-practice_3 > my-form-app > src > js > views > formpractice.html > oj-form-layout.oj-formlayout-full-width > oj-radioset > oj-opt

1 <div></div>
2 <oj-form-layout max-columns="3"
3   direction="row"
4   class="oj-formlayout-full-width"
5   user-assistance-density="compact">
6
7   <!-- Practice 1 -->
8   <oj-input-text id="nameInput" value="{{name}}" label-hint="Enter name" required="true">/oj-input-text>
9   <oj-input-text id="emailInput" value="{{email}}" label-hint="Enter email" required="true">/oj-input-text>
10
11   <!-- Practice 2 -->
12   <oj-select-single id="countrySelect" label-hint="Select Country"
13     data="[countryDataProvider]"
14     item-text="label"
15     value="{{selectedCountry}}"
16     required="true">
17   </oj-select-single>
18
19   <!-- Practice 3 -->
20   <oj-radioset label-hint="Gender" value="{{gender}}" required="true">
21     <oj-option value="male">Male</oj-option>
22     <oj-option value="female">Female</oj-option>
23     <oj-option value="other">Other</oj-option>
24   </oj-radioset>
25
26   <oj-checkboxset label-hint="Hobbies" value="{{hobbies}}">
27     <oj-option value="reading">Reading</oj-option>
28     <oj-option value="sports">Sports</oj-option>
29     <oj-option value="music">Music</oj-option>
30   </oj-checkboxset>
31
32 </oj-form-layout>
33 </div>

```

7. Run ojet serve on command terminal
8. Navigate to the Form Practice page in the browse.
9. Enter Name, Email, and select a Country, hobbies and gender

Upto this practice, you have created two textboxes and one drop down list, checkboxes and radio buttons for the form

The screenshot shows a web application titled "ORACLE App Name". The user is logged in as "john.hancock@oracle.com". The navigation bar includes links for Dashboard, Incidents, Customers, About, and Form Practice. The form contains the following elements:

- Enter name ***: A text input field.
- Enter email ***: A text input field.
- Select Country ***: A dropdown menu.
- Gender ***: A group of radio buttons with options: Male, Female, and Other.
- Hobbies**: A group of checkboxes with options: Reading, Sports, and Music.