

3.6. Oracle JET Multi-Step Form Practice with oj-train, oj-avatar, and oj-dialog

Introduction

This hands-on exercise demonstrates how to build a multi-step form in Oracle JET using MVVM architecture, enhanced with components like `<oj-train>`, `<oj-avatar>`, and `<oj-dialog>`. You'll learn to use observable data binding, form validation, conditional dropdowns, and dynamic UI feedback through dialogs and avatars.

This type of form is common in enterprise-grade applications where user data is captured in multiple logical steps for better UX.

Pre-requisites:

Ensure all the following are complete:


- Practice 1: Name and Email fields
- Practice 2: Country dropdown with `oj-select-single`
- Practice 3: Gender (`oj-radioset`) and Hobbies (`oj-checkboxset`)
- Practice 4: creating submit button
- Practice 5: Creating the reset button along with dialog and submitted data
- You are working in a JET app (e.g., `NavDrawer` template)

Learning Objectives

By the end of this activity, you will be able to:

- Use `oj-form-layout` to organize fields in a structured grid
- Dynamically populate country-state dropdowns using `oj-select-single` and `ArrayDataProvider`
- Use `oj-train` to create a wizard-style multi-step form
- Bind and render a dynamic avatar using `oj-avatar` based on input
- Validate form data using required fields and `checkValidity()`
- Open and close `oj-dialog` upon submission to show success feedback
- Reset the form state programmatically

Project structure

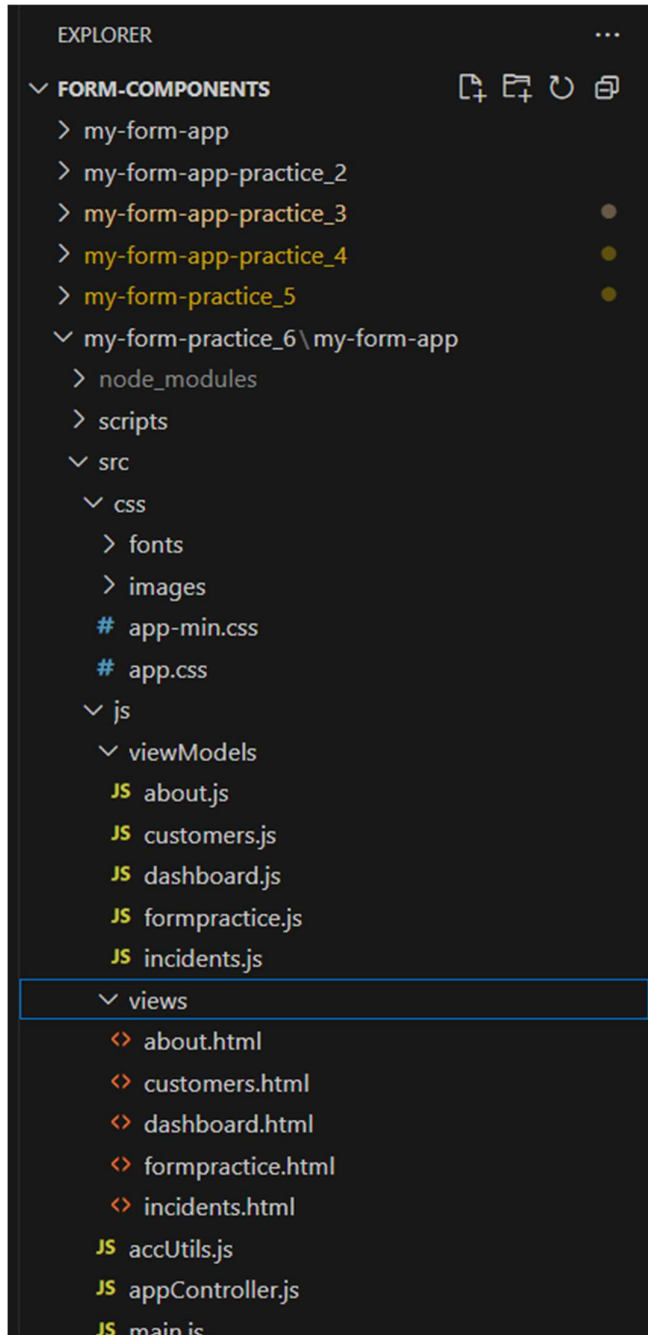

Tasks :

1. Create a new folder named "my-form-app-practice_6" and move to that directory

2. In the command line run,

Ojet create my-form-app --template=navdrawer

3. Then run **ojet build web** and **ojet serve** respectively (like we did before)

4. Create folders `/js/viewModels/formpractice.js` and `/js/views/formpractice.html`

5. Add following code to `formpractice.js`

```
JS formpractice.js my-form-practice_5\... M X JS formpractice.js my-form-practice_6\...
my-form-practice_5 > my-form-app > src > js > viewModels > JS formpractice.js > define() callback
1  define([
2      'knockout',
3      'ojs/ojarraydataprovider',
4      'ojs/ojformlayout',
5      'ojs/ojinputtext',
6      'ojs/ojselectsingle',
7      'ojs/ojradioset',
8      'ojs/ojcheckboxset',
9      'ojs/ojbutton',
10     'ojs/ojdialog',
11     'ojs/ojmessages'
12 ], function (ko, ArrayDataProvider) {
13     function FormPracticeViewModel() {
14         this.name = ko.observable('');
15         this.email = ko.observable('');
16         this.selectedCountry = ko.observable('');
17         this.selectedState = ko.observable('');
18         this.gender = ko.observable('');
19         this.hobbies = ko.observableArray([]);
20
21         this.formSubmitted = ko.observable(false);
22         this.submittedData = ko.observable({});
23         this.successMessages = ko.observableArray([]);
24
25         // Country and state options
26         this.countryOptions = [
27             { value: 'IN', label: 'India' },
28             { value: 'US', label: 'USA' },
29             { value: 'UK', label: 'UK' }
30         ];
31         this.countryDataProvider = new ArrayDataProvider(this.countryOptions, { keyAttributes: 'value' });
32
33         this.stateMap = {
34             IN: [
35                 { value: 'PB', label: 'Punjab' },
36                 { value: 'DL', label: 'Delhi' },
37                 { value: 'MH', label: 'Maharashtra' }
```

```
38     ],
39     US: [
40       { value: 'NY', label: 'New York' },
41       { value: 'CA', label: 'California' },
42       { value: 'TX', label: 'Texas' }
43     ],
44     UK: [
45       { value: 'ENG', label: 'England' },
46       { value: 'SCT', label: 'Scotland' },
47       { value: 'WLS', label: 'Wales' }
48     ]
49   };
50
51   this.stateDataProvider = ko.pureComputed(() => {
52     const country = this.selectedCountry();
53     const states = this.stateMap[country] || [];
54     return new ArrayDataProvider(states, { keyAttributes: 'value' });
55   });
56
57   this.isStateEnabled = ko.computed(() => !!this.selectedCountry());
58
59   this.handleSubmit = (event) => {
60     if (event) {
61       event.preventDefault(); // Prevent form's default submit behavior
62     }
63
64     const form = document.getElementById('form-container');
65     if (form && form.checkValidity()) {
66       this.formSubmitted(true);
67       this.submittedData({
68
```

```

69         name: this.name(),
70         email: this.email(),
71         country: this.selectedCountry(),
72         state: this.selectedState(),
73         gender: this.gender(),
74         hobbies: this.hobbies()
75     });
76
77     // Show dialog
78     const dialog = document.getElementById('submitDialog');
79     if (dialog) {
80         dialog.open();
81     }
82     } else {
83         form.reportValidity();
84     }
85 };
86
87 this.resetForm = () => {
88     this.name('');
89     this.email('');
90     this.selectedCountry('');
91     this.selectedState('');
92     this.gender('');
93     this.hobbies([]);
94     this.formSubmitted(false);
95     this.submittedData({});
96 };
97
98 this.closeDialog = () => {
99     const dialog = document.getElementById('submitDialog');
100    if (dialog) {
101        dialog.close();
102    }
103    };
104 }
105
106 return FormPracticeViewModel;
107 });
108

```

6. Now add following code to formpractice.html

formpractice.html 2 X

my-form-practice_6 > my-form-app > src > js > views > formpractice.html > div.oj-hybrid-padding

```
1 <div class="oj-hybrid-padding">
2   <style>
3     .avatar-container {
4       position: absolute; /* Take it out of the normal flow */
5       top: 130px;        /* Adjust as needed for vertical position */
6       right: 100px;       /* Adjust as needed for horizontal position */
7     }
8   </style>
9
10  <div class="oj-flex">
11    <oj-train id="profileTrain"
12      steps="[[trainSteps]]"
13      selected-step="{{stepValue}}">
14    </oj-train>
15  </div>
16
17  <form id="form-container" onsubmit="return false;">
18    <oj-form-layout max-columns="2" direction="row">
19      <oj-input-text label-hint="Enter name" required="true" value="{{name}}"></oj-input-text>
20      <oj-input-text label-hint="Enter email" required="true" value="{{email}}"></oj-input-text>
21
22      <oj-select-single label-hint="Select Country"
23        data="[[countryDataProvider]]"
24        value="{{selectedCountry}}"
25        required="true">
26      </oj-select-single>
27
28      <oj-select-single label-hint="Select State"
29        data="[[stateDataProvider]]"
30        value="{{selectedState}}"
31        required="true"
32        disabled="[[!isStateEnabled()]]">
33      </oj-select-single>
34
35      <div>
36        <oj-label for="genderGroup">Gender</oj-label>
37        <oj-radioset id="genderGroup" value="{{gender}}" required="true">
38
39          <oj-option value="male">Male</oj-option>
40          <oj-option value="female">Female</oj-option>
41          <oj-option value="other">Other</oj-option>
42        </oj-radioset>
43      </div>
44
45      <div>
46        <oj-label for="hobbiesGroup">Hobbies</oj-label>
47        <oj-checkboxset id="hobbiesGroup" value="{{hobbies}}">
48          <oj-option value="reading">Reading</oj-option>
49          <oj-option value="sports">Sports</oj-option>
50          <oj-option value="music">Music</oj-option>
51        </oj-checkboxset>
52      </div>
53
54      <div class="avatar-container"> <oj-avatar id="userAvatar"
55        role="img"
56        aria-label="User avatar"
57        size="lg"
58        initials="[[avatarInitials]]">
59      </oj-avatar>
60    </div>
61
62    <div class="oj-flex oj-sm-justify-content-center oj-sm-margin-top-4">
63      <oj-button on-oj-action="[[handleSubmit]]">Submit</oj-button>
64      <oj-button on-oj-action="[[resetForm]]" class="oj-sm-margin-start-2">Reset</oj-button>
65    </div>
66  </oj-form-layout>
67 </form>
68
69 <oj-dialog id="submitDialog" dialog-title="Success" modality="modeless">
```

```

69     <div slot="body">
70       <p>Form submitted successfully!</p>
71     </div>
72     <div slot="footer">
73       <oj-button on-oj-action="[[closeDialog]]">OK</oj-button>
74     </div>
75   </oj-dialog>
76
77   <div class="oj-sm-margin-top-4" data-bind="if: formSubmitted">
78     <h3>Submitted Data</h3>
79     <pre data-bind="text: JSON.stringify(submittedData(), null, 2)"></pre>
80   </div>
81 </div>

```

7. Run ojet serve on command terminal
8. Navigate to the Form Practice page in the browse.
9. Enter Name, Email, and select a Country and its dependent state, hobbies and gender, submit and success dialog box after submission along with entered content. Also, you will notice train steps at the top and

The screenshot shows the Oracle App Name Form Practice page. The page has a navigation bar with links to Dashboard, Incidents, Customers, About, and Form Practice. The Form Practice page has a progress indicator with three steps: 1. Personal Info, 2. Preferences, and 3. Review & Submit. The Personal Info section includes fields for Enter name (Richa jain), Enter email, and Select Country (India). The Preferences section includes Gender (Male, Female, Other) and Hobbies (Sports, Music). The Review & Submit section has Submit and Reset buttons. A success dialog box is displayed in the center, showing the message "Form submitted successfully!" and an OK button. Below the dialog box, the Submitted Data is displayed as a JSON object: { "name": "Richa jain" }.